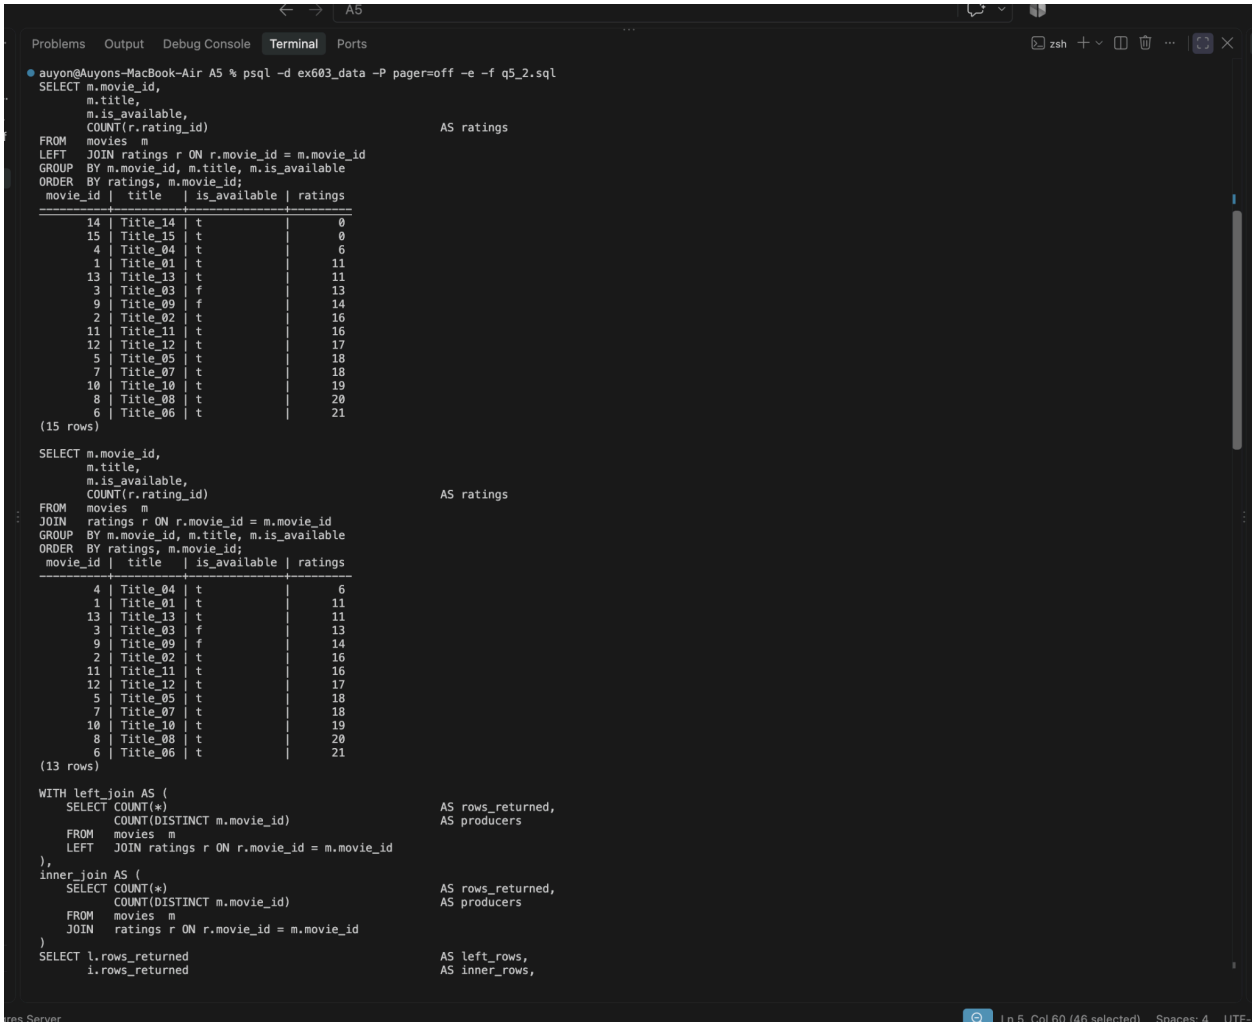
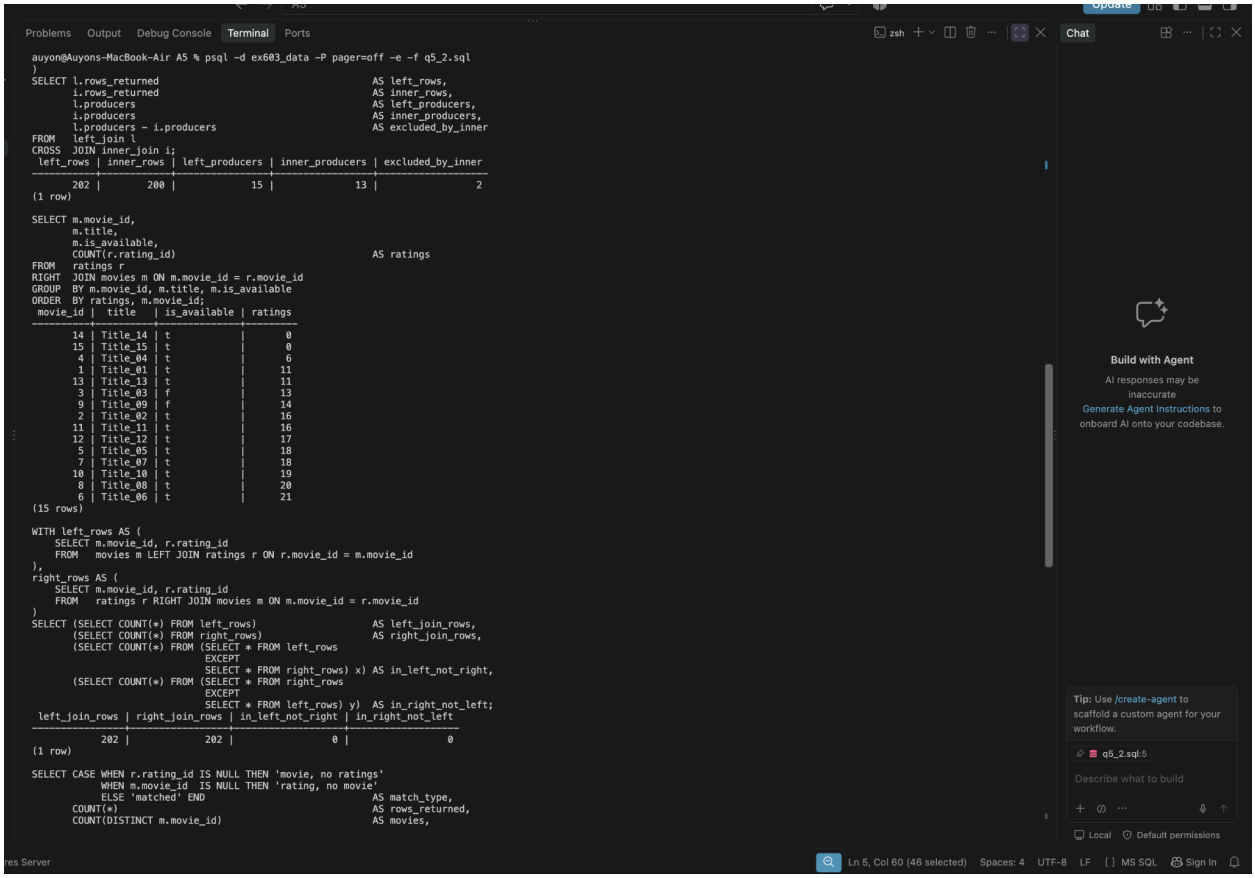

A5
Problems
Output
Debug Console
Terminal
Ports
zsh
auyon@Auyons-MacBook-Air A5 % psql -d ex603_data -P pager=off -e -f q5_2.sql
SELECT m.movie_id,
m.title,
m.is_available,
COUNT(r.rating_id) AS ratings
FROM movies m
LEFT JOIN ratings r ON r.movie_id = m.movie_id
GROUP BY m.movie_id, m.title, m.is_available
ORDER BY ratings, m.movie_id;
movie_id | title | is_available | ratings
14 | Title_14 | t | 0
15 | Title_15 | t | 0
4 | Title_04 | t | 6
1 | Title_01 | t | 11
13 | Title_13 | t | 11
3 | Title_03 | f | 13
9 | Title_09 | f | 14
2 | Title_02 | t | 16
11 | Title_11 | t | 16
12 | Title_12 | t | 17
5 | Title_05 | t | 18
7 | Title_07 | t | 18
10 | Title_10 | t | 19
8 | Title_08 | t | 20
6 | Title_06 | t | 21
(15 rows)
SELECT m.movie_id,
m.title,
m.is_available,
COUNT(r.rating_id) AS ratings
FROM movies m
JOIN ratings r ON r.movie_id = m.movie_id
GROUP BY m.movie_id, m.title, m.is_available
ORDER BY ratings, m.movie_id;
movie_id | title | is_available | ratings
4 | Title_04 | t | 6
1 | Title_01 | t | 11
13 | Title_13 | t | 11
3 | Title_03 | f | 13
9 | Title_09 | f | 14
2 | Title_02 | t | 16
11 | Title_11 | t | 16
12 | Title_12 | t | 17
5 | Title_05 | t | 18
7 | Title_07 | t | 18
10 | Title_10 | t | 19
8 | Title_08 | t | 20
6 | Title_06 | t | 21
(13 rows)
WITH left_join AS (
SELECT COUNT(*) AS rows_returned,
COUNT(DISTINCT m.movie_id) AS producers
FROM movies m
LEFT JOIN ratings r ON r.movie_id = m.movie_id
),
inner_join AS (
SELECT COUNT(*) AS rows_returned,
COUNT(DISTINCT m.movie_id) AS producers
FROM movies m
JOIN ratings r ON r.movie_id = m.movie_id
)
SELECT l.rows_returned AS left_rows,
i.rows_returned AS inner_rows,
Ln 5, Col 60 (46 selected)
Spaces: 4
UTF-


Problems
Output
Debug Console
Terminal
Ports
zsh
Chat
Update
auyon@Auyons-MacBook-Air A5 % psql -d ex603_data -P pager=off -e -f q5_2.sql
)
SELECT l.rows_returned AS left_rows,
i.rows_returned AS inner_rows,
l.producers AS left_producers,
i.producers AS inner_producers,
l.producers - i.producers AS excluded_by_inner
FROM left_join l
CROSS JOIN inner_join i;
left_rows | inner_rows | left_producers | inner_producers | excluded_by_inner
202 | 200 | 15 | 13 | 2
(1 row)
SELECT m.movie_id,
m.title,
m.is_available,
COUNT(r.rating_id) AS ratings
FROM ratings r
RIGHT JOIN movies m ON m.movie_id = r.movie_id
GROUP BY m.movie_id, m.title, m.is_available
ORDER BY ratings, m.movie_id;
movie_id | title | is_available | ratings
14 | Title_14 | t | 0
15 | Title_15 | t | 0
4 | Title_04 | t | 6
1 | Title_01 | t | 11
13 | Title_13 | t | 11
3 | Title_03 | f | 13
9 | Title_09 | f | 14
2 | Title_02 | t | 16
11 | Title_11 | t | 16
12 | Title_12 | t | 17
5 | Title_05 | t | 18
7 | Title_07 | t | 18
10 | Title_10 | t | 19
8 | Title_08 | t | 20
6 | Title_06 | t | 21
(15 rows)
WITH left_rows AS (
SELECT m.movie_id, r.rating_id
FROM movies m LEFT JOIN ratings r ON r.movie_id = m.movie_id
),
right_rows AS (
SELECT m.movie_id, r.rating_id
FROM ratings r RIGHT JOIN movies m ON m.movie_id = r.movie_id
)
SELECT (SELECT COUNT(*) FROM left_rows) AS left_join_rows,
(SELECT COUNT(*) FROM right_rows) AS right_join_rows,
(SELECT COUNT(*) FROM (SELECT * FROM left_rows
EXCEPT
SELECT * FROM right_rows) x) AS in_left_not_right,
(SELECT COUNT(*) FROM (SELECT * FROM right_rows
EXCEPT
SELECT * FROM left_rows) y) AS in_right_not_left;
left_join_rows | right_join_rows | in_left_not_right | in_right_not_left
202 | 202 | 0 | 0
(1 row)
SELECT CASE WHEN r.rating_id IS NULL THEN 'movie, no ratings'
WHEN m.movie_id IS NULL THEN 'rating, no movie'
ELSE 'matched' END AS match_type,
COUNT(*) AS rows_returned,
COUNT(DISTINCT m.movie_id) AS movies,
Build with Agent
AI responses may be inaccurate
Generate Agent Instructions to onboard AI onto your codebase.
Tip: Use /create-agent to scaffold a custom agent for your workflow.
q5_2.sql:5
Describe what to build
Local
Default permissions
res Server
Ln 5, Col 60 (46 selected)
Spaces: 4
UTF-8
LF
MS SQL
Sign In