

Partner-Specific Affective Precision in Social Active Inference

Anonymous Author(s)

Anonymous Institution

Abstract. In multi-agent social settings, model reliability varies across relationships. Beyond inferring what others will do, an agent must calibrate how confidently those inferences should guide policy selection for each relationship. An agent may maintain a well-validated model of one partner, a fragile model of another, and a model under revision for a third; collapsing these into a single confidence estimate loses information critical for policy selection. Thus, we use active inference to model affect as a metacognitive estimate of confidence in the current partner model, formalized as relationship-specific affective precision. Each partner’s behavioral evidence updates a local confidence estimate that modulates policy precision during selection, regulating how strongly inferred beliefs are expressed in policy rather than changing the beliefs themselves.

Simulations in a multi-partner graded trust game show that partner-local affective precision influences behavior through policy commitment rather than improved inference about partner states. Because the mechanism tracks partner-response predictability rather than realized payoff, greater confidence leads to more committed policies without necessarily producing higher rewards. Under abrupt shifts in social behavior, confidence accumulated from a previously reliable relationship can continue to sharpen commitment after the partner changes, showing that adaptation requires revising confidence estimates and reallocating engagement across relationships. Finally, varying precision gain and priors on model fitness reveal distinct trust-calibration profiles, generating computational hypotheses about individual differences in social trust. Together, these results demonstrate that affective precision serves as a relationship-specific metacognitive signal that distinguishes social prediction from social commitment.

Keywords: Active inference · Affective precision · Social metacognition · Predictive reliability · Policy precision · Trust calibration

1 Introduction

Social agents rarely act on a single, stable model of the social world; instead, they maintain different expectations for different partners. One partner may be familiar and reliable, another newly encountered and uncertain, and another predictable but adversarial. Repeated social exchange depends on learning such partner-specific regularities, including reciprocity, reputation, moral character,

and social value [16, 3, 7, 23, 9]. In such settings, the question is not only what an agent believes about each partner, but how confidently those beliefs should guide policy inference.

Computational models of social decision-making can therefore be separated into three problems. The first is inferring a partner’s behavioral disposition: whether their actions are cooperative, exploitative, reciprocal, or volatile. The second is modeling what they know or intend: the theory-of-mind problem of how another agent represents the world and plans action [10, 11, 20]. The third is estimating whether the resulting partner model is reliable enough to guide confident policy commitment [22]. This aligns with active-inference accounts of trust as confidence in reliable interaction with a partner. To address this third problem, an agent must decide not only what it believes about a partner, but how strongly to act on those beliefs. However, many formal models specify the content of social inference while treating confidence in those inferences as fixed, global, or implicit.

The active inference framework [18] provides a natural formalism for this problem because it links perception, belief updating, and policy selection through a common inferential process. In active inference, agents infer hidden states of the world and select policies by minimizing expected free energy. Moreover, policy inference is precision-weighted, controlling how sharply an agent commits to its inferred policy distribution, making it an effective model of not only what an agent believes but how confidently those beliefs are expressed in policy.

Existing social active-inference models address complementary parts of the problem. Theory-of-mind models address how agents model what others know or intend through recursive belief structures and factorized generative models [20, 21]. Volatility and social-learning models address how prediction errors should change belief updating under uncertainty [17, 3, 8]. Social-learning work also shows that agents revise expectations from discrepancies between expected and observed behavior of others, including in trust-game interactions [15]. These approaches clarify how agents infer partners, model others’ mental states, and revise beliefs under uncertainty. However, they do not by themselves explain how confidence in a social model should remain local to the relationship that generated the evidence.

Affect provides a natural candidate mechanism for this confidence-calibration role. In psychology and neuroscience, affect is often described in terms of valence and arousal—the felt pull toward or away from situations and social commitments [2]. Free-energy and active-inference accounts extend this view by linking affective dynamics to prediction error, model evidence, emotional-state inference, and precision-weighted policy inference [14, 24, 13, 19]. Prior affective-precision accounts make confidence endogenous by relating affect to subjective model fitness and policy precision [13]. On this view, affect can regulate how strongly current beliefs are expressed in policy, shaping the degree of commitment rather than the content of inference.

We therefore define partner-local affective precision as a relationship-specific confidence signal. The focal agent maintains a separate β_k estimate for each

partner, updated only from that partner’s behavioral evidence, which modulates policy precision when inferring policies toward that partner. Unlike prior affective-precision accounts centered on policy-inference quantities [13], we formulate the affective signal from partner-response likelihood surprisal: the surprise of an observed partner response under the focal agent’s current posterior over that partner’s type and stance. This makes the signal perceptual and relationship-local: it tracks whether the current model predicts this partner’s behavior, preserving predictability differences that a global confidence estimate would collapse.

We evaluate this mechanism in a repeated multi-partner graded trust game with partner-choice conditions, abrupt betrayal, and profile variation. The remainder of this paper is organized as follows: Section 2 specifies the multi-partner trust game, per-partner generative models, and the partner-local affective precision mechanism. Section 3 reports simulation results and analyses. Section 4 discusses implications, limitations, and directions for future work.

2 Methods

A focal active-inference agent plays a repeated multi-partner trust/investment game with four partners whose behavioral types and stances are hidden. The agent is implemented using the `pymdp` library for discrete active inference [12, 6], which provides standard components for belief updating and policy selection. Partner-local affective precision is layered on top of separate per-partner generative models, allowing both evidence and policy precision to remain relationship-specific. The task generative process, focal-agent POMDP, affective-precision update, and simulation protocols are specified in Appendices A–D.

2.1 Trust game

We evaluate the mechanism in a repeated multi-partner trust/investment game [4]. The task has a Prisoner’s-Dilemma-style social-dilemma structure: investing more can yield larger returns when a partner cooperates, but larger losses relative to the risk-free baseline when the partner defects. The task therefore requires the focal agent to solve two coupled problems: predicting how each partner is likely to respond, and deciding how strongly to commit to that prediction through investment.

Each interaction consists of partner assignment or selection, investment, and response. In partner-choice conditions, the focal agent first selects a partner k ; in conditions without explicit partner choice, the interaction partner is assigned according to the configured protocol. The agent then chooses a graded investment level $a \in \mathcal{A} = \{0, 1, 2, 3, 4, 5\}$, where 0 denotes no investment and 5 denotes maximum investment. The selected partner emits a response $o_k^{\text{act}} \in \{\text{cooperate}, \text{defect}\}$, sampled from that partner’s hidden behavioral state.

Each partner has two hidden state factors. The first is behavioral type, $s_k^{\text{type}} \in \{\text{cooperator}, \text{reciprocator}, \text{exploiter}, \text{random}\}$. These labels are stylized

abstractions of heterogeneous motives and reciprocity patterns observed in trust-game behavior [9, 23]. The second is stance toward the focal agent, $s_k^{\text{stance}} \in \{\text{trusting, neutral, hostile}\}$. These states are not directly observed; the focal agent infers them from partner responses and payoff observations. Partners themselves are environment-side processes: they sample cooperate-or-defect responses from type- and stance-conditioned probabilities and undergo investment-dependent stance transitions, but do not perform variational inference or maintain affective precision estimates. This isolates the focal agent’s precision mechanism before extending to reciprocal active-inference partners.

With endowment $E = 10$ and return multiplier $M = 3$, when the partner cooperates, the invested amount is multiplied by M and split evenly, so the focal agent receives $Ma/2$; when the partner defects, the focal agent loses the invested amount. Focal payoff is

$$\pi(a, o_k^{\text{act}}) = \begin{cases} E - a + \frac{Ma}{2}, & o_k^{\text{act}} = \text{cooperate}, \\ E - a, & o_k^{\text{act}} = \text{defect}. \end{cases}$$

Thus, cooperation yields $\pi(a, \text{cooperate}) = 10 + 0.5a$, whereas defection yields $\pi(a, \text{defect}) = 10 - a$. The no-investment action $a = 0$ gives a risk-free payoff of 10, while higher investment increases both potential gains and exposure to defection.

Investment also affects future partner stance. Higher investment provides stronger cooperative evidence and shifts stance dynamics toward trust-building transitions; lower investment or withholding shifts dynamics toward trust-damaging transitions. Formally, the transition model interpolates between high-investment and low-investment endpoint matrices according to $\rho(a) = a/5$, with environment-side transition matrices specified in Appendix A.

2.2 Per-partner generative models

Rather than maintaining a single pooled social model, the focal agent maintains a separate discrete generative model $\mathcal{M}_k$ for each partner k . This factorization keeps observations, beliefs, and confidence evidence local to the relationship that generated them. Each $\mathcal{M}_k$ uses the standard $A/B/C/D/E$ components of discrete active inference [6]: observation likelihoods, transition dynamics, preferences, initial priors, and policy priors. The focal agent’s partner-local POMDP specification is provided in Appendix B.

Each partner model contains three hidden factors: partner type, partner stance, and own investment. Type and stance are inferred from evidence; own investment is deterministic bookkeeping that makes the executed investment level available to the payoff likelihood. Observations are the partner’s cooperate-or-defect response and the focal agent’s realized payoff. The partner-response likelihood depends on type and stance, so predictive reliability is defined by response model fit rather than payoff: a reliably cooperative and a reliably defecting partner can both be predictable. The payoff likelihood depends on investment level and marginalizes over partner response, keeping instrumental

payoff preferences inside the generative model. The agent’s transition model mirrors the process dynamics in Appendix A, while scheduled betrayal and repair manipulations are environment-side interventions defined in Appendix D. This model supplies ordinary partner-state inference; the affective-precision layer in Section 2.3 estimates how confidently each partner model should be deployed in policy inference.

2.3 Partner-local affective precision

Partner-local affective precision maps relationship-specific model fit onto policy precision. Before assimilating the observed partner response, the focal agent evaluates how surprising that response would be under its predictive type–stance posterior for partner k . After this precision update, the partner-state posterior is updated on the same observation. Unlike prior affective-precision accounts centered on policy-inference quantities [13], the evidence source here is perceptual partner-response model fit. Because this update is computed separately for each partner, confidence can diverge across relationships even when the focal agent’s task and preferences remain fixed.

Let $\hat{o}_k^{\text{act}}$ denote the observed response from partner k and q_k^- the type–stance posterior before updating on $\hat{o}_k^{\text{act}}$. The agent computes

$$\epsilon_k = -\log P(o_k^{\text{act}} = \hat{o}_k^{\text{act}} \mid q_k^-(s_k^{\text{type}}, s_k^{\text{stance}})). \quad (1)$$

Equation (1) is the negative log posterior predictive likelihood assigned to the observed partner response under q_k^- . Equivalently, the predictive probability marginalizes over the agent’s pre-update beliefs about partner type and stance:

$$P(o_k^{\text{act}} = \hat{o}_k^{\text{act}} \mid q_k^-) = \sum_{s^{\text{type}}, s^{\text{stance}}} P(o_k^{\text{act}} = \hat{o}_k^{\text{act}} \mid s^{\text{type}}, s^{\text{stance}}) q_k^-(s^{\text{type}}, s^{\text{stance}}).$$

Partner response directly tests the type-by-stance model: a reliably defecting partner can produce low surprisal despite poor payoff, while an erratic cooperative partner can produce high surprisal despite favorable outcomes. The signal therefore tracks partner-response model fit rather than partner value.

The neutral baseline is the squared surprisal of a chance-level two-outcome partner-response prediction,

$$\sigma_0^2 = (-\log 0.5)^2.$$

Because the response modality is binary, probability 0.5 corresponds to predicting neither cooperation nor defection better than chance. Squaring places surprisal on a nonnegative error scale before signed affective charge is computed:

$$\phi_k = \alpha(\sigma_0^2 - \epsilon_k^2), \quad (2)$$

where $\alpha \geq 0$ is a gain parameter. Positive ϕ_k means partner k ’s response was predicted better than chance; negative ϕ_k means it was predicted worse than chance.

The signed charge ϕ_k is then used as evidence over the partner-specific inverse-precision estimate β_k . Positive charge shifts posterior mass toward lower β_k , corresponding to higher policy precision; negative charge shifts posterior mass toward higher β_k , corresponding to lower policy precision. A persistence prior smooths this update across rounds so that confidence changes gradually rather than resetting after each interaction. The full categorical update is given in Appendix C.

The agent then sets partner-specific policy precision from the posterior mean:

$$\gamma_k = \gamma_{\text{base}} / \mathbb{E}_{q(\beta_k)}[\beta_k], \quad (3)$$

where γ_{base} is the baseline policy precision. Because β_k is inverse precision, higher expected β_k yields broader, less committed policy inference, whereas lower expected β_k yields higher γ_k and sharper policy commitment.

The β_k posterior is maintained as an auxiliary precision tracker rather than as a hidden state inside the focal agent’s generative model. This keeps the mechanism lightweight and experimentally isolable, but prevents the agent from forming prior expectations over its own future confidence states; this limitation is discussed in Section 4.

2.4 Cross-partner policy selection

In partner-choice regimes, policy inference compares candidate partner–investment policies across relationships. For each partner k , the set Π_k contains policies involving that partner, such as different investment levels or action sequences directed toward k . The corresponding partner model $\mathcal{M}_k$ assigns each candidate policy an unnormalized policy-evidence score $u_{k,\pi}$, where larger values indicate stronger posterior support under the sign convention used for softmax policy inference. Partner-specific precision γ_k should sharpen or flatten commitment among policies involving partner k , without by itself changing the average evidence for selecting that partner.

To apply γ_k locally, we separate each partner’s mean policy evidence from the relative differences among that partner’s policies. Let

$$\bar{u}_k = \frac{1}{|\Pi_k|} \sum_{\pi \in \Pi_k} u_{k,\pi}$$

be the mean policy evidence for partner k . The precision-adjusted score is then

$$\tilde{u}_{k,\pi} = \bar{u}_k + \gamma_k (u_{k,\pi} - \bar{u}_k), \quad (4)$$

where γ_k is the partner-specific policy precision from Eq. (3). The transformation preserves the mean evidence for partner k , while sharpening or flattening relative preferences among policies directed toward that partner. Higher γ_k amplifies within-partner differences, producing more decisive policy commitment; lower γ_k compresses them, producing more tentative commitment.

The final policy posterior is computed by applying a softmax over the transformed scores $\tilde{u}_{k,\pi}$ across all partners and candidate policies. This procedure does not change the per-partner generative models; it only determines how partner-local precision enters cross-partner policy comparison. Reported policy entropy is the natural-log Shannon entropy of $q(\pi)$ over all partner-policy candidates at planning horizon $H=4$, averaged over rounds and seeds; values are in nats and are not normalized by maximum entropy.

2.5 Simulation setup

Simulations compare four precision-runtime variants: full partner-local precision, a shared- β ablation that pools evidence across partners while keeping per-partner POMDP beliefs intact, a tracked-only ablation that updates $q(\beta_k)$ but fixes $\gamma_k = \gamma_{\text{base}}$, and a no-affect control that disables the β tracker entirely. Conditions include open graded investment, partner choice, abrupt betrayal, and precision-dynamics/profile diagnostics. Full condition definitions, episode lengths, and metrics are provided in Appendix D. Simulation code, analysis scripts, and experiment configurations will be released in a public repository upon acceptance.

3 Results

The experiments are organized around three claims about partner-local affective precision, followed by profile analyses of trust-calibration dynamics. Section 3.1 tests whether partner-local precision tracks partner-response predictability more strongly than realized payoff, and whether this relationship weakens when precision evidence is pooled across partners. Section 3.2 tests whether behavioral effects arise through the $\beta_k \rightarrow \gamma_k$ policy-precision pathway rather than improved partner-state inference. Sections 3.3 and 3.4 examine how this policy-commitment effect appears in partner choice and under abrupt social change. Section 3.5 then varies precision gain and prior model fitness to characterize temporal profiles of confidence revision.

3.1 Partner-local precision tracks predictability rather than realized payoff

Partner-local precision was more strongly associated with partner-response likelihood surprisal than with realized payoff. Because partner-choice episodes couple payoff, surprisal, and exposure, we computed active-encounter partial correlations controlling for encounter count (uncontrolled correlations in Appendix D.6). The precision-surprisal association remained strong ($r = -0.940$), while the precision-payoff association was near zero ($r = 0.023$). Negative signs indicate that higher partner-response likelihood surprisal corresponds to lower β_k -derived policy precision; Figure 1 plots absolute magnitudes for readability.

Pooling precision evidence across partners weakened this relationship-specific signal. In the shared- β ablation, per-partner beliefs remained separate but the

precision tracker was updated from pooled partner evidence. The precision–surprisal association fell to $r = -0.496$ after controlling for encounter count, while the precision–payoff association was comparable in magnitude ($r = 0.535$). Thus, the update rule alone is not sufficient: when precision evidence is pooled, β_k no longer cleanly indexes relationship-local model fit and becomes more entangled with global exposure/payoff structure.

Payoff in the same predictability-value analysis run did not identify the mechanism. Mean cumulative payoff was similar for partner-local precision (1977.2) and shared- β (1973.4), while both exceeded no-affect (1905.9). The payoff panel therefore complements the correlation panels: payoff can vary across runtime variants, but the clearest relationship-specific precision signal is the partner-local precision–surprisal association, not a precision–payoff association. This is consistent with affective precision serving as a confidence-calibration signal rather than a direct reward-maximization signal.

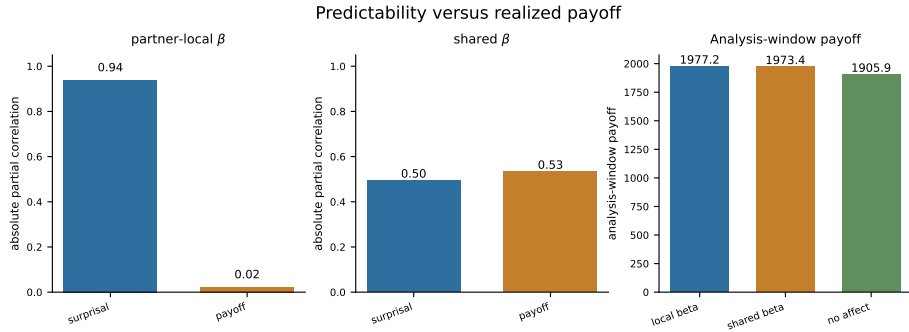


Fig. 1: Partner-local precision is more strongly associated with partner-response likelihood surprisal than with realized payoff. The correlation panels plot absolute active-encounter partial correlations; the payoff panel shows payoff in the same predictability-value analysis run. Pooling precision evidence across partners attenuates the partner-local predictability signature and makes the pooled precision signal less diagnostically specific, with payoff and surprisal associations becoming comparable under shared β .

3.2 Tracked-only ablation isolates policy commitment

To test whether partner-local affective precision changes behavior through policy deployment rather than partner-state inference, we used a tracked-only ablation. This variant updates $q(\beta_k)$ normally while holding $\gamma_k = \gamma_{\text{base}}$, preserving the precision estimate but preventing it from modulating policy selection.

The tracked-only ablation confirmed that the tracker can move without producing the deployment effect. In the open graded deployment run, tracked-only produced a mean β_k range comparable to full partner-local precision (1.34

versus 1.32), but holding $\gamma_k = \gamma_{\text{base}}$ kept policy entropy at the tracked-only reference level. Full precision modulation lowered entropy by 0.205 relative to tracked-only, with lower cumulative payoff (1851.3 versus 1864.2). Thus, β_k matters behaviorally when it is allowed to modulate γ_k , producing sharper policy commitment. When that pathway is cut, the tracker remains active but the entropy effect is lost. Figure 2 shows the pathway-isolation comparison.

This supports the interpretation of affective precision as a calibration layer rather than an inference-improvement mechanism. The tracker does not directly improve partner-state inference; it regulates how strongly the agent commits to policies based on its current partner model. Whether sharper commitment improves payoff depends on the social context, not on precision alone.

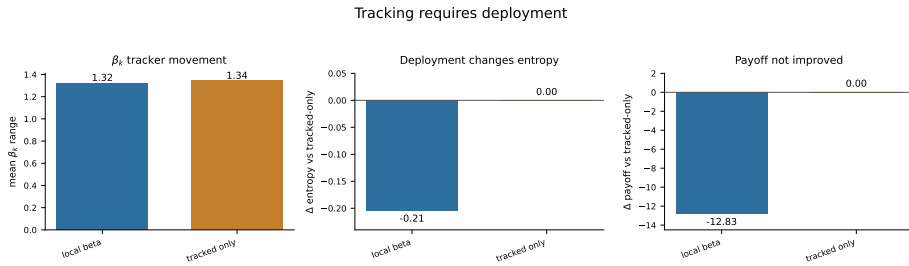


Fig. 2: Open graded regime: tracked-only and partner-local precision both move the β_k tracker, but only partner-local precision deploys that tracker through γ_k . Relative to tracked-only, partner-local precision lowers policy entropy without improving payoff, isolating the entropy effect to the $\beta_k \rightarrow \gamma_k$ policy-precision pathway.

3.3 Partner choice extends policy commitment to social allocation

Partner-local precision also affected policy commitment when the agent could choose whom to engage. In the partner-choice regime, each candidate pairs a partner with a multi-step investment plan, of which only the first step is executed each round. Precision modulation lowered policy entropy relative to the no-affect control (3.99 versus 4.83), indicating that the $\beta_k \rightarrow \gamma_k$ pathway shapes partner-investment policies, not only investment levels within a fixed interaction.

The allocation shift was small and condition-specific: the partner-local agent selected the cooperator slightly more often than the no-affect control (36.6% versus 34.8%) and the exploiter slightly less often (13.8% versus 16.2%). This should not be read as a general cooperator-seeking bias. The main effect is sharper commitment under current partner models, not direct value tracking; aggregate payoff was nearly unchanged (393.6 versus 393.2).

Together, these results show that partner-local precision can reshape engagement without guaranteeing reward improvement. Whether sharper commitment

helps or hurts depends on whether the social environment remains stable. The abrupt-betrayal condition tests this boundary directly.

3.4 Abrupt betrayal tests confidence under change

Accumulated confidence helps when it remains attached to a valid partner model, but can lag behind abrupt social change. The abrupt-betrayal condition tests this boundary: a previously cooperative partner switches stance at round 31, and the agent must adapt while carrying confidence built from the pre-switch relationship.

Precision modulation continued to affect deployment after the switch. Mean policy entropy was lower under partner-local precision than under the no-affect control (8.36 versus 8.74), with a bootstrap interval that did not cross zero (-0.63 to -0.16). Joint partner-type accuracy was also higher under precision modulation (0.372 versus 0.266; bootstrap interval 0.024 to 0.188), consistent with engagement being redirected rather than simply disrupted. Because the tracked-only ablation in Section 3.2 isolated the $\beta_k \rightarrow \gamma_k$ pathway, this accuracy difference is best interpreted as a downstream effect of changed engagement and sampling, not as direct improvement to the partner-state update.

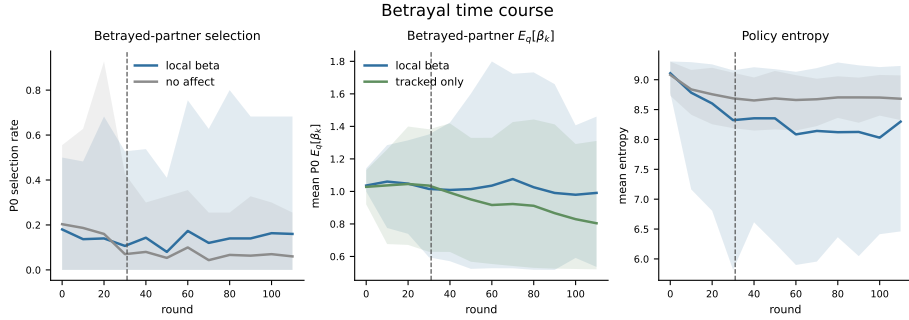


Fig. 3: Abrupt betrayal in the partner-choice regime. The dashed line marks the round-31 stance switch for partner 0. Shaded bands show 95% intervals across seeds. Partner-local precision maintains lower policy entropy after the switch, while the tracked-only condition shows that β_k dynamics can persist without the same deployment effect. Betrayed-partner selection illustrates the reallocation problem: confidence remains behaviorally relevant after the relationship changes, but payoff depends on how engagement is redistributed.

Payoff showed a weaker and more variable pattern. The payoff difference was positive but uncertain (1185.9 versus 1172.1; bootstrap interval -21.6 to 52.0). This pattern is consistent with a calibration mechanism: confidence can keep policies decisive after a relationship changes, but reward depends on whether

the agent redirects engagement quickly enough and toward useful alternatives. Figure 3 shows the time course around the round-31 betrayal: partner-local precision maintains lower policy entropy after the switch, while tracked-only separates the β_k trajectory from policy deployment. Betrayed-partner selection illustrates the reallocation problem: confidence remains behaviorally relevant after the relationship changes, but payoff depends on how engagement is redistributed.

The betrayal result exposes a timing problem in social confidence: confidence built from reliable past evidence can remain behaviorally active after the relationship changes. We next vary precision gain and prior model fitness to examine how confidence-revision dynamics differ across agents.

3.5 Precision dynamics as computational profiles of social trust calibration

The betrayal result shows that confidence revision has temporal structure: confidence can be too weak, too slow, or too reactive. Varying precision gain α confirmed that gain controls the amplitude of β_k dynamics: in the betrayal regime, mean within-episode β_k range increased from 0.147 at $\alpha = 0.05$ to 1.218 at $\alpha = 8.0$. Payoff did not follow this monotonic pattern, indicating that faster confidence revision is not automatically better revision.

Crossing prior model fitness with gain produced distinct trust-calibration profiles. Low gain muted confidence dynamics and weakened policy commitment; high gain amplified revision but increased vulnerability to overcommitment after change; cautious priors suppressed premature confidence but also reduced exploitation of reliable partners. In the tested betrayal profiles, the default configuration achieved the highest payoff, while naive-stubborn, avoidant-rigid, and anxious-reactive variants expressed different failure modes: diffuse commitment, suppressed exploitation, and post-change overcommitment. Exact priors, gain values, and profile metrics are reported in Appendix E.

Trust-repair diagnostics further separated reengagement from restored confidence. Some variants reengaged a reverted partner without rebuilding the same confidence dynamics, while high-gain variants showed larger β_k swings without faster payoff recovery. The agent can return to a partner before it trusts them again. Extended profile and repair metrics are reported in Appendix E.

4 Discussion

The results support partner-local affective precision as a calibration mechanism for social policy commitment. Precision was defined from partner-response predictability rather than payoff, lost its entropy effect when the $\beta_k \rightarrow \gamma_k$ pathway was cut, and remained behaviorally active under abrupt change without guaranteeing reward improvement. Together, these findings support the paper’s central distinction: social prediction and social commitment are related but distinct. A reliably cooperative partner and a reliably defecting partner can both generate low partner-response likelihood surprisal because both are predictable; conversely,

a favorable but inconsistent partner can remain difficult to model. Partner-local affective precision therefore estimates how well the current partner model is working, then regulates how strongly that model is expressed in policy.

The tracked-only ablation clarifies where the mechanism acts. Updating β_k without allowing it to modulate γ_k preserved the tracker but removed the entropy effect, while full precision modulation sharpened policy commitment. This supports the interpretation that partner-local affective precision does not improve partner-state inference directly; it changes how strongly current partner beliefs are deployed. It also clarifies the distinction from affective-precision accounts centered on policy-inference quantities: here, the model-fitness signal is partner-response likelihood surprisal under the current type-stance posterior.

The abrupt-betrayal condition shows the main limitation of this first calibration layer. Confidence built from reliable past evidence can remain behaviorally active after the relationship changes. In the present model, β_k is an auxiliary tracker, so the agent does not explicitly infer when its own confidence has become stale. A fuller architecture should add volatility or change detection that discounts accumulated confidence when prediction-error structure shifts, and should make partner-choice policies more exploratory after detected change. Embedding β_k as a hidden state would also allow the agent to form prior expectations over its own future confidence rather than only updating confidence retrospectively.

The profile analyses generate computational hypotheses about trust calibration, connecting to broader work on social learning, psychosis, and attachment [3, 1, 5]. Precision gain and prior model fitness shaped update amplitude, sensitivity to change, and reengagement after repair, but no single profile was uniformly best [25]. High gain expanded confidence swings without monotonic payoff improvement; low gain stabilized behavior but slowed revision; cautious priors protected against premature confidence while suppressing confidence even toward reliable partners. These tradeoffs suggest empirical tests on trust-game time series, including repair settings after trust violations: whether human behavior separates predictability from value, policy deployment from partner-state inference, and reengagement from restored confidence. A further extension is to replace scripted partners with reciprocal active-inference agents that maintain their own beliefs, policies, and precision estimates.

5 Conclusion

We formalize social affect as a relationship-specific metacognitive signal: an estimate of how confidently an agent should select policies from its current model of each partner. Implemented as partner-local affective precision, this signal updates from partner-response likelihood surprisal and modulates policy precision during selection. Across simulations in a graded multi-partner trust game, precision tracks predictability more closely than payoff, affects behavior through the $\beta_k \rightarrow \gamma_k$ policy-precision pathway rather than improved partner-state inference, and remains behaviorally active when relationships change.

These results support a distinction between social prediction and social commitment. An agent can infer what a partner is likely to do while separately estimating how strongly that inference should guide policy commitment. Precision gain and prior model fitness shape this calibration process, producing tradeoffs in confidence accumulation, betrayal adaptation, reengagement, and repair. Future empirical work can test whether human trust-game behavior shows similar distinctions between predictability and value, inference and policy commitment, and reengagement and restored confidence. Partner-local affective precision offers a computational account of social metacognition in which relationships differ not only in what an agent believes about them, but in how strongly those beliefs should guide policy selection.

References

1. Adams, R.A., Stephan, K.E., Brown, H.R., Frith, C.D., Friston, K.J.: The computational anatomy of psychosis. *Frontiers in Psychiatry* **4**, 47 (2013). <https://doi.org/10.3389/fpsy.2013.00047>
2. Barrett, L.F.: Solving the emotion paradox: Categorization and the experience of emotion. *Personality and Social Psychology Review* **10**(1), 20–46 (2006). https://doi.org/10.1207/s15327957pspr1001_2
3. Behrens, T.E.J., Hunt, L.T., Woolrich, M.W., Rushworth, M.F.S.: Associative learning of social value. *Nature* **456**, 245–249 (2008). <https://doi.org/10.1038/nature07538>
4. Berg, J., Dickhaut, J., McCabe, K.: Trust, reciprocity, and social history. *Games and Economic Behavior* **10**(1), 122–142 (1995). <https://doi.org/10.1006/game.1995.1027>
5. Cittern, D., Nolte, T., Friston, K., Edalat, A.: Intrinsic and extrinsic motivators of attachment under active inference. *PLOS ONE* **13**(4), e0193955 (2018). <https://doi.org/10.1371/journal.pone.0193955>
6. Da Costa, L., Parr, T., Sajid, N., Veselic, S., Neacsu, V., Friston, K.J.: Active inference on discrete state-spaces: A synthesis. *Journal of Mathematical Psychology* **99**, 102447 (2020). <https://doi.org/10.1016/j.jmp.2020.102447>
7. Delgado, M.R., Frank, R.H., Phelps, E.A.: Perceptions of moral character modulate the neural systems of reward during the trust game. *Nature Neuroscience* **8**(11), 1611–1618 (2005). <https://doi.org/10.1038/nn1575>
8. Diaconescu, A.O., Mathys, C., Weber, L.A.E., Kasper, L., Mauer, J., Stephan, K.E.: Hierarchical prediction errors in midbrain and septum during social learning. *Social Cognitive and Affective Neuroscience* **12**(4), 618–634 (2017). <https://doi.org/10.1093/scan/nsw171>
9. Espín, A.M., Exadaktylos, F., Herrmann, B., Brañas-Garza, P.: Heterogeneous motives in the trust game: A tale of two roles. *Frontiers in Psychology* **7**, 728 (2016). <https://doi.org/10.3389/fpsyg.2016.00728>
10. Frith, C.D., Frith, U.: Mechanisms of social cognition. *Annual Review of Psychology* **63**, 287–313 (2012). <https://doi.org/10.1146/annurev-psych-120710-100449>
11. Hampton, A.N., Bossaerts, P., O’Doherty, J.P.: Neural correlates of mentalizing-related computations during strategic interactions in humans. *Proceedings of the National Academy of Sciences* **105**(18), 6741–6746 (2008). <https://doi.org/10.1073/pnas.0711099105>

12. Heins, C., Millidge, B., Demekas, D., Klein, B., Friston, K., Couzin, I.D., Tschantz, A.: pymdp: A python library for active inference in discrete state spaces. *Journal of Open Source Software* **7**(73), 4098 (2022). <https://doi.org/10.21105/joss.04098>
13. Hesp, C., Smith, R., Parr, T., Allen, M., Friston, K.J., Ramstead, M.J.D.: Deeply felt affect: The emergence of valence in deep active inference. *Neural Computation* **33**(2), 398–446 (2021). <https://doi.org/10.1162/neco.a.01341>
14. Joffily, M., Coricelli, G.: Emotional valence and the free-energy principle. *PLOS Computational Biology* **9**(6), e1003094 (2013). <https://doi.org/10.1371/journal.pcbi.1003094>
15. Joiner, J., Piva, M., Turrin, C., Chang, S.W.C.: Social learning through prediction error in the brain. *npj Science of Learning* **2**, 8 (2017). <https://doi.org/10.1038/s41539-017-0009-2>
16. King-Casas, B., Tomlin, D., Anen, C., Camerer, C.F., Quartz, S.R., Montague, P.R.: Getting to know you: reputation and trust in a two-person economic exchange. *Science* **308**(5718), 78–83 (2005). <https://doi.org/10.1126/science.1108062>
17. Mathys, C., Daunizeau, J., Friston, K.J., Stephan, K.E.: A Bayesian foundation for individual learning under uncertainty. *Frontiers in Human Neuroscience* **5**, 39 (2011). <https://doi.org/10.3389/fnhum.2011.00039>
18. Parr, T., Pezzulo, G., Friston, K.J.: *Active Inference: The Free Energy Principle in Mind, Brain, and Behavior*. MIT Press (2022)
19. Pattisapu, C., Verbelen, T., Pitliya, R.J., Kiefer, A.B., Albarracin, M.: Free energy in a circumplex model of emotion. In: *Active Inference: 5th International Workshop, IWAI 2024, Oxford, UK, September 9–11, 2024, Revised Selected Papers. Communications in Computer and Information Science*, vol. 2193, pp. 34–46. Springer (2025). https://doi.org/10.1007/978-3-031-77138-5_3
20. Pitliya, R.J., Catal, O., Van de Maele, T., Pezzato, C., Verbelen, T.: Theory of mind using active inference: A framework for multi-agent cooperation (2025). <https://doi.org/10.48550/arXiv.2508.00401>
21. Ruiz-Serra, J., Sweeney, P., Harré, M.S.: Factorised active inference for strategic multi-agent interactions. In: *Proceedings of the 24th International Conference on Autonomous Agents and Multiagent Systems*. pp. 1793–1802. International Foundation for Autonomous Agents and Multiagent Systems (2025). <https://doi.org/10.5555/3709347.3743815>
22. Schoeller, F., Miller, M., Salomon, R., Friston, K.J.: Trust as extended control: Human-machine interactions as active inference. *Frontiers in Systems Neuroscience* **15**, 669810 (2021). <https://doi.org/10.3389/fnsys.2021.669810>
23. Smith, A.: Reciprocity effects in the trust game. *Games* **4**(3), 367–374 (2013). <https://doi.org/10.3390/g4030367>
24. Smith, R., Parr, T., Friston, K.J.: Simulating emotions: An active inference model of emotional state inference and emotion concept learning. *Frontiers in Psychology* **10**, 2844 (2019). <https://doi.org/10.3389/fpsyg.2019.02844>
25. Yuan, B., Dong, Y., Li, W.: The trust repair effect of apology: A systematic review and meta-analysis. *Advances in Psychological Science* **25**(7), 1103–1113 (2017). <https://doi.org/10.3724/SP.J.1042.2017.01103>

Appendix

A Trust-Game Generative Process

This appendix specifies the environment-side process used in the repeated trust-game simulations. The generative process consists of scripted partners with hidden type and stance variables, investment-dependent stance transitions, cooperate-or-defect responses, and deterministic payoff delivery. Appendix B then specifies the focal agent’s POMDP model of this process.

A.1 Episode structure

Each episode consists of repeated interactions between one focal active-inference agent and four environment-side partners. In each round, the interaction partner is either assigned by the configured protocol or selected by the focal agent in partner-choice conditions. The focal agent then chooses a graded investment level

$$a \in \mathcal{A} = \{0, 1, 2, 3, 4, 5\},$$

where $a = 0$ denotes no investment and $a = 5$ denotes maximum investment. The selected partner emits a binary response

$$o_k^{\text{act}} \in \{\text{cooperate}, \text{defect}\},$$

sampled from the partner’s current type and stance. The environment then delivers payoff according to the deterministic payoff function in Appendix A.4, and updates the partner’s stance according to the investment-dependent transition model in Appendix A.5.

A.2 Partner state variables

Each environment-side partner k has two hidden process variables. The first is behavioral type,

$$s_k^{\text{type}} \in \{\text{cooperator}, \text{reciprocator}, \text{exploiter}, \text{random}\},$$

and the second is stance toward the focal agent,

$$s_k^{\text{stance}} \in \{\text{trusting}, \text{neutral}, \text{hostile}\}.$$

These variables are hidden from the focal agent but define how the environment generates partner responses and stance transitions. Type controls the partner’s broad response tendency, while stance modulates how cooperative the partner is toward the focal agent at a given point in the episode.

A.3 Partner-response probabilities

The partner cooperation likelihood table defines the probability the partner cooperates given type and stance:

Table 1: Cooperation likelihood $P(\text{cooperate} \mid s^{\text{type}}, s^{\text{stance}})$.

Partner type	Trusting	Neutral	Hostile
Cooperator	0.95	0.80	0.55
Reciprocator	0.90	0.70	0.30
Exploiter	0.70	0.35	0.10
Random	0.60	0.50	0.35

The table defines the environment-side cooperation probability

$$P(o_k^{\text{act}} = \text{cooperate} \mid s_k^{\text{type}}, s_k^{\text{stance}}),$$

with

$$P(o_k^{\text{act}} = \text{defect} \mid \cdot) = 1 - P(o_k^{\text{act}} = \text{cooperate} \mid \cdot).$$

The same response probabilities are used in the focal agent’s partner-response likelihood A_k^{act} (Appendix B.3), allowing the focal agent to infer type and stance from observed cooperate-or-defect responses. Predictability is not identical to cooperation probability. A strongly cooperative state and a strongly defective state can both be predictable when the focal agent assigns high probability to the response that actually occurs.

A.4 Payoff function

Payoff is delivered by the environment after the partner response is sampled. With endowment $E = 10$ and multiplier $M = 3$, the invested amount is subtracted from the focal agent’s endowment. If the partner cooperates, the investment is multiplied by M and split evenly, so the focal agent receives $Ma/2$. If the partner defects, the focal agent receives no return from the investment.

$$\pi(a, o_k^{\text{act}}) = \begin{cases} E - a + \frac{Ma}{2}, & o_k^{\text{act}} = \text{cooperate}, \\ E - a, & o_k^{\text{act}} = \text{defect}. \end{cases} \quad (5)$$

Thus, cooperation yields $\pi(a, \text{cooperate}) = 10 + 0.5a$, whereas defection yields $\pi(a, \text{defect}) = 10 - a$. The no-investment action $a = 0$ gives a risk-free payoff of 10, while higher investment increases both possible gains and exposure to defection.

A.5 Stance transition dynamics

Stance transitions depend on the focal agent’s graded investment a by interpolating between a high-investment/trust-building endpoint and a low-investment/withholding endpoint:

$$\rho(a) = \frac{a}{|\mathcal{A}| - 1} = \frac{a}{5}, \quad B^{\text{stance}}(a) = \rho(a)B^{\text{high}} + (1 - \rho(a))B^{\text{low}}. \quad (6)$$

High investment shifts dynamics toward trust building; low investment or withholding shifts dynamics toward trust damage; recovery from hostility is slower than collapse.

Table 2: Endpoint stance transition dynamics. The focal agent’s graded investment interpolates between B^{high} and B^{low} according to Eq. (6).

High investment / trust-building endpoint B^{high}			
To \ From	Trusting	Neutral	Hostile
Trusting	0.90	0.30	0.05
Neutral	0.10	0.60	0.35
Hostile	0.00	0.10	0.60
Low investment / withholding endpoint B^{low}			
To \ From	Trusting	Neutral	Hostile
Trusting	0.10	0.05	0.02
Neutral	0.50	0.35	0.18
Hostile	0.40	0.60	0.80

These dynamics instantiate the asymmetry of trust: sustained high investment gradually builds trust, while sustained withholding rapidly damages trust; recovery from hostility is slow. In scheduled betrayal and repair protocols, the environment can additionally intervene on a partner’s stance according to the protocol schedule; these interventions are not known transition events in the focal agent’s POMDP.

A.6 Boundary of the current simulation

All reported simulations use one focal active-inference agent interacting with four scripted partners. Partners maintain hidden type and stance, sample responses from Appendix A.3, and update stance according to Appendix A.5; they do not perform variational inference, infer policies, or maintain affective-precision estimates. This boundary isolates the focal agent’s partner-local precision mechanism before reciprocal active-inference partners are introduced.

B Focal-Agent POMDP Specification

This appendix specifies the focal agent’s partner-local generative model in standard discrete active-inference form. For each partner k , the agent maintains a POMDP $\mathcal{M}_k$ with hidden factors for partner type, partner stance, and own-investment bookkeeping. The model is fit to the generative process in Appendix A, but it is not identical to the environment: payoff is represented as an observation modality whose likelihood marginalizes over partner response, scheduled betrayal and repair are environment-side interventions, and affective precision is maintained outside the POMDP.

B.1 Partner-local factorization

The focal agent maintains a separate model $\mathcal{M}_k$ for each partner k , rather than one pooled social model. Each $\mathcal{M}_k$ contains its own observation likelihoods, transition dynamics, preferences, initial priors, and policy priors. This factorization keeps partner-specific evidence local to the relationship that generated it. Partner choice is handled outside the individual partner-local POMDPs by comparing candidate partner–investment policies after each partner model has produced policy evidence.

B.2 Hidden state factors and observations

As described in Section 2.2, the focal agent’s generative model for each partner k maintains three hidden factors:

$$s_k^{\text{type}} \in \mathcal{S}^{\text{type}}, \quad (7)$$

$$s_k^{\text{stance}} \in \mathcal{S}^{\text{stance}}, \quad (8)$$

$$s^{\text{own}} \in \mathcal{A}, \quad (9)$$

where

$$\begin{aligned} \mathcal{S}^{\text{type}} &= \{\text{cooperator, reciprocator,} \\ &\quad \text{exploiter, random}\}, \\ \mathcal{S}^{\text{stance}} &= \{\text{trusting, neutral, hostile}\}, \\ \mathcal{A} &= \{0, 1, 2, 3, 4, 5\}. \end{aligned}$$

Executed investment levels index s^{own} . The own-investment factor is deterministic bookkeeping: the agent always knows its executed investment level, and this factor makes that knowledge available to the observation model. It is not a psychological hidden variable. The joint hidden state per partner spans $4 \times 3 \times 6 = 72$ configurations.

Observations are partner response and focal payoff:

$$o_k^{\text{act}} \in \mathcal{O}^{\text{act}}, \quad (10)$$

$$o_k^{\text{pay}} \in \mathcal{O}^{\text{pay}}, \quad (11)$$

where $\mathcal{O}^{\text{act}} = \{\text{cooperate, defect}\}$ and $\mathcal{O}^{\text{pay}}$ comprises eleven discrete payoff levels (Eq. (5)).

B.3 Observation likelihoods

Partner-response likelihood A_k^{act} . The partner-response modality represents the focal agent’s likelihood model for observed cooperate-or-defect responses. It uses the cooperation probabilities in Appendix A.3:

$$P(o_k^{\text{act}} = \text{cooperate} \mid s_k^{\text{type}}, s_k^{\text{stance}}),$$

with

$$P(o_k^{\text{act}} = \text{defect} \mid \cdot) = 1 - P(o_k^{\text{act}} = \text{cooperate} \mid \cdot).$$

The modality is uniform over s^{own} : partner response depends on inferred partner type and stance, not on the bookkeeping factor itself. Investment affects future response probabilities indirectly through stance transitions.

Payoff likelihood A_k^{pay} . In the environment, payoff is deterministic given investment and partner response (Appendix A.4). In the focal agent’s POMDP, payoff is represented as a likelihood over payoff observations conditional on own investment and latent partner state, marginalizing over partner response:

$$\begin{aligned} P(o_k^{\text{pay}} = v \mid s^{\text{own}}, s_k^{\text{type}}, s_k^{\text{stance}}) \\ = \sum_{o^{\text{act}} \in \{\text{cooperate}, \text{defect}\}} \mathbb{I}[\pi(s^{\text{own}}, o^{\text{act}}) = v] P(o_k^{\text{act}} = o^{\text{act}} \mid s_k^{\text{type}}, s_k^{\text{stance}}). \end{aligned} \quad (12)$$

This makes higher investment beneficial when cooperation is likely and costly when defection is likely, while keeping payoff preferences inside the generative model.

B.4 Transition dynamics

Type drift B_k^{type} . Partner type is uncontrollable and drifts slowly:

$$P(s_k^{\text{type}'} = j \mid s_k^{\text{type}} = i) = \begin{cases} 1 - p_{\text{switch}} & j = i, \\ p_{\text{switch}} / (K_{\text{type}} - 1) & j \neq i, \end{cases} \quad (13)$$

with $K_{\text{type}} = 4$ and default $p_{\text{switch}} = 0.05$. Scheduled betrayal scenarios set $p_{\text{switch}} = 0$.

Stance dynamics B_k^{stance} . The focal agent’s stance-transition model uses the same investment-dependent interpolation form as the environment-side process in Appendix A.5:

$$\rho(a) = \frac{a}{|\mathcal{A}| - 1} = \frac{a}{5}, \quad B^{\text{stance}}(a) = \rho(a)B^{\text{high}} + (1 - \rho(a))B^{\text{low}}.$$

The endpoint matrices B^{high} and B^{low} are given in Appendix A.5. This transition model encodes the agent’s prior belief that higher investment tends to build

trust, lower investment or withholding tends to damage trust, and recovery from hostility is slower than collapse.

Scheduled betrayal and repair protocols intervene on the environment-side stance process. The focal agent is not given explicit prior knowledge of these intervention times; it must adapt from subsequent partner responses and payoff observations.

Own-investment bookkeeping B^{own} . Identity transition on the executed investment level (not an inferred belief):

$$P(s^{\text{own}'} = a' \mid s^{\text{own}}, a) = \mathbb{I}[a' = a]. \quad (14)$$

B.5 Preferences, priors, and policy priors

Observation preferences C_k . There is no direct preference over partner responses:

$$C_k^{\text{act}} = [0, 0] \quad \text{over } \{\text{cooperate, defect}\}. \quad (15)$$

Payoff preferences ascend over the graded payoff support generated by Eq. (5):

$$C_k^{\text{pay}} = \text{log_softmax}\left(\frac{[5, 6, 7, 8, 9, 10, 10.5, 11, 11.5, 12, 12.5]}{\tau}\right), \quad (16)$$

where τ is a temperature parameter controlling preference sharpness. Instrumental motivation therefore enters through payoff observations and multi-step planning rather than direct preferences over partner responses.

Initial-state priors D_k . Type, stance, and own-investment priors are

$$D_k^{\text{type}} = \left[\frac{1}{4}, \frac{1}{4}, \frac{1}{4}, \frac{1}{4}\right], \quad (17)$$

$$D_k^{\text{stance}} = [0.2, 0.6, 0.2], \quad (18)$$

$$D^{\text{own}} = \text{Unif}(\{0, 1, 2, 3, 4, 5\}). \quad (19)$$

Policy priors E_k . Policy priors are uniform over admissible graded investment sequences at the configured planning horizon. In partner-choice settings, partner selection is handled outside the per-partner POMDP by evaluating partner-investment policy candidates with precision-adjusted scores before executing the chosen investment. This cross-partner comparison is specified in Appendix C.

B.6 Runtime and precision boundary

The partner-local POMDPs supply ordinary active-inference belief updating and policy evidence for each partner. They do not contain β_k as a hidden state. Instead, β_k is maintained as an auxiliary partner-local precision tracker, updated from partner-response likelihood surprisal and then mapped to policy precision γ_k . This design keeps the POMDP state space compact and makes the precision pathway experimentally isolable. The cost is that the focal agent cannot form prior expectations over its own future confidence states. Appendix C specifies the auxiliary update and the cross-partner policy-selection procedure.

C Affective-Precision Update and Policy Selection

This appendix specifies the auxiliary affective-precision update layered on top of the focal agent’s partner-local POMDPs. The update maps partner-response model fit into a categorical posterior over inverse precision β_k , then maps the posterior mean to partner-specific policy precision γ_k . The same appendix also specifies how γ_k enters partner-choice policy comparison.

C.1 Categorical beta support

Each partner maintains a categorical posterior $q(\beta_k)$ over discrete inverse-precision levels $\{0.5, 0.67, 1.0, 1.5, 2.0\}$, updated each round from affective charge ϕ_k . The categorical representation keeps the inverse-precision convention explicit, bounds the precision dynamics, and allows the update to be analyzed as movement over interpretable confidence states.

C.2 Persistence prior

The update proceeds in three steps. First, a persistence prior smooths the previous posterior via a tridiagonal transition matrix:

$$p(\beta_k) \leftarrow T \cdot q_{\text{prev}}(\beta_k), \quad (20)$$

where T is tridiagonal with persistence parameter 0.8 and reflecting boundaries, encoding the prior expectation that precision evolves slowly.

C.3 Charge-based pseudo-likelihood

Second, a charge-based pseudo-likelihood maps positive charge toward high policy precision (low β) and negative charge toward low policy precision (high β):

$$\log \ell(\beta_\ell) = \phi_k \cdot \frac{1}{\beta_\ell}, \quad (21)$$

where β_ℓ ranges over the five support points. This auxiliary update satisfies the intended monotonicity: positive charge reinforces lower β , negative charge reinforces higher β , and the effect scales with effective precision at each support point.

C.4 Posterior update and policy precision

Third, the posterior is normalized:

$$q(\beta_k) \propto \exp(\log \ell(\beta_\ell)) \cdot p(\beta_k). \quad (22)$$

Policy precision is then set from the posterior mean as given in Eq. (3) of the main text. The quantity β_k is inverse precision, so higher posterior mean β_k lowers

policy precision γ_k , while lower posterior mean β_k raises γ_k . The β_k posterior is maintained as an external auxiliary tracker rather than a proper hidden state in the generative model, which simplifies implementation at the cost of losing the agent’s ability to form prior expectations over its own future affective states (discussed in Section 4).

C.5 Cross-partner policy selection

In partner-choice regimes, partner-specific precision sharpens or flattens policy commitment among policies directed toward a given partner while preserving the mean policy evidence associated with that partner. The transformation in Eq. (4) applies γ_k to deviations from the partner-specific policy mean, rather than to raw policy scores. The agent samples or selects policies from the combined set of transformed scores across all partners and policies. This lets γ_k control commitment among policies involving partner k without changing the average evidence for approaching partner k during cross-partner comparison.

C.6 Ablation variants

The four precision-runtime variants are defined in Section 2.5. For completeness: the no-affect control disables the β tracker entirely and fixes $\gamma_k = \gamma_{\text{base}}$; the tracked-only ablation updates $q(\beta_k)$ normally but fixes $\gamma_k = \gamma_{\text{base}}$, allowing the precision estimate to be analyzed without influencing policy selection; the default partner-local variant applies the full update pipeline described in this appendix and sets γ_k from each partner’s posterior mean; and the shared- β ablation maintains a single pooled β state updated from all partner evidence while keeping per-partner POMDP beliefs intact, with all partner branches inheriting precision from the shared expected β .

D Simulation Protocols and Metrics

This appendix summarizes simulation conditions, replication counts, schedules, and metrics.

D.1 Simulation conditions

All reported experiments use one focal active-inference agent with four partners ($K = 4$), per-partner generative models, graded investment actions, and environment-side partner policies (Appendices A–B). Conditions differ by assignment mode, scheduled partner changes, and precision/profile manipulations within the graded payoff regime. In conditions without explicit partner choice, the interaction partner is assigned according to the configured protocol; in partner-choice conditions, the agent selects the partner before selecting an investment level.

Open graded decision regime. The graded regime uses a discretized investment level while keeping the same hidden type–stance structure. This is the primary deployment-contrast setting (Section 3.2): affect, no-affect, and tracked-only variants are compared on policy entropy and cumulative payoff.

Predictability-over-payoff locality probe. A 100-round partner-choice graded environment with partner-local, shared- β , and no-affect variants tests whether β_k -derived policy precision tracks partner-response likelihood surprisal more strongly than realized payoff (Section 3.1). The payoff panel reports the same active-encounter analysis window used for the locality-probe correlation readouts.

Partner-choice regime. The agent first selects a partner, then selects an investment level toward that partner each round ($4 \times 6 = 24$ one-step branches; policy entropy uses multi-step policies at $H=4$). Partner selection is where engagement reorganization and social-allocation readouts are defined (Section 3.3).

Abrupt betrayal. A partner-choice graded environment with scheduled stance betrayal on a previously cooperative partner tests post-switch reallocation, entropy, payoff, and joint accuracy (Section 3.4).

Precision-dynamics/profile variation. Computational profile variants vary β_k amplitude and stability by manipulating precision gain α and prior model fitness in open graded, betrayal, and partner-choice environments (Section 3.5; Appendix E).

Forgiveness. The trust-repair protocol extends abrupt betrayal by allowing the betrayed partner to return to a cooperative/trusting state, testing reengagement and confidence recovery after restored reliability (Section 3.5).

D.2 Seed counts and episode lengths

Unless otherwise stated in the main text, episode length is 200 rounds. The abrupt-betrayal condition uses 120 rounds because post-switch readouts dominate interpretation. Profile tables use 20 seeds per condition. Central behavioral comparisons use 30 seeds per condition. Three-seed implementation checks were used only for implementation validation; all main-text claims are based on the runs reported in the relevant sections.

Representative configured scales:

Table 3: Representative episode lengths and replication counts by experiment family.

Experiment family	Setting	Rounds	Seeds
Open deployment	graded, random/open choice	200	30
Predictability-over-payoff locality probe	graded partner choice	100	30
Partner allocation	partner choice	200	30
Abrupt betrayal	scheduled partner-choice betrayal	120	30
Precision perturbation	graded perturbations	200	30
Profile program	sweeps, factorial, forgiveness	200	20

Supplementary materials. Simulation code, analysis scripts, and experiment configurations will be released in a public repository upon acceptance. The release will include the simulation environments, precision-runtime variants, experiment configuration files, analysis scripts, and figure-generation code used for the reported experiments.

D.3 Betrayal schedule

The canonical abrupt-betrayal protocol (**betrayal_choice**) uses graded payoffs, agent-chosen partners, four partners with fixed initial types and stances, and no stochastic type switching ($p_{\text{switch}} = 0$). Partner P0 begins as a cooperator in a trusting stance. At round 31, P0 undergoes a scheduled stance switch to hostile while other partners retain their initial configurations. Primary readouts are post-switch cumulative payoff, policy entropy, partner reallocation, and joint partner-type accuracy over the remaining episode.

The betrayal environments used in the alpha sweep and prior-gain factorial apply the same single-switch structure within 200-round episodes for recovery-time and quadrant metrics. The forgiveness profile extends this schedule: rounds 1–80 cooperative baseline, rounds 81–120 betrayal on P0, rounds 121–200 reversion to cooperative/trusting on P0.

D.4 Partner-choice allocation metrics

Partner-choice readouts quantify how precision reshapes *who* the agent engages, not only how it acts toward a fixed partner.

Selection share. Per-partner selection rate is the fraction of rounds on which each partner is chosen. Partner-choice reallocation is summarized qualitatively in Section 3.3.

Selection concentration. The Gini coefficient of the partner-selection distribution summarizes how concentrated engagement is across the social context (used in the profile alpha sweep and prior-gain factorial).

Post-betrayal allocation. Post-switch windows report reallocation away from the switched partner and toward alternatives, including post-betrayal P0 selection and high-investment rates in profile analyses.

D.5 Entropy, payoff, and accuracy readouts

Total payoff. Cumulative focal-agent payoff over the episode (or over defined post-switch windows for betrayal analyses).

Policy entropy. Natural-log Shannon entropy of $q(\pi)$ over the enumerated candidate set produced by the configured planner at $H=4$, averaged over rounds and seeds (**q_pi_entropy**). In partner-choice conditions, candidates tile each partner’s multi-step policies across partners before softmax selection. Values are in nats and are not normalized; lower values indicate sharper commitment.

Joint partner-type accuracy. Mean joint correctness of inferred partner type (**mean_joint_accuracy**) summarizes epistemic state inference; it is reported

separately from payoff because precision modulation can change deployment and accuracy independently of cumulative reward.

β_k **range.** Unless otherwise specified, β_k range denotes the mean within-episode range of the posterior mean $\mathbb{E}_q[\beta_k]$, averaged across relevant partners and seeds. It is an observed precision-dynamics amplitude metric, not the fixed support of the categorical β_k variable.

Profile diagnostics. Investment churn is the fraction of adjacent rounds in which the selected investment level changes. Early exploiter investment is the fraction of rounds 1–30 in which the selected partner is an exploiter and the investment level is at least half of the available action range. Trust asymmetry is the ratio of withdrawal latency after the first defection to initial high-investment approach latency.

Betrayal timing metrics. Recovery rounds and related latency readouts measure rounds after a switch until selection or payoff returns toward baseline thresholds (profile alpha-sweep, prior-gain factorial, and betrayal analyses).

D.6 Locality-probe correlation readouts

For the predictability-over-payoff locality probe (Section 3.1), correlations are computed at the partner–seed unit level ($n = 120$ units across 30 seeds). Main-text claims use active-encounter partial correlations that control for encounter count, because partner-choice episodes couple payoff, surprisal, and exposure. Uncontrolled Pearson correlations are reported here for completeness.

Table 4: Locality-probe correlations by precision-runtime variant.

Variant / association	Raw r	Partial r
<i>Partner-local precision</i>		
Precision–surprisal	−0.945	−0.940
Precision–payoff	0.367	0.023
<i>Shared-β ablation</i>		
Precision–surprisal	−0.583	−0.496
Precision–payoff	0.379	0.535

Negative precision–surprisal associations indicate that higher partner-response likelihood surprisal corresponds to lower β_k -derived policy precision. Figure 1 plots absolute partial-correlation magnitudes for the partner-local and shared- β variants.

D.7 Replication summary

Central behavioral comparisons in Section 3 use 30 seeds per condition. Profile-scale analyses use 20 seeds per condition.

E Extended Profile and Robustness Results

This appendix reports extended parameter sweeps, profile analyses, and robustness diagnostics that support the main-text results.

E.1 Precision-dynamics parameter variation

The following auxiliary perturbation controls vary the amplitude and stability of β_k dynamics in the graded decision regime. They support interpretation of the main-text deployment results but are not themselves core empirical claims.

Table 5: Precision-dynamics parameter variation in the graded decision regime.

Variant	Mean β_k range	Total payoff	Policy entropy
affect	1.32	1851.3	8.59
low-gain	0.24	1840.5	8.9
high-gain	1.48	1859.0	8.1
cautious-prior	1.48	1877.7	8.4

Flattening the precision signal produces the clearest behavioral change. The low-gain variant compresses β_k range to 0.24 and raises entropy to 8.9, near the no-affect and tracked-only baselines. Expanded-dynamics variants produce wider β_k movement, but payoff does not follow range monotonically. The parameter sweeps below therefore vary gain and prior structure directly.

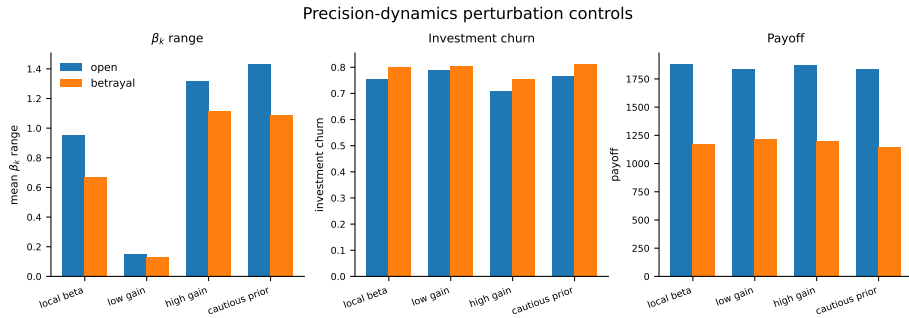


Fig. 4: Precision-dynamics perturbation controls in the graded decision regime. Low gain compresses β_k dynamics and raises policy entropy toward the no-affect/tracked-only baselines reported in Table 5. Wider β_k movement under high-gain and cautious-prior variants does not map monotonically to payoff, separating confidence dynamics from reward.

E.2 Alpha sweep

Sweeping α across $\{0.05, 0.1, 0.3, 0.5, 1.0, 2.0, 4.0, 8.0\}$ tests whether precision gain controls reactive social confidence across metrics. β_k movement range increases monotonically with α in the betrayal regime:

Table 6: β_k range by precision-gain α (betrayal regime, 20 seeds).

α	Mean β_k range
0.05	0.147
0.1	0.182
0.3	0.326
0.5	0.416
1.0	0.580
2.0	0.862
4.0	1.051
8.0	1.218

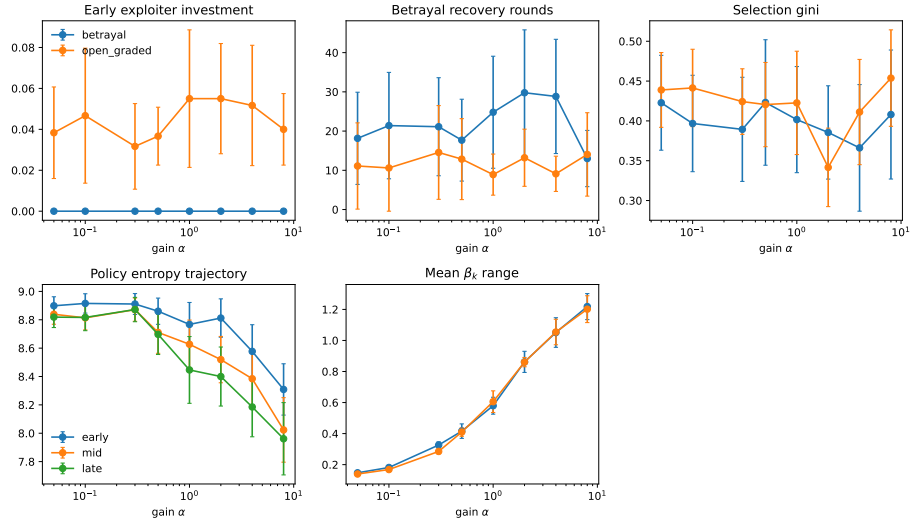


Fig. 5: Precision-gain sweep across open graded and betrayal environments (20 seeds). Higher α expands β_k range, while engagement, recovery, entropy, and pay-off readouts vary non-monotonically. Precision gain therefore controls confidence-reactivity amplitude rather than mapping directly to reward.

E.3 Gain-prior profile signatures

Crossing prior model fitness with precision gain defines the profile variants used in Section 3.5. “Naive” and “cautious” refer to the initial prior over $q(\beta_k)$ on support $\{0.5, 0.67, 1.0, 1.5, 2.0\}$: naive uses $[0.40, 0.40, 0.15, 0.04, 0.01]$, while cautious uses $[0.01, 0.04, 0.15, 0.40, 0.40]$. Low and high gain refer to $\alpha = 0.1$ and $\alpha = 3.0$, respectively, with the default agent using $\alpha = 3.0$ and centered initialization at $\beta_k = 1.0$. β_k range denotes the mean within-episode range of the inverse-precision estimate. Table 7 gives key metrics.

Table 7: Behavioral metrics by profile (betrayal environment, 20 seeds). Default agent shown for reference.

Profile	Payoff	Recovery rounds	Gini	β_k range	Trust asymmetry
Anxious-reactive	1932	26.5	0.338	1.084	0.98
Hypervigilant	1951	20.1	0.423	0.892	1.65
Naive-stubborn	1894	21.3	0.304	0.364	1.19
Avoidant-rigid	1889	14.9	0.357	0.322	1.21
Default	1991	23.0	0.423	0.893	1.68

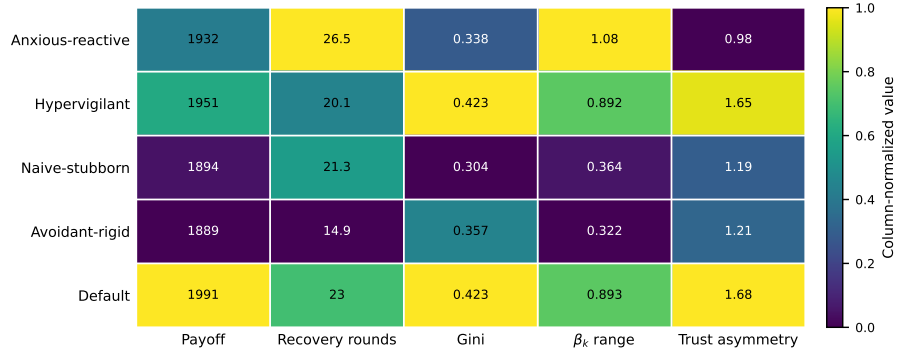


Fig. 6: Gain-prior profile signatures from the prior-by- α factorial (betrayal environment, 20 seeds). Cells are column-normalized across profiles for visual comparison; raw metric values are reported in Table 7. The heatmap shows that gain and prior model fitness produce distinct calibration signatures rather than a single reward-aligned ordering.

E.4 Forgiveness and trust repair

The forgiveness paradigm uses a 200-round partner-choice episode: cooperative baseline (rounds 1–80), betrayal on P0 (rounds 81–120), then reversion to cooperative/trusting behavior (rounds 121–200). Readouts include reengagement latency, post-return selection, payoff recovery, and β_k recovery trajectories for the reverted partner.

Table 8: Forgiveness and trust-repair metrics by precision profile (20 seeds). Reengagement is the post-repair P0 selection rate; payoff recovery compares late post-repair payoff with the late pre-betrayal baseline.

Variant	Reengagement	Payoff recovery	Latency	β_k range
cautious-high- α	0.518	0.996	5.5	0.971
cautious-low- α	0.630	1.014	1.5	0.287
default	0.475	1.019	3.0	1.012
naive-high- α	0.560	1.005	2.2	1.100
naive-low- α	0.527	1.004	4.6	0.325
no-affect	0.593	1.033	1.7	—

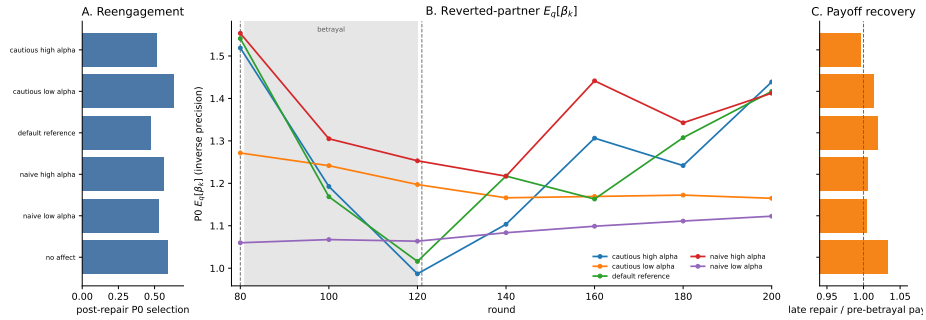


Fig. 7: Forgiveness/trust-repair diagnostic from the 20-seed profile analyses. Vertical markers indicate the transition from cooperative baseline to betrayal and then to repair/reversion. Reengagement and payoff recovery are shown alongside the reverted-partner β_k trajectory. Because β_k is inverse precision, lower β_k indicates higher confidence / higher policy precision; no-affect is omitted from the β_k trajectory panel because it has no β tracker. The figure shows that agents can reengage a repaired partner before rebuilding the same confidence dynamics.