

# **Developing with SailfishOS**

**a short introduction**

Sven Putze, hardcodes.de

December 11, 2013



## Contents

|        |  |    |
|--------|--|----|
| 1      | About  | 2  |
| 2      | Download and install   | 2  |
| 2.1    | OSX . . . . .  | 4  |
| 2.2    | Windows . . . . .  | 12 |
| 2.3    | Linux . . . . .  | 23 |
| 2.4    | Remove plugins . . . . .                                     | 23 |
| 3      | Quickstart   | 24 |
| 4      | Know your tools  | 29 |
| 4.1    | Technology stack . . . . .                                   | 30 |
| 4.2    | QtCreator integrated development environment (IDE) . . . . . | 30 |
| 4.2.1  | kits . . . . .   | 31 |
| 4.2.2  | qmake . . . . .  | 33 |
| 4.2.3  | .pro file . . . . .  | 39 |
| 4.2.4  | merssh . . . . .   | 41 |
| 4.2.5  | gcc . . . . .  | 43 |
| 4.2.6  | make . . . . .   | 44 |
| 4.2.7  | rpm . . . . .  | 45 |
| 4.2.8  | deploy . . . . .   | 45 |
| 4.2.9  | spectacle / yaml . . . . .                                   | 46 |
| 4.2.10 | Project settings . . . . .                                   | 46 |
| 4.2.11 | Build settings . . . . .                                     | 48 |
| 4.2.12 | Pimp the clean process . . . . .                             | 49 |
| 4.2.13 | Run settings . . . . .                                       | 50 |
| 4.3    | Mer build engine for cross compilation . . . . .             | 53 |
| 4.3.1  | Directories . . . . .  | 54 |
| 4.4    | Scratchbox2 . . . . .  | 55 |
| 4.4.1  | sb2 . . . . .  | 56 |
| 4.4.2  | mb2 . . . . .  | 56 |
| 4.5    | The SailfishOS Emulator . . . . .                            | 58 |
| 4.6    | Sailfish Silica . . . . .                                    | 58 |
| 4.7    | Tools chained up . . . . .                                   | 63 |
| 4.7.1  | Build process . . . . .                                      | 63 |
| 4.7.2  | Run app . . . . .  | 64 |
| 5      | Installing additional packages                               | 65 |
| 5.1    | Emulator . . . . .   | 65 |

|        |   |    |
|--------|---|----|
| 5.1.1  | zypper . . . . .  | 66 |
| 5.1.2  | Known Logins . . . . .                                      | 67 |
| 5.2    | Mer SDK Build Engine . . . . .                              | 67 |
| 5.2.1  | Known Logins . . . . .                                      | 67 |
| 5.2.2  | SSH login . . . . .   | 67 |
| 6      | Templates for QtCreator                                     | 68 |
| 7      | Physical device   | 69 |
| 7.1    | How to connect to SSH over usb connection from PC . . . . . | 69 |
| 7.2    | How do I deploy a package to my phone? . . . . .            | 69 |
| 8      | Harbour   | 70 |
| 9      | Bug Reports   | 74 |
| 10     | Troubleshooting   | 74 |
| 10.1   | Mer build engine for cross compilation . . . . .            | 74 |
| 10.1.1 | Management Webpage . . . . .                                | 74 |
| 10.1.2 | SSH login pre Alpha2SDK . . . . .                           | 75 |
| 10.1.3 | SSH login Alpha2SDK and later . . . . .                     | 77 |
| 10.1.4 | SSH login any SDK . . . . .                                 | 77 |
| 10.1.5 | Drive(s) not mounted . . . . .                              | 79 |
| 10.1.6 | Slow . . . . .  | 81 |
| 10.2   | Emulator . . . . .  | 82 |
| 10.2.1 | Deploying offline . . . . .                                 | 82 |
| 10.2.2 | Timeout, emulator offline . . . . .                         | 83 |
| 11     | Use your editor of choice                                   | 83 |
| 12     | Community   | 83 |
| 12.1   | Jolla . . . . .   | 83 |
| 12.1.1 | SailfishOS . . . . .  | 84 |
| 12.1.2 | Mer . . . . .   | 84 |
| 12.1.3 | Nemo mobile . . . . .                                       | 84 |
| 13     | Uninstall   | 84 |
| 13.0.4 | OSX . . . . .   | 84 |
| 13.0.5 | Windows . . . . .   | 87 |
| 13.0.6 | Linux . . . . .   | 88 |
| 14     | Thanks  | 88 |



|                                  |    |
|----------------------------------|----|
| 15 Appendix                      | 88 |
| 15.1 mb2 - bash script . . . . . | 88 |
| References                       | 98 |



## 1 About

Hi, my name is Sven[hc01] and I am eager to develop for the Jolla smartphone. On my way some questions came up and I tried to answer them as good as I can. After a while I decided to write down what I've learned, so that I had a central place to come back to and maybe others can benefit from this small document, too. The latest and greatest version is to be found on Github[hc02]. For those who don't want to clone the git project there will be just the pdf version at <http://hardcodes.de/SailfishOS/Developing-with-SailfishOS.pdf>.

*This work is licensed under the Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License. To view a copy of this license, visit [http://creativecommons.org/licenses/by-nc-sa/4.0/deed.en\\_US](http://creativecommons.org/licenses/by-nc-sa/4.0/deed.en_US).*

This goes only for content I have written myself, I don't claim ownership or copyright/left on cited content. Content from other parties remains under its original license.

All mentioned trademarks and trade names are the property of their respective holders, I have not marked them with a <sup>TM</sup>, <sup>®</sup> or <sup>©</sup> sign. Use some common sense here. Not all information is written by myself, I've tried to quote as responsible as possible and quite intensive if appropriate. Read these notes as a human being, not like a lawyer.

If you find typos, errors or quirks, have suggestions how to make this document better, please drop me a note. Or collaborate. #jolla2gether!

Don't panic if you are not comfortable with writing in L<sup>A</sup>T<sub>E</sub>X, I am happy to use your Libre/Open Office or even Word documents.

## 2 Download and install

You will need Virtual Box, because some components of the SailfishOS SDK come as virtual machines. Download for your development machine[vbox01].



Figure 1: Download VirtualBox from the virtualbox website.

If you already use VirtualBox, you don't need to load it again, just skip that step. Just make sure that you have the latest updates installed.

To take a dip, head over to the Sailfish Website[sailfishos01] and download the SDK for your operating system.



Figure 2: Download the SDK from the SailfishOS website.

## 2.1 OSX

Double click on the downloaded disk image for VirtualBox and run the installer application inside. Some file go into system folders and you must be or elevate to an admin account to install successfully.



Figure 3: Downloaded diskimage.

If you use VirtualBox just for the SailfishOS SDK you don't have to care about the VirtualBox application, although you can see which folders are shared inside the preferences.

Double click on the downloaded disk image for the SailfishOS SDK and run the installer app that's inside. The installed files will end in your user directory, you don't need to be an administrator to achieve that.

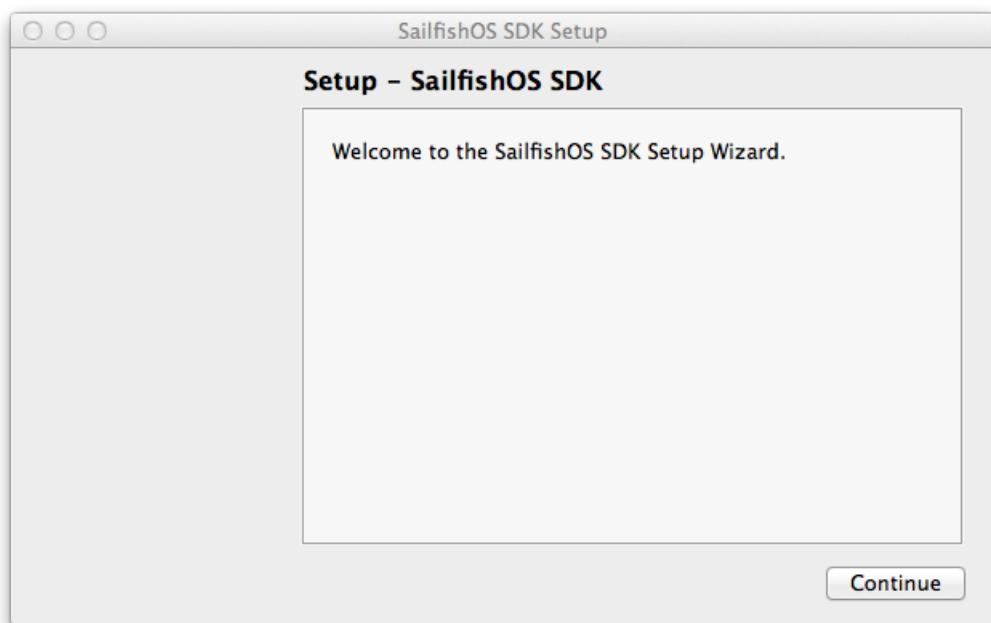


Figure 4: Install SailfishOS SDK, step 1.

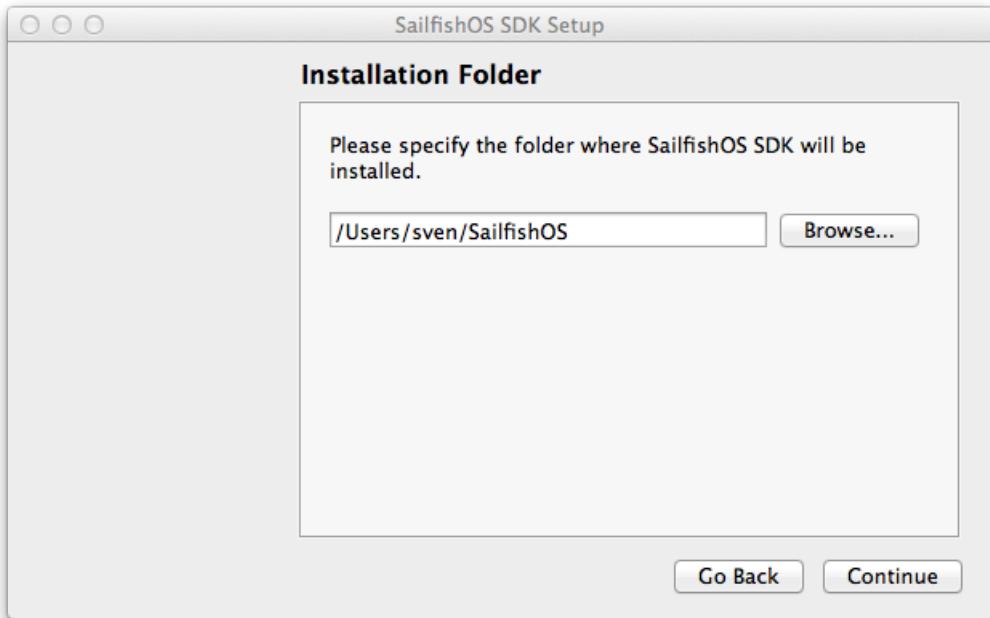


Figure 5: Install SailfishOS SDK, step 2.

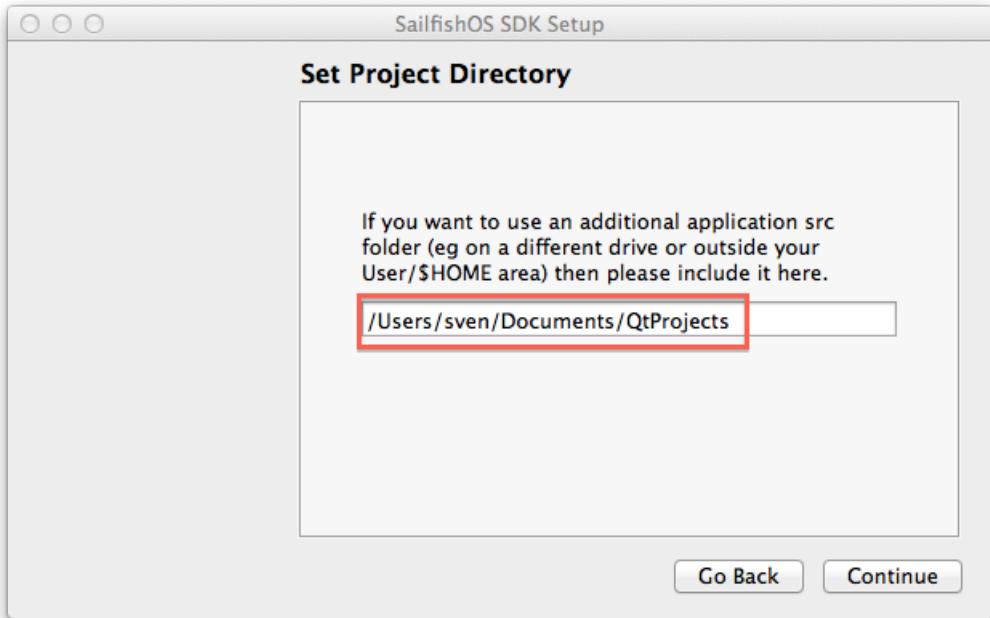


Figure 6: Install SailfishOS SDK, step 3. Enter the path to your source code.  
There is no folder selector dialog, you must enter it by hand.



Figure 7: Install SailfishOS SDK, step 4.

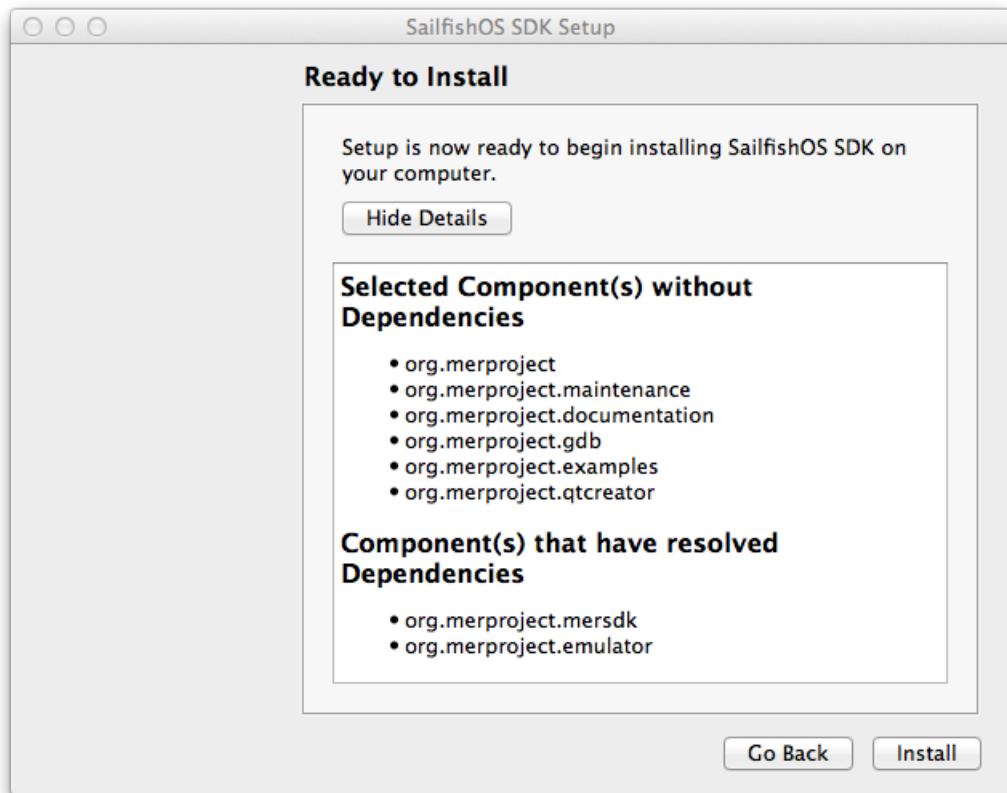


Figure 8: Install SailfishOS SDK, step 5.

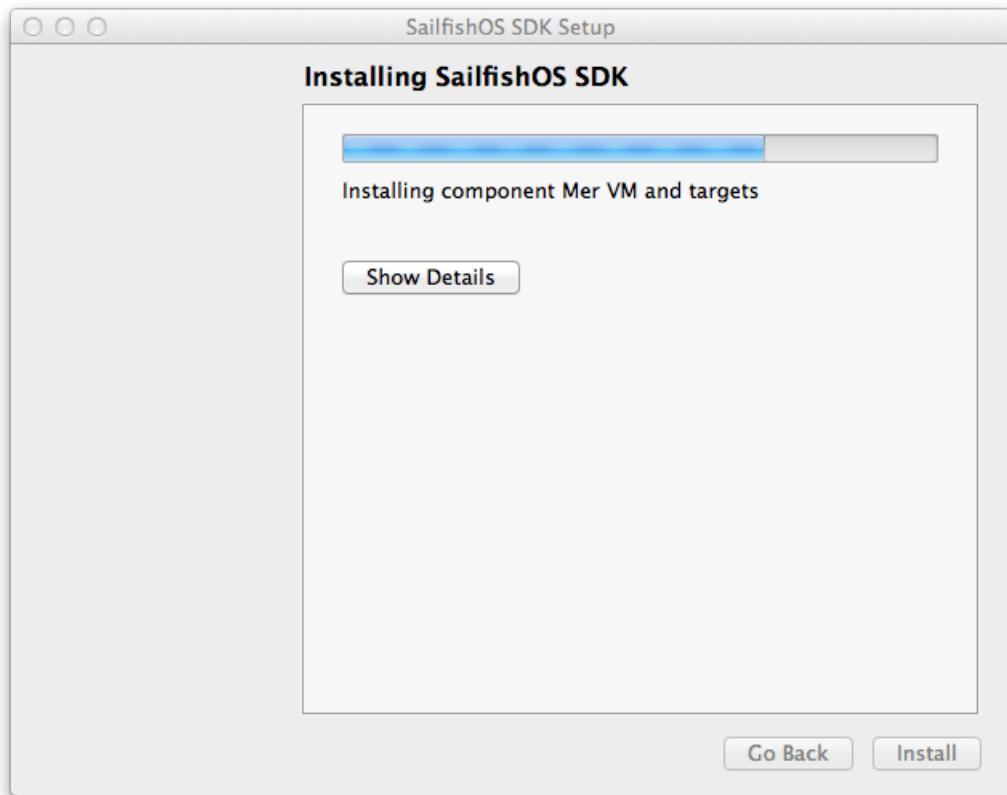


Figure 9: Install SailfishOS SDK, step 6.

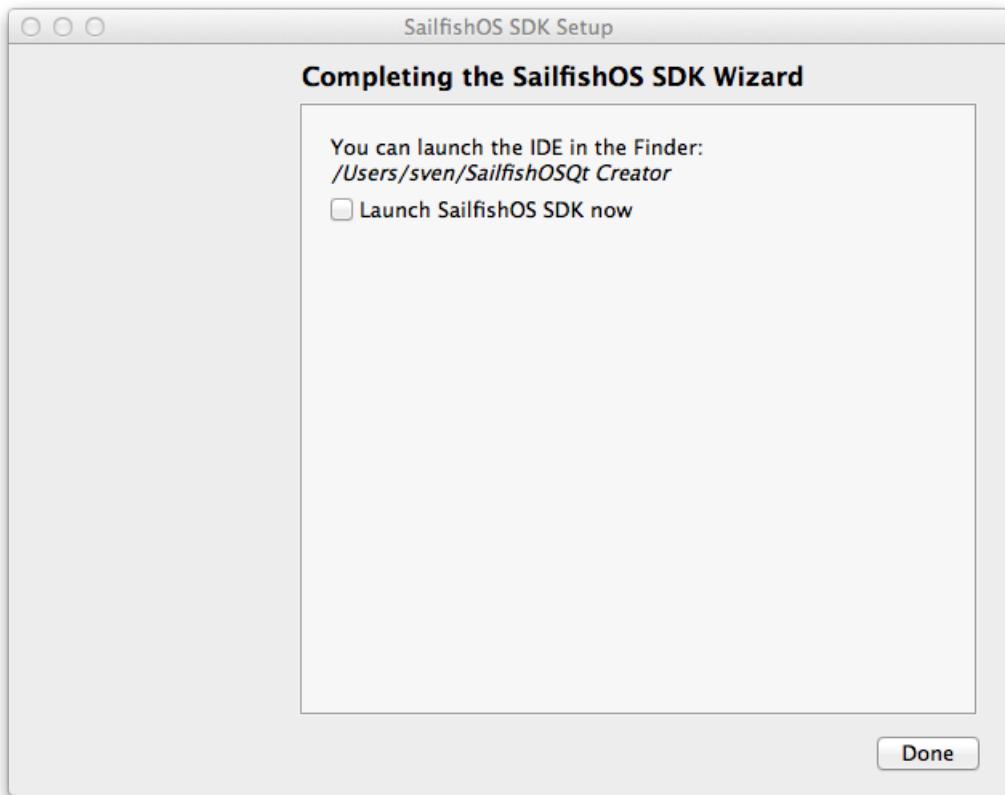


Figure 10: Install SailfishOS SDK, step 7.




Figure 11: Unmount SailfishOS SDK disk image, step 8.

With the installation came two hidden directories, you should know about. More about those directories will follow later on.

```
$HOME/.config/SailfishAlpha2  
$HOME/.scratchbox2
```

After you installed the SDK, you should immediately update the components.



Figure 12: QtCreator show that there are updates for the SDK.

As of now the progress inside Jolla is at good pace, so it might be that there is some stuff slightly out of date in the installer (see figures 13 and 14).

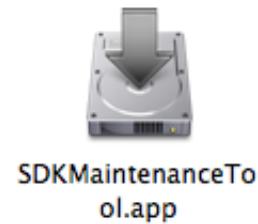


Figure 13: Inside the SailfishOS folder you find the maintenance application. Run it directly after the installation.

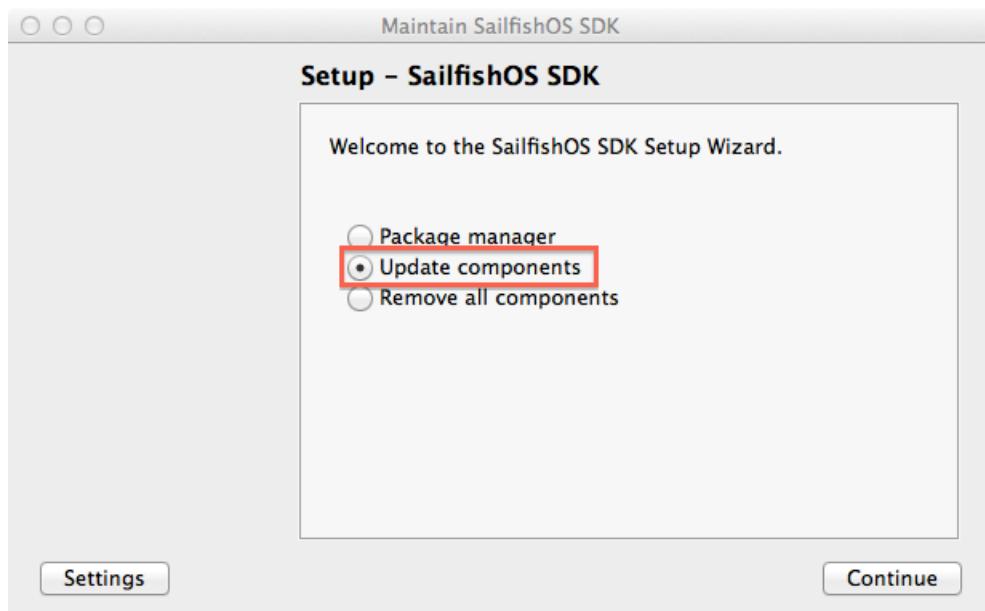


Figure 14: Update components, choose everything that is in store.

With the SDK comes QtCreator<sup>1</sup>, a complete IDE for C++ development. This

<sup>1</sup>Look in in the "bin" folder of the SDK.

IDE is part of the Qt Framework[qt01] and is simply reused<sup>2</sup> by Jolla. Personally I use the QtCreator on my machines as well and for better differentiation I made a custom icon for the one in the SailfishOS SDK - feel free to download and use it, too[hc03].



Figure 15: Alternative icon for the QtCreator inside the SDK.

## 2.2 Windows

Double click the  VirtualBox-4.3.4-91027-Win.exe executable that you have downloaded and follow the installer.

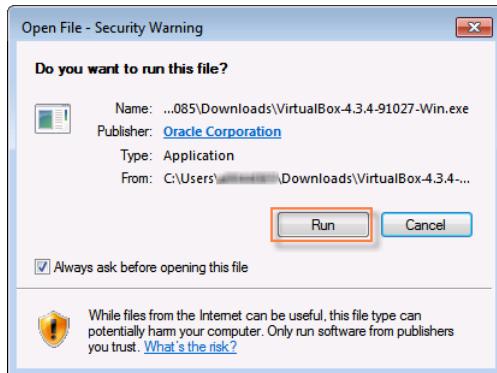


Figure 16: Install VirtualBox, Step 1.

---

<sup>2</sup>Customized with some little tweaks to suite the SailfishOS development.



Figure 17: Install VirtualBox, Step 2.

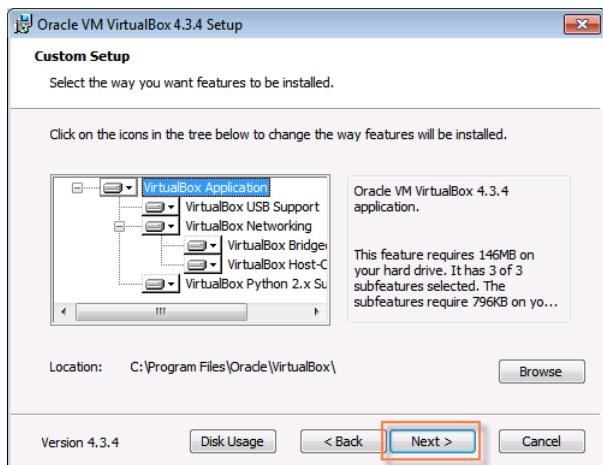


Figure 18: Install VirtualBox, Step 3.

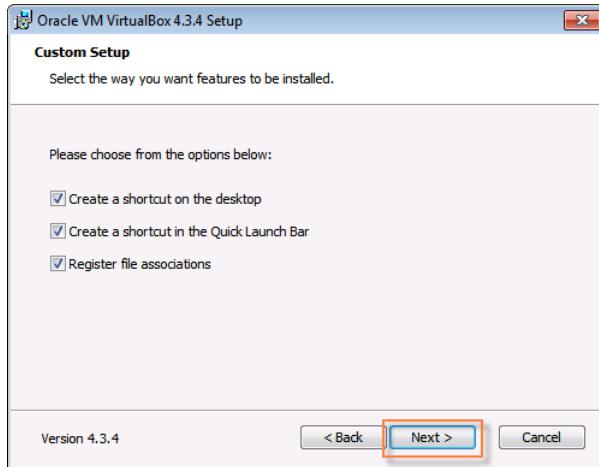


Figure 19: Install VirtualBox, Step 4.

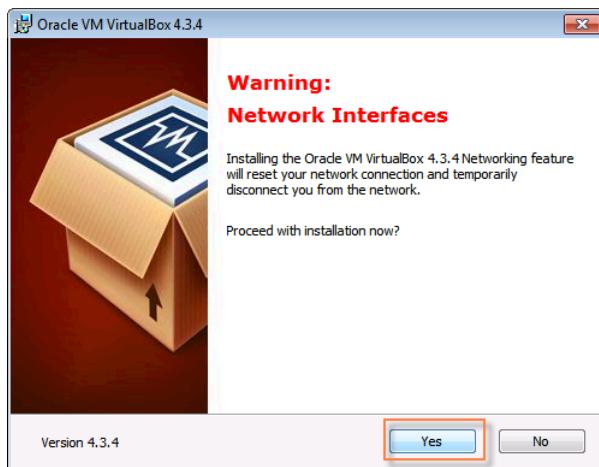


Figure 20: Install VirtualBox, Step 5.

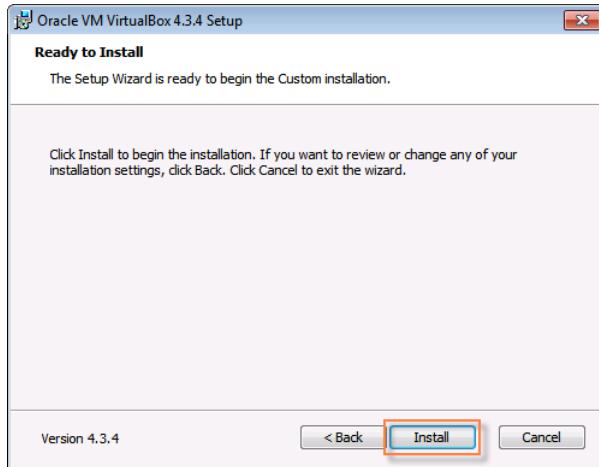


Figure 21: Install VirtualBox, Step 6.



Figure 22: Install VirtualBox, Step 7.



Figure 23: Install VirtualBox, Step 8.



Figure 24: Install VirtualBox, Step 9.

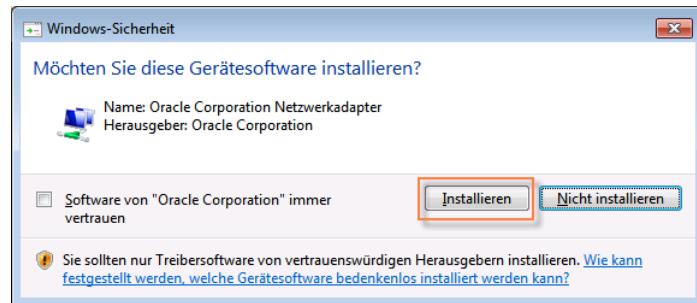


Figure 25: Install VirtualBox, Step 10.



Figure 26: Install VirtualBox, Step 11.

Start the  `SailfishOSSDK-Alpha-1310-Qt5-windows-offline.exe` executable and install the SDK.

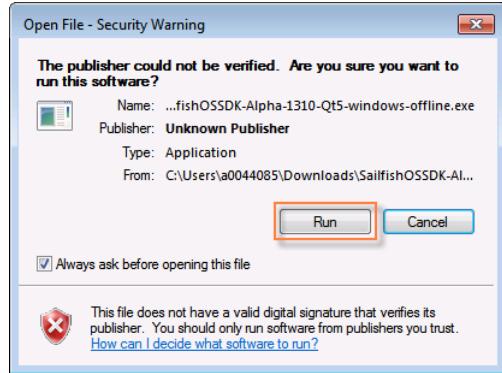


Figure 27: Install SDK, Step 1.

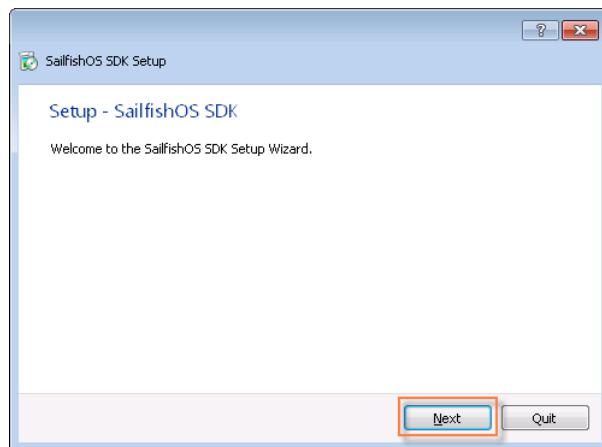


Figure 28: Install SDK, Step 2.

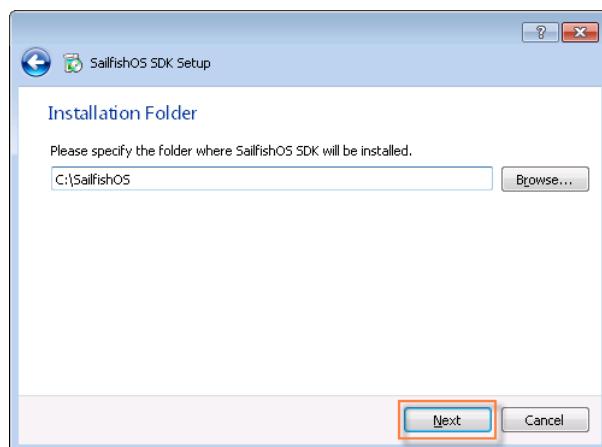


Figure 29: Install SDK, Step 3.

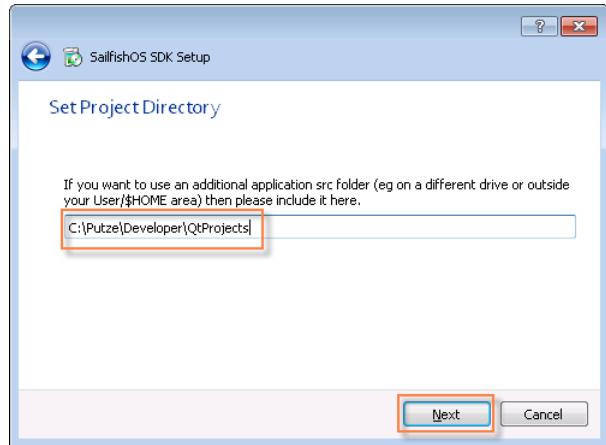


Figure 30: Install SDK, Step 4.

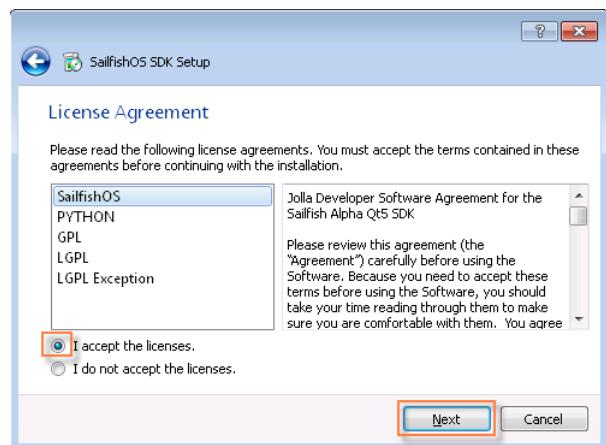


Figure 31: Install SDK, Step 5.

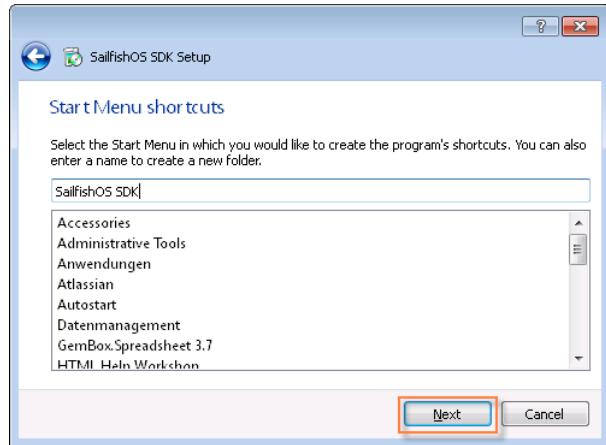


Figure 32: Install VirtualBox, Step 6.

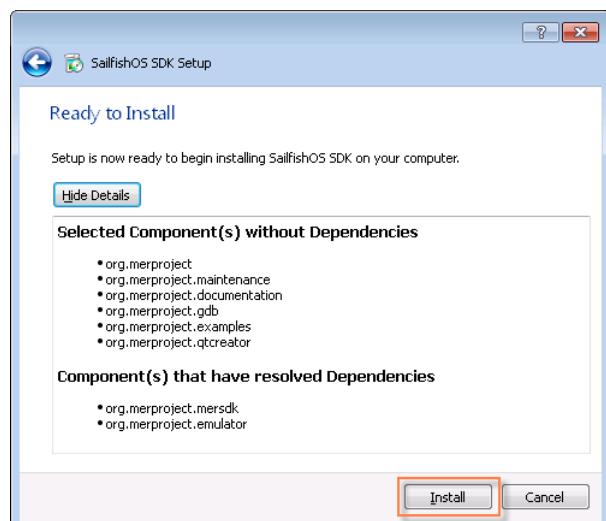


Figure 33: Install VirtualBox, Step 7.

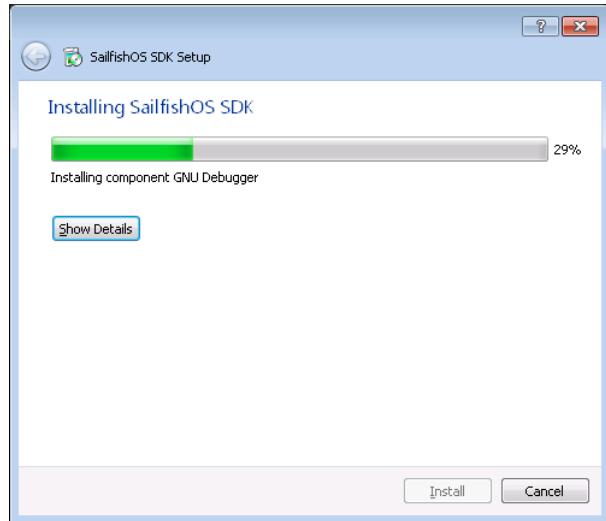


Figure 34: Install VirtualBox, Step 8.

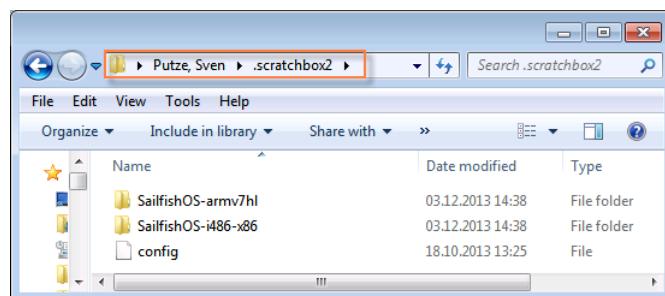


Figure 35: Install VirtualBox, Step 9.

Start the maintenance tool from the start menu or from the SailfishOS SDK directory  `SDKMaintenanceTool.exe` and update all components.

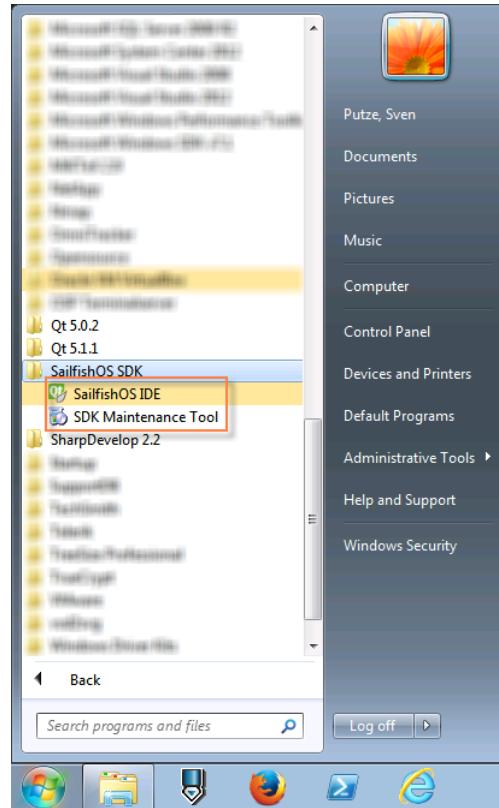


Figure 36: SDK and maintenance tool

With the installation come some directories.

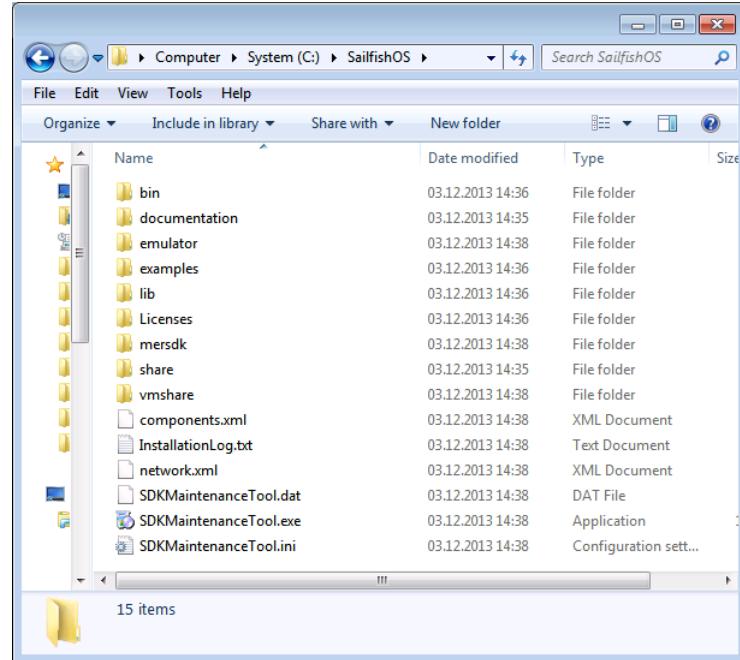


Figure 37: Directory after installation.

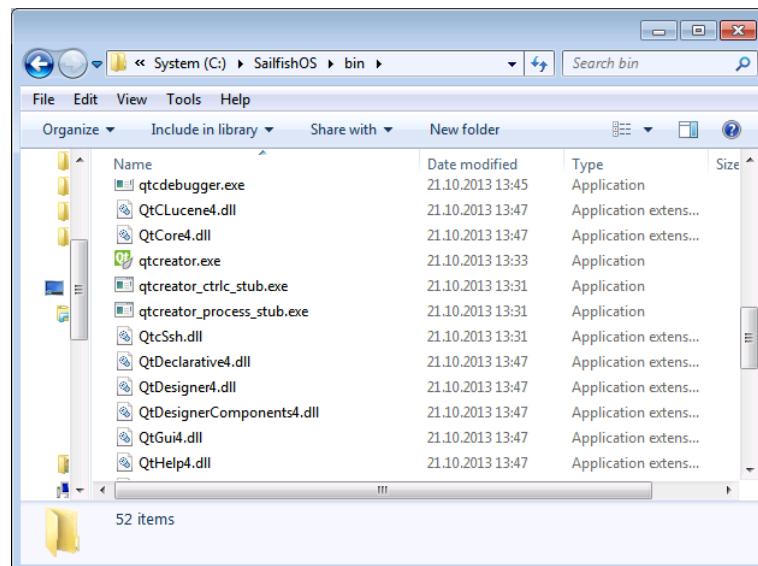


Figure 38: Directory after installation.

## 2.3 Linux

Since I have not installed the SDK on Linux yet, I can not provide any information here. Sorry!

Apart from that I have no physical Linux machine that is connected to a display and can be diverted for a test installation. A virtual machine might work but that would result in VMs inside a VM, not very promising.

Volunteers present?

## 2.4 Remove plugins

If you want to improve the startup time of QtCreator, you can deactivate plugins you don't need or want<sup>3</sup>. Just don't shoot in your foot here.

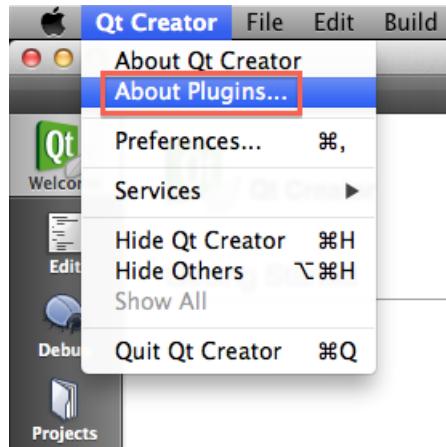


Figure 39: About plugins = manage plugins.

---

<sup>3</sup>On Windows and Linux the plugins should be found in Extras/Plugins.

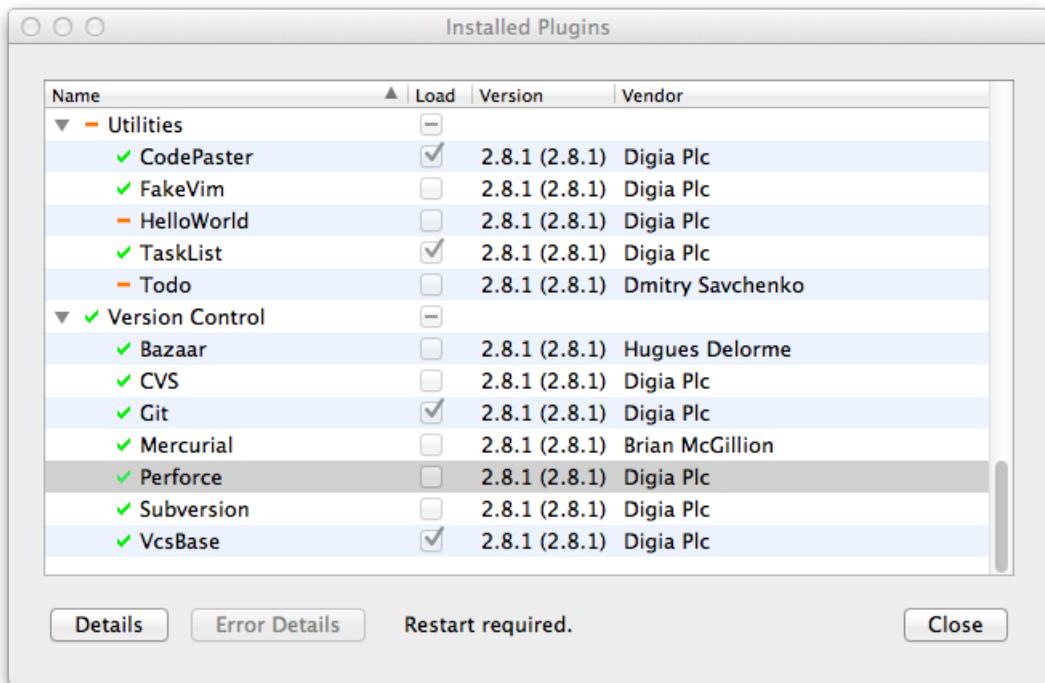


Figure 40: Deactivate every plugin you don't need.

### 3 Quickstart

Start the QtCreator from the fresh installed SDK.

"The SDK comes with a handy SailfishOS application template that gives you a quick way to create your very first Sailfish OS application. Just go to File-> New File or Project in the IDE"[sailfishos2]

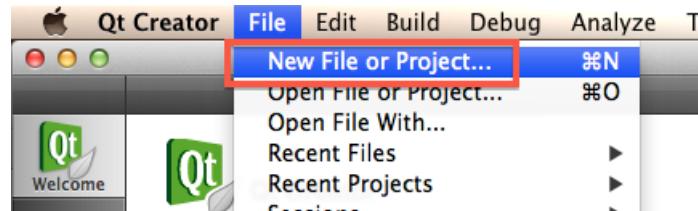


Figure 41: First example, step 1.

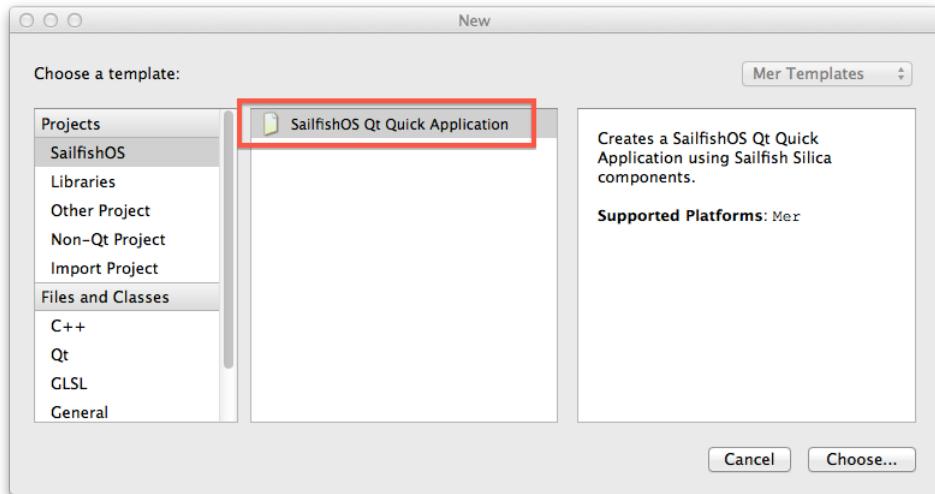


Figure 42: First example, step 2.

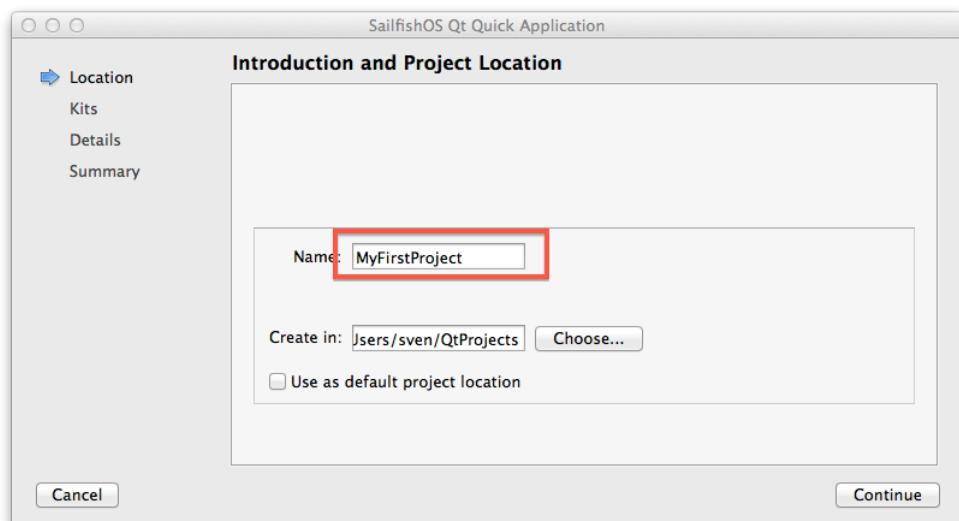


Figure 43: First example, step 3.

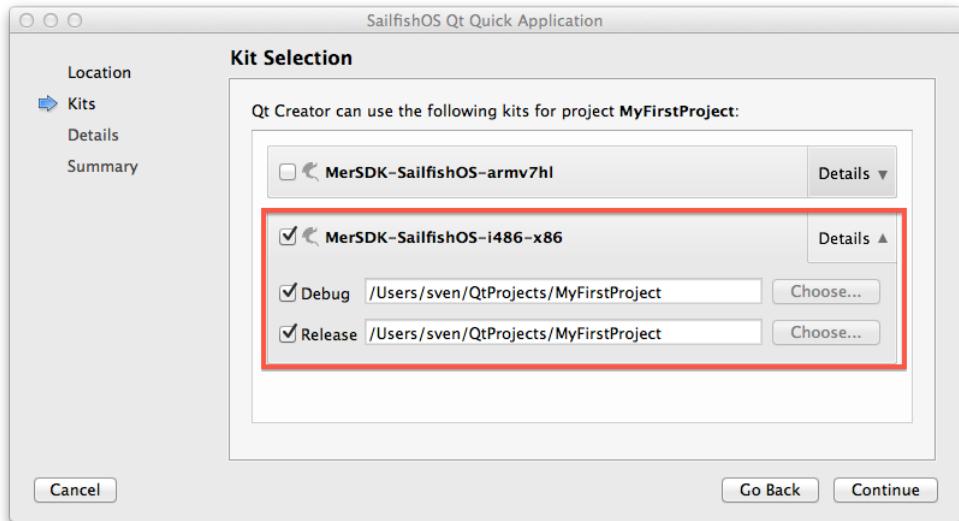


Figure 44: First example, step 4.

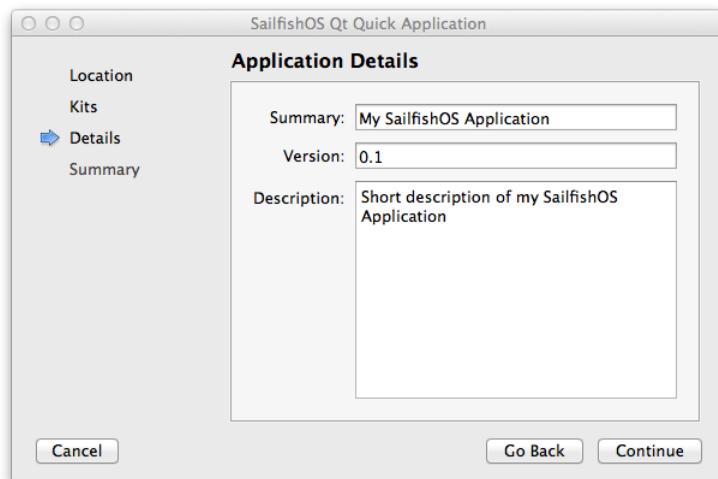


Figure 45: First example, step 5.

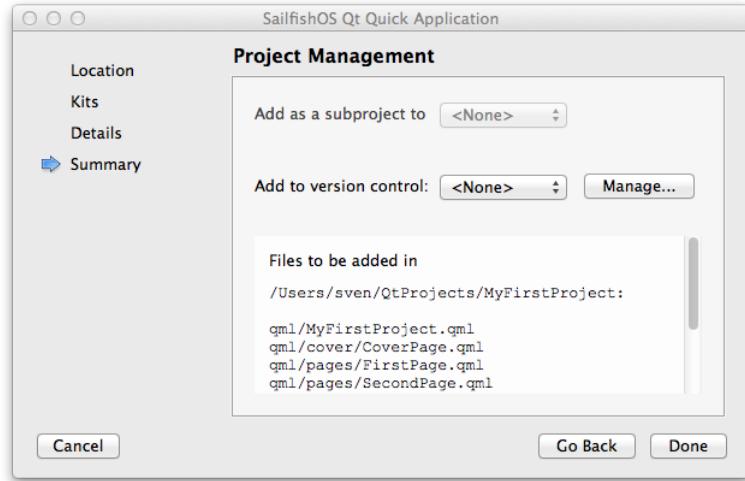


Figure 46: First example, step 1.

Start the SDK from inside the QtCreator.



Figure 47: Starting the SDK.

When the virtual machine with the SDK is running, apply updates if necessary.

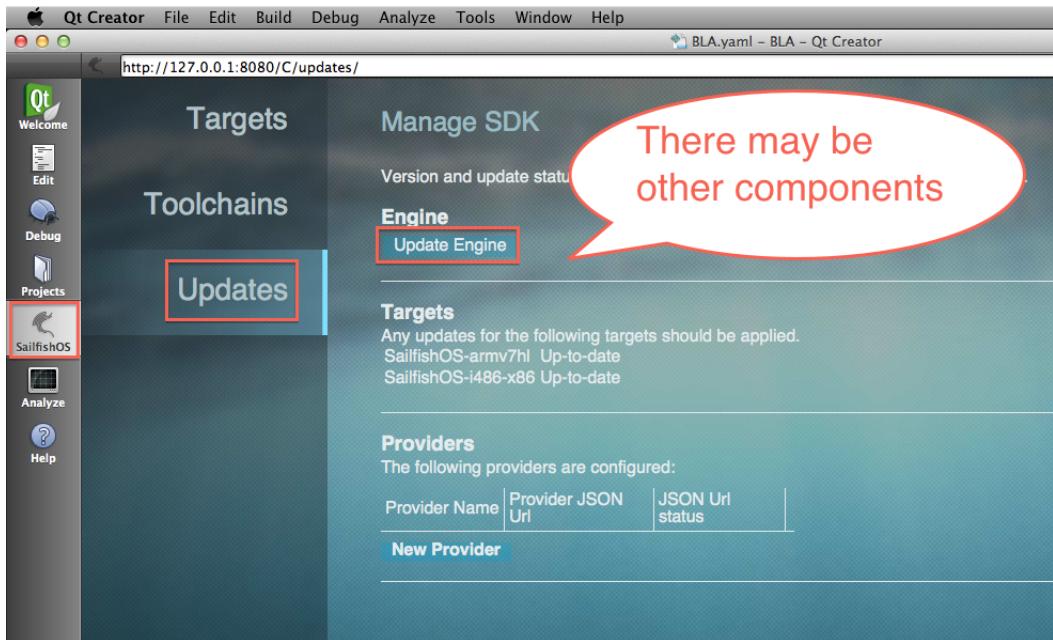


Figure 48: Updating the SDK.

Start the Emulator.



Figure 49: Starting the Emulator.

Compile and run your application.



Figure 50: Build and run the application.

Easy as pie, also see figure 86 on page 58. But what happens when and where if you click on those Icons? Look in section *Know your tools*.

A good starting point to look for a more sophisticated starting example is *The missing HelloWorld. Wizard included* by Artem Marchenko[gh01]. You should check that out! It has all the tweaks needed to bring your app to the Jolla store!

And you should look in the examples folder of the SDK of course.

## 4 Know your tools

Jolla chose the Qt framework to be part of their technology stack. “Qt is a cross-platform application and UI framework for developers using C++ or QML, a CSS & JavaScript like language. Qt Creator is the supporting Qt IDE. Qt, Qt Quick and the supporting tools are developed as an open source project governed by an inclusive meritocratic model. Qt can be used under open source (LGPL v2.1) or commercial terms.”[qt01]

“Qt - code once, deploy everywhere”, that’s the mantra of the Qt framework. If you have developed for more than one platform in the past, you know that this sounds like heaven. Maintaining different source code and technologies for each and every platform is a tedious task that can eat up all your developer resources. As if software development is not difficult enough if you stay on one platform<sup>4</sup>.

So there were good reasons to choose Qt as framework, no doubt about that. As of now you can develop for Android, iOS, BlackBerry and of course SailfishOS. If you look into the documentation and examples of all these platforms, you will find that those examples assume, that you are developing for this platform only. Quite stupid, if you use the Qt framework. Understandable if you think about the effort that would be necessary to build a documentation that incorporates all other possible platforms. For some time now I was wondering how I should organize my code in such a way, that allows me to develop for more than one target platform at a time. It’s not just compiling for another platform! Each platform has a unique UI that behaves in an own different way, e.g. SailfishOS is gesture based, other ones are touch based. In the long run you will create an UI for each of those targets. Period. Patterns like MVC[wiki01] will come to mind, using separate business logic, yada yada.

To cut a long story short, why am I writing about this stuff, this section is supposed to be about tools? When you prepare a software project for the use for more than one target platform, you will start organizing stuff differently. Maybe you use folders that have the name of the targets to differentiate stuff that’s platform dependent. Maybe you even create a business logic that is really unique and encapsulated in such clever way that it can be reused and does not know anything about the outside world. Such a business logic or model can be driven from tests, command line tools, web or different native UIs. Would be nice to have it in a separate folder or even subproject. If you start to move and/or rename things, your tools will break. Intentionally.

By examining those fractures you can learn a lot about your tools that otherwise work so silently in the background. So go on and break your tools!<sup>5</sup>

---

<sup>4</sup>In my eyes software development is an art of craftsmanship and can not be done by Mr. Average and thus is a more or less complicated thing to do.

<sup>5</sup>Ok, not so short :-)

Here is what I've learned so far.

## 4.1 Technology stack



Figure 51: Sailfish architecture, taken from  
[https://sailfishos.org/images/Sailfish\\_Architecture.png](https://sailfishos.org/images/Sailfish_Architecture.png).

## 4.2 QtCreator integrated development environment (IDE)

“QtCreator is a cross platform integrated development environment (IDE) tailored to the needs of Qt developers. It has been extended to add support for Sailfish UI application development using Sailfish Silica components. It provides a sophis-

ticated code editor with version control, project and build management system integration.”[sailfishos3].

Reusing an existing open source IDE is a smart move from Jolla. Why should they waste resources on developing something that has already done by others? Or why should they burn up their staff for all those development solutions out there? Be it Visual Studio, Eclipse, Emacs or even Vi. If you really dive in the tools, you can also use those but I doubt that Jolla will provide you with support if something does not work. Working with QtCreator is also quite natural in the Qt universe albeit being a fast IDE. So have a look in the preferences<sup>6</sup>.

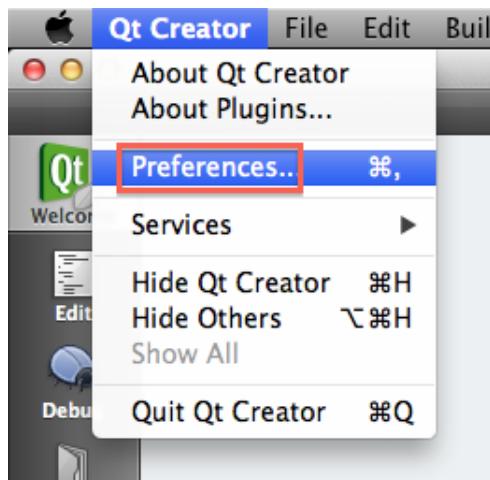


Figure 52: Open the QtCreator preferences.

I will not walk through every setting of QtCreator, [qt02] is a better place to start for basic questions. Also I will not use the order of tabs in the preferences, but try to follow the sequence in which those tools touch your source code.

#### 4.2.1 kits

But before we do that, we must talk about *kits*. A kit is kind of an umbrella setting, which combines the information of the following bits and pieces, like qmake, compiler, and device type. This is the information hub that QtCreator uses to pull all information together and initiate its actions when you build or start your application.

---

<sup>6</sup>On Windows and Linux they should be found in Extras/Options.

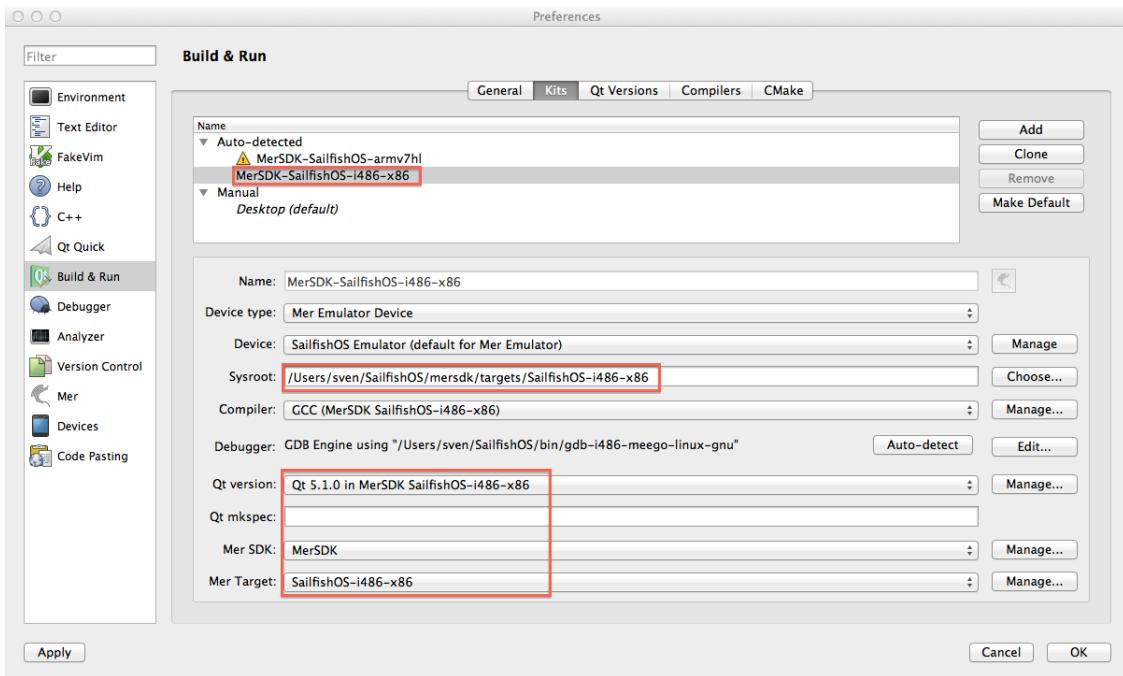


Figure 53: Preferences, kits tab.

So far there are 2 kits defined:

- MerSDK-SailfishOS-armv7hl  
*this kit is marked with a warning sign in the Alpha2 SDK, there is no device assigned yet.*
- MerSDK-SailfishOS-i486-x86

Should you have a kit named Desktop, it's of no use inside the QtCreator that comes with the SailfishOS SDK, try not to build your app with this kit!

#### 4.2.2 qmake

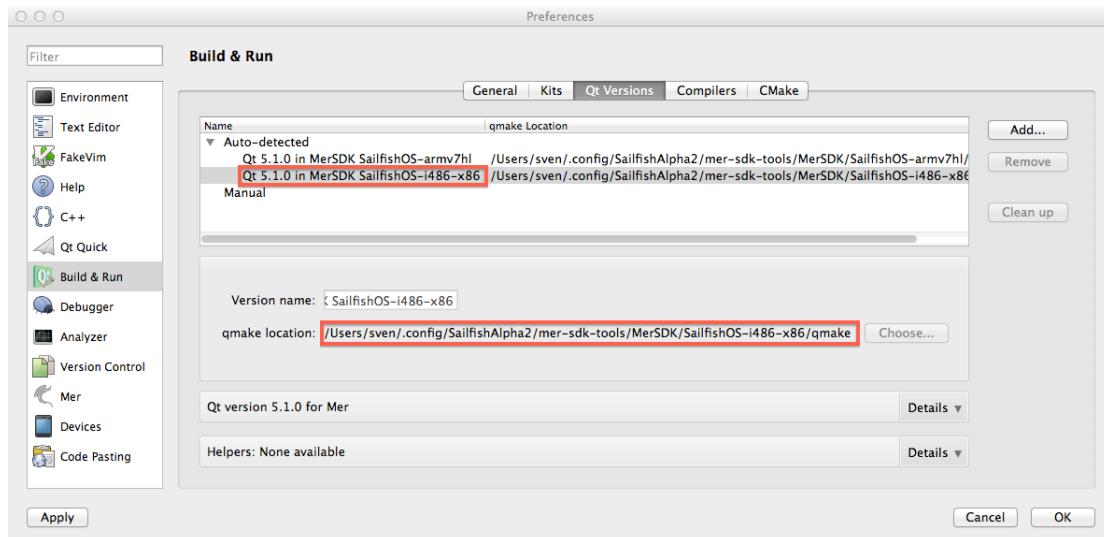


Figure 54: Preferences, QtVersions tab.

“qmake is a tool that helps simplify the build process for development project across different platforms. qmake automates the generation of Makefiles so that only a few lines of information are needed to create each Makefile. qmake can be used for any software project, whether it is written in Qt or not. qmake generates a Makefile based on the information in a project file. Project files are created by the developer, and are usually simple, but more sophisticated project files can be created for complex projects. qmake contains additional features to support development with Qt, automatically including build rules for moc and uic. qmake can also generate projects for Microsoft Visual studio without requiring the developer to change the project file.”[qt03]

| Qt version 5.1.0 for Mer |  |
|--------------------------|--|
|                          | Details ▲  |
| Name:                    | Qt 5.1.0 in MerSDK SailfishOS-i486-x86   |
| ABI:                     | x86-linux-generic-elf-32bit  |
| Source:                  | /Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr  |
| mkspec:                  | linux-g++  |
| qmake:                   | /Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK/SailfishOS-i486-x86/qmake                    |
| Version:                 | 5.1.0  |
| QMAKE_SPEC               | linux-g++  |
| QMAKE_VERSION            | 3.0  |
| QMAKE_XSPEC              | linux-g++  |
| QT_HOST_BINS             | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/bin</a>            |
| QT_HOST_DATA             | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/share/qt5</a>              |
| QT_HOST_LIBS             | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib</a>                    |
| QT_HOST_PREFIX           | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr</a>                        |
| QT_INSTALL_ARCHDATA      | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/share/qt5</a>              |
| QT_INSTALL_BINS          | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/bin</a>            |
| QT_INSTALL_CONFIGURATION | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/etc/xdg</a>                    |
| QT_INSTALL_DATA          | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/share/qt5</a>              |
| QT_INSTALL_DEMOS         | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/examples</a>       |
| QT_INSTALL_DOCS          | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/share/doc/qt5/</a>         |
| QT_INSTALL_EXAMPLES      | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/examples</a>       |
| QT_INSTALL_HEADERS       | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/include/qt5</a>            |
| QT_INSTALL_IMPORTS       | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/imports</a>        |
| QT_INSTALL_LIBEXEC       | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/libexec</a>        |
| QT_INSTALL_LIBS          | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib</a>                    |
| QT_INSTALL_PLUGINS       | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/plugins</a>        |
| QT_INSTALL_PREFIX        | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr</a>                        |
| QT_INSTALL_QML           | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/qml</a>            |
| QT_INSTALL_TESTS         | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/lib/qt5/tests</a>          |
| QT_INSTALL_TRANSLATIONS  | <a href="#">/Users/sven/SailfishOS/mersdk/targets/SailfishOS-i486-x86/usr/share/qt5/translations</a> |
| QT_SYSROOT               |  |
| QT_VERSION               | 5.1.0  |

Figure 55: Preferences, QtVersions tab., qmake details

UIC is a tool that creates C++ classes from XML information generated with the UI designer inside QtCreator. This designer is for Qt widgets which should not be used with SailfishOS and is not further explained in this document.

MOC is the Meta-Object Compiler which “reads a C++ header file. If it finds one or more class declarations that contain the `Q_OBJECT` macro, it produces a C++ source file containing the meta-object code for those classes.”[qt04]. If you use qmake to produce your Makefile, you don’t have to worry about it, the rules are created automatically.

```
SailfishOS-i486-x86 — bash — 80x24
lastenhuone:~ sven$ cd .config/SailfishAlpha2/mer-sdk-tools/MerSDK/SailfishOS-i4
86-x86/
lastenhuone:SailfishOS-i486-x86 sven$ ls -lah
total 64
drwxr-xr-x 10 sven staff 340B 20 Nov 14:23 .
drwxr-xr-x 4 sven staff 136B 20 Nov 14:23 ..
-rwxrwx--- 1 sven staff 224B 20 Nov 14:23 deploy
-rwxrwx--- 1 sven staff 221B 20 Nov 14:23 gcc
-rw-r--r-- 1 sven staff 21B 20 Nov 14:23 gcc.dumpmachine
-rwxrwx--- 1 sven staff 234B 20 Nov 14:23 gdb
-rwxrwx--- 1 sven staff 222B 20 Nov 14:23 make
-rwxrwx--- 1 sven staff 223B 20 Nov 14:23 qmake
-rw-r--r-- 1 sven staff 1,9K 20 Nov 14:23 qmake.query
-rwxrwx--- 1 sven staff 221B 20 Nov 14:23 rpm
lastenhuone:SailfishOS-i486-x86 sven$ ./qmake
Project ERROR: Could not connect to MerSDK Virtual Machine. No private key file
given.
lastenhuone:SailfishOS-i486-x86 sven$ 
```

Figure 56: Running qmake from command line.

If you run qmake manually, you will find out that it tries to connect to the *Mer build engine for cross compilation*. The error also appears if the virtual machine is up and running. In the Projects settings you can see how qmake is invoked if started by QtCreator.





Figure 57: Project settings.

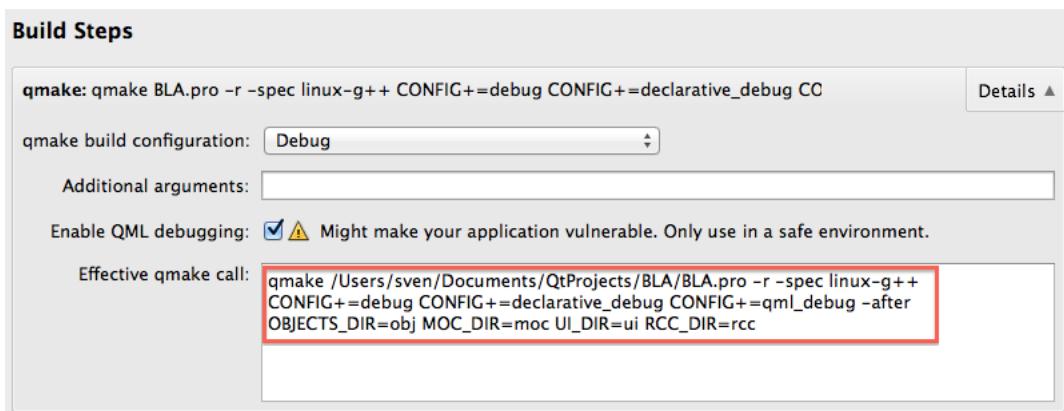

The screenshot shows the 'Build Steps' configuration in Qt Creator. It displays a single step:

```
qmake: qmake BLA.pro -r -spec linux-g++ CONFIG+=debug CONFIG+=declarative_debug CC
```

Configuration details:


- qmake build configuration: Debug
- Additional arguments: (empty)
- Enable QML debugging:  Might make your application vulnerable. Only use in a safe environment.

The 'Effective qmake call:' field contains the command:

```
qmake /Users/sven/Documents/QtProjects/BLA/BLA.pro -r -spec linux-g++ CONFIG+=debug CONFIG+=declarative_debug CONFIG+=qml_debug -after OBJECTS_DIR=obj MOC_DIR=moc UI_DIR=ui RCC_DIR=rcc
```

Figure 58: Build steps for qmake.


Using those parameters via command line does not work, too.

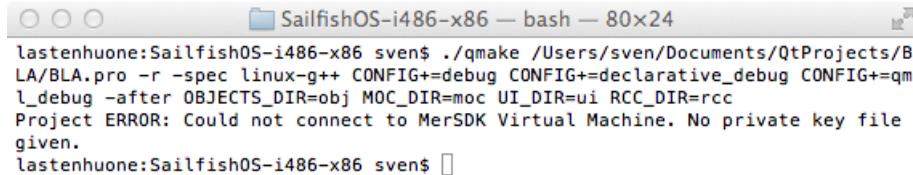

```
lastenhuone:SailfishOS-i486-x86 sven$ ./qmake /Users/sven/Documents/QtProjects/BLA/BLA.pro -r -spec linux-g++ CONFIG+=debug CONFIG+=declarative_debug CONFIG+=qml_debug -after OBJECTS_DIR=obj MOC_DIR=moc UI_DIR=ui RCC_DIR=rcc
Project ERROR: Could not connect to MerSDK Virtual Machine. No private key file given.
lastenhuone:SailfishOS-i486-x86 sven$
```

Figure 59: Running qmake from command line with parameters from build steps.

If `qmake` is invoked by the QtCreator it works just fine.

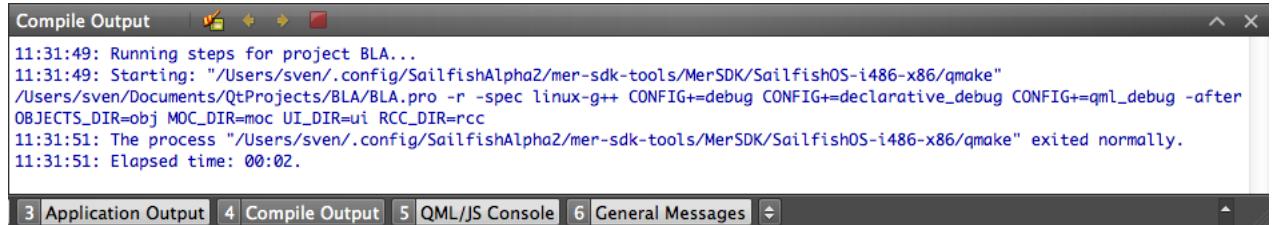

```
Compile Output | 🌐 🔍 ⏪ ⏩ 🎯
11:31:49: Running steps for project BLA...
11:31:49: Starting: "/Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK/SailfishOS-i486-x86/qmake"
/Users/sven/Documents/QtProjects/BLA/BLA.pro -r -spec linux-g++ CONFIG+=debug CONFIG+=declarative_debug CONFIG+=qml_debug -after
OBJECTS_DIR=obj MOC_DIR=moc UI_DIR=ui RCC_DIR=rcc
11:31:51: The process "/Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK/SailfishOS-i486-x86/qmake" exited normally.
11:31:51: Elapsed time: 00:02.

3 Application Output 4 Compile Output 5 QML/JS Console 6 General Messages
```

Figure 60: Running qmake from QtCreator (Build menu).

As a result you will find a `Makefile` in your project directory.

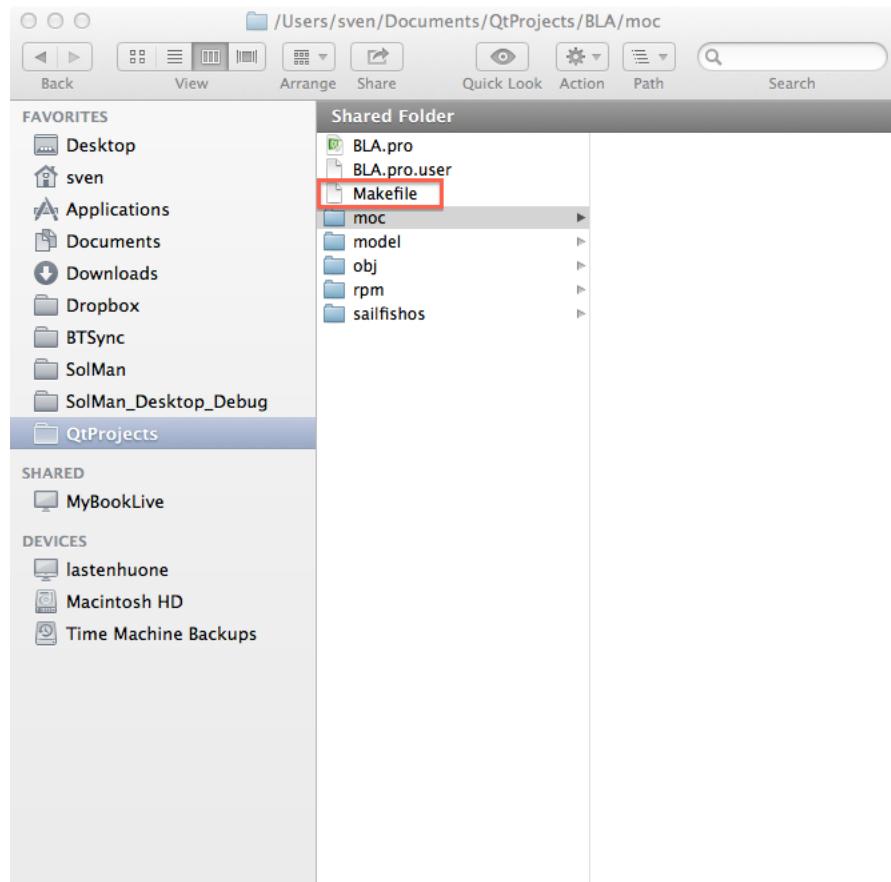


Figure 61: Result of running qmake from QtCreator (Build menu).

Here is the snippet about the MOC.

```
##### Sub-libraries

distclean: clean
-$(DEL_FILE) $(TARGET)
-$(DEL_FILE) Makefile

mocclean: compiler_moc_header_clean compiler_moc_source_clean

mocables: compiler_moc_header_make_all compiler_moc_source_make_all

check: first

compiler_rcc_make_all:
compiler_rcc_clean:
compiler_wayland-server-header_make_all:
compiler_wayland-server-header_clean:
```

```
compiler_wayland-client-header_make_all:
compiler_wayland-client-header_clean:
compiler_qtwayland-client-header_make_all:
compiler_qtwayland-client-header_clean:
compiler_qtwayland-server-header_make_all:
compiler_qtwayland-server-header_clean:
compiler_moc_header_make_all: moc/moc_qbusinesslogic.cpp
compiler_moc_header_clean:
    -$(DEL_FILE) moc/moc_qbusinesslogic.cpp
moc/moc_qbusinesslogic.cpp: /usr/include/qt5/QtCore/QObject \
    /usr/include/qt5/QtCore/qobject.h \
    /usr/include/qt5/QtCore/qobjectdefs.h \
    /usr/include/qt5/QtCore/qnamespace.h \
    /usr/include/qt5/QtCore/qglobal.h \
    /usr/include/qt5/QtCore/qconfig.h \
    /usr/include/qt5/QtCore/qfeatures.h \
    /usr/include/qt5/QtCore/qsystemdetection.h \
    /usr/include/qt5/QtCore/qcompilerdetection.h \
    /usr/include/qt5/QtCore/qprocessordetection.h \
    /usr/include/qt5/QtCore/qglobalstatic.h \
    /usr/include/qt5/QtCore/qatomic.h \
    /usr/include/qt5/QtCore/qbasicatomic.h \
    /usr/include/qt5/QtCore/qatomic_bootstrap.h \
    /usr/include/qt5/QtCore/qgenericatomic.h \
    /usr/include/qt5/QtCore/qatomic_msvc.h \
    /usr/include/qt5/QtCore/qatomic_integrity.h \
    /usr/include/qt5/QtCore/qoldbasicatomic.h \
    /usr/include/qt5/QtCore/qatomic_vxworks.h \
    /usr/include/qt5/QtCore/qatomic_power.h \
    /usr/include/qt5/QtCore/qatomic_alpha.h \
    /usr/include/qt5/QtCore/qatomic_armv7.h \
    /usr/include/qt5/QtCore/qatomic_armv6.h \
    /usr/include/qt5/QtCore/qatomic_armv5.h \
    /usr/include/qt5/QtCore/qatomic_bfin.h \
    /usr/include/qt5/QtCore/qatomic_ia64.h \
    /usr/include/qt5/QtCore/qatomic_mips.h \
    /usr/include/qt5/QtCore/qatomic_s390.h \
    /usr/include/qt5/QtCore/qatomic_sh4a.h \
    /usr/include/qt5/QtCore/qatomic_sparc.h \
    /usr/include/qt5/QtCore/qatomic_x86.h \
    /usr/include/qt5/QtCore/qatomic_cxx11.h \
    /usr/include/qt5/QtCore/qatomic_gcc.h \
    /usr/include/qt5/QtCore/qatomic_unix.h \
    /usr/include/qt5/QtCore/qmutex.h \
    /usr/include/qt5/QtCore/qlogging.h \
    /usr/include/qt5/QtCore/qflags.h \
    /usr/include/qt5/QtCore/qtypeinfo.h \
    /usr/include/qt5/QtCore/qtypetraits.h \
    /usr/include/qt5/QtCore/qsysinfo.h \
```

```

/usr/include/qt5/QtCore/qobjectdefs_impl.h \
/usr/include/qt5/QtCore/qstring.h \
/usr/include/qt5/QtCore/qchar.h \
/usr/include/qt5/QtCore/qbytearray.h \
/usr/include/qt5/QtCore/qrefcount.h \
/usr/include/qt5/QtCore/qarraydata.h \
/usr/include/qt5/QtCore/qstringbuilder.h \
/usr/include/qt5/QtCore/qlist.h \
/usr/include/qt5/QtCore/qalgorithms.h \
/usr/include/qt5/QtCore/qiterator.h \
/usr/include/qt5/QtCore/qcoreevent.h \
/usr/include/qt5/QtCore/qscopedbackpointer.h \
/usr/include/qt5/QtCore/qmetatype.h \
/usr/include/qt5/QtCore/qvarlengtharray.h \
/usr/include/qt5/QtCore/qcontainerfwd.h \
/usr/include/qt5/QtCore/qisenum.h \
/usr/include/qt5/QtCore/qobject_impl.h \
model/qt/qbusinesslogic.h
/usr/lib/qt5/bin/moc $(DEFINES) $(INCPATH) -I/usr/lib/gcc/i486-
meego-linux/4.6.4/../../../../../include/c++/4.6.4 -I/usr/lib/gcc/
i486-meego-linux/4.6.4/../../../../../include/c++/4.6.4/i486-meego-
linux -I/usr/lib/gcc/i486-meego-linux/4.6.4/../../../../../include/c
++/4.6.4/backward -I/usr/lib/gcc/i486-meego-linux/4.6.4/include -I
/usr/local/include -I/usr/include model/qt/qbusinesslogic.h -o moc
/moc_qbusinesslogic.cpp

```

The qmake from the SailfishOS SDK is just a simple bash script, that invokes merssh.

```

#!/bin/bash
exec "/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/..
Resources/merssh" -sdktoolsdir "/Users/sven/.config/SailfishAlpha2
/mer-sdk-tools/MerSDK" -commandtype mb2 -mertarget SailfishOS-i486
-x86 qmake $@oluahuone:SailfishOS-i486-x86

```

So that's the trick: \$@ is replaced with the qmake call parameters, oluhuone is just the name of one of my computers.

#### 4.2.3 .pro file

Project files contain all the information required by qmake to build your application, library, or plugin. Generally, you use a series of declarations to specify the resources in the project, but support for simple programming constructs enables you to describe different build processes for different platforms and environments[QtCreator help].

If you select the help mode of QtCreator and switch to *Index*, you can search amongst other things for qmake and have a look at the qmake Variable Reference.

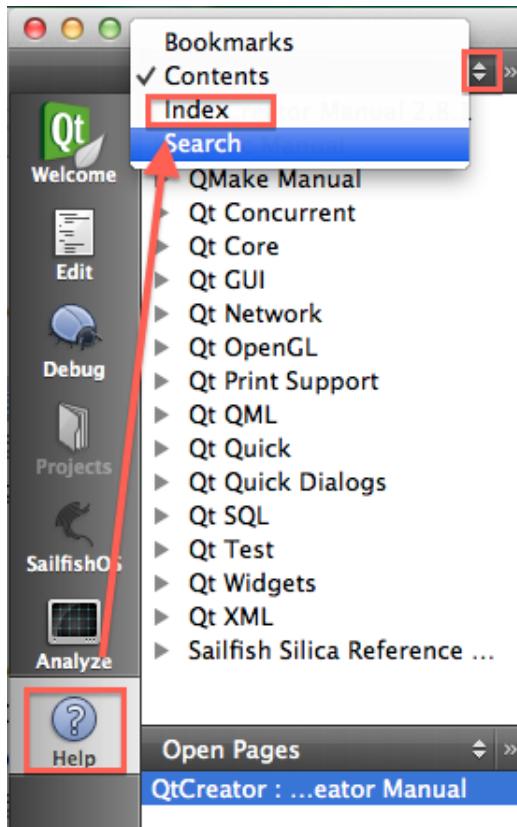


Figure 62: QtCreator, Help, Index.

The fundamental behavior of qmake is influenced by variable declarations that define the build process of each project. Some of these declare resources, such as headers and source files, that are common to each platform. Others are used to customize the behavior of compilers and linkers on specific platforms[QtCreator help].


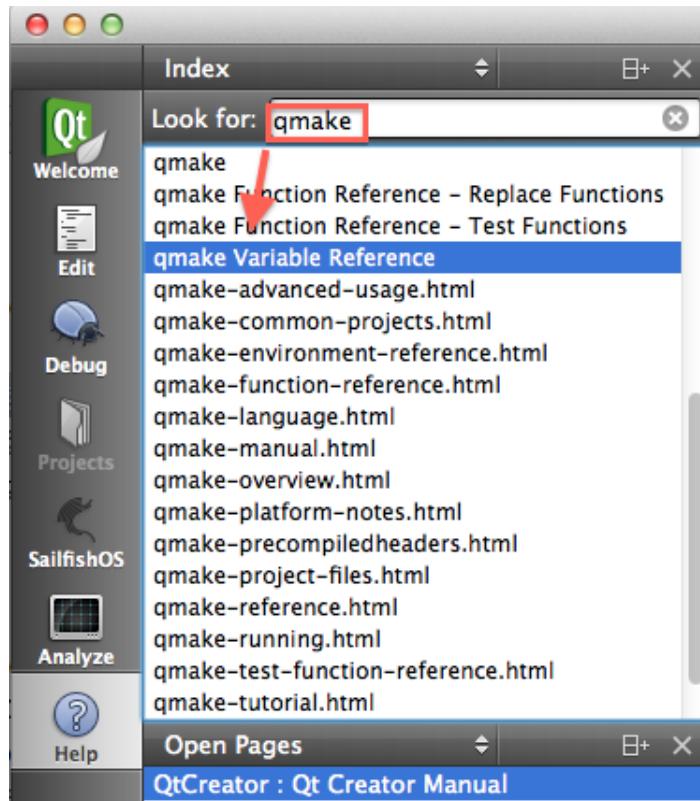


Figure 63: QtCreator, search for qmake.

#### 4.2.4 merssh

Looking with `top` showed a process called `merssh` when `qmake` was started via QtCreator. Interesting, what's that?

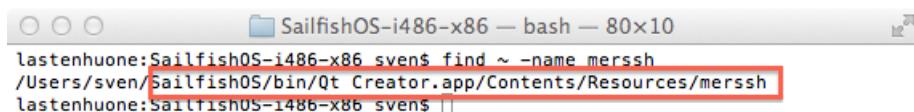

```
lastenhuone:SailfishOS-i486-x86 Svens$ find ~ -name merssh
/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/Resources/merssh
lastenhuone:SailfishOS-i486-x86 Svens$
```

Figure 64: What is merssh?.

So it is part of the QtCreator that is shipped with the SailfishOS SDK.

```
SailfishOS-i486-x86 — bash — 80x11
lastenhuone:SailfishOS-i486-x86 sven$ /Users/sven/SailfishOS/bin/Qt\ Creator.app
/Contents/Resources/merssh
merssh usage:
merssh <options> <command>
  -sdktoolsdir    directory with Qt Creator's target helpers
  -mertarget      the mer target name
  -commandtype   ['standard'|'sb2']
All options are mandatory.

lastenhuone:SailfishOS-i486-x86 sven$
```

Figure 65: merssh invoked, what's it?.

All the programs called by QtCreator during the build and run process are more or less just proxy scripts<sup>7</sup> that call `merssh`, which in turn calls something on the Mer build engine for cross compilation, see page 53.

More than that, it calls `sb2` which is short for Scratchbox2, have a look at section Scratchbox2 on page 55, there are more details. For now let's just assume that "Scratchbox 2 is a cross-compilation engine, it can be used to create a highly flexible SDK." [sb2].

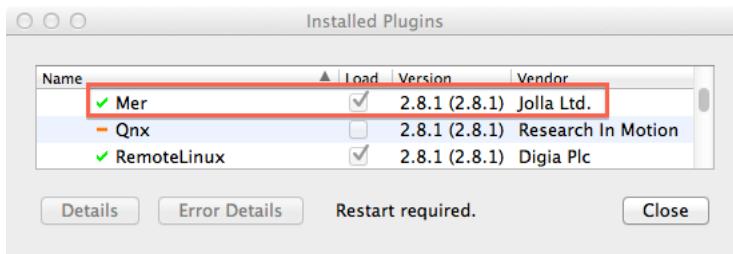


Figure 66: Mer plugin, maybe that's the source of merssh?.

I've grepped the command line for the `merssh`

```
$ ps -ef|grep "merssh"
```

And the result is:

```
/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/../Resources
  /merssh -sdktoolsdir /Users/sven/.config/SailfishAlpha2/mer-sdk-
  tools/MerSDK -commandtype mb2 -mertarget SailfishOS-i486-x86 qmake
    /Users/sven/QtProjects/TestSailfishOS/TestSailfishOS.pro -r -spec
      linux-g++ CONFIG+=debug CONFIG+=declarative_debug CONFIG+=
        qml_debug -after OBJECTS_DIR=obj MOC_DIR=moc UI_DIR=ui RCC_DIR=rcc
```

<sup>7</sup>OSX and Linux come with bash scripts, Windows comes with?

The picture is getting clearer now. QtCreator starts the SDK version of qmake which calls mer ssh with all parameters needed to call qmake via mb2 on the virtual machine.

This time it is not a bash script and I haven't found the source code yet. Maybe this little piece of software is one of the closed ones.

#### 4.2.5 gcc

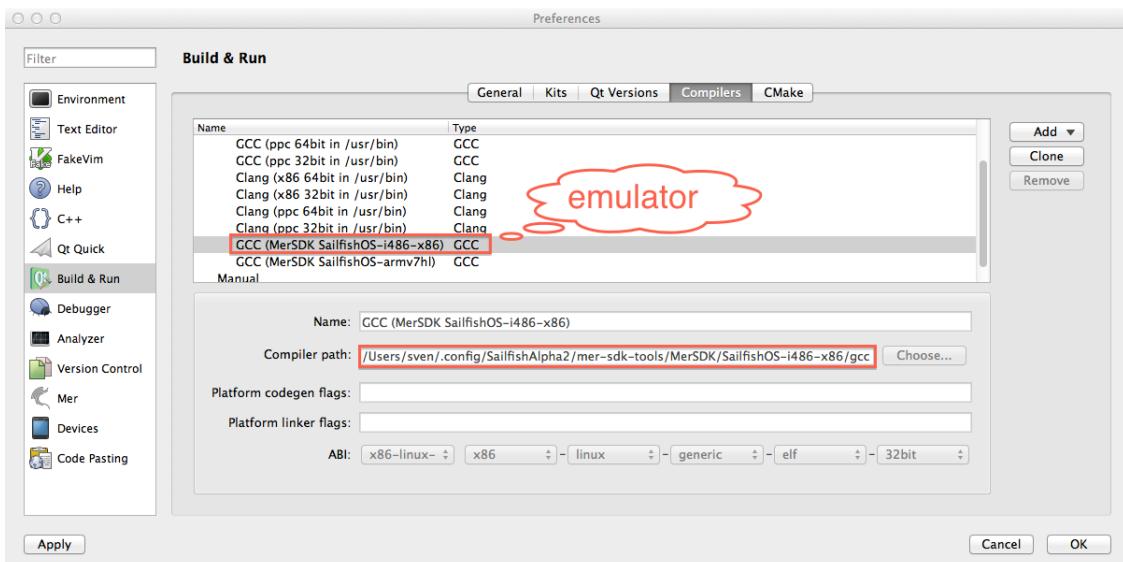


Figure 67: Preferences, compiler tab.

The SailfishOS SDK uses GCC as compiler. It is run inside the Mer build engine for cross compilation, see page 53. Stored on your development machine is only a stub or proxy that wants to connect to the virtual machine and start compiling from there.



Figure 68: Running GCC from command line.

So far I don't know why this piece of software is not installed with the rest of the SDK, `~/.config` is not a directory where I would expect executables. The error message even shows up if the *Mer build engine for cross compilation* is up and running. Again this helper program is invoked via merssh, see page 41.

Looking inside `gcc` from the SDK I also find a bash script:

```
#!/bin/bash
exec "/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/...
    Resources/merssh" -sdktoolsdir "/Users/sven/.config/SailfishAlpha2
    /mer-sdk-tools/MerSDK" -commandtype sb2 -mertarget SailfishOS-i486
    -x86 gcc $@oluhuone:SailfishOS-i486-x86
```

`$@` is replaced with the `gcc` call parameters, `oluhuone` is just the name of my current machine.

One question remains: when is this ever called? To my understanding `qmake` and `make` are called on the Mer build engine for cross compilation. I would conclude that the compiler is invoked from inside the VM.

#### 4.2.6 make

Again, `make` is just a bash script, `$@` replaced, `oluhuone` my machine:

```
#!/bin/bash
```

```
exec "/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/../Resources/merssh" -sdktoolsdir "/Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK" -commandtype mb2 -mertarget SailfishOS-i486-x86 make $@oluuhuone:SailfishOS-i486-x86
```

I've grepped the command line for the merssh while building the application.

```
$ ps -ef|grep "merssh"
```

Resulting in

```
/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/../Resources/merssh -sdktoolsdir /Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK -commandtype mb2 -mertarget SailfishOS-i486-x86 make
```

Calling make on the development machine just calls a proxy script, which forwards the command via merssh and executes make on the Mer build engine for cross compilation.

#### 4.2.7 rpm

Red Hat Package Manager or RPM Package Manager (RPM) is a package management system.[4] The name RPM variously refers to the .rpm file format, files in this format, software packaged in such files, and the package manager itself. RPM was intended primarily for Linux distributions; the file format is the baseline package format of the Linux Standard Base[wiki03].

Guess what, the command is a bash script inside the SDK:

```
#!/bin/bash
exec "/Users/sven/SailfishOS/bin/Qt Creator.app/Contents/MacOS/../Resources/merssh" -sdktoolsdir "/Users/sven/.config/SailfishAlpha2/mer-sdk-tools/MerSDK" -commandtype mb2 -mertarget SailfishOS-i486-x86 rpm $@oluuhuone:SailfishOS-i486-x86
```

This script is called when you deploy your app. Deploying happens implicitly if you *run* the application. See section Run settings on page 50. Or you can deploy explicitly.

#### 4.2.8 deploy

There are two ways to start the deployment process, also have a look at section Run settings on page 50.

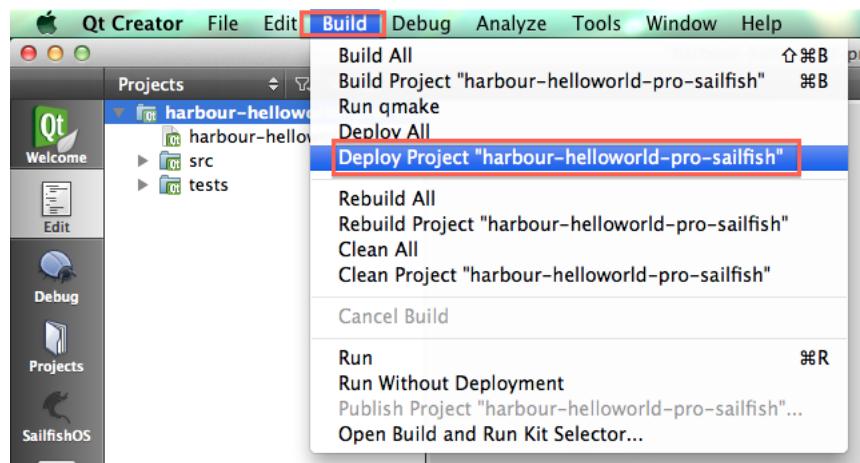


Figure 69: Deploy via “build” menu.

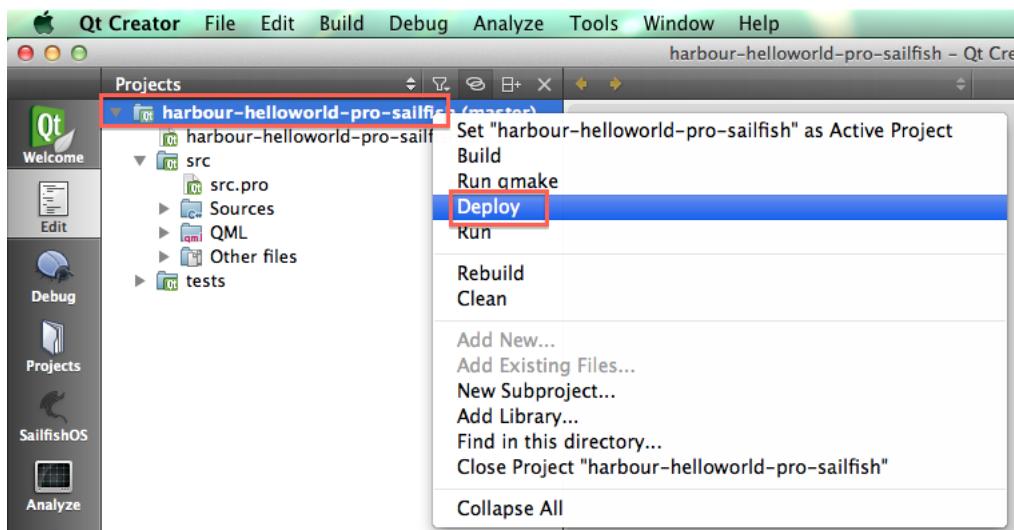


Figure 70: Deploy via “project tree”.

#### 4.2.9 spectacle / yaml

TODO

#### 4.2.10 Project settings

As so often in life there is more than one way to do things. There are the *project settings*. This is the place where you define what happens when you build and compile.



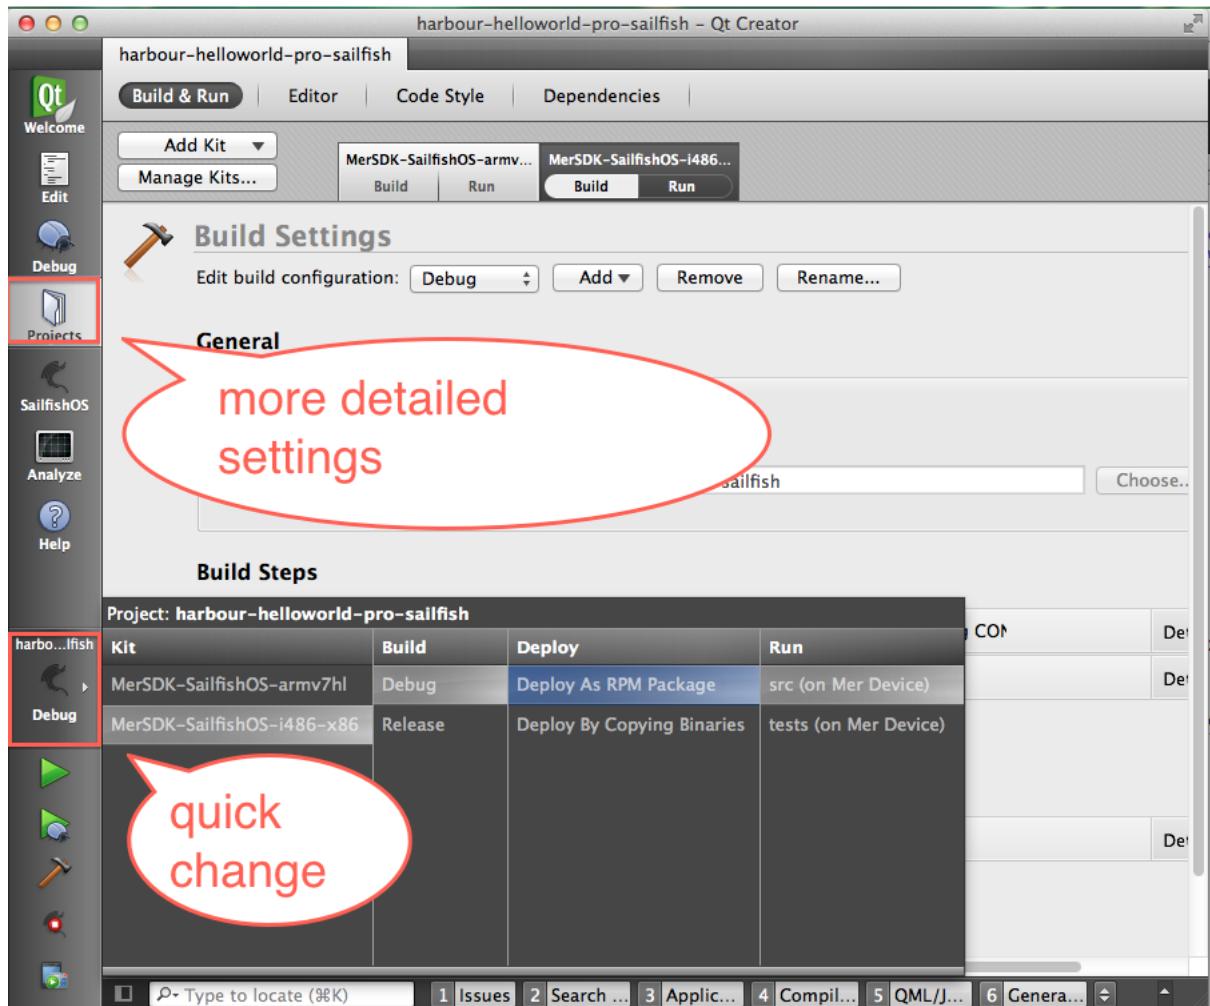


Figure 71: Two way to change project settings.

The second way is the fast *mode selector*  that switches between the settings that were defined in the *project settings*. It's the sailfish button above the green run button. You have started a project just with the SailfishOS-i486-x86 setting<sup>8</sup> or meanwhile there is another platform available. In any of those cases the **Add Kit** button is your way to go. This way you can add new target platforms. In Qt-Speak they are called kits, a combination of Qt library, compiler and deployment target.

Right next to it is a little section for each platform you have chosen to build for. Each of this sections is decided into a *build* and *run* pane. As you can guess, *build*

<sup>8</sup>Or vice versa.

defines how to build your app, *run* defines how to run it.



Figure 72: Settings for build and run for each target.

#### 4.2.11 Build settings

Do you want to build a debug version of your app with all the debug symbol built-in? Or are you ready to ship your app to the Harbour?

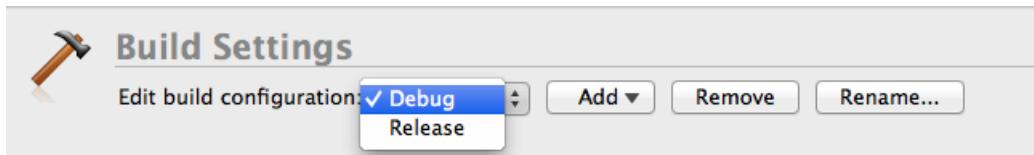


Figure 73: Build Debug or Release version?.

The build directory of your app will be the same as your source directory. Usually you can change that with the “Shadow build” checkbox, but on Nov 12, 2013 there was an entry in the mailing list that Jolla still works on an SDK that supports that.

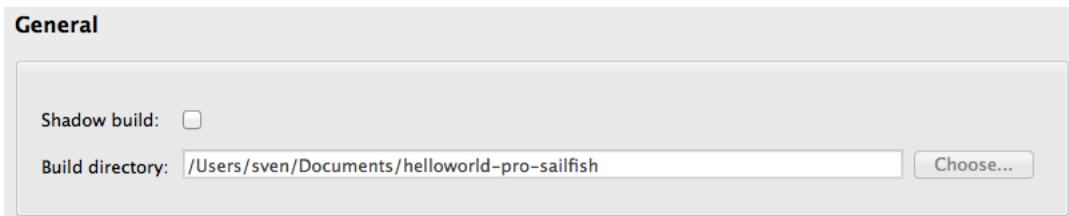


Figure 74: Where should your code be built?.

The Mer SDK Build Engine has mounted your home drive and eventually a separate source code directory from your development machine. So don't wonder why the build directory is local on your machine?

The *Build steps* section defines what happens if you actually build your app. If you open up the details, you can see the called command line.

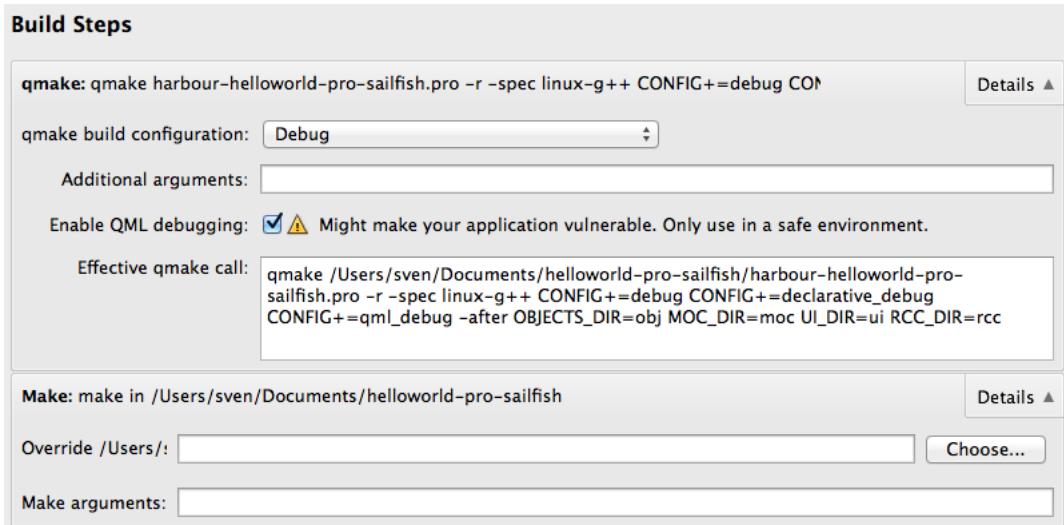


Figure 75: How to build?.

Usually qmake is called, followed by make. *Note:* those commands are not invoked locally, they run remote on the Mer build engine for cross compilation, as defined in the preferences for the QtCreator<sup>9</sup>.

*Clean steps* defines how your project is make cleaned.

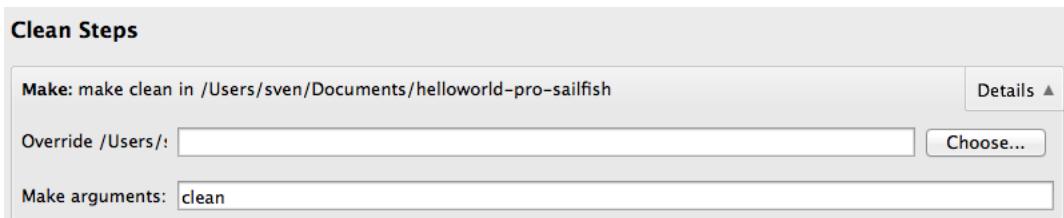


Figure 76: How to clean your project?.

The *Build environment* defines the environment variables that are used during build.

#### 4.2.12 Pimp the clean process

Every now and then you clean your project. What bugged my for some time using QtCreator<sup>10</sup> was that it left the Makefile after you cleaned the project. This way qmake is often not run after a make clean. No problem, just choose the *Build*

<sup>9</sup>Preferences->bash scripts->merssh->VM

<sup>10</sup>That has nothing to do with the SailfishOS SDK, the regular QtCreator does that, too.

*settings* pane of the *project settings* and hit the button **Add Clean Step ▾** and create an extra step that is executed every time after the cleanup has been done.




Figure 77: Create a custom process step.

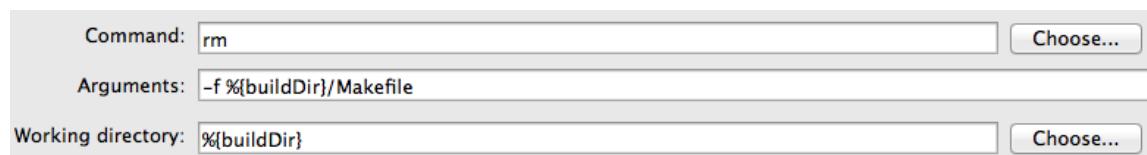


Figure 78: Clean step: Remove the Makefile.

Here again for copy and paste:

```
rm
-f ${buildDir}/Makefile
${buildDir}
```

#### 4.2.13 Run settings

Here you have some control on how the compiled binary and its companion files will be transferred to the target device.

Choose *Deploy By Copying Binaries* if you are in an early development stage and recompile very often. It's the faster way.

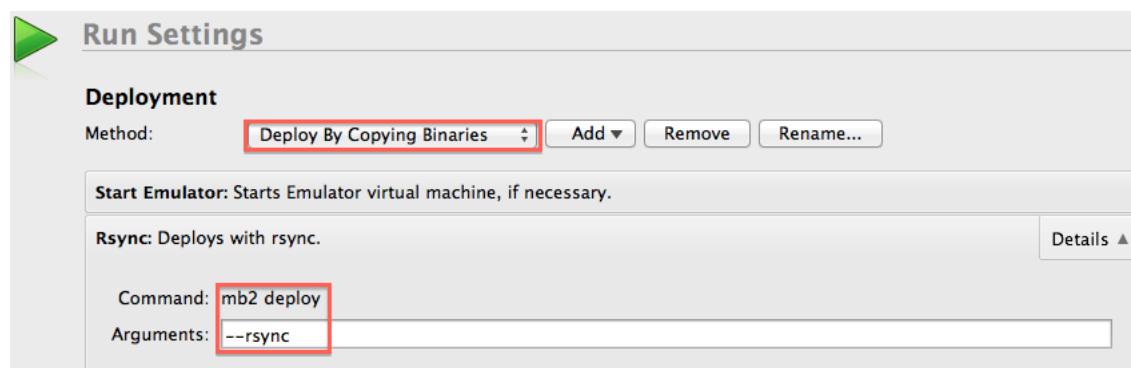


Figure 79: Run Setting, Deploy By Copying Binaries.

If your app is almost ready to ship to the Harbour, you can change to *RPM*. Now your compiled files will be packaged into a RPM file, transferred to the target device and installed like any other application from the store.

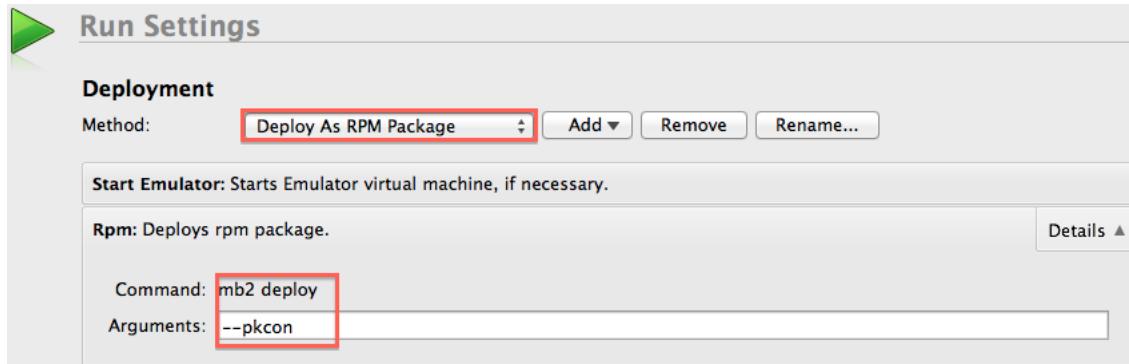


Figure 80: Run Setting, Deploy As RPM Package.

Either way uses a variation of the `mb2 deploy` command on the Mer build engine for cross compilation, which means that the binaries or packages are transferred from one VM to the other VM.

The *Run configuration* contains information about how your app is run on the target device.

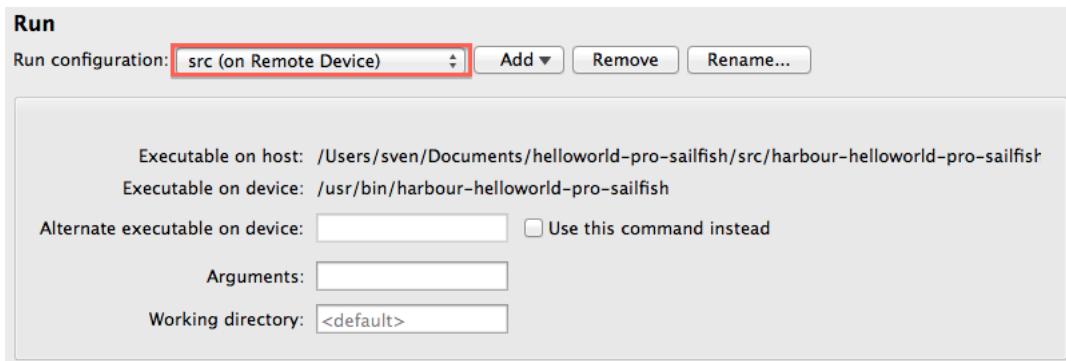


Figure 81: Run configuration.

In case your project consists of more than one (sub-)project, the *configuration* determines which of these should run. *Executable on host* is the path to the compiled binary locally on your development machine. In contrast is the *Executable on device* the path to the transferred binary on the target device<sup>11</sup>.

<sup>11</sup>If you hit *run*, the binary is copied or installed at his location.

The *Run environment* represents the environment variables that are visible to the binary when it is executed on the target device.

**Run Environment**

Use System Environment

Base environment for this run configuration: **System Environment**

| Variable                  | Value  |
|---------------------------|--|
| DBUS_SESSION_BUS_ADDRESS  | unix:path=/run/user/10000/dbus/user_bus_socket         |
| EGL_DRIVER                | egl_gallium  |
| EGL_PLATFORM              | wayland  |
| GSETTINGS_BACKEND         | gconf  |
| G_BROKEN_FILERAMES        | 1  |
| HISTCONTROL               | ignoredups   |
| HISTSIZE                  | 1000   |
| HOME                      | /home/nemo   |
| HOSTNAME                  |  |
| LESSOPEN                  | /usr/bin/lesspipe.sh %s                                |
| LOGNAME                   | nemo   |
| LS_COLORS                 |  |
| MAIL                      | /var/spool/mail/nemo                                   |
| M_DECORATED               | 0  |
| OPTIONS                   | -background none -nocursor                             |
| PATH                      | /usr/local/bin:/bin:/usr/bin:/usr/local/sbin:/usr/sbin |
| PWD                       | /home/nemo   |
| QML_FIXED_ANIMATION_STEP  | no   |
| QT_DEFAULT_RUNTIME_SYS... | meego  |
| QT_GRAPHICSSYSTEM         | runtime  |
| QT_IM_MODULE              | Maliit   |
| QT_QPA_PLATFORM           | wayland  |
| QT_WAYLAND_DISABLE_WIN... | 1  |
| SHELL                     | /bin/bash  |
| SHLVL                     | 1  |
| SSH_CLIENT                | 10.0.2.2 49308 22                                      |
| SSH_CONNECTION            | 10.0.2.2 49308 10.0.2.15 22                            |
| USER                      | nemo   |
| WAYLAND_DISPLAY           | .../display/wayland-0                                  |
| XDG_RUNTIME_DIR           | /run/user/100000                                       |
| XDG_SESSION_ID            | c3   |
| -                         | /bin/env   |

Figure 82: Run environment - environment variables on target device.

To see them, you must start the emulator and click on the **Fetch Device Environment** button. The *Analyzer Settings* are clearly for valgrind a static analyzer tool. I haven't used it one the emulator yet and on OSX Mountain Lion it does not run anymore. I'd prefer clang which is AFAIK not available on the SDK.



The *Debugger Settings* are for TODO.

### 4.3 Mer build engine for cross compilation

“The Mer build engine is a virtual machine (VM) containing the Mer development toolchains and tools. It also includes a SailfishOS target for building and running Sailfish and QML applications. The target is mounted as a shared folder to allow QtCreator to access the compilation target. Additionally, your home directory is shared and mounted in the VM, thus giving access to your source code for compilation. The build engine also supports additional build targets and cross-compilation toolchains. These can be managed from the SDK Control Centre interface within QtCreator which allows toolchains, targets and even individual target packages to be added and removed.”[sailfishos3].



Figure 83: SailfishOS icon.

The VM runs headless<sup>12</sup>, you can not see it running. For you as a developer there is a webpage served by this VM accessible through the SailfishOS icon inside QtCreator. See figure 48 on page 28.

---

<sup>12</sup>You can change that in Preferences->Mer, uncheck "Headless" and restart the VM or start it from the VirtualBox control center if you need it just once.

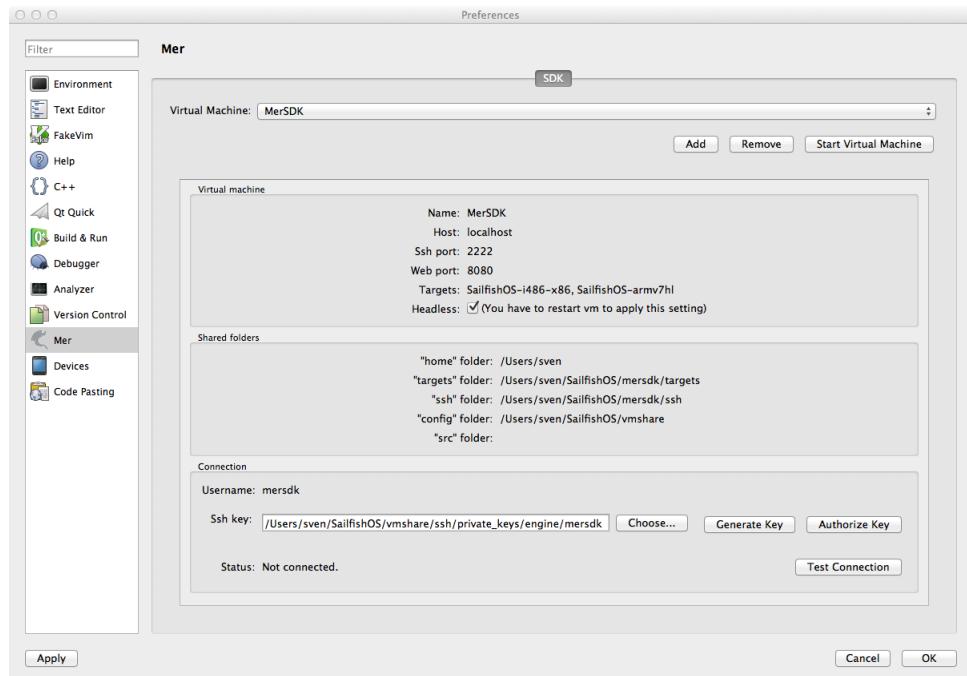


Figure 84: Preferences, Mer SDK - virtual machine.

#### 4.3.1 Directories

VirtualBox shared folders are used for sharing files between the host and the build engine and emulators for[mer04]:

- Configuration
- SSH keys
- Home directory
- Targets
- Other source directory trees

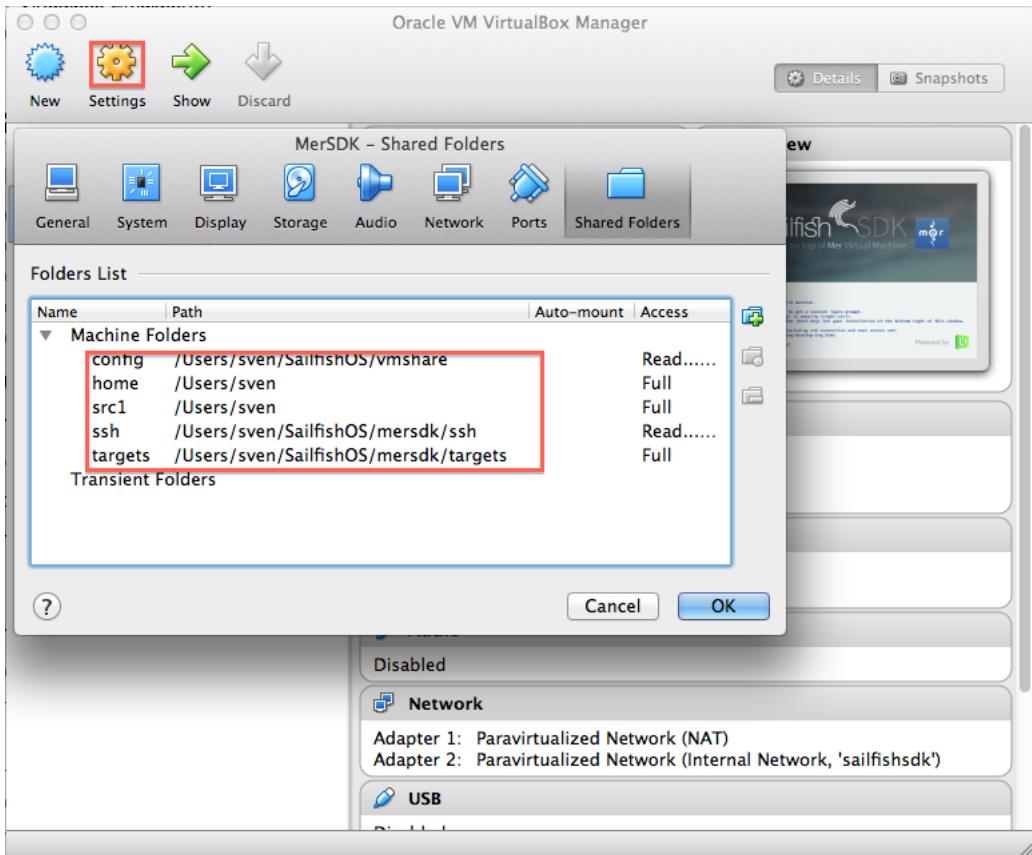


Figure 85: Virtual Box, shared folders.

Those shared folders are mount to these positions in the filesystem of the Mer build engine for cross compilation:

```
[root@SailfishSDK ~]# mount
none on /etc/ssh/authorized_keys type vboxsf (rw,nodev,relatime)
none on /home/mersdk type vboxsf (rw,nodev,relatime)
none on /host_targets type vboxsf (rw,nodev,relatime)
none on /etc/mersdk/share type vboxsf (rw,nodev,relatime)
none on /home/src1 type vboxsf (rw,nodev,relatime)
```

## 4.4 Scratchbox2

“Scratchbox2 (sbox2 or sb2) is a cross-compilation toolkit designed to make embedded Linux application development easier. It also provides a full set of tools to integrate and cross-compile an entire Linux distribution.

In the Linux world, when building software, many parameters are auto-detected based on the host system (like installed libraries and system configurations), through autotools "./configure" scripts for example. But so, when one wants to build for an embedded target (cross-compilation), most of the detected parameters are incorrect (i.e. host configuration is not the same as the embedded target configuration).

Without Scratchbox2, one has to manually set many parameters and "hack" the "configure" process to be able to generate code for the embedded target.

At the opposite, Scratchbox2 allows one to set up a "virtual" environment that will trick the autotools and executables into thinking that they are directly running on the embedded target with its configuration.

Moreover, Scratchbox2 provides a technology called CPU-transparency that goes further in that area. With CPU-transparency, executables built for the host CPU or for the target CPU could be executed directly on the host with sbox2 handling the task to CPU-emulate if needed to run a program compiled for the target CPU. So, a build process could mix the usage of program built for different CPU architectures. That is especially useful when a build process requires building the program X to be able to use it to build the program Y (Example: building a Lexer that will be used to generate code for a specific package).<sup>[wiki02]</sup>

The Wiki page of the Mer project contains a exhaustive description how to compile a program on platform A for platform B[mer01].

#### 4.4.1 sb2

You can find Scratchbox2 or the sb2 in the /usr/bin folder of the Mer build engine for cross compilation. This shell script is not called directly. The SailfishOS SDK uses subsubsec:mb2 as a wrapper for convenience.

#### 4.4.2 mb2

This is a convenience wrapper script in the /usr/bin folder of the Mer build engine for cross compilation.. Look at the source code in section mb2 - bash script on page 88.

Here is just the usage part to trap what is happening when this script is called<sup>13</sup>.

```
Executes a subset of build commands in the context of an rpmbuild.  
Typically called from QtCreator to perform qmake/make phases of a  
project.  
Note that any other build steps in the .spec file will also be run.  
<specfile> will be looked for in the current rpm/ dir. If there is
```

<sup>13</sup>It should be alright to show a snippet since I included the whole source with copyright notice.

more than one it must be provided.

CWD is used as a base dir **for** installroot/ and RPMS/ to allow **for** shadowbuilds

mb2 is aware of spectacle and will update the spec file **if** there is an obvious yaml file which is newer.

```
mb2 build [-d] [-j <n>] [<args>]
           : runs rpmbuild for the given spec file in the
             given sb2 target. Produces an rpm package.
           : -d      enable debug build
           : -j <n> use only 'n' CPUs to build
           : can use -s -t -p

mb2 qmake [<args>] : runs qmake in the 'build' phase
           Note that this also verifies target
           build dependencies are up to date
           : can use -s -t -p

mb2 make [<args>]  : run make in the 'build' phase
           : can use -s -t -p

mb2 deploy --zypper|--pkcon|--rsync
           : runs the install or rpm-creation phase and
then
           copies/install the relevant files to the
           device
           : can use -s -t -p -d

mb2 run|ssh [<args>] : runs a command (on device if --device given)
           ;
           intended for running gdb and a gdb server
           : can use -s -t -p -d

mb2 install [<args>] : runs the 'install' phase to install to
           $buildroot
           : can use -s -t -p
mb2 rpm [<args>]    : runs the install & rpm-creation phases
           : can use -s -t -p

-t | --target       : specify the sb2 target to use
-d | --device       : specify the device
-p | --projectdir   : when running shadow build/deploy from another
           dir
-s | --specfile     : if the specfile is not in rpm/*.spec and
           cannot be found using -p
```

---

## 4.5 The SailfishOS Emulator

“The emulator is an x86 VM image containing a stripped down version of the target device software. It emulates most of the functions of the target device running Sailfish operating system, such as gestures, task switching and ambience theming.”[sailfishos3]. At least with the AlphaSDK2 the emulator can not simulate device rotations.

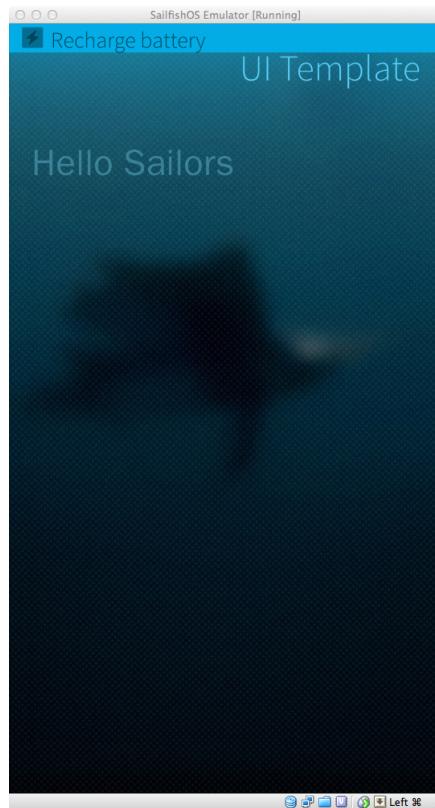



Figure 86: Emulator running the templated SailfishOS Qt Quick Application.


## 4.6 Sailfish Silica


“Sailfish Silica is a QML module which provides Sailfish UI components for applications. Their look and feel fits with the Sailfish visual style and behavior and enables unique Sailfish UI application features, such as pulley menus and application covers.”[sailfishos3].


QML[qt05] is the Qt Quick Markup Language[qt06] that supersedes widgets for designing user interfaces. It is a declarative “language” that can contain a small subset of Javascript.


Also have a look at some open source examples on Github[sailfishos5]. The emulator comes with a demo application that shows the silica components.

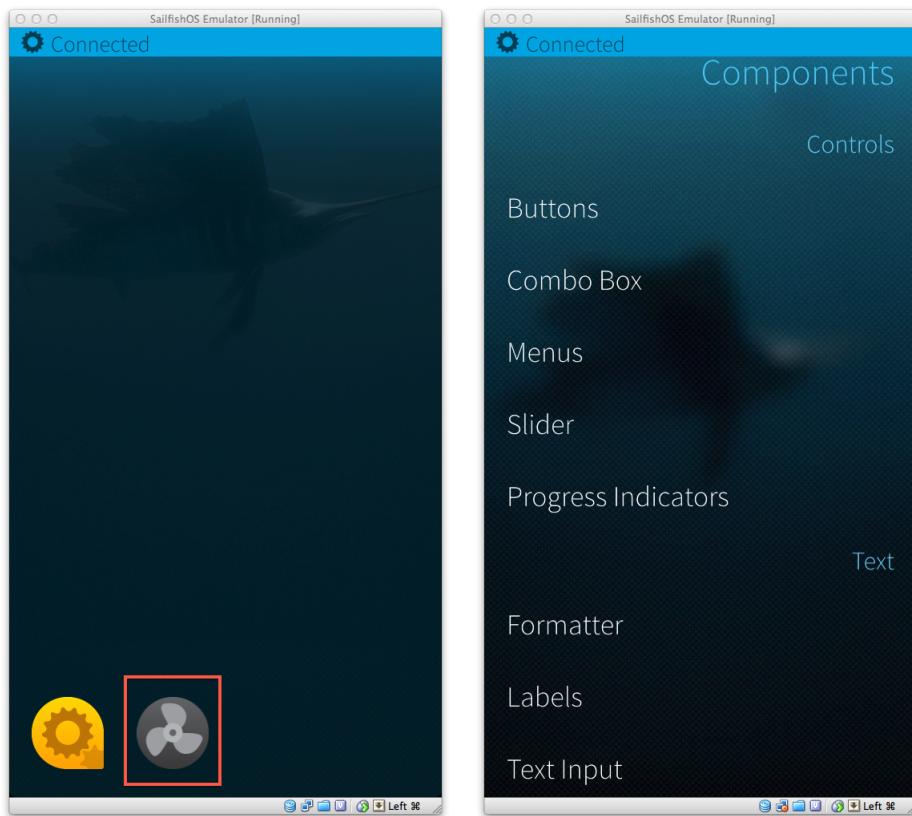

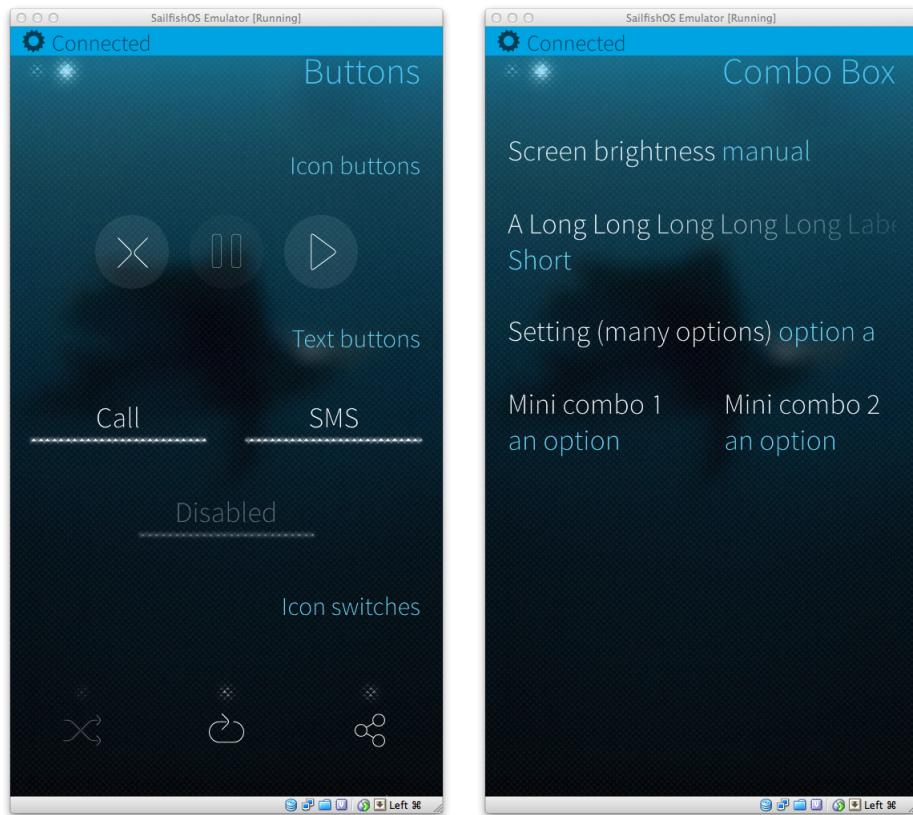

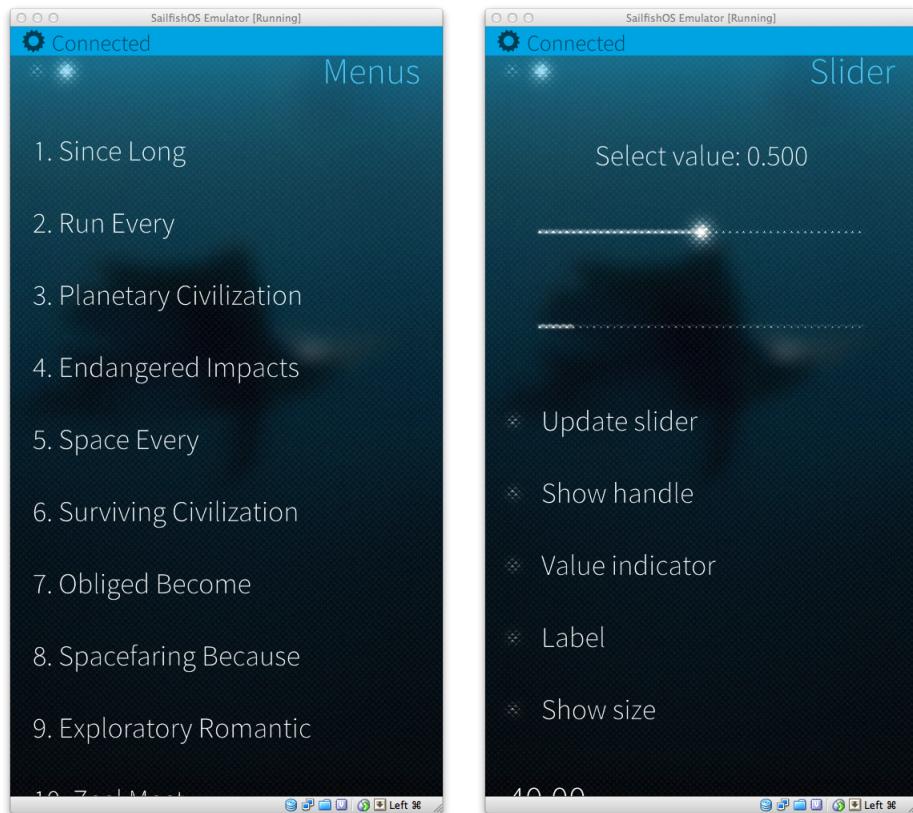

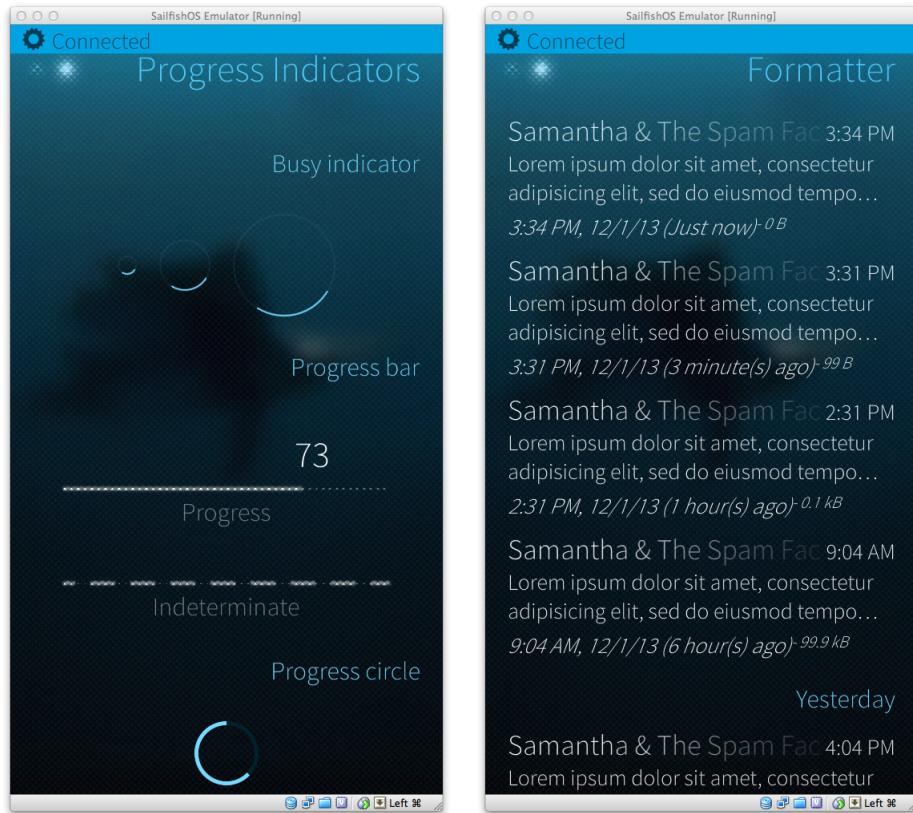

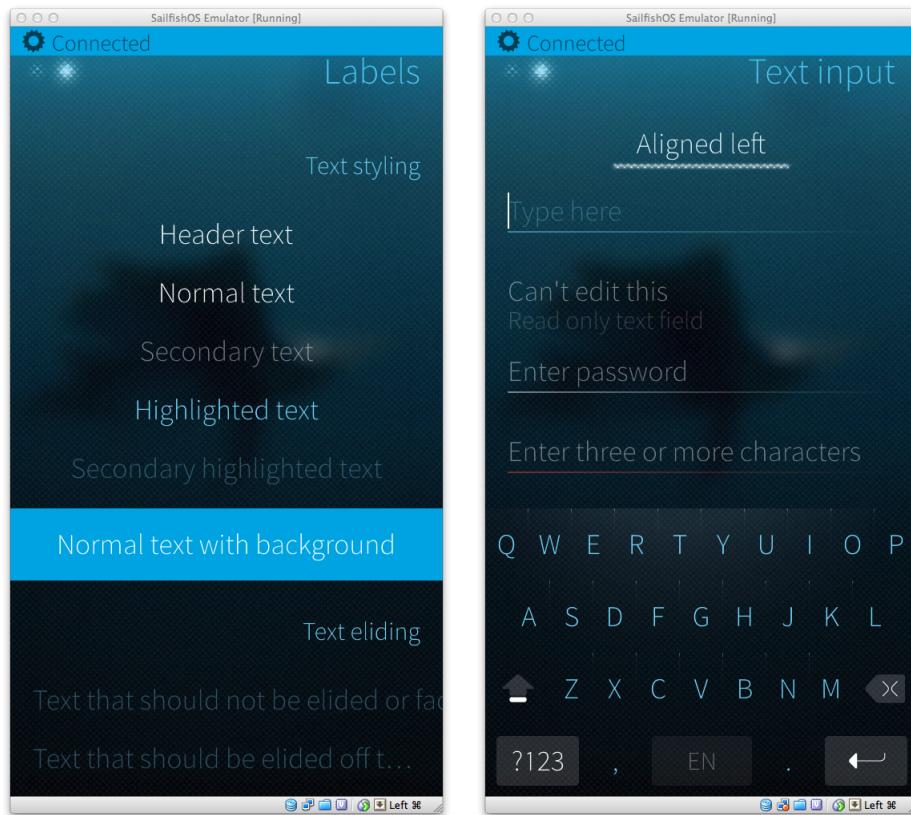

## 4.7 Tools chained up

Now that we have seen all the tools, bits and pieces, I will try to give an overview how everything works together, when you compile your code in QtCreator for SailfishOS.

### 4.7.1 Build process

As an example we just assume that the user<sup>14</sup> builds an app for the emulator and thus uses the `SailfishOS-i486-x86` target.

---

<sup>14</sup>That means you ;-)

| <i>QtCreator</i>  | <i>Mer SDK VM</i>                        | <i>emulator</i> |
|-------------------|--|-----------------|
| user starts build |  |                 |
| qmake             |  |                 |
| merssh            |  |                 |
|                   | mb2 -mertarget SailfishOS-i486-x86 qmake |                 |
| make              |  |                 |
| merssh            |  |                 |
|                   | mb2 -mertarget SailfishOS-i486-x86 make  |                 |
| parse output      |  |                 |

#### 4.7.2 Run app

Now the user hits *run*, variation 1 = *Deploy By Copying Binaries*.

| <i>QtCreator</i>                | <i>Mer SDK VM</i>                                 | <i>emulator</i> |
|---------------------------------|---|-----------------|
| user runs app                   |   |                 |
| start emulator if necessary     |   |                 |
| deploy                          |   |                 |
| merssh                          |   |                 |
|                                 | mb2 -mertarget SailfishOS-i486-x86 deploy --rsync |                 |
|                                 | copying files to the emulator                     |                 |
| run executable on remote device |   |                 |
|                                 |   | execute binary  |
| catch execution status          |   |                 |

Or the user hits *run*, variation 2 = *Deploy As RPM Package*.

| <i>QtCreator</i>                | <i>Mer SDK VM</i>   | <i>emulator</i>        |
|---------------------------------|---|------------------------|
| user runs app                   |   |                        |
| start emulator if necessary     |   |                        |
| deploy                          |   |                        |
| merssh                          | mb2 -mertarget SailfishOS-i486-x86 deploy -pkcon<br>building RPM package<br>copying RPM package to the emulator | installing RPM package |
| run executable on remote device |   | execute binary         |
| catch execution status          |   |                        |

## 5 Installing additional packages

You can use additional libraries for your code, so you don't have to write all functionality for yourself. Some of them are available on the emulator and the physical device later on. Sadly not all library packages that are available for Nemo/Mer are usable here. Have look in section Harbour on page 70 for details about allowed packages. That does not mean, that you can not use libraries that are not part of SailfishOS. You can deliver them with your app, linked to the correct location. Mind the problems<sup>15</sup> that you inherit by doing so.

### 5.1 Emulator

You can login from your development machine via terminal and ssh, the emulator should be running.

```
$ ssh -p 2223 nemo@localhost
nemo@localhost's password:
# the password is nemo
'---
| SailfishOS 0.98.0.67 (i486,testing)
'---
[nemo@SailfishEmul ~]$
```

---

<sup>15</sup>Think security updates.

As an alternative you can log in the running VM of the emulator. Press CMD+F2<sup>16</sup><sup>17</sup> to change to the login screen. User and password are of course the same.

### 5.1.1 zypper

Additional software and libraries come in RPM packages and the management tool on the emulator is `zypper`. It provides “functions like repository access, dependency solving, package installation”[suse01].

```
[nemo@SailfishEmul ~]$ zypper refresh
```

will update the meta data that is stored from the package repository.

```
[nemo@SailfishEmul ~]$ zypper search
```

will show you all packages that can be installed on the emulator.

```
[nemo@SailfishEmul ~]$ zypper search boost
```

will show you all package names that contain `boost`.

```
[nemo@SailfishEmul ~]$ sudo zypper install boost-filesystem
```

will install the library `boost-filesystem` and all its dependencies on the emulator. *Note:* `boost-filesystem` is not one of the currently available libraries<sup>18</sup>.

<sup>16</sup>On OSX your function keys will probably not work as regular function keys, they provide OSX functionality as printed on them, e.g. volume up/down. Go to System Preferences->Keyboard->Keyboard and check "Use all F1, F2, etc. as standard function keys".

<sup>17</sup>On Windows and Linux use the CTRL Key instead of CMD.

<sup>18</sup>So why do I use it as an example? Honi soit qui mal y pense.

```
[nemo@SailfishEmul ~]$ sudo zypper remove boost-filesystem
```

will remove the library `boost-filesystem` and all its dependencies from the emulator. Of course you can install additional software on the emulator<sup>19</sup> that helps you to edit files directly or manage the filesystem better.

*Note:* you do not need the development packages on the emulator or physical device.

### 5.1.2 Known Logins

| <i>user</i> | <i>password</i> | <i>comment</i>                                  |
|-------------|-----------------|---|
| nemo        | nemo            |   |
| root        |                 | no password needed, just works in the VM for me |

## 5.2 Mer SDK Build Engine



Figure 87: Choose “SailfishOS” from the left pane.

### 5.2.1 Known Logins

| <i>user</i> | <i>password</i> | <i>comment</i>                   |
|-------------|-----------------|----------------------------------|
| nemo        | nemo            | no private keys provided         |
| mersdk      |                 | for use with ssh and private key |
| root        |                 | no password needed in the VM     |

### 5.2.2 SSH login

Open your terminal and enter

```
# connection as user mersdk
ssh -p 2222 -i ~/SailfishOS/vmshare/ssh/private_keys/engine/mersdk
      mersdk@localhost
-bash-3.2$
```

or

---

<sup>19</sup>As long as this software is not part of your app.

```
# connection as user root
ssh -p 2222 -i /Users/sven/SailfishOS/vmshare/ssh/private_keys/engine
    /root root@localhost
Last login: Fri Dec  6 16:41:16 2013
[root@SailfishSDK ~]#
```

## 6 Templates for QtCreator

The SailfishOS SDK comes with a template for a new SailfishOS Qt Quick Application project. On OSX those templates are stored inside the QtCreator bundle, you can change those templates there or create new ones.

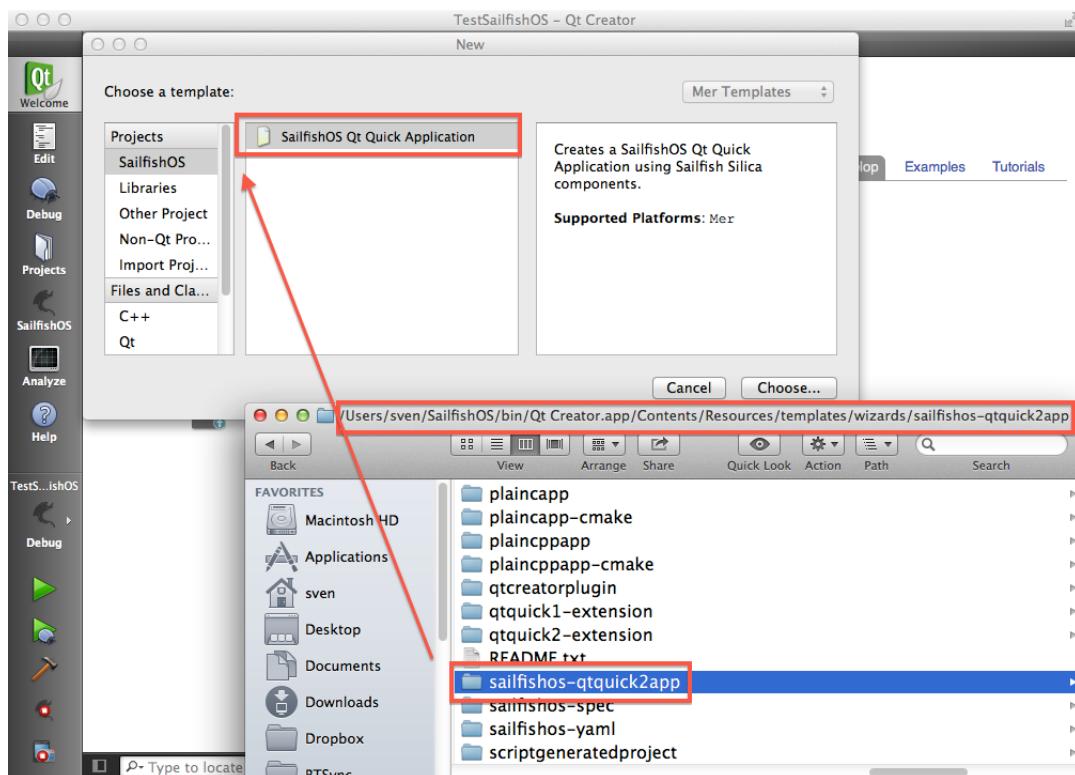


Figure 88: Template for a new SailfishOS Qt Quick Application.

Just make sure that you don't use the names `obj`, `moc`, `ui` or `rcc` inside your template. These are going to be used to store the compile results and temporaries if you compile a SailfishOS program.

Updates of the SDK may delete changed or new templates, you might want to create a backup in a safe place.

TODO example of a new template, figure out the caveats here!

## 7 Physical device

Developing with the emulator only will do you no good. You have to experience your program on a real device. Things that might look great on an emulator, may not even work on a real phone. It maybe just your fingers that are hiding the screen. Buttons are too small or too close.

### 7.1 How to connect to SSH over usb connection from PC

- the usb is either `usb_storage` or `usb_net`
- enable developer mode
- enable SSH (it's openssh, not dropbear)
- set password
- goto usb settings
- change that to developer mode
- reconnect usb cable
- you should see the ip address of the device on the UI
- you should be able to ssh to that address from PC (set an ip address first)

Taken from [ex01].

This section obviously needs a lot more information. Lacking a physical device or an SDK that enables me to interact with it, this has to be done in future.

### 7.2 How do I deploy a package to my phone?

As of now there is only the Alpha2 SDK out that has no built-in features to deploy a package to your device.

But you can help yourself<sup>20</sup>:

---

<sup>20</sup>Since I have no device yet, I couldn't test this. Time will come, more details will follow.

1. build RPM
2. deploy RPM, look in the output for the location
3. copy RPM to Jolla phone
4. use pkcon install-local to install it locally

Also have a look at [mer02].

## 8 Harbour

our wrote a fantastic app and now you want to bring it to the people. Head over to the Jolla Harbour[jolla02] and submit your app.

There are some things about naming an such to consider when you prepare your app, here is the Sailfish FAQ from the Jolla Harbour as of now = Dec. 2nd 2013. This is of course a moving target, which means there will be more libraries available in future. Even if you don't have an app ready to submit, you should look there once in a while. Ne need to re-invent the wheel here. If there is missing something, contact Jolla.

### Naming

What should I name the application?

You have to use the prefix "harbour-" in front of the application name. Only lower case characters are allowed.

Why do I have to name my Application with a prefix?

The reason for this requirement is so that applications do not clash with other installed packages on the device. It also allows us to verify certain things automatically, e.g. imports of your own QML modules.

What is that '\$NAME' you use here in the FAQ's?

That is your application name including the prefix "harbour-" (e.g. harbour-myawesomeapp).

How can I name the app in the application launch grid? I don't want that long name with prefix to appear there!

In the .desktop file, there is the "Name=" field. The string defined there is shown in the application launcher as the application name. That name does not have to be unique. So there might be more than one application called "HelloWorld!" in the application launcher grid. The package name of the application (\$NAME) does not appear in the UI.

Where must this \$NAME be used?

the executable binary: /usr/bin/\$NAME

the .desktop file: /usr/share/applications/\$NAME.desktop

the icon: /usr/share/icons/hicolor/86x86/apps/\$NAME.png

the folder in /usr/share where you can install other application files: /usr/share/\$NAME

The rpm package name, note that is not necessarily the same as the RPM file name!

The name you get with:

```
rpm -q --queryformat=' %{NAME}\n' -p harbour-awesomeapp-1.0.0.armv7hl.  
rpm
```

That is what is set in .spec resp. .yaml file under "Name: "

Your own QML imports resp. modules, but with "--" replaced with "." due to QML grammar rules. e.g import harbour.myawesomeapp.

MyQmlModule 1.0 as MyModule

Do I need to put that unique \$NAME into the "Title" field when I upload an app to the Harbour?

No, in the "Title" field you can use a pretty name that will be shown to the user in the store client UI.

RPM-Packaging

In which locations can I install files?

You are allowed to install:

```
/usr/bin/$NAME <- the executable binary  
/usr/share/applications/$NAME.desktop <- the desktop file  
/usr/share/icons/hicolor/86x86/apps/$NAME.png <- the icon file  
/usr/share/$NAME/* <- anything else (data files, private shared libraries, private QML imports, etc..) goes here
```

Why are you so restrictive? Why can't I install my libraries, images etc in places where I think it makes sense?

We have to ensure that rpms can be installed and do not conflict with other rpms. It will also allow us to install store applications under a different path (rpm --relocate) in the future.

What does the package name have to be? (.spec/.yaml "Name: foo")

Use "Name: \$NAME". See Naming section in this FAQ.

Icons

Which size should the application icon be?

86x86. Older SDK versions contain a template which suggests a size of 90x90. That is obsolete and will soon be updated with the next SDK version.

Where shall the icon be installed?

/usr/share/icons/hicolor/86x86/apps/\$NAME.png. Older SDK versions contain a template which suggests a size of 90x90 and also a different install path. That is obsolete, not supported anymore, and will soon be updated with the next SDK version.

What file formats are supported for the icon?

The icon must be a PNG file.

How do I define an icon in the .desktop file, so it shows up in the application launcher?

Icon=\$NAME

You must not use absolute path names. There was a bug in older SDK versions (lipstick < 0.18.6) so the absolute path was necessary and the template suggested it. That will soon be updated with the next SDK version. The reason to not use absolute path names is: it would allow us in the future to install store applications under

a different path.

#### .desktop-Files

What do I have to put into the Exec= line?

Exec=\$NAME (for Silica applications using C++ and QML) or Exec=  
sailfish-qml \$NAME (for QML-only Silica applications without an  
application binary)

What do I have to put into the Icon= line?

Icon=\$NAME

What do I have to put into the Name= line?

The name defined there is shown in the application launcher as the  
application name. That name does not have to be unique. So there  
might be more than one application called "HelloWorld!" in the  
application launcher grid.

What do I have to put into the X-Nemo-Application-Type= line and what  
is it good for?

For Silica Qt 5 applications, use "X-Nemo-Application-Type=silica-qt  
5" - this will make sure that the application is launched using  
the right booster, and will make startup faster.

How can I disable single-instance launching?

In general, you should use single-instance launching (tapping on the  
application icon will bring the existing window to the foreground)  
. If for some reason your application conflicts with single-  
instance launching, you can add "X-Nemo-Single-Instance=no" to  
your .desktop file to disable this behaviour.

#### QML API

Which QML modules (imports) are allowed?

Currently the following QML modules (imports) are allowed:

QtQuick 2.0

QtQuick 2.1

QtMultimedia 5.0

Sailfish.Silica 1.0

QtQuick.LocalStorage 2.0

QtQuick.XmlListModel 2.0

QtQuick.Particles 2.0

QtQuick.Window 2.0

Why do you not allow more QML modules from Qt/Nemo/Mer or other 3rd  
party?

Not all modules have a stable API. Before promising compatibility, we  
must first make sure that we can promise the API is of high  
quality and will not change (through a review process). We are  
open for suggestions to provide more APIs.

Can I use QML modules, which I ship together with the application?

Yes, you can do that. But you have to prefix the name of the imports  
with your \$NAME, but with "-" replaced with "." due to QML grammar  
rules (e.g. harbour.myapp.myQmlObject, where harbour-myapp = \$  
NAME). And you have to install them under /usr/share/\$NAME (or  
loadable QML plugins or the QML files) if the type is not built  
into the application (setContextProperty).

### Shared Libraries

Which shared libraries can I link against?

Currently the following shared libraries are allowed:

```
libsailfishapp.so.1
libmdeclarativecache5.so.0
libQt5Quick.so.5
libQt5Qml.so.5
libQt5Network.so.5
libQt5Gui.so.5
libQt5Core.so.5
libGLESv2.so.2
libpthread.so.0
libstdc++.so.6
libm.so.6
libgcc_s.so.1
libc.so.6
ld-linux-armhf.so.3
libQt5Concurrent.so.5
libQt5Multimedia.so.5
libQt5Sql.so.5
libQt5Svg.so.5
libQt5XmlPatterns.so.5
libQt5Xml.so.5
librt.so.1
libz.so.1
libQt5DBus.so.5
```

Why do you allow just such a limited amount of shared libraries?

We can only whitelist libraries that have both a stable API and ABI,  
and which we are sure we can provide for the foreseeable future.

For now, the list is quite small, but as Sailfish OS matures, we  
expect to add more. We are open for suggestions to allow more  
stable shared libraries.

Can I link against shared libraries which I ship with the app  
together in the same rpm?

Yes, you can do that. But you have to install the library under /usr/  
share/\$NAME/. You have to ensure yourself that the rpath in your  
executable is set correct, so the linker finds the library. Future  
versions of invoker might set the LD\_LIBRARY\_PATH to /usr/share/\$  
NAME/, but that is not yet in place.

You do not allow QtOpenGL, what is the alternative?

QtGui in Qt 5 includes a number of classes to replace the QtOpenGL  
classes. In many cases, using the QtGui equivalents will just  
involve a renaming (QGL\* -> QOpenGL\*) and removing the linking  
against QtOpenGL. There are API changes involved in some cases,  
but these should not be too difficult.

Startup performance is better without using QtOpenGL, which is one  
reason we are disallowing it. This is due to its dependency on  
QtWidgets, which is quite a large library.

Why do you not allow QtWidgets?

QtWidgets is not optimized for (or well tested) on Sailfish OS.

Furthermore, it is generally not going to result in a good user experience due to using non-touch-optimized controls, and software rendering (which will be much slower than rendering using OpenGL ES on Sailfish OS).

I think library XYZ would be useful for others too, I want to make that library available in the store. Can I submit a library only rpm?

No, the app store, is as the name says, an application store and not a shared library store. But if you think an important library is missing in SailfishOS and you want to see it available in the platform, then please join the Mer and Nemo project and make the library available in one of these projects. Then suggest the library to become a supported one (by making sure it has a stable API, and is well-maintained and supported).

Runtimes

Can I submit Python applications?

Currently not, there are some enablers missing for that. But we are working on it, to make that happen. You can support us with that effort, please ask in Nemo project how to help with Python.

Can I submit Perl/Ruby/\$MY\_FAVOURITE\_LANGUAGE applications?

No, and we currently do not plan to support that. But feel free to request it, if there is enough interest, we might allow it in the future.

## 9 Bug Reports

What's the correct way to report bugs?

A good question. IMHO IRC and mailing list (see section SailfishOS on page 84) are just temporary solutions. You can also write to developer-care@jolla.com but right at the moment there is no developer-specific bug tracker.

## 10 Troubleshooting

### 10.1 Mer build engine for cross compilation

#### 10.1.1 Management Webpage

For some users (this includes me), the management webpage is not shown, instead there is an empty webpage ("about:blank"). Type "127.0.0.1:8080" as URL and hit

<Enter><sup>21</sup>. If it doesn't work at all (even that happened to me), then you can enter "127.0.0.1:8080" in your regular browser.

If you are in doubt that there is anything running at all, you can use telnet or mmap[nm01] to check if someone is listening on the given address and port.

```
telnet 127.0.0.1 8080
# you should see some web server welcome messages
Trying 127.0.0.1...
Connected to localhost.
Escape character is '^]'.
```

```
nmap -p 8080 -sV localhost

Starting Nmap 6.25 ( http://nmap.org ) at 2013-12-05 18:20 CET
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000071s latency).
PORT      STATE SERVICE VERSION
8080/tcp  open   http    WEBrick httpd 1.3.1 (Ruby 1.9.3 (2013-06-05))

Service detection performed. Please report any incorrect results at
http://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.49 seconds
```

Maybe your VM isn't reacting at all, see Slow on page 81.

### 10.1.2 SSH login pre Alpha2SDK

The first SsifishOS SDK and the SailfishOS Alpha SDK used to store the private keys in the directory `~/.ssh`. Here come some quirks that happened to me. *You should upgrade!*

You try to connect via SSH with the VM and get this:

```
ssh -p 2222 -i ~/.ssh/mer-qt-creator-rsa nemo@localhost
@@@@@@@@@@@aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa
@ WARNING: REMOTE HOST IDENTIFICATION HAS CHANGED! @
@@@@@@@@@@@aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa
IT IS POSSIBLE THAT SOMEONE IS DOING SOMETHING NASTY!
Someone could be eavesdropping on you right now (man-in-the-middle
attack) !
It is also possible that a host key has just been changed.
The fingerprint for the RSA key sent by the remote host is
75:51:61:e8:3a:80:41:ab:81:36:bc:45:8f:ca:56:76.
Please contact your system administrator.
```

<sup>21</sup>the complete URL is <http://127.0.0.1:8080/C/targets/>

```
Add correct host key in /Users/sven/.ssh/known_hosts to get rid of
this message.
Offending RSA key in /Users/sven/.ssh/known_hosts:3
RSA host key for [localhost]:2222 has changed and you have requested
strict checking.
Host key verification failed.
```

Somehow the image of the VM has changed since you last logged in. Remove it from known\_hosts and re-connect to accept the new host key.

```
ssh-keygen -R [localhost]:2222
/Users/sven/.ssh/known_hosts updated.
Original contents retained as /Users/sven/.ssh/known_hosts.old
ssh -p 2222 -i ~/SailfishOS/vmshare/ssh/private_keys/engine/mersdk
    mersdk@localhost
The authenticity of host '[localhost]:2222 ([127.0.0.1]:2222)' can't
be established.
RSA key fingerprint is 75:51:61:e8:3a:80:41:ab:81:36:bc:45:8f:ca
:56:76.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '[localhost]:2222' (RSA) to the list of
known hosts.
```

It may even happen that your (local) private key is missing, check with

```
ls ~/.ssh/mer-qt-creator-rsa
ls: /Users/sven/.ssh/mer-qt-creator-rsa: No such file or directory
```

Right at the moment I am not sure when the key files were delivered since I don't have a SDK older than Alpha2 installed.

I had problems, when the public key was in the .ssh directory.

```
ssh -p 2222 -i ~/.ssh/mer-qt-creator-rsa root@localhost
Permission denied (publickey).
# just a generic error message, then
mv ~/.ssh/mer-qt-creator-rsa.pub ~/.ssh/mer-qt-creator-rsa.pub.backup
ssh -p 2222 -i ~/.ssh/mer-qt-creator-rsa nemo@localhost
```

The private key file may have wrong permissions, the error message is very clear about that.

```
ssh -p 2222 -i ~/.ssh/mer-qt-creator-rsa nemo@localhost
@@@@@@@@@@@
```

```
@      WARNING: UNPROTECTED PRIVATE KEY FILE!      @  
@oooooooooooooooooooooooooooooooooooooooooooooo  
Permissions 0644 for '/Users/sven/.ssh/mer-qt-creator-rsa' are too  
open.  
It is required that your private key files are NOT accessible by  
others.  
This private key will be ignored.  
bad permissions: ignore key: /Users/sven/.ssh/mer-qt-creator-rsa  
Permission denied (publickey).  
# so change them  
chmod 600 ~/.ssh/mer-qt-creator-rsa
```

#### 10.1.3 SSH login Alpha2SDK and later

No Alpha2 specific bugs yet. If you have trouble with the private keys, please note that they are now stored in another directory[mer02].

```
~/SailfishOS/vmshare/ssh/private_keys/engine
```

#### 10.1.4 SSH login any SDK

If your SSH connection still does not work, it may be that the drive with the authorized\_keys file is not mounted. Check with mmap[nm01] if a ssh service is listening at all.

```
# this is an example of a non-working ssh daemon  
nmap -p 2222 -sV localhost  
  
Starting Nmap 6.25 ( http://nmap.org ) at 2013-12-05 13:37 CET  
Nmap scan report for localhost (127.0.0.1)  
Host is up (0.00021s latency).  
PORT      STATE SERVICE          VERSION  
2222/tcp  open  EtherNet/IP-1?  
  
Service detection performed. Please report any incorrect results at  
http://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 89.49 seconds
```

If you can see that the ssh daemon is not working, you can restart the VM directly from VirtualBox, log into the VM as user `root` from there, check for the daemon and start it.

```
ps -ef | grep sshd
root      533      0  2:05pm tty2      0:00.01 grep sshd
# OK, it is not running - start it
systemctl start sshd.service
# check again
ps -ef | grep sshd
root      534      1  0 2:06pm ?      0:00.01 /usr/sbin/sshd -D -f /etc/
    ssh/sshd_config_engine
root      535      1  0 2:06pm tty2      0:00.01 grep sshd
```

Now you can check from your development machine again.

```
# here the ssh daemon works
nmap -p 2222 -sV localhost

Starting Nmap 6.25 ( http://nmap.org ) at 2013-12-05 14:01 CET
Nmap scan report for localhost (127.0.0.1)
Host is up (0.00013s latency).
PORT      STATE SERVICE VERSION
2222/tcp  open  ssh      OpenSSH 5.6 (protocol 2.0)

Service detection performed. Please report any incorrect results at
http://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 0.24 seconds
```

To enable the service check if it disabled at all.

```
[root@SailfishSDK ~]# systemctl status sshd.service
sshd.service - OpenSSH Daemon
   Loaded: loaded (/lib/systemd/system/sshd.service; disabled)
             ^_
             |
#   # look here -----+
   Active: active (running) since Fri, 06 Dec 2013 16:46:45 +0000;
   28min ago
     Process: 523 ExecStartPre=/bin/bash -c if [ \(! -s /etc/ssh/
       ssh_host_dsa_key \|) -a \(! -s /etc/ssh/ssh_host_dsa_key.pub \|) -a
       \(! -s /etc/ssh/ssh_host_rsa_key \|) -a \(! -s /etc/ssh/
       ssh_host_rsa_key.pub \|); then /usr/sbin/sshd-hostkeys; fi (code=
   exited, status=0/SUCCESS)
   Main PID: 527 (sshd)
     CGroup: name=systemd:/system/sshd.service
             + 527 /usr/sbin/sshd -D -f /etc/ssh/sshd_config_engine

Dec 06 16:46:45 SailfishSDK sshd[527]: Server listening on 0.0.0.0
port 22.
```


```
Dec 06 16:46:45 SailfishSDK sshd[527]: Server listening on :: port
22.
Dec 06 16:49:59 SailfishSDK sshd[1288]: Accepted publickey for mersdk
from 10.0.2.2 port 49275 ssh2
Dec 06 17:11:35 SailfishSDK sshd[1315]: Connection closed by 10.0.2.2
Dec 06 17:13:09 SailfishSDK sshd[1316]: Accepted publickey for root
from 10.0.2.2 port 49300 ssh2
[root@SailfishSDK ~]#
```

Enable the service AKA unit.

```
[root@SailfishSDK ~]# systemctl enable sshd.service
ln -s '/lib/systemd/system/sshd.service' '/etc/systemd/system/multi-
user.target.wants/sshd.service'
# check with reboot
[root@SailfishSDK ~]# shutdown -r now
```

#### 10.1.5 Drive(s) not mounted

Log into the VM and have a look if the drive with the authorized\_keys file is mounted.

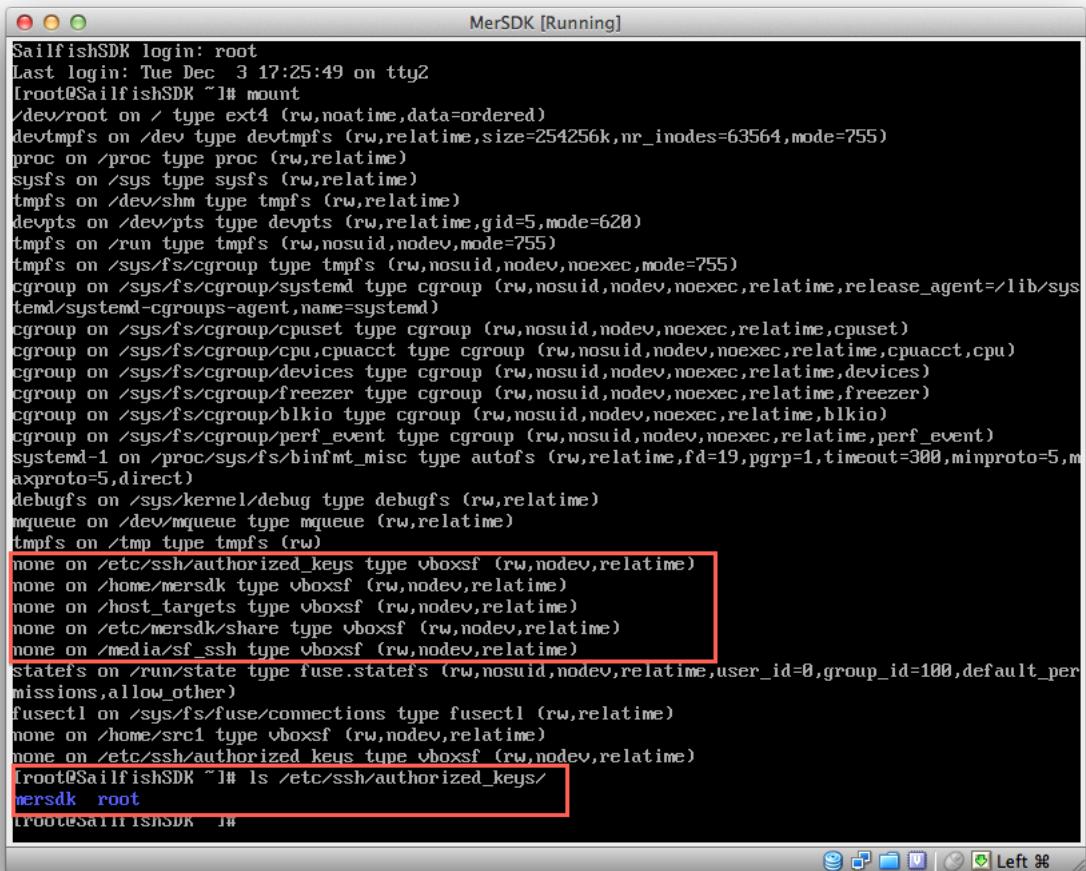

```

SailfishSDK login: root
Last login: Tue Dec  3 17:25:49 on tty2
[roo...@SailfishSDK ~]# mount
/dev/root on / type ext4 (rw,noatime,data=ordered)
devtmpfs on /dev type devtmpfs (rw,relatime,size=254256k,nr_inodes=63564,mode=755)
proc on /proc type proc (rw,relatime)
sysfs on /sys type sysfs (rw,relatime)
tmpfs on /dev/shm type tmpfs (rw,relatime)
devpts on /dev/pts type devpts (rw,relatime,gid=5,mode=620)
tmpfs on /run type tmpfs (rw,nosuid,nodev,mode=755)
tmpfs on /sys/fs/cgroup type tmpfs (rw,nosuid,nodev,noexec,mode=755)
cgroup on /sys/fs/cgroup/systemd type cgroup (rw,nosuid,nodev,noexec,relatime,release_agent=/lib/systemd/systemd-cgroups-agent,name=systemd)
cgroup on /sys/fs/cgroup/cpuacct type cgroup (rw,nosuid,nodev,noexec,relatime,cpuacct)
cgroup on /sys/fs/cgroup/devices type cgroup (rw,nosuid,nodev,noexec,relatime,devices)
cgroup on /sys/fs/cgroup/freezer type cgroup (rw,nosuid,nodev,noexec,relatime,freezer)
cgroup on /sys/fs/cgroup/blkio type cgroup (rw,nosuid,nodev,noexec,relatime,blkio)
cgroup on /sys/fs/cgroup/perf_event type cgroup (rw,nosuid,nodev,noexec,relatime,perf_event)
systemd-1 on /proc/sys/fs/binfmt_misc type autofs (rw,relatime,fd=19,pgrp=1,timeo...
axproto=5,direct)
debugfs on /sys/kernel/debug type debugfs (rw,relatime)
mqueue on /dev/mqueue type mqueue (rw,relatime)
tmpfs on /tmp type tmpfs (rw)
none on /etc/ssh/authorized_keys type vboxsf (rw,nodev,relatime)
none on /home/mersdk type vboxsf (rw,nodev,relatime)
none on /host_targets type vboxsf (rw,nodev,relatime)
none on /etc/mersdk/share type vboxsf (rw,nodev,relatime)
none on /media/sf_ssh type vboxsf (rw,nodev,relatime)
[roo...@SailfishSDK ~]# ls /etc/ssh/authorized_keys/
mersdk  root
[roo...@SailfishSDK ~]#

```

Figure 89: Check for authorized\_keys.

If the drive exists<sup>22</sup>, you can check if the file is accessible.

```

ls -lah /etc/ssh/authorized_keys/mersdk/authorized_keys
ls -lah /etc/ssh/authorized_keys/root/authorized_keys

```

Handle the other shared folders according to this. Your VM acts strange and you don't know why? Check if updates for VirtualBox are available. If yes, download and install the latest version and don't forget the extension pack.

---

<sup>22</sup>It seems that the output of mount does not show it right, even if it is mounted and accessible.



Figure 90: Check if VirtualBox update is available.

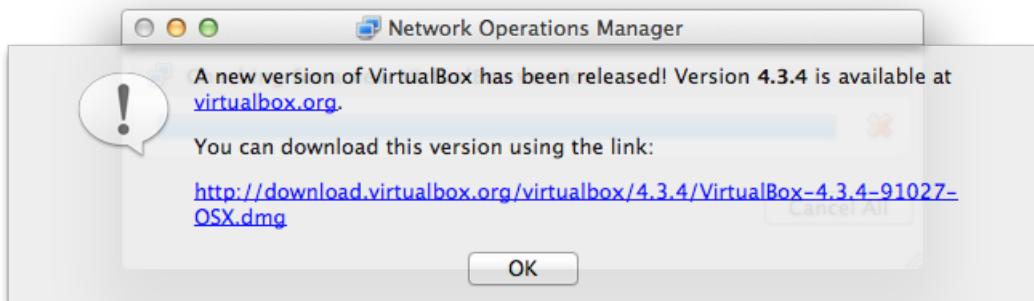


Figure 91: Update for VirtualBox is available.

#### 10.1.6 Slow

I had the situation where everything seems perfect and still it didn't work. For me the last resort was re-installing the VM with the Mer SDK, see section Uninstall on page 84. One machine the VM was running but slow<sup>23</sup>, so every connection attempt timed out. Even control from VirtualBox itself was almost impossible.

---

<sup>23</sup>As in tar pit.

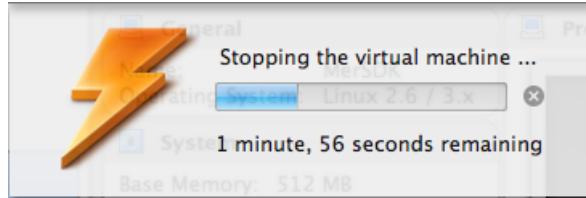


Figure 92: Vm can not be controlled.

This could even happen to a working and running VM to which I successfully logged in via ssh. Working inside the terminal: no problem: compiling: no go. Until now I found no solution for this.

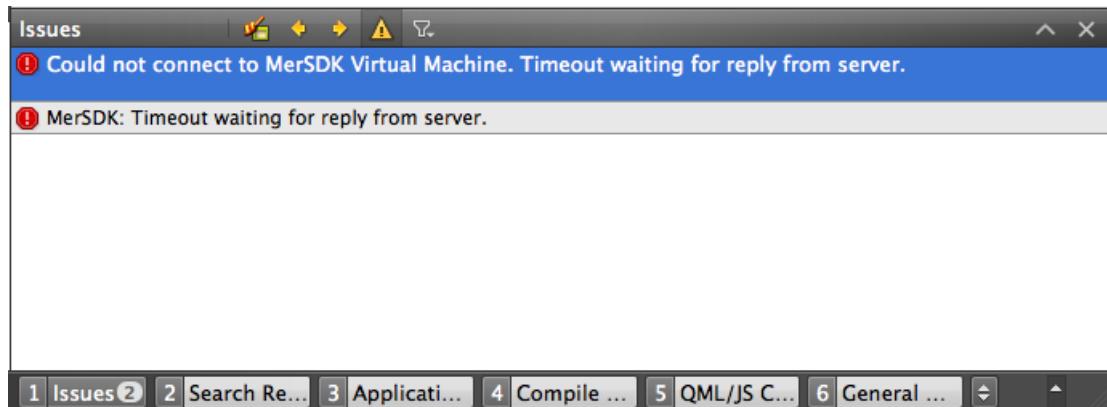


Figure 93: Project ERROR: Could not connect to MerSDK Virtual Machine.  
Timeout waiting for reply from server.

This happened on a notebook where the hard drive is clearly a bottleneck but it should nevertheless be fast enough to handle this task<sup>24</sup>.

If nothing else works, power off the VM from inside VirtualBox. Even that may freeze. When the VM is in state *aborted*, kill VirtualBox and start it again. Now start the VM manually from inside VirtualBox. QtCreator will not recognize such a VM as running. Hit the  button and after its green again, your good to go.

## 10.2 Emulator

### 10.2.1 Deploying offline

When you deploy an app to the emulator<sup>25</sup> and the deployment process discovers that you have dependent packages, it tries to download them automatically. That

<sup>24</sup>No SSD, spinning disks with 5400 RPM.

<sup>25</sup>Deploy happens when you hit *run*.

works not so well if you're offline. The following lines could show up in the *Compile Output* tab.

```
Status:  Downloading packages
Package: qt5-qttest-5.1.0+git17-1.13.1.i486
Results:
Fatal error: Download (curl) error for 'http://releases.sailfishos.org/sdk/latest/jolla/i486/qt/i486/qt5-qttest-5.1.0+git17-1.13.1.i486.rpm':
Error code: Connection failed
Error message: Couldn't resolve host 'releases.sailfishos.org'
```

At least for the first compilation of your app you may need a connection to the internet.

### 10.2.2 Timeout, emulator offline

The emulator is running as you can see but QtCreator complains that it is not reachable. That is a well known bug, just hit the start button in QtCreator and try again.

## 11 Use your editor of choice

Now you are happy with coding for a device with SailfishOS and the SDK, API and all, but for some reason you want to use *your* editor<sup>26</sup> of choice. Because you are used to it, never used something else, it's better, whatever. TODO provide one example of how to build with a foreign editor

## 12 Community

Much of the communication is done via IRC[irc01], you should make yourself familiar with that and follow the guidelines of the respective channels. You will see that not each of them is as chatty as a marketplace.

### 12.1 Jolla

Jolla homepage: <http://jolla.com>.  
Jolla on Twitter: <https://twitter.com/JollaHQ>.

<sup>26</sup>notepadl vi, emacs, eclipse, named it.

### 12.1.1 SailfishOS

As a developer you should subscribe to the mailing list at <https://lists.sailfishos.org/cgi-bin/mailman/listinfo-devel>.

Have a look at the Wiki at [https://sailfishos.org/wiki/Main\\_Page](https://sailfishos.org/wiki/Main_Page).  
At freenode: #sailfishos.

If those don't match, there is still [developer-care@jolla.com](mailto:developer-care@jolla.com).

### 12.1.2 Mer

At freenode: #mer. Homepage: <http://merproject.org>.

### 12.1.3 Nemo mobile

At freenode: #nemomobile. Mer Wiki page about the Nemo project: <https://wiki.merproject.org/wiki/Nemo>.

## 13 Uninstall

You really want to quit? Stay here, the water is warm! Jokes aside, for whatever reason you might want to uninstall the SDK, here is how it goes.

### 13.0.4 OSX




Figure 94: Inside the SailfishOS folder you find the maintenance application. Start it to uninstall the SDK.

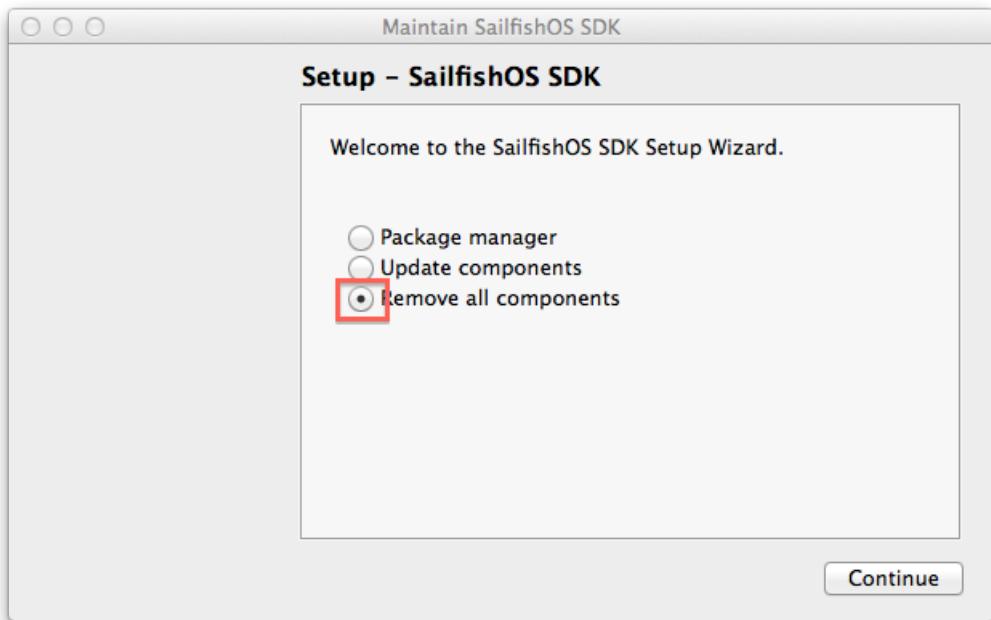


Figure 95: Uninstall, step 1.

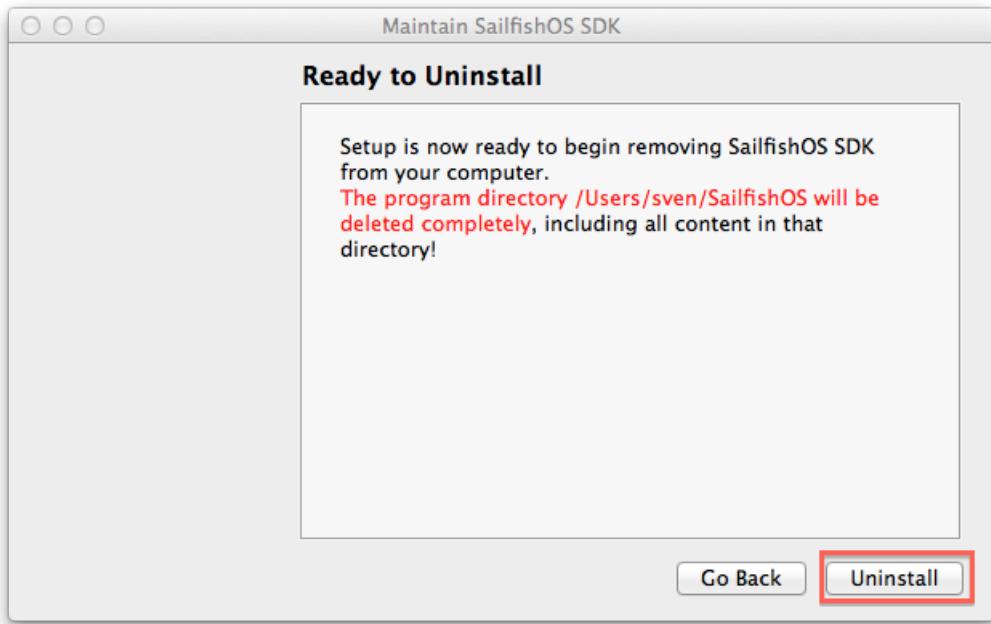


Figure 96: Uninstall, step 2.

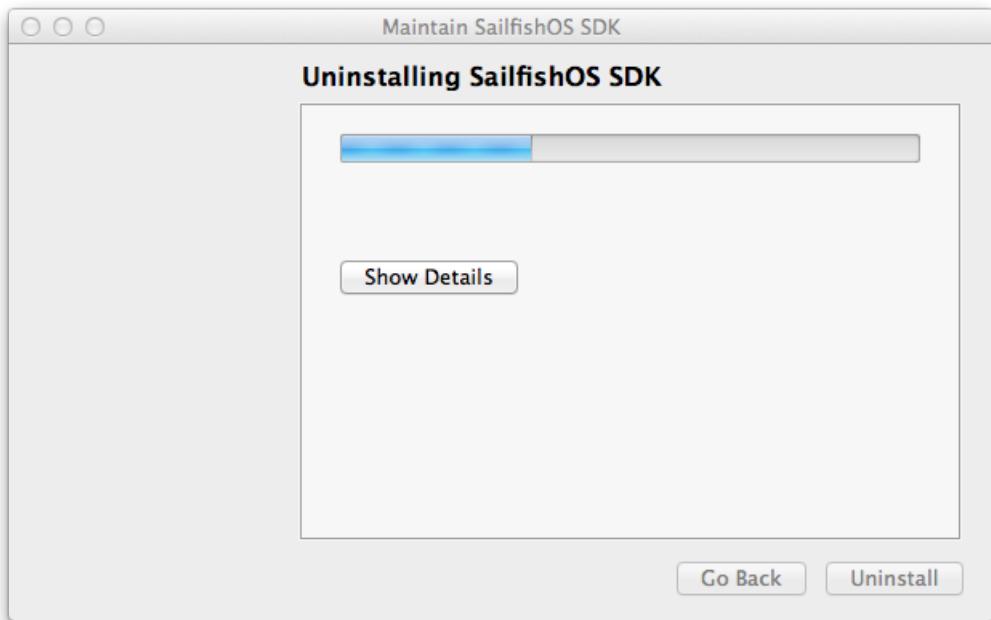


Figure 97: Uninstall, step 3.



Figure 98: Uninstall, step 4.

To make it really clean, remove orphaned files and directories. Of course you can keep those files for later use.

```
# remains from the pre Alpha2 SDK
rm ~/.ssh/mer-qt-creator-rsa*
# there seem remains of every iteration of the SDK
rm -R ~/.config/SailfishAlpha*
# created if you deploy an app
rm -R ~/rpmbuild
```

If you don't need VirtualBox anymore, mount the diskimage<sup>27</sup> and start the `VirtualBox_Uninstall.tool`, a bash script that removes all components from your system.

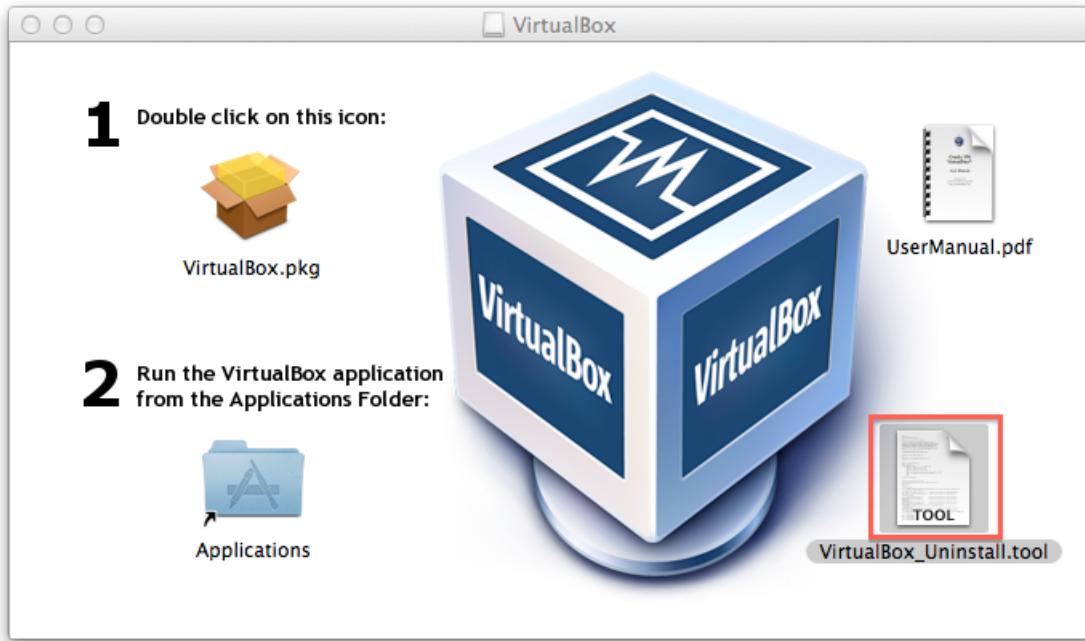


Figure 99: Uninstall of VirtualBox.

### 13.0.5 Windows

- Go to the control panel, choose "programs and features" and uninstall the SailfishOS SDK.
- Uninstall the VirtualBox from the same window if you don't need it anymore.

---

<sup>27</sup>You still have that, don't you?

### 13.0.6 Linux

Sorry, as for installation: until now I can not provide information here.

## 14 Thanks

Of course a big thanks goes out to everybody at Jolla. You are #unlike!

## 15 Appendix

### 15.1 mb2 - bash script

```
#!/bin/bash
# Copyright (C) 2013 Jolla Ltd.
# Contact: David Greaves <david.greaves@jollamobile.com>
# All rights reserved.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions
# are met:
#
# - Redistributions of source code must retain the above copyright
#   notice, this list of conditions and the following disclaimer.
# - Redistributions in binary form must reproduce the above copyright
#   notice, this list of conditions and the following disclaimer in
#   the documentation and/or other materials provided with the
#   distribution.
#
# THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
# "AS IS"
# AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED
# TO, THE
# IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
# PURPOSE
# ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR
# CONTRIBUTORS BE
# LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
# CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT
# OF
# SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
# BUSINESS
# INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
# WHETHER IN
# CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR
# OTHERWISE)
```

```

# ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
# OF THE
# POSSIBILITY OF SUCH DAMAGE.

short_usage() {
    cat <<EOF
usage: $ME [-t <target>] [-s <specfile>] [-d <device>] [-p <
projectdir>]
           build [-d] [-j <n>] [<args>] | qmake [<args>] | make [<
args>] | ssh <args>
           install [<args>] | rpm [<args>] | deploy <args> | run <
args>
    $ME --help
EOF
# exit if any argument is given
[ -n "$1" ] && exit 1
}

usage() {
    short_usage
    cat <<EOF

Executes a subset of build commands in the context of an rpmbuild.
Typically called from QtCreator to perform qmake/make phases of a
project.
Note that any other build steps in the .spec file will also be run.

<specfile> will be looked for in the current rpm/ dir. If there is
more than one it must be provided.

CWD is used as a base dir for installroot/ and RPMS/ to allow for
shadowbuilds

$ME is aware of spectacle and will update the spec file if there is
an obvious yaml file which is newer.

$ME build [-d] [-j <n>] [<args>]
          : runs rpmbuild for the given spec file in the
          given sb2 target. Produces an rpm package.
          : -d      enable debug build
          : -j <n> use only 'n' CPUs to build
          : can use -s -t -p

$ME qmake [<args>] : runs qmake in the 'build' phase
          Note that this also verifies target
          build dependencies are up to date
          : can use -s -t -p

$ME make [<args>]  : run make in the 'build' phase

```

```

        : can use -s -t -p

$ME deploy --zypper|--pkcon|--rsync
                    : runs the install or rpm-creation phase and
then
                    copies/install the relevant files to the
device
                    : can use -s -t -p -d

$ME run|ssh [<args>] : runs a command (on device if --device given)
;
                    intended for running gdb and a gdb server
: can use -s -t -p -d

$ME install [<args>] : runs the 'install' phase to install to
$buildroot
                    : can use -s -t -p
$ME rpm [<args>]    : runs the install & rpm-creation phases
                    : can use -s -t -p

-t | --target      : specify the sb2 target to use
-d | --device      : specify the device
-p | --projectdir  : when running shadow build/deploy from another
dir
-s | --specfile    : if the specfile is not in rpm/*.spec and
cannot be found using -p

EOF
}

fatal() {
    echo "Fatal: $*"
    exit 1
}

assert_spec_supports_mb2() {
    if ! grep "define qtc_qmake" "$spec" >/dev/null 2>&1 ; then
    fatal "This specfile does not have the qtc_* macros defined"
    fi
}

try_to_make_spec() { # Tries to create a missing spec
    [[ -f "$1" ]] && return # It's not missing
    yaml=$(dirname "$1")/$(basename "$1" .spec).yaml
    [[ -f "$yaml" ]] || return # No yaml
    ANSI_COLORS_DISABLED=1 specify -n -N "$yaml"
}

```

```
try_to_make_spec_from_yaml() {
    # Tries to create a missing spec from a given yaml
    try_to_make_spec $(dirname "$1")/$(basename "$1" .yaml).spec
}

ensure_spec_newer_than_yaml() {
    yaml=$(dirname "$spec")/$(basename "$spec" .spec).yaml
    [[ -f "$yaml" ]] || return # User has decided not to use yaml
    if [[ "$yaml" -nt "$spec" ]]; then # -nt is newer than
        ANSI_COLORS_DISABLED=1 specify -n -N "$yaml"
    fi
}

verify_target_dependencies() {
    rpmspec --query --buildrequires "$spec" | \
        xargs --no-run-if-empty sb2 -t "$target" -m sdk-install -R
    zypper --non-interactive in
}

get_spec_tag() {
    rpmspec --query --srpm --queryformat="$1" "$spec"
}

# Helper to read XML
read_dom () {
    local IFS=\>
    read -d \< ENTITY CONTENT
    local RET=$?
    TAG_NAME=${ENTITY%% *}
    ATTRIBUTES=${ENTITY#* }
    return $RET
}

# This slurps the XML and converts tags like <subnet> to
# $device_subnet
# Also sets device_name and device_type from the attributes
get_device() {
    local FOUND_DEVICE=
    local IN_DEVICE=
    local maintag=
    while read_dom; do
        case $TAG_NAME in
            device )
                maintag=$TAG_NAME
                eval local $ATTRIBUTES
                if [[ "$name" == "$1" ]]; then
                    FOUND_DEVICE=1
                    IN_DEVICE=1
                    device_name="$name"
                fi
            ;;
        esac
    done
}
```

```

        device_type="$type"
else
    IN_DEVICE=
fi
;;
    engine )
maintag=$TAG_NAME
eval local $ATTRIBUTES
;;
    mac|index|subnet|ip|sshkeypath )
# Don't process and store nested tags if we're in
# device with wrong name
if [[ "$maintag" == "device" ]]; && [[ $IN_DEVICE != 1 ]]; then
    continue
fi
eval ${maintag}_$TAG_NAME="$CONTENT"
;;
esac
done
# Set this up as it's useful
if [[ "$device_subnet" ]]; then
device_ip="$device_subnet".${device_index}
fi
if [[ "$FOUND_DEVICE" == 1 ]]; then return 0; else return 1; fi
}

rsync_as() {
    local user=$1;shift
    local key=$(dirname "$DEVICES_XML")/${device_sshkeypath}/$user"
    [[ -f "$key" ]] || fatal "No key for user $user on $device_name
given in devices.xml"
    RSYNC_RSH="ssh -F /etc/ssh/ssh_config.sdk -l $user -i $key" rsync
    "$@"
}

ssh_as() {
    local user=$1;shift
    local key=$(dirname "$DEVICES_XML")/${device_sshkeypath}/$user"
    [[ -f "$key" ]] || fatal "No key for user $user on $device_name
given in devices.xml"
    ssh -F /etc/ssh/ssh_config.sdk -i $key -l $user $device_ip $@
}

cd_to_spec_setup_dir() {
    _basedir=$(pwd)
    local setup_dir=$(grep -Po '%setup.*-n.*' "$spec" | cut -s -f2 -d
    '/')
    if [ -n "$setup_dir" ]; then
    # in case we got a spec %{tag} out of this, try to expand it
}

```

```
setup_dir=$(get_spec_tag "$setup_dir")
cd "$setup_dir"
fi
}

run_build() {
    # intended to provide mb build behaviour
    verify_target_dependencies

    sed -e '/^%patch/d' "$spec" > "$spec".$$

    (
        cd_to_spec_setup_dir;
        rm -f $_basedir/RPMS/*;
        eval sb2 -t $target rpmbuild --build-in-place \
            $BUILD_DEBUG \
            --define \"_smp_mflags -j$BUILD_JOBS\" \
            --define \"_rpmdir $_basedir/RPMS\" \
            --define \"_sourcedir $_basedir/rpm\" \
            --define \"_rpmfilename %%{name}-%%{version}-%%{release}.%%{
arch}.rpm \" \
            --buildroot=\"$buildroot\" \
            --dobuild \
            --doinstall \
            --dobinary \
            --docheck \
            \"$spec\".$$
    )
    rm -f "$spec".$$
}

run_qmake() {
    if [[ "$spec" ]]; then
        # This is a good time to verify the target dependencies as per mb
        verify_target_dependencies
        (
            cd_to_spec_setup_dir;
            eval sb2 -t $target rpmbuild --build-in-place \
                --dobuild \
                --define \"noecho 1\" \
                --define \"qtc_builddir $_basedir\" \
                --define \"qtc_make true ignoring make\" \
                --define \"qtc_qmake5 %qmake5 $@\" \
                --define \"qtc_qmake %qmake $@\" \
                \"$spec\""
        )
        else
            sb2 -t $target qmake "$@"
        fi
    fi
}
```

```
}

run_make() {
    if [[ "$spec" ]]; then
    (
        cd_to_spec_setup_dir;
        eval sb2 -t $target rpmbuild --build-in-place \
--dobuild \
--define \"noecho 1 \" \
--define \"qtc_builddir $_basedir \" \
--define \"qtc_qmake5 true ignoring qmake\" \
--define \"qtc_qmake true ignoring qmake\" \
--define \"qtc_make make ${?_smp_mflags} ${@}\" \
\"$spec\"
    )
    else
        sb2 -t $target make "${@}"
    fi
}

run_install() {
    # Install to buildroot which should be rsync'ed to /opt/sdk/
    $package on device
    (
        cd_to_spec_setup_dir;
        eval sb2 -t $target rpmbuild --build-in-place \
--define \"noecho 1 \" \
--define \"qtc_builddir $_basedir \" \
--define \"_sourcedir $_basedir/rpm \" \
--buildroot=\"$buildroot\" \
--doinstall \
\"$spec\"
    )
}

run_rpm() {
    (
        cd_to_spec_setup_dir;
        rm -f $_basedir/RPMS/*;
        eval sb2 -t $target rpmbuild --build-in-place \
--define \"qtc_builddir $_basedir \" \
--define \"_rpmdir $_basedir/RPMS \" \
--define \"_sourcedir $_basedir/rpm \" \
--define \"_rpmfilename %%{name}-%%{version}-%%{release}.%%{
arch}.rpm \" \
--buildroot=\"$buildroot\" \
--doinstall \
--dobinary \
--docheck \
```

```

        \\"$spec\\"
    )
}

run_deploy() {
    [[ "$device_type" ]] || fatal "deploy must have a valid --device"
    local fail_text="deploy must use one of --pkcon, --rsync or --
    zypper"
    [[ -z ${1:-} ]] && fatal $fail_text

    while [[ $1 ]]; do
    case "$1" in
        "--pkcon" ) shift
        run_rpm
        rpms=$(find RPMS -name \*rpm | grep -v -- "-debug")
        rsync_as root -av ${rpms} $device_ip:/root/RPMS/
        ssh_as root pkcon --plain --noninteractive install-local ${rpms}
        ;;
        "--zypper" ) shift
        run_rpm
        rpms=$(find RPMS -name \*rpm | grep -v -- "-debug")
        rsync_as root -av ${rpms} $device_ip:/root/RPMS/
        ssh_as root zypper --non-interactive in -f ${rpms}
        ;;
        "--rsync" ) shift
        user=$deviceuser
        run_install
        name=$(get_spec_tag "%{name}")
        rsync_as $user -av ${buildroot}/. $device_ip:/opt/sdk/$name
        ;;
        *)
        fatal $fail_text ;;
    esac
    done
}

ME=$(basename $0)
target=""
pkgdir=".rpm"
DEVICES_XML=/etc/mersdk/share/devices.xml
deviceuser=nemo

# Virtualbox environment will install in this hardcoded location
if [[ -f /etc/mer-sdk-vbox ]]; then
    buildroot=/home/deploy/installroot
else
    buildroot=$(pwd)/installroot
fi

```

```
while [[ "$1" ]]; do
    case "$1" in
        "-t" | "--target") shift
        target="$1"; shift
        ;;
        "-d" | "--device") shift
        device="$1"; shift
        get_device "$device" < $DEVICES_XML || fatal "'$device' not
        found in devices.xml"
        ;;
        "-p" | "--projectdir") shift
        projdir="$1"; shift
        pkgdir="$projdir"/rpm
        [[ -d "$projdir" ]] || fatal "'$projdir' is not a directory"
        ;;
        "-s" | "--specfile" ) shift
        spec="$1"; shift
        try_to_make_spec "$spec"
        [[ -f "$spec" ]] || fatal "'$spec' doesn't exist (and couldn't
        be made from a yaml)"
        ;;
        install | rpm | deploy | build )
            needspec=1;
            break 2 ;;
        qmake | make | run | ssh )
            break 2 ;;
        *)
            usage
            exit 1
            ;;
    esac
done

if [[ ! "$target" ]]; then
    if [[ -f ~/.scratchbox2/config ]]; then
        . ~/.scratchbox2/config
        target=$DEFAULT_TARGET
    fi
    [[ "$target" ]] || fatal "You must specify an sb2 target or have
    a default configured"
fi

[[ -d ~/.scratchbox2/$target ]] || fatal "$target is an invalid sb2
target"

# spec rules are complex:
# a .spec is required for some but not all operations
# if -s is given then
#     if it does not exist then specify tries to make it
```

```
#      if it exists it will be used
#  if there is a rpm/*.spec then that is used
#  if there is a rpm/*.yaml then a spec is made and used

if [[ ! "$spec" ]]; then
    numspec=$(ls "$pkgdir"/spec 2>/dev/null | wc -l)
    if [[ $numspec -gt 1 ]]; then
        [[ $needspec ]] && fatal "Too many spec files - please use -s to
            identify which to use"
        echo "Too many spec files - not using any. Use -s to identify a
            specific one"
    # spec is not set
    fi

    if [[ $numspec -eq 0 ]]; then
# No spec, try to find a yaml
        numyaml=$(ls "$pkgdir"/yaml 2>/dev/null | wc -l)
        if [[ $numyaml -eq 1 ]]; then
            try_to_make_spec_from_yaml $(ls "$pkgdir"/yaml)
            numspec=$(ls "$pkgdir"/spec 2>/dev/null | wc -l)
        else
            [[ $needspec ]] && fatal "No spec file found in '$pkgdir/' and
                couldn't make one from a yaml"
        fi
        fi

        if [[ $numspec -eq 1 ]]; then
            spec=$(ls "$pkgdir"/spec)
        else
# this is because we did try_to_make_spec_from_yaml and failed
            [[ $needspec ]] && fatal "No spec file found in '$pkgdir/' and
                couldn't make one from a yaml"
        fi
    fi

# Now if there is a spec given, make sure it is up-to-date
if [[ "$spec" ]]; then
    # turn 'spec' into an absolute path
    spec=$(readlink -f "$spec")
    ensure_spec_newer_than_yaml
fi

case "$1" in
    qmake | make | install | rpm | deploy )
cmd=run_$1
    if [[ "$spec" ]]; then
        assert_spec_supports_mb2
    fi
```

```
    shift
    ;;
  build )
cmd=run_$1; shift
BUILD_DEBUG='--define "debug_package %{nil} "'"
BUILD_JOBS=$(getconf _NPROCESSORS_ONLN)
while [[ "$1" ]]; do
  case "$1" in
    -d|--enable-debug) shift
      BUILD_DEBUG= ;;
    -j*)
      # support giving -j with and without space between
      # it and the 'n'
      if [ ${#1} -gt 2 ]; then
        BUILD_JOBS=${1:2}; shift
      else
        [ -z "$2" ] && short_usage quit
        BUILD_JOBS="$2"; shift 2;
      fi
      ;;
    *)
      break
      ;;
    esac
done
;;
run | ssh ) shift
if [[ "$device" ]]; then
  cmd="ssh_as $deviceuser"
else
  cmd="eval"
fi
;;
*)
short_usage quit
;;
esac

$cmd "$@"
```

..../media/sdk/mb2

[language=bash]

## References

- [jolla01] Jolla ltd., based in Finland - the inventors of the Jolla smartphone  
<http://jolla.com>

- [jolla02] Jolla Harbour - the place for your apps  
<https://harbour.jolla.com>
- [sailfishos01] SailfisoS - the operating system driving the Jolla smartphone  
<https://sailfishos.org>
- [sailfishos2] Quick introduction into development with the SailfishOS SDK  
<https://sailfishos.org/develop.html>
- [sailfishos3] SailfishOS SDK overview  
<https://sailfishos.org/develop-overview-article.html>
- [sailfishos4] SailfishOS open source code  
<http://releases.sailfishos.org/sdk/>
- [sailfishos5] Unofficial Sailfish OS third party open source apps collection  
<https://github.com/sailfishapps>
- [vbox01] VirtualBox, a virtualization platform from Oracle  
<https://www.virtualbox.org/wiki/Downloads>
- [hc01] hardcodes, that's my nickname and my website  
<http://www.hardcodes.de>
- [hc02] This document on Github  
<https://github.com/hardcodes/developwithsailfishos.git>
- [hc03] Alternative Icon for the QtCreator inside of the SailfishOS SDK  
<http://blog.hardcodes.de/articles/68/sailfish-os-icon>
- [hc04] Just the PDF version of this document  
<http://hardcodes.de/SailfishOS/Developing-with-SailfishOS.pdf>
- [qt01] The Qt Project.  
<https://qt-project.org>
- [qt02] QtCreator.  
<https://qt-project.org/doc/qtcreator-2.8/>
- [qt03] qmake manual.  
<https://qt-project.org/doc/qt-4.8/qmake-manual.html>

- [qt04] Meta-Object Compiler (MOC)  
<http://qt-project.org/doc/qt-4.8/moc.html>
- [qt05] QML  
<http://qt-project.org/doc/qt-5.0/qtqml/qtqml-index.html>
- [qt06] QtQuick  
<http://qt-project.org/doc/qt-5.0/qtquick/qtquick-index.html>
- [qt07] QtCreator, Adding New Custom Wizards  
<http://qt-project.org/doc/qtcreator-2.8/creator-project-wizards.html>
- [wiki01] Wikipedia, Model-view-controller (MVC)  
<http://en.wikipedia.org/wiki/Model\T1\textendashview\T1\textendashcontroller>
- [wiki02] Wikipedia, Scratchbox2  
<http://en.wikipedia.org/wiki/Scratchbox2>
- [wiki03] RPM - Redhat Package Manager  
[http://en.wikipedia.org/wiki/RPM\\_Package\\_Manager](http://en.wikipedia.org/wiki/RPM_Package_Manager)
- [sb2] Scratchbox2 homepage  
<https://maemo.gitorious.org/scratchbox2>
- [mer01] Mer Wiki, Platform SDK and SB2  
[https://wiki.merproject.org/wiki/Platform\\_SDK\\_and\\_SB2](https://wiki.merproject.org/wiki/Platform_SDK_and_SB2)
- [mer02] Mer Wiki, SailfishOS SDK hacks  
[https://wiki.merproject.org/wiki/Sailfish\\_SDK\\_Hacks](https://wiki.merproject.org/wiki/Sailfish_SDK_Hacks)
- [mer03] Mer Project, start page  
<http://merproject.org>
- [mer04] Mer SDK on VirtualBox/Design [https://wiki.merproject.org/wiki/SDK\\_on\\_VirtualBox/Design](https://wiki.merproject.org/wiki/SDK_on_VirtualBox/Design)
- [mer05] Mer Wiki, spectacle  
<https://wiki.merproject.org/wiki/Spectacle>

- [yaml01] yaml specs  
<http://www.yaml.org/spec/>
- [ex01] Jolla details on eLinux  
<http://elinux.org/Jolla>
- [sdc01] SmartDevCon  
<http://smartdevcon.eu>
- [gh01] The missing HelloWorld. Wizard included by Artem Marchenko  
<https://github.com/amarchen/helloworld-pro-sailfish>
- [suse01] openSUSE Portal:Zypper  
<http://en.opensuse.org/Portal:Zypper>
- [nm01] Nmap, network security scanner  
<http://nmap.org>
- [irc01] A Short IRC Primer  
<http://irchelp.org/irchelp/ircprimer.html>