

Project 1_3 (copy)

October 20, 2021

0.1 3: Importance sampling for random walks

```
[2]: import numpy as np
import matplotlib.pyplot as plt
```

0.1.1 3.1 1-D Bernoulli random walk

```
[3]: x = 0.5
N = 100
length = 1
# left or right: 0 or 1
```

0.1.2 2.1 (a) Below:

- define random walk sampler to pass to random walk simulation

```
[4]: def random_walk_sampler(num_steps):
    """ Generate a set of steps for a random walk """
    X = np.random.rand(num_steps) # samples from a uniform
    # Inverse CDF Trick
    X[X > 0.5] = 1.0
    X[X < 0.5] = -1.0
    return X
```

```
[5]: def random_walk(num_samples, sample_generator, cumsum=False):


    samples = sample_generator(num_samples)
    if cumsum is False:
        estimate = np.sum(samples, axis=0)
    else:
        estimate = np.cumsum(samples, axis=0)

    return estimate, samples
```

Generating random walk paths

```
[6]: g = lambda x: x # identity function
num_trials = 500
num_samples = N
estimator_vals = np.zeros((num_trials, num_samples))
for trial in range(num_trials):
    estimator_vals[trial, :], _ = random_walk(num_samples, random_walk_sampler,
    ↪ cumsum=True)
#     print("one trial: ", estimator_vals[trial, :])
```

```
[7]: plt.figure(figsize=(20,10))
plt.plot(np.arange(1, num_samples+1), estimator_vals.T, color='grey', alpha=0.
    ↪ 0.05)
plt.ylabel(r'$S_n(\omega)$', fontsize=20)
plt.xlabel(r'Number of samples $n$', fontsize=20)
plt.xticks(fontsize=16)
plt.yticks(fontsize=16)
plt.xlim([0, 100])
# plt.ylim([0, 30])
plt.show()
```

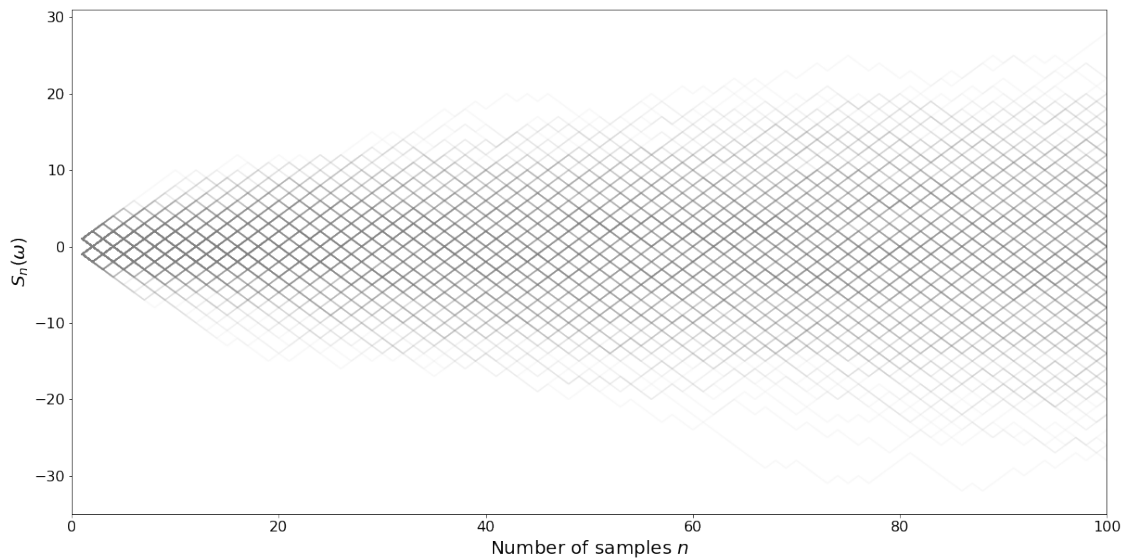

0.1.3 2.1(b)

- define Monte carlo function below
- then define another function that computes cases when $S > 10$

```
[8]: num_trials = 10**5
def monte_carlo_probability(sample_paths_vs_n, threshold):
    N_paths, _ = sample_paths_vs_n.shape
```

```

s_estimates_satisfy_condition = np.any( sample_paths_vs_n[:, -1:] >
↪ threshold, axis = 1 ) # Choose last element which corresponds to N = 100
s_estimate = np.sum(s_estimates_satisfy_condition) / float(N_paths)
return s_estimate

```

```

[9]: estimator_vals = np.zeros((num_trials, num_samples))
for trial in range(num_trials):
    estimator_vals[trial, :] = random_walk(num_samples, random_walk_sampler,
↪ cumsum=True)

threshold = 10
print("P(S>10) = ", monte_carlo_probability(estimator_vals, threshold))

threshold = 55
print("P(S>55) = ", monte_carlo_probability(estimator_vals, threshold))

probs = []
for threshold in range(50):
    probs.append(monte_carlo_probability(estimator_vals, threshold))

plt.plot(probs)
plt.xlabel('threshold')
plt.ylabel('Probability')

```


P(S>10) = 0.13676

P(S>55) = 0.0

```

[9]: Text(0, 0.5, 'Probability')

```

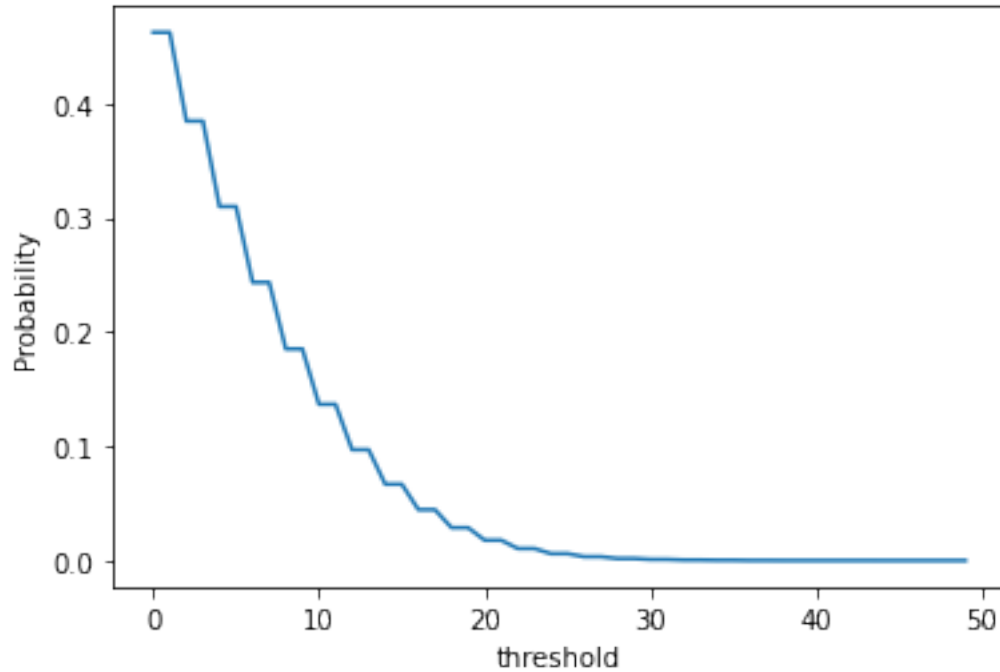

Therefore, probability for steps $>$ about 25 is too low and cannot be computed with standard monte carlo easily. We need importance sampling.

0.1.4 Actual probability can be calculated as follows:

$$P(S > 10) = 1 - P(S \leq 10)$$

Suppose $+1$ is chosen k times and -1 is chosen $100-k$ times. Then position at end $= k(1) + (100 - k)(-1) = 2k - 100 \leq 10$. Therefore, $k \leq 55$.

$$P(S \leq 10) = \sum_{k=0}^{55} \binom{n}{k} (0.5)^k (0.5)^{100-k} \quad (1)$$

```
[58]: # Actual Probability
from math import factorial
def comb(n, k):
    return factorial(n) / factorial(k) / factorial(n - k)

prob = 0
for k in range(56):
    prob = prob + comb(100,k)
print(prob)
prob = prob * 0.5**100
print("Actual P(S>10) = ", 1 - prob)
```

1.09572357083777e+30

Actual $P(S>10) = 0.13562651203691733$

0.1.5 2.1 (c)

- Importance sampling with 10^5 trials for $P(S>55)$
- Next we try importance sampling with a proposal DISCRETE distribution that puts more probability on getting $X_i = 1$.

: $P(1) = 0.8, P(-1) = 0.2$

This is because, we want to use importance sampling on X_i and therefore the only way we can do this is by shifting probability towards 1.0

```
[11]: shift = 0.1

def shifted_random_walk_sampler(num_steps):
    """ Generate a set of steps for a random walk """
    X = np.random.rand(num_steps) # samples from a uniform
    # Inverse CDF Trick
    X[X > shift] = 1.0
    X[X < shift] = -1.0
    return X

def prob_normal_walk(sample):
    return 0.5

def prob_shifted_walk(sample):
    if sample > 0:
        return 1 - shift
    else:
        return shift

[12]: def random_walk_weighted(num_samples, sample_generator, cumsum=False):

    samples = sample_generator(num_samples)
    weighted_samples = np.asarray([ sample * prob_normal_walk(sample) /
    ↪ prob_shifted_walk(sample) for sample in samples])
    if cumsum is False:
        estimate = np.sum(weighted_samples, axis=0)
    else:
        estimate = np.cumsum(weighted_samples, axis=0)

    return estimate, samples

def monte_carlo_importance(sample_paths_vs_n, threshold):
    N_paths, _ = sample_paths_vs_n.shape
    s_estimates_satisfy_condition = np.any( sample_paths_vs_n[:, -1:] >
    ↪ threshold, axis = 1 ) # Choose last element which corresponds to N = 100
```

```
s_estimate = np.sum(s_estimates_satisfy_condition) / float(N_paths)
return s_estimate
```

```
[13]: num_trials = 10**5
estimator_vals_importance = np.zeros((num_trials, num_samples))
for trial in range(num_trials):
    estimator_vals_importance[trial, :] = random_walk_weighted(num_samples,
    ↪shifted_random_walk_sampler, cumsum=True)


threshold = 55
print("P(S>55) = ", monte_carlo_importance(estimator_vals_importance,
    ↪threshold))

probs = []
for threshold in range(50):
    probs.append(monte_carlo_importance(estimator_vals_importance, threshold))

plt.plot(probs)
plt.xlabel('threshold')
plt.ylabel('Probability')
```

$P(S>55) = 5e-05$

```
[13]: Text(0, 0.5, 'Probability')
```

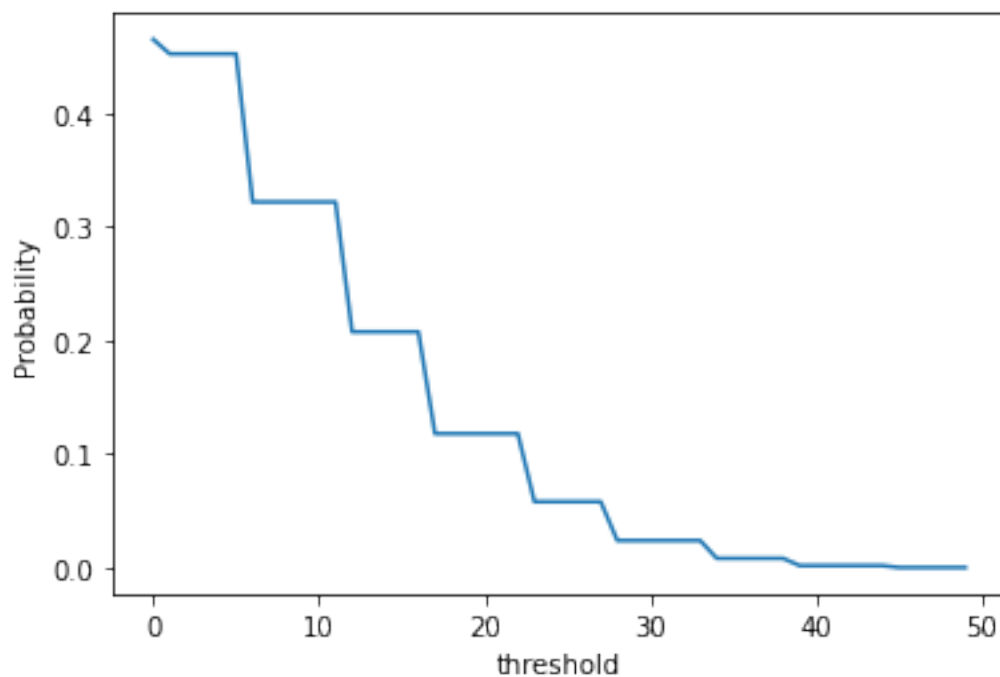

Actual probability can be calculated as follows: $P(S > 55) = 1 - P(S \leq 55)$

Suppose +1 is chosen k times and -1 is chosen $100 - k$ times. Then position at end $= k(1) + (100 - k)(-1) = 2k - 100 \leq 55$. Therefore, $k \leq 77.5$.

$$P(S \leq 55) = \sum_{k=0}^{77} \binom{100}{k} (0.5)^k (0.5)^{100-k} \quad (2)$$

```
[14]: # Actual Probability
from math import factorial
def comb(n, k):
    return factorial(n) / factorial(k) / factorial(n - k)

prob = 0
for k in range(78):
    prob = prob + comb(100, k)
print(prob)
prob = prob * 0.5**100
print("Actual P(S>55) = ", 1 - prob)
```

1.26765059014703e+30

Actual P(S>55) = 7.952664082822025e-09

0.1.6 2.1 (e) (i) Monte Carlo errors

```
[15]: def mc_estimate_of_probability(num_trials, num_samples, threshold=10):
    estimator_vals = np.zeros((num_trials, num_samples))
    for trial in range(num_trials):
        estimator_vals[trial, :] = random_walk(num_samples,
        ↪ random_walk_sampler, cumsum=True)
    return monte_carlo_probability(estimator_vals, threshold)

def replicates(num_replicate, num_samples, true_value, threshold=10):
    # One replicate
    probability_estimates = np.zeros(num_replicate)
    for run in range(num_replicate):
        probability_estimates[run] = mc_estimate_of_probability(100000,
        ↪ num_samples, threshold)

    print(probability_estimates)
    z = 2
    std_error = np.std(probability_estimates) # / np.sqrt(num_replicate) sigma /
    ↪ sqrt(n) is the std deviation of Sn. Therefore no need to divide by sqrt(n)

    print("std error", z*std_error)

    success = 0
```

```

for run in range(num_replicate):
    Sn = probability_estimates[run]
    bound_lower = Sn - z*std_error
    bound_upper = Sn + z*std_error
    if true_value<=bound_upper and true_value>=bound_lower:
        success = success + 1

return success/num_replicate

replicates(100,num_samples, 0.135626, threshold=10)

```

```

[0.13598 0.13477 0.13452 0.13491 0.1336 0.13649 0.13559 0.1361 0.13313
0.13535 0.13596 0.13527 0.13486 0.13466 0.13426 0.13501 0.13645 0.13719
0.13551 0.13588 0.13477 0.13633 0.13546 0.13496 0.13495 0.13589 0.13564
0.1377 0.13507 0.13565 0.1364 0.13749 0.13763 0.13528 0.13582 0.13562
0.13514 0.13512 0.13609 0.13777 0.1339 0.13546 0.13396 0.13404 0.13496
0.13661 0.13458 0.13584 0.13555 0.1365 0.1365 0.13624 0.1366 0.13745
0.13442 0.13601 0.13623 0.13391 0.1351 0.13464 0.13334 0.13458 0.13615
0.13449 0.13491 0.13586 0.13686 0.13809 0.13721 0.13521 0.1352 0.13522
0.13545 0.13684 0.13497 0.13573 0.13709 0.13572 0.13508 0.1348 0.13637
0.134 0.1341 0.13814 0.13536 0.13784 0.13764 0.13433 0.13411 0.13517
0.1358 0.13552 0.13497 0.13544 0.13641 0.13454 0.13621 0.13539 0.13651
0.13427]
std error 0.002182282648971026

```

[15]: 0.95

0.2 2.2 3-D Gaussian Random Walk

2.2(a)

```

[21]: def Gaussian_random_walk_sampler(num_steps):
    """ Generate a set of steps for a random walk """
    num_dim = 3
    X = np.random.normal(size = (num_dim,num_steps)) # samples from a uniform
    return X

def gaussian_random_walk(num_samples, sample_generator, cumsum=False):

    samples = sample_generator(num_samples)
    if cumsum is False:
        estimate = np.sum(samples, axis=0)
    else:
        estimate = np.cumsum(samples, axis=0)

```




```
return estimate, samples
```


```
[22]: N = 100
path, samples = gaussian_random_walk(N, Gaussian_random_walk_sampler, cumsum = True)

plt.figure()
plt.plot(path[0,:], label = r'x_1')
plt.plot(path[1,:], label = r'x_2')
plt.plot(path[2,:], label = r'x_3')
plt.xlabel('Number of steps n')
plt.ylabel('Location of agent')
plt.legend()

plt.figure()
plt.plot(np.linalg.norm(path, axis=0))
plt.xlabel('Number of steps n')
plt.ylabel('Distance of agent')
```

```
[22]: Text(0, 0.5, 'Distance of agent')
```

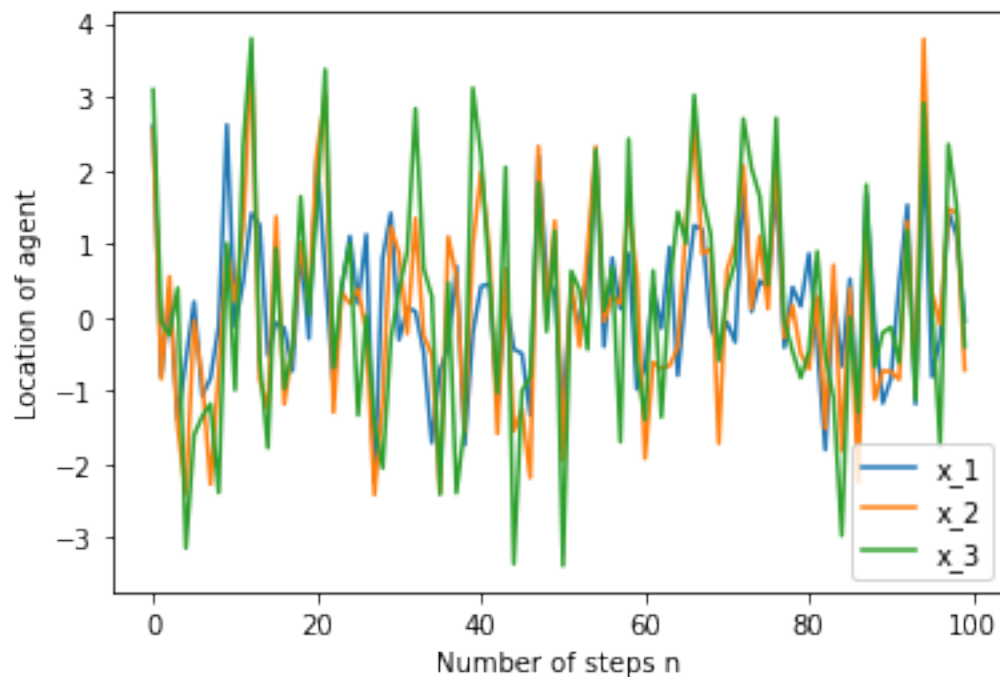

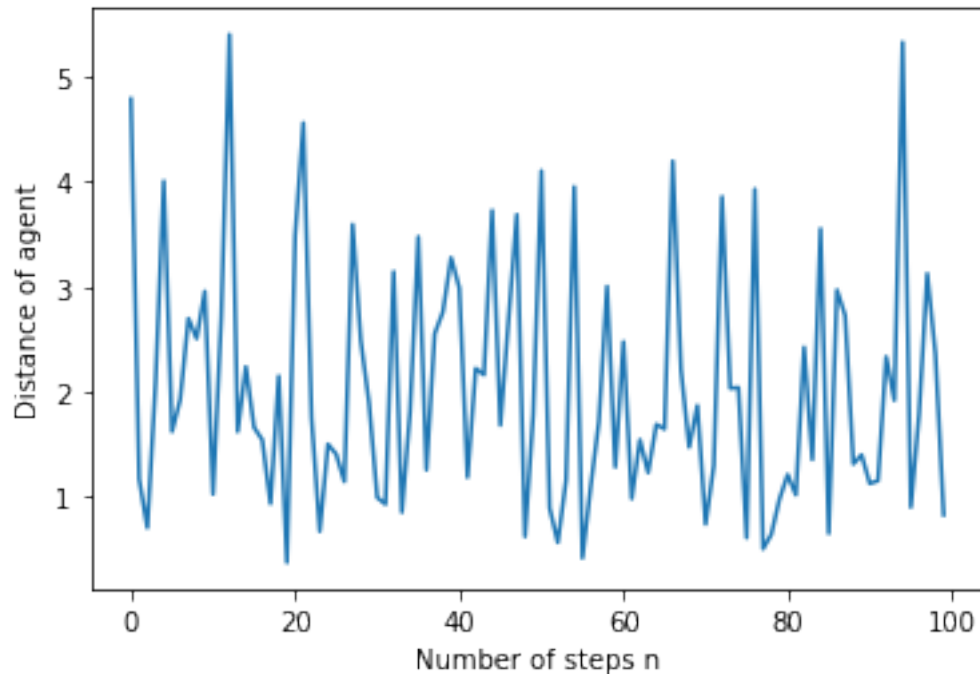

0.2.1 2.2(b)

```
[23]: num_trials = 10**5
num_samples = N
estimator_gaussian_vals = np.zeros((num_trials, num_samples))
for trial in range(num_trials):
    path, _ = gaussian_random_walk(num_samples,
    ↪ Gaussian_random_walk_sampler, cumsum=True)
    #     print("path shape", path.shape)
    #     print("|S| shape", np.linalg.norm(path, axis=0).shape)
    estimator_gaussian_vals[trial, :] = np.linalg.norm(path, axis=0)
print(estimator_gaussian_vals.shape )
```

(100000, 100)

0.2.2 Calculating probabilities

```
[27]: threshold = 10
print("P(|S|>10) = ", monte_carlo_probability(estimator_gaussian_vals,
    ↪ threshold))

probs = []
for threshold in range(50):
    probs.append(monte_carlo_probability(estimator_gaussian_vals, threshold))
```

```


plt.plot(probs)
plt.xlabel('threshold')
plt.ylabel('Probability')

threshold = 55
print("P(|S|>55) = ", monte_carlo_probability(estimator_gaussian_vals, ↵
↵threshold))

```

$P(|S|>10) = 1e-05$

$P(|S|>55) = 0.0$

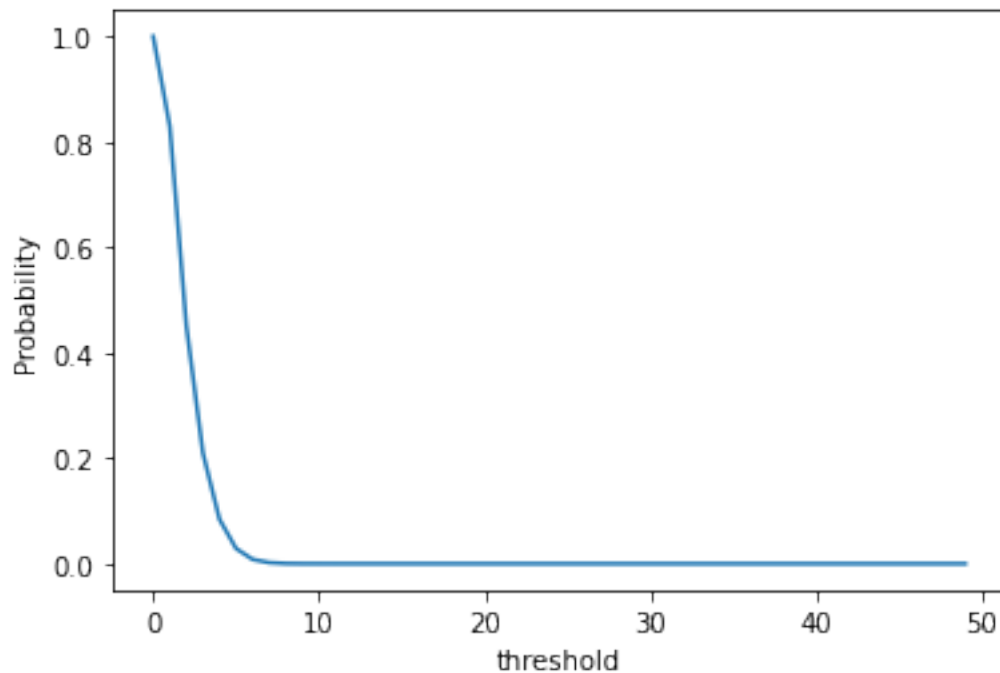


Note here that the above probability variance is very high even with $\text{num_trials} = 10^5$. Most of the times, the probability will come out to be 0. Other times it is 10^{-5}

```

[159]: # plt.figure(figsize=(20,10))
# plt.plot(np.arange(1, num_samples+1), estimator_gaussian_vals.T, ↵
↵color='grey', alpha=0.05)
# plt.ylabel(r'$S_n(\omega)$', fontsize=20)
# plt.xlabel(r'Number of samples $n$', fontsize=20)

```

```
# plt.xticks(fontsize=16)
↪
↪
↪
↪
↪
↪
↪
↪
↪
↪
# plt.yticks(fontsize=16)
# plt.xlim([0, 100])
# # plt.ylim([0, 30])
# plt.show()
```

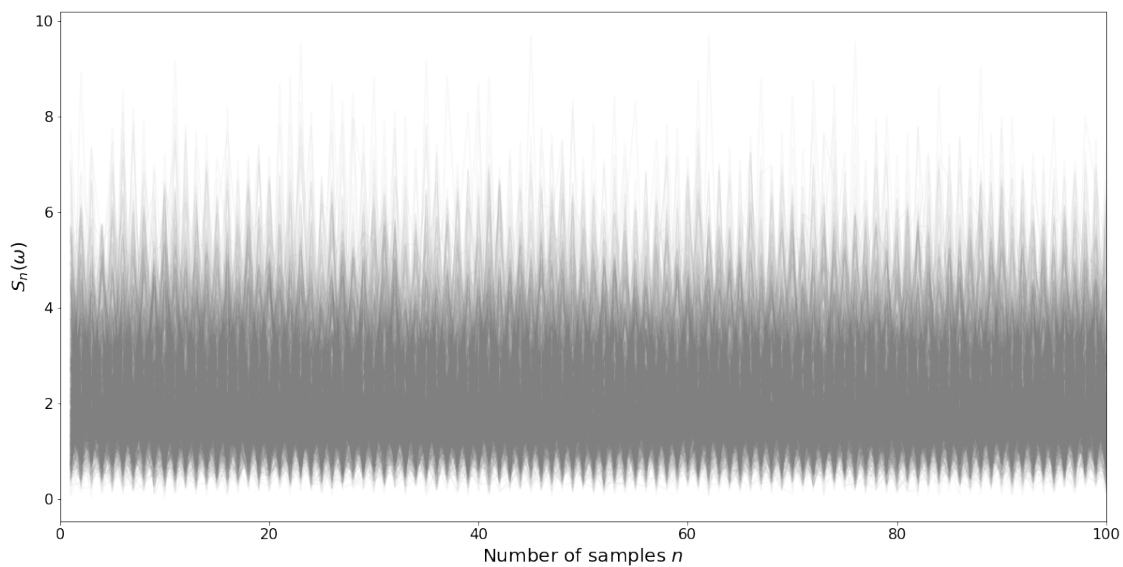

0.2.3 2.2 (c)

```
[28]: def shifted_Gaussian_random_walk_sampler(num_steps):
        """ Generate a set of steps for a random walk"""
        num_dim = 3
        X = np.random.normal(loc = (2/np.sqrt(3)), size = (num_dim,num_steps)) #↪
        ↪samples from a uniform
        return X

def probab_normal_gaussian_walk(sample):
    return 1/np.sqrt(2*np.pi)*np.exp(-(sample)**2/2)

def probab_shifted_gaussian_walk(sample):
    shift_gaussian = 2/np.sqrt(3)
```

```

    return 1/np.sqrt(2*np.pi)*np.exp(-(sample-shift_gaussian)**2/2)

def gaussian_random_walk_weighted(num_samples, sample_generator, cumsum=False):

    samples = sample_generator(num_samples)
    weighted_samples = np.asarray([ sample * prob_normal_gaussian_walk(sample) /
    ↪ prob_shifted_gaussian_walk(sample) for sample in samples])
    if cumsum is False:
        estimate = np.sum(weighted_samples, axis=0)
    else:
        estimate = np.cumsum(weighted_samples, axis=0)

    return estimate, samples

```

```

[29]: num_trials = 10**5
estimator_vals_importance = np.zeros((num_trials, num_samples))
for trial in range(num_trials):
    path, _ = gaussian_random_walk_weighted(num_samples, ↪
    ↪ shifted_Gaussian_random_walk_sampler, cumsum=True)
    estimator_vals_importance[trial, :] = np.linalg.norm(path, axis=0)

threshold = 55
print("P(S>55) = ", monte_carlo_importance(estimator_vals_importance, ↪
    ↪ threshold))

probs = []
for threshold in range(50):
    probs.append(monte_carlo_importance(estimator_vals_importance, threshold))

plt.plot(probs)
plt.xlabel('threshold')
plt.ylabel('Probability')


```

P(S>55) = 0.00272

```

[29]: Text(0, 0.5, 'Probability')

```

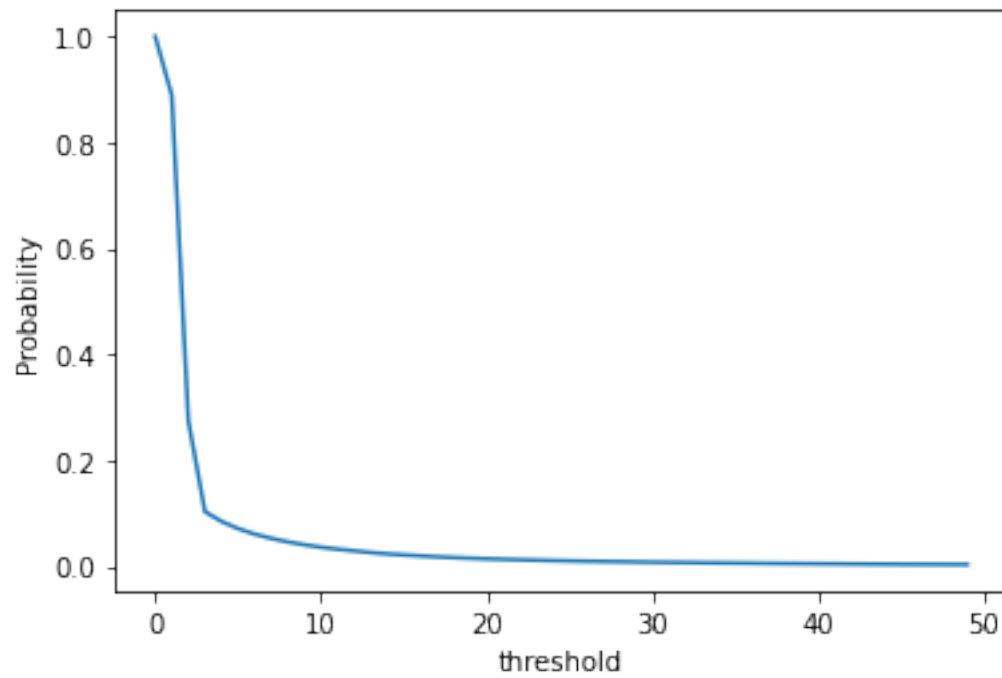

```
[62]: a = np.array([ [1,2],[3,4] ])
      np.shape(a[0:0,:])
```

```
[62]: (0, 2)
```

```
[ ]:
```