

Ex No: 6

Date:

RECOGNIZE A VALID VARIABLE WITH LETTERS AND DIGITS USING LEX AND YACC

AIM:

To recognize a valid variable which starts with a letter followed by any number of letters or digits.

ALGORITHM:

Lex (exp6.l):

1. Recognizes letters, digits, any single character, and newline.
2. Returns tokens for letters, digits, and single characters.
3. Indicates the end of input with yywrap().

Yacc (exp6.y):

1. Includes headers and defines global variables.
2. Declares tokens digit and letter.
3. Defines grammar rules for identifiers.
4. Handles syntax errors with yyerror().
5. The main function, obtain the input, parses it, and prints if it's recognized as an identifier.

PROGRAM:

exp6.l:

```
%{  
    #include "y.tab.h"  
}%  
%%  
[a-zA-Z_][a-zA-Z_0-9]* return letter;  
[0-9]          return digit;  
.              return yytext[0];  
\n            return 0;  
%%  
int yywrap(){  
    return 1;  
}
```

Roll Number: 210701066

Name: Haresh M

exp6.y:

```
%{
```

```
    #include<stdio.h>
```

```
    int yylex();
```

```
    int yyerror();
```

```
    int valid=1;
```

```
%}
```

```
%token digit letter
```

```
%%
```

```
start : letter s
```

```
s :  letter s
```

```
    | digit s
```

```
    |
```

```
    ;
```

```
%%
```

```
int yyerror(){
```

```
    printf("\nIts not a identifier!\n");
```

```
    valid=0;
```

```
    return 0;
```

```
}
```


```
int main() {
```

Roll Number: 210701066

Name: Haresh M

```
printf("\nEnter a name to test for an identifier: ");  
yyparse();  
if(valid) {  
    printf("\nIt is a identifier!\n");  
} }
```

OUTPUT:

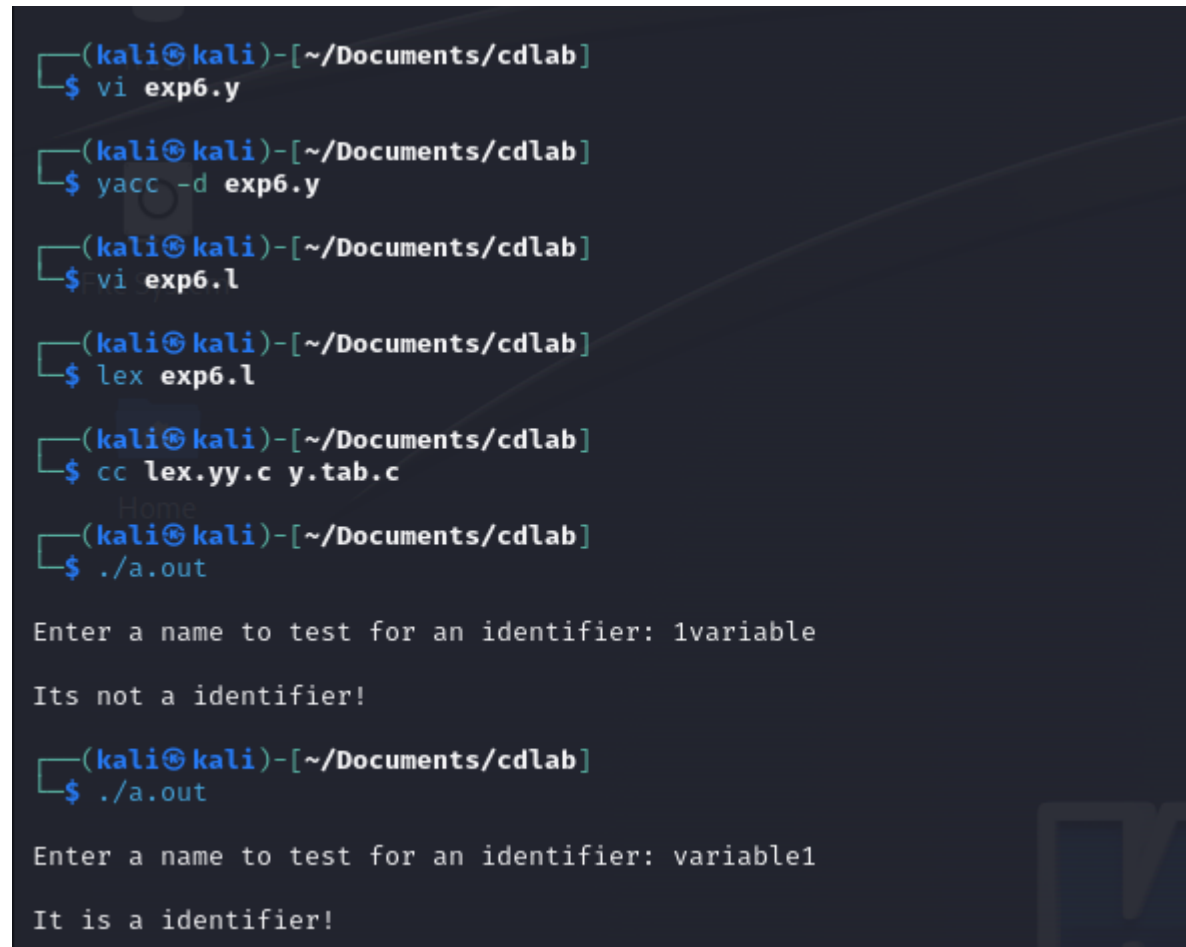

```
(kali㉿kali)-[~/Documents/cdlab]  
$ vi exp6.y  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ yacc -d exp6.y  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ vi exp6.l  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ lex exp6.l  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ cc lex.yy.c y.tab.c  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ ./a.out  
  
Enter a name to test for an identifier: 1variable  
  
Its not a identifier!  
  
(kali㉿kali)-[~/Documents/cdlab]  
$ ./a.out  
  
Enter a name to test for an identifier: variable1  
  
It is a identifier!
```

RESULT:

Thus, a program using lex and yacc tool is implemented to recognize a valid variable which starts with a letter followed by any number of letters or digits.

Ex No: 7

Date:

Roll Number: 210701066

Name: Haresh M