


Tokenizing and parsing word /command in the shell to interpret the shell

The program accepts a shell-like command as input and first performs **tokenization**. Whitespace is ignored and special characters such as |, <, and > are identified as separate tokens.

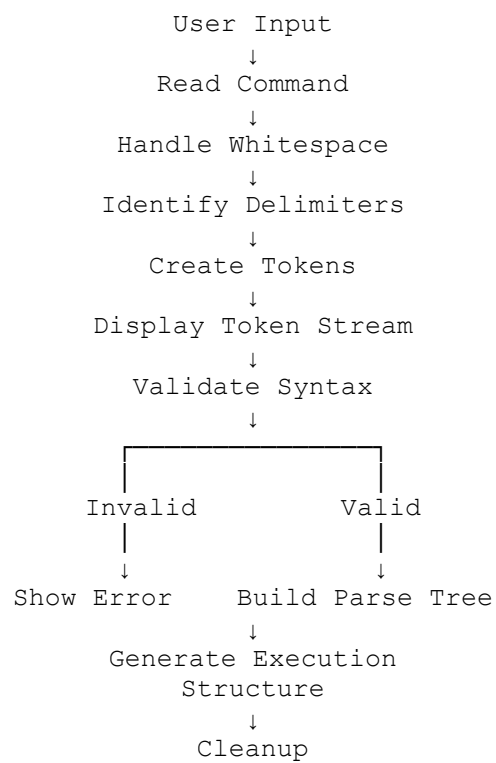

```
hari@LAPTOP-C6JDNL02:~/OS/2520090048_skill/skill-4$ cd "/home/hari/OS/2520090048_skill/skill-4/" && g
cc code.c -o code && "/home/hari/OS/2520090048_skill/skill-4/"code
```

Linux Tokenizer and Parser

Enter a shell-like command.

Examples:

ls -l /home

cat file.txt | grep hello

cat < input.txt > output.txt

Type 'exit' to quit.

parser> ls -l /hari

===== TOKEN STREAM =====

Token 1:

Value : ls

Type : WORD

Token 2:

Value : -l

Type : WORD

Token 3:

Value : /hari

Type : WORD

Token stream is syntactically valid.

===== PARSE TREE =====

|-- ls [WORD]

|-- -l [WORD]

|-- /hari [WORD]

Execution structure generated successfully.

parser> █