

R1

```
R1#
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#exit
R1#
*Aug 25 10:26:49.643: %SYS-5-CONFIG_I: Configured from console by console
R1#write
Building configuration...
[OK]
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 172.19.0.0 255.255.0.0 20.0.0.2
R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 21.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 192.168.168.0 255.255.255.0 20.0.0.2
R1(config)#ip route 162.14.0.0 255.255.0.0 20.0.0.2
R1(config)#exit
R1#
*Aug 25 10:32:19.477: %SYS-5-CONFIG_I: Configured from console by console
R1#write
Building configuration...
[OK]
R1#
```



R2

```
R2#
R2#
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#int e0/0
*Aug 25 11:09:35.602: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config)#int e0/0
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#exit
R2#
*Aug 25 11:10:50.370: %SYS-5-CONFIG_I: Configured from console by console
R2#write
Building configuration...
[OK]
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#ip route 172.19.0.0 255.255.0.0 30.0.0.2
R2(config)#ip route 15.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 21.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 192.168.168.0 255.255.255.0 30.0.0.2
R2(config)#ip route 162.14.0.0 255.255.0.0 30.0.0.2
R2(config)#exit
R2#
*Aug 25 11:14:26.583: %SYS-5-CONFIG_I: Configured from console by console
R2#write
Building configuration...
[OK]
R2#
```



R3

```
R3#
R3#
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#int e0/0
R3(config-if)#ip add 30.0.0.2 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#int e0/1
R3(config-if)#
*Aug 25 11:16:46.223: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config-if)#ip add 172.19.0.1 255.255.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#int e0/2
R3(config-if)#ip add 21.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 15.0.0.0 255.0.0.0 172.19.0.2
R3(config)#ip route 192.168.168.0 255.255.255.0 21.0.0.2
R3(config)#ip route 162.14.0.0 255.255.0.0 21.0.0.2
R3(config)#exit
R3#
*Aug 25 11:21:46.048: %SYS-5-CONFIG_I: Configured from console by console
R3#write
Building configuration...
[OK]
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip route 172.19.0.0 255.255.0.0 172.19.0.2
R3(config)#end
R3#
*Aug 25 11:49:02.405: %SYS-5-CONFIG_I: Configured from console by console
R3#
```



R4

```
R4#
R4#
R4#
R4#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#int e0/1
R4(config-if)#ip ass
*Aug 25 11:23:46.339: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4(config-if)#ip add 172.19.0.2 255.255.0.0
R4(config-if)#no sh
R4(config-if)# exit
R4(config)#
R4(config)#int e0/0
R4(config-if)#ip add 15.0.0.1 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#exit
R4#
*Aug 25 11:25:14.486: %SYS-5-CONFIG_I: Configured from console by console
R4#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#ip route 10.0.0.0 255.0.0.0 172.19.0.1
R4(config)#ip route 20.0.0.0 255.0.0.0 172.19.0.1
R4(config)#ip route 30.0.0.0 255.0.0.0 172.19.0.1
R4(config)#ip route 21.0.0.0 255.0.0.0 172.19.0.1
R4(config)#ip route 192.168.168.0 255.255.255.0 172.19.0.1
R4(config)#ip route 162.14.0.0 255.255.0.0 172.19.0.1
R4(config)#exit
R4#
*Aug 25 11:29:58.167: %SYS-5-CONFIG_I: Configured from console by console
R4#write
Building configuration...
[OK]
R4#
```



```
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#int e0/0
R5(config-if)#nosh
      ^
% Invalid input detected at '^' marker.

R5(config-if)#no sh
R5(config-if)#ip add 21.0.0.2 255.0.0.0
R5(config-if)#exit
R5(config)#int e0/1
R5(config-if)#ip add 192.168.168.1 255.255.255.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#exit
R5#
*Aug 25 11:34:32.300: %SYS-5-CONFIG_I: Configured from console by console
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#ip route 10.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 20.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 30.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 15.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 172.19.0.0 255.255.0.0 21.0.0.1
R5(config)#ip route 162.14.0.0 255.255.0.0 192.168.168.2
*Aug 25 11:37:17.697: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R5(config)#ip route 162.14.0.0 255.255.0.0 192.168.168.2
R5(config)#exit
R5#
*Aug 25 11:37:39.606: %SYS-5-CONFIG_I: Configured from console by console
R5#write
Building configuration...
[OK]
R5#
```

Tab groups


R6

```
R6#
R6#
R6#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R6(config)#
*Aug 25 11:38:19.511: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R6(config)#int e0/1
R6(config-if)#ip add 192.168.168.2 255.255.255.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#int e0/0
R6(config-if)#ip add 162.14.0.1
% Incomplete command.

R6(config-if)#ip add 162.14.0.1 255.255.0.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#exit
R6#
*Aug 25 11:40:08.053: %SYS-5-CONFIG_I: Configured from console by console
R6#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R6(config)#ip route 10.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 20.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 30.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 15.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 21.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 172.19.0.0 255.255.0.0 192.168.168.1
R6(config)#exit
R6#w
*Aug 25 11:43:46.238: %SYS-5-CONFIG_I: Configured from console by console
R6#write
Building configuration...
[OK]
R6#
```

Tab groups



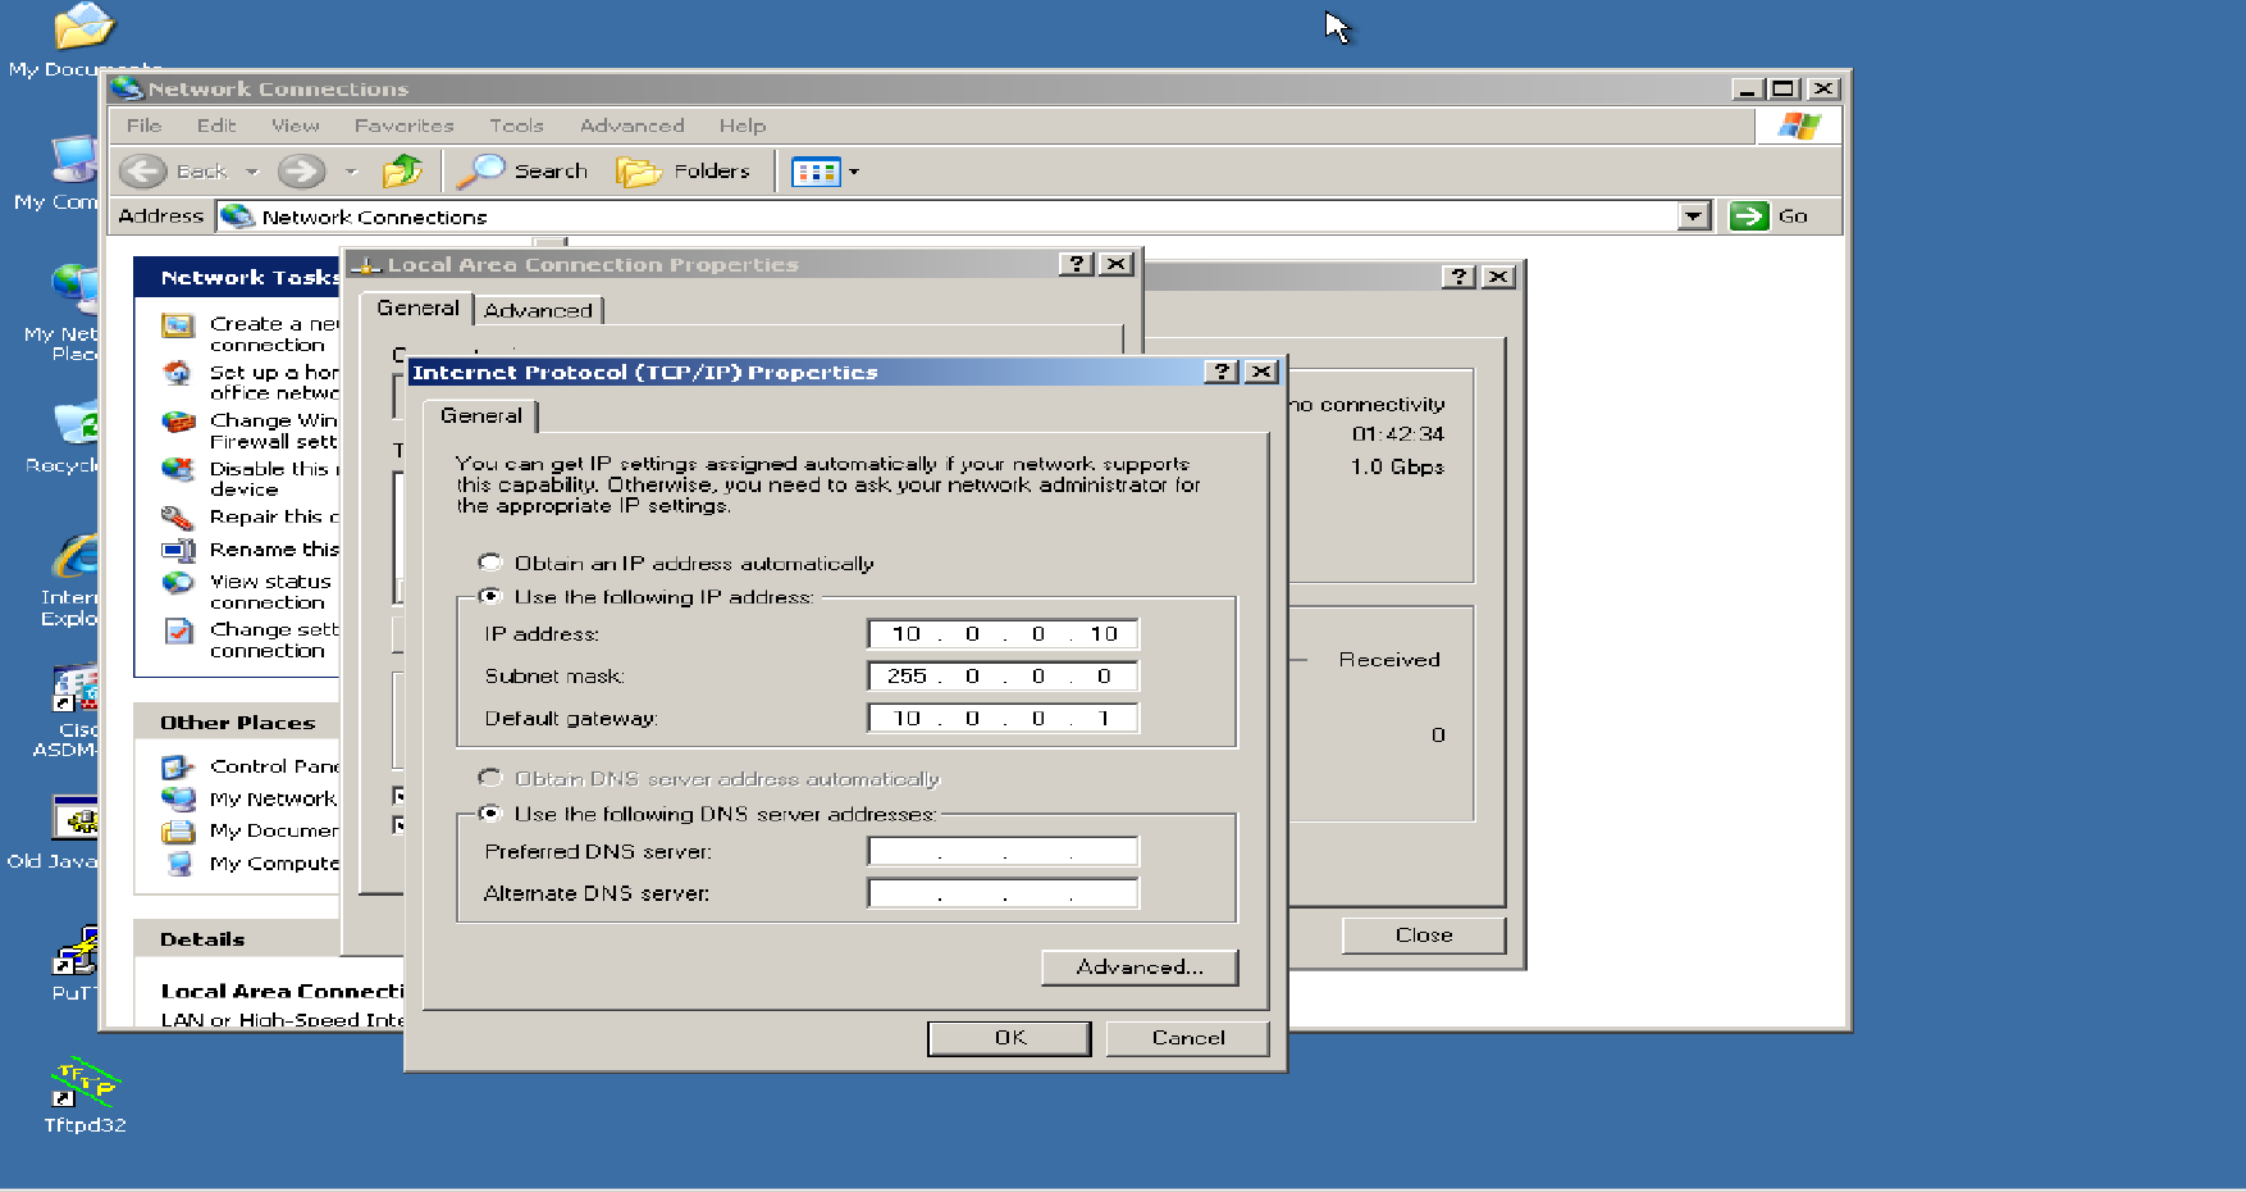

Network Connections

File Edit View Favorites Tools Advanced Help

Back Forward Search Folders

Address Network Connections Go

Network Tasks

- Create a new connection
- Set up a home or office network
- Change Windows Firewall settings
- Disable this connection
- Repair this connection
- Rename this connection
- View status of connection
- Change settings of connection

Other Places

- Control Panel
- My Network Places
- My Documents
- My Computer

Details

Local Area Connection Properties

General Advanced

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address: 15 . 0 . 0 . 10

Subnet mask: 255 . 0 . 0 . 0

Default gateway: 15 . 0 . 0 . 1

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server: . . .

Alternate DNS server: . . .


Advanced...


OK Cancel

Close

no connectivity
01:43:33
1.0 Gbps

Received
0

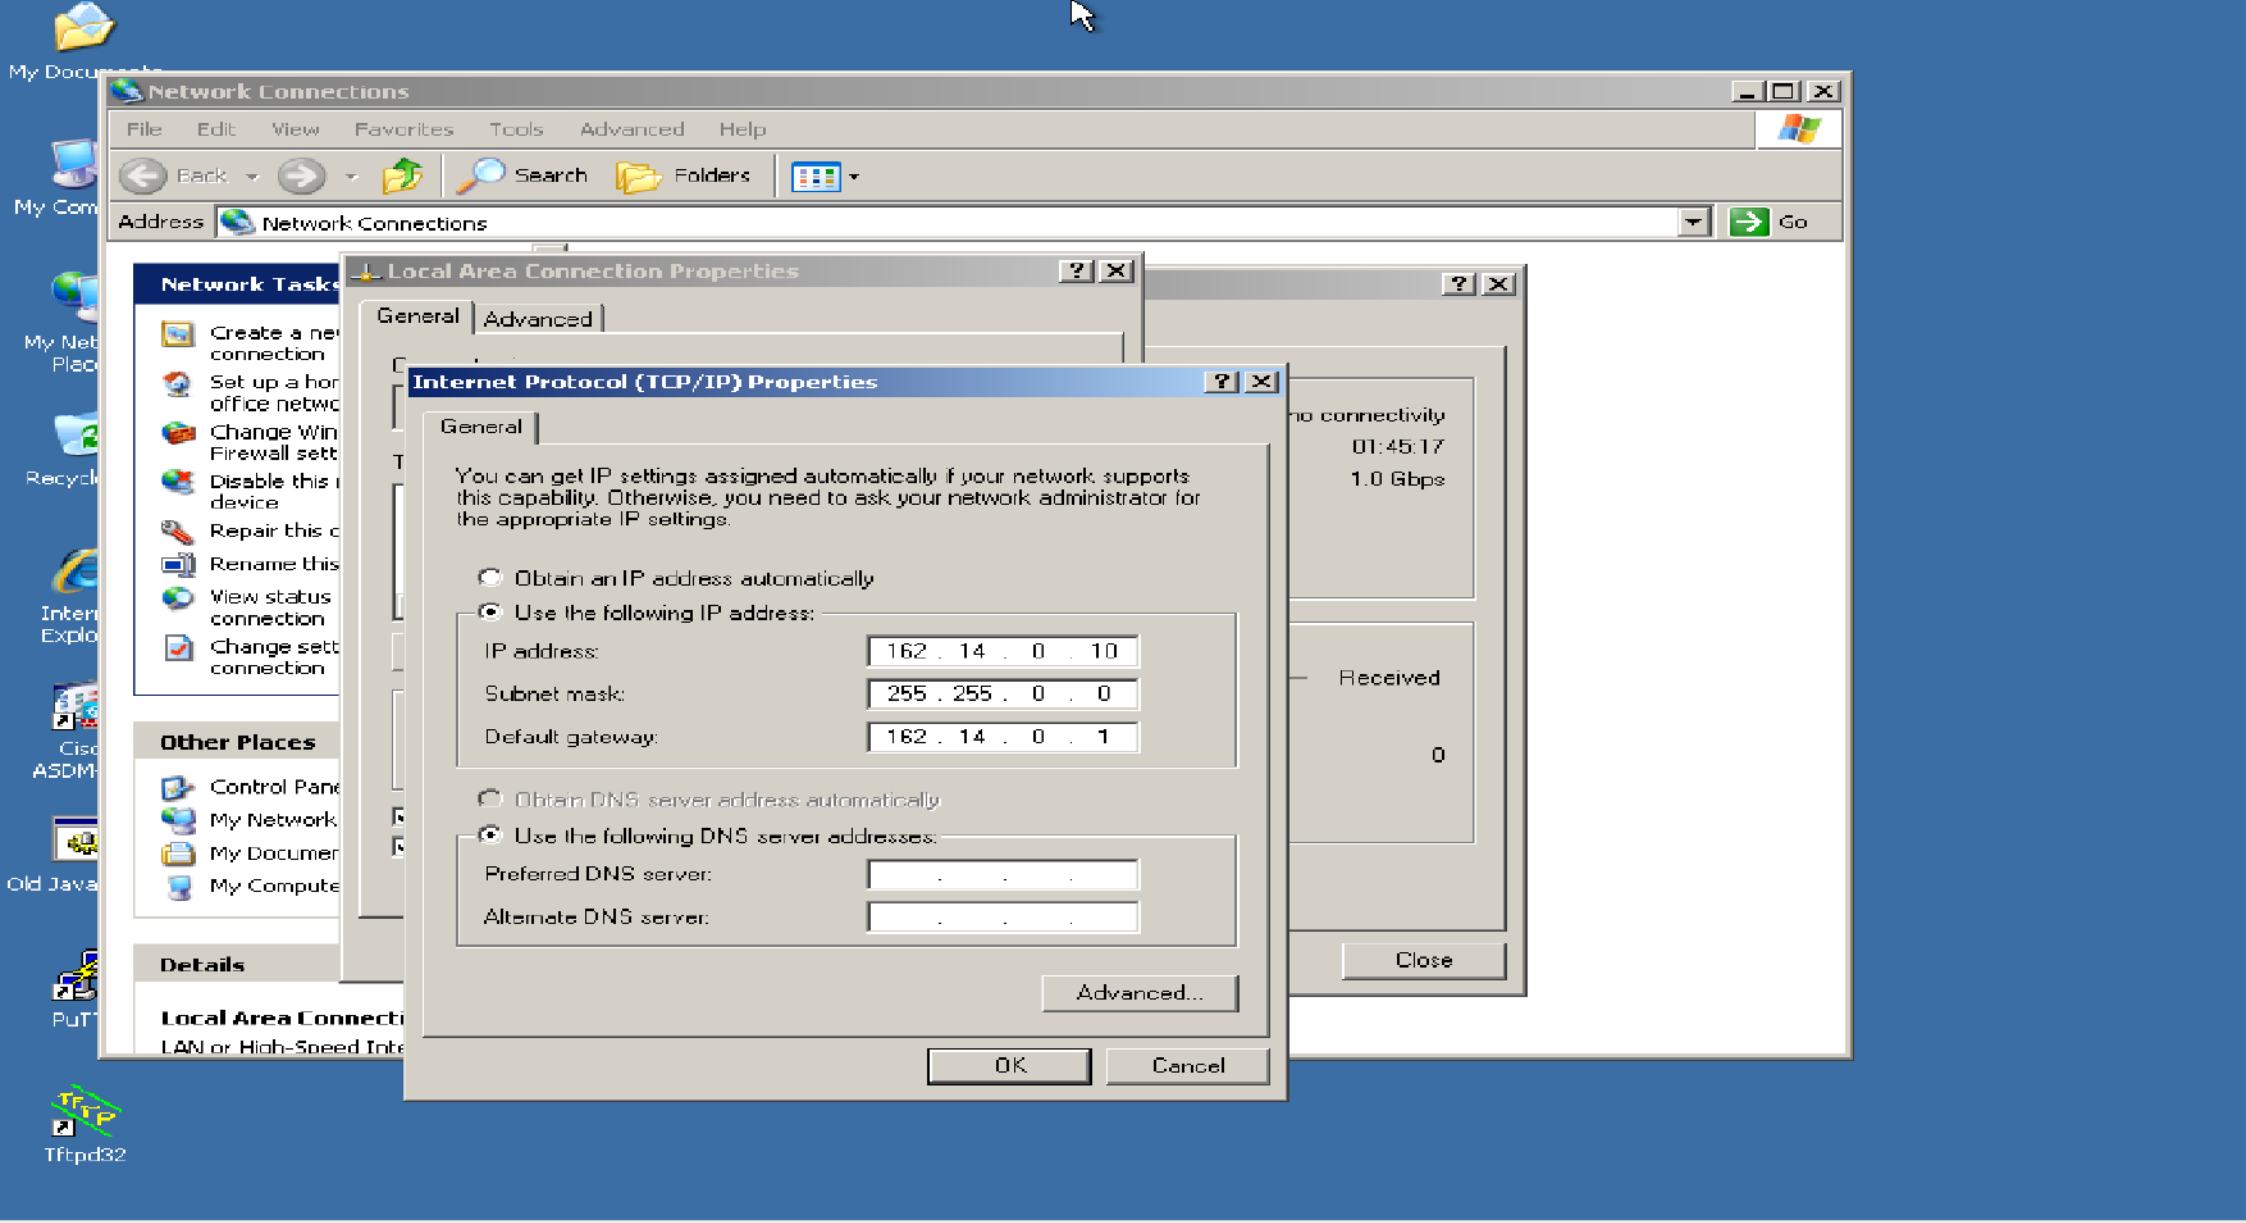

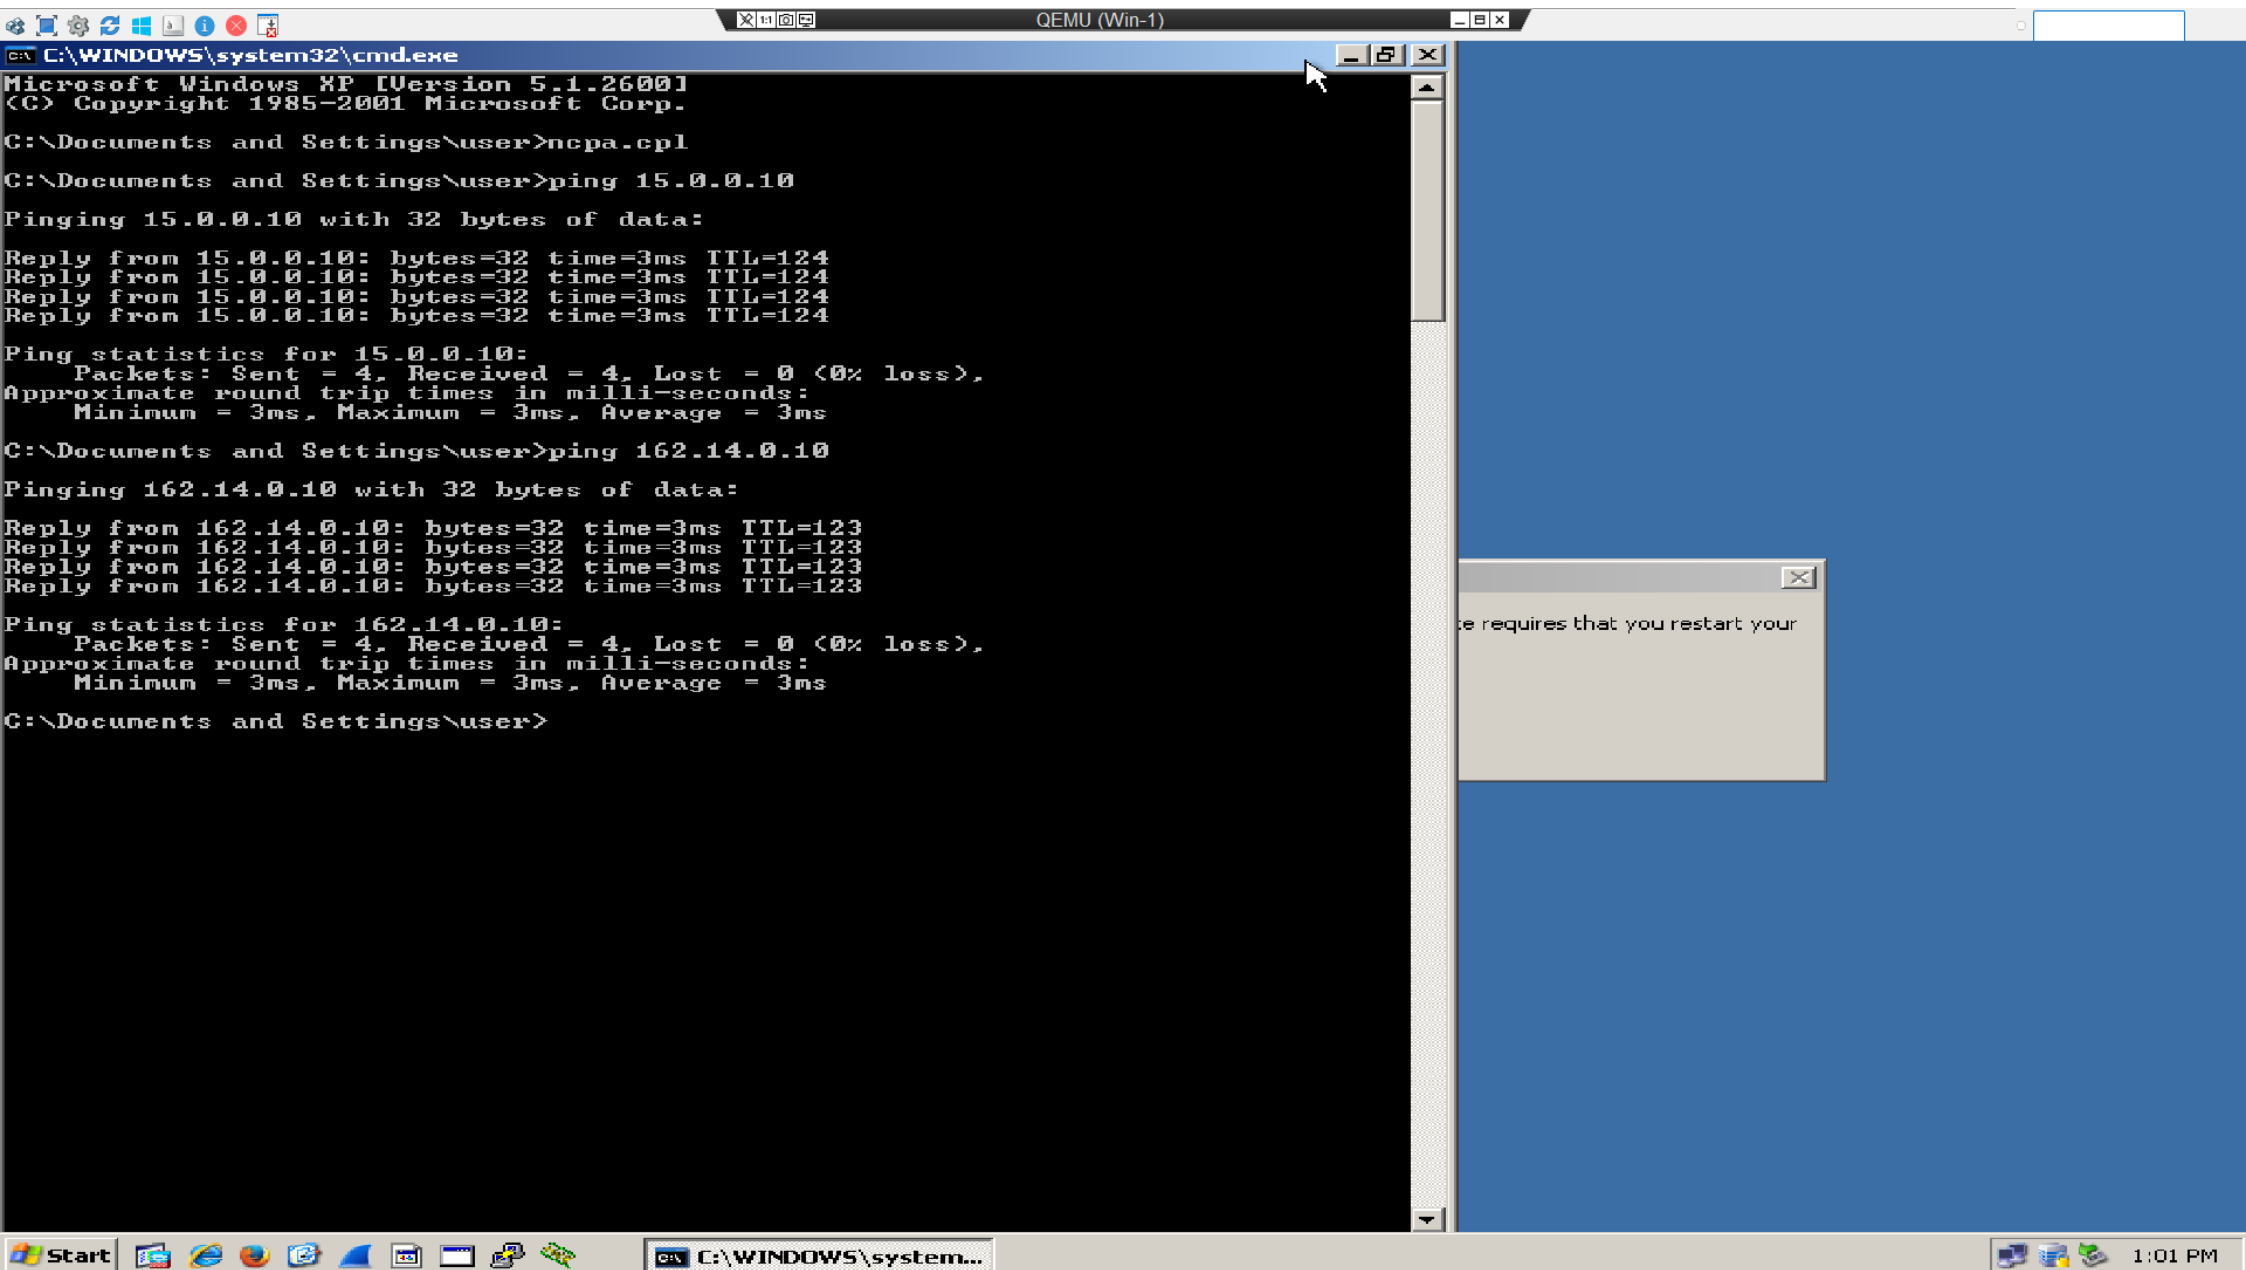



QEMU (Win-2)



C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=4ms TTL=124

Reply from 10.0.0.10: bytes=32 time=2ms TTL=124

Reply from 10.0.0.10: bytes=32 time=1ms TTL=124

Reply from 10.0.0.10: bytes=32 time=1ms TTL=124

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=4ms TTL=124

Reply from 162.14.0.10: bytes=32 time=2ms TTL=124

Reply from 162.14.0.10: bytes=32 time=1ms TTL=124

Reply from 162.14.0.10: bytes=32 time=2ms TTL=124


Ping statistics for 162.14.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>

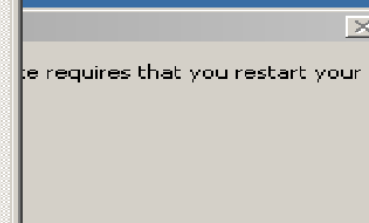

Start



C:\WINDOWS\system...



1:05 PM



QEMU (Win-3)



C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 3ms, Maximum = 3ms, Average = 3ms

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=3ms TTL=124

Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Reply from 15.0.0.10: bytes=32 time=3ms TTL=124


Ping statistics for 15.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>

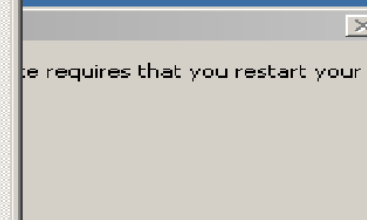

C:\WINDOWS\system...



1:07 PM