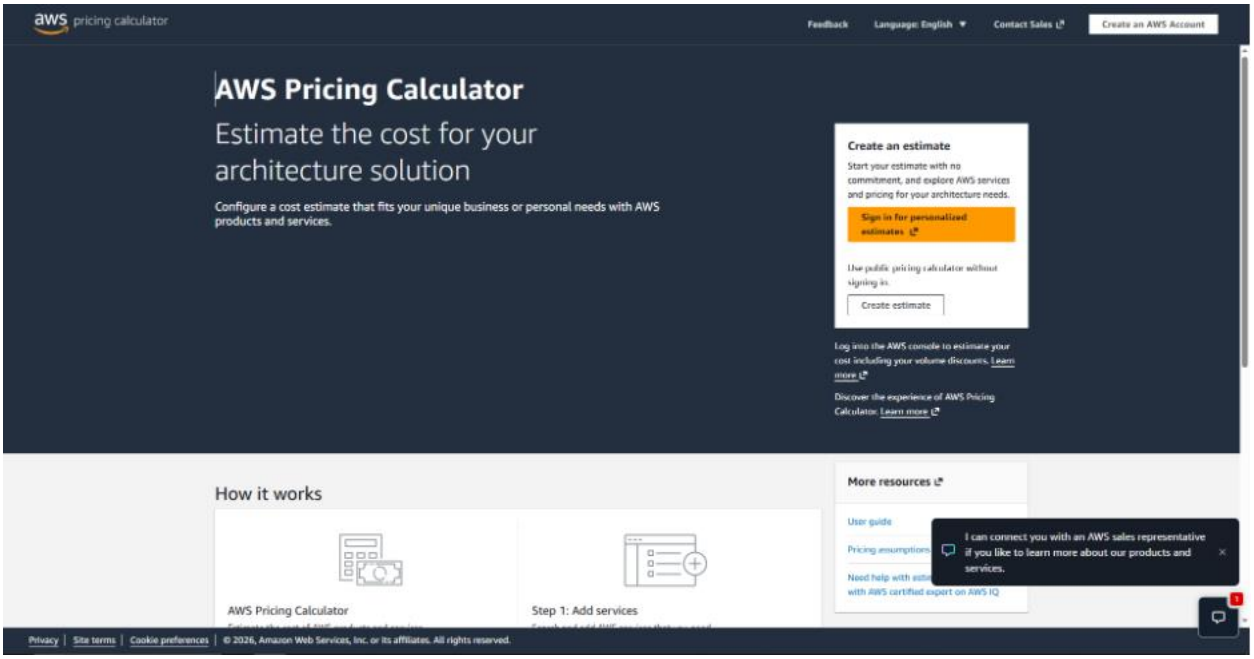
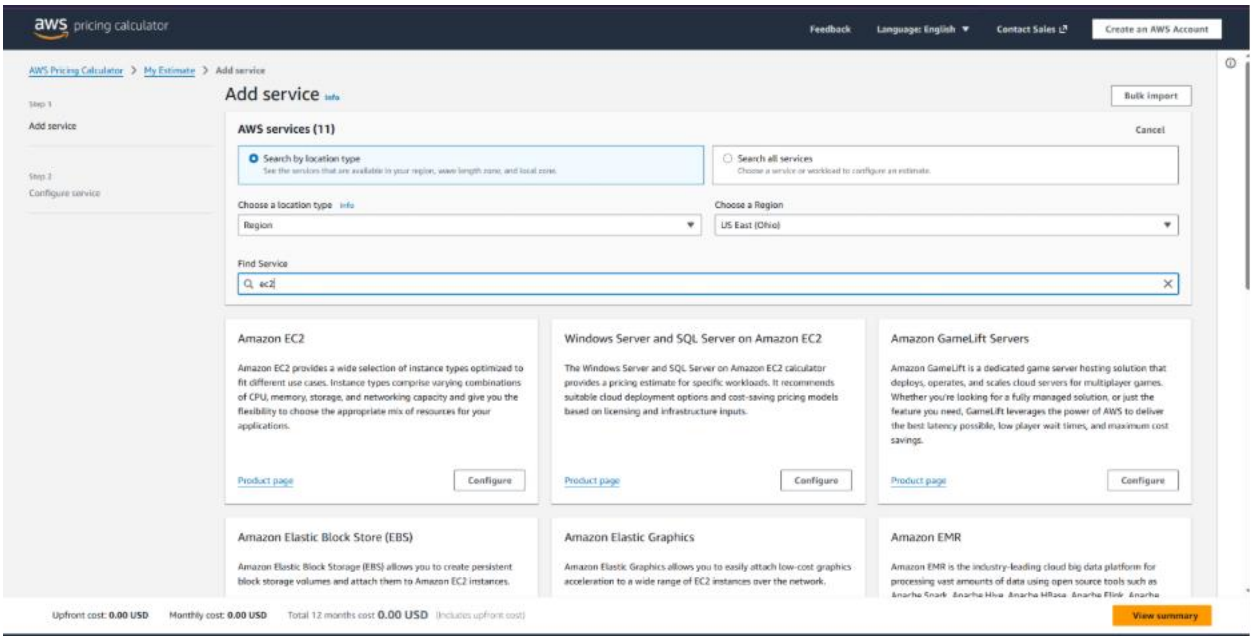
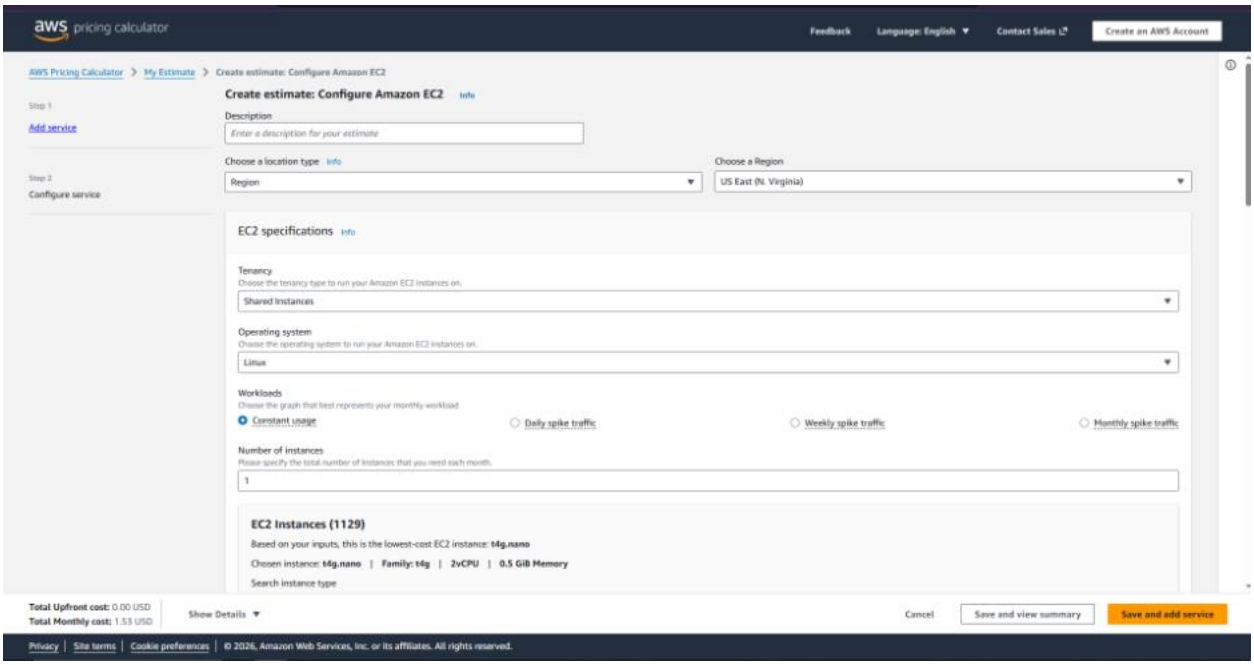
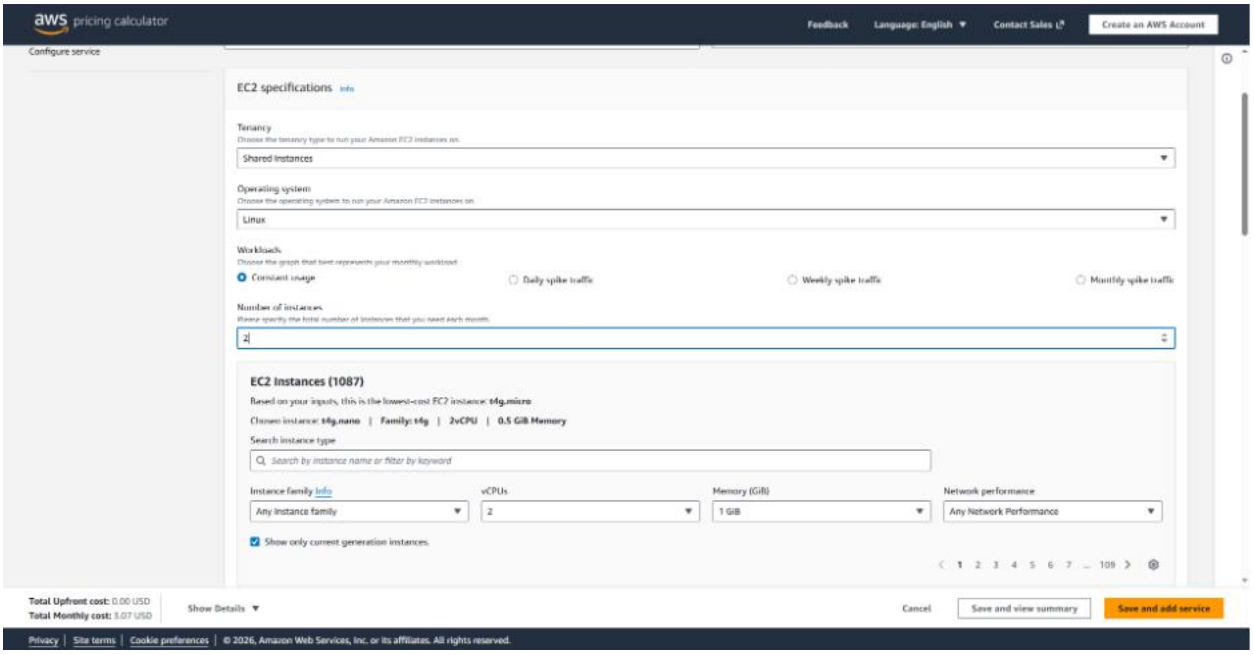
Deliver the Service Through Cloud

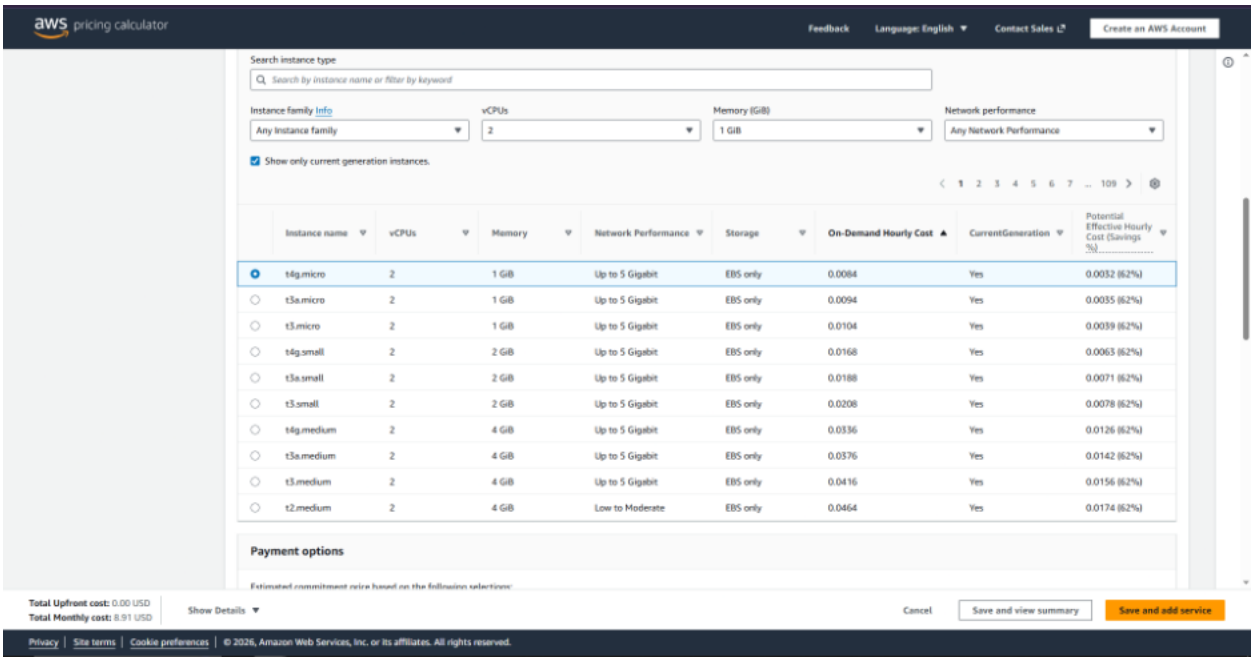
Task 1: Create an Estimate

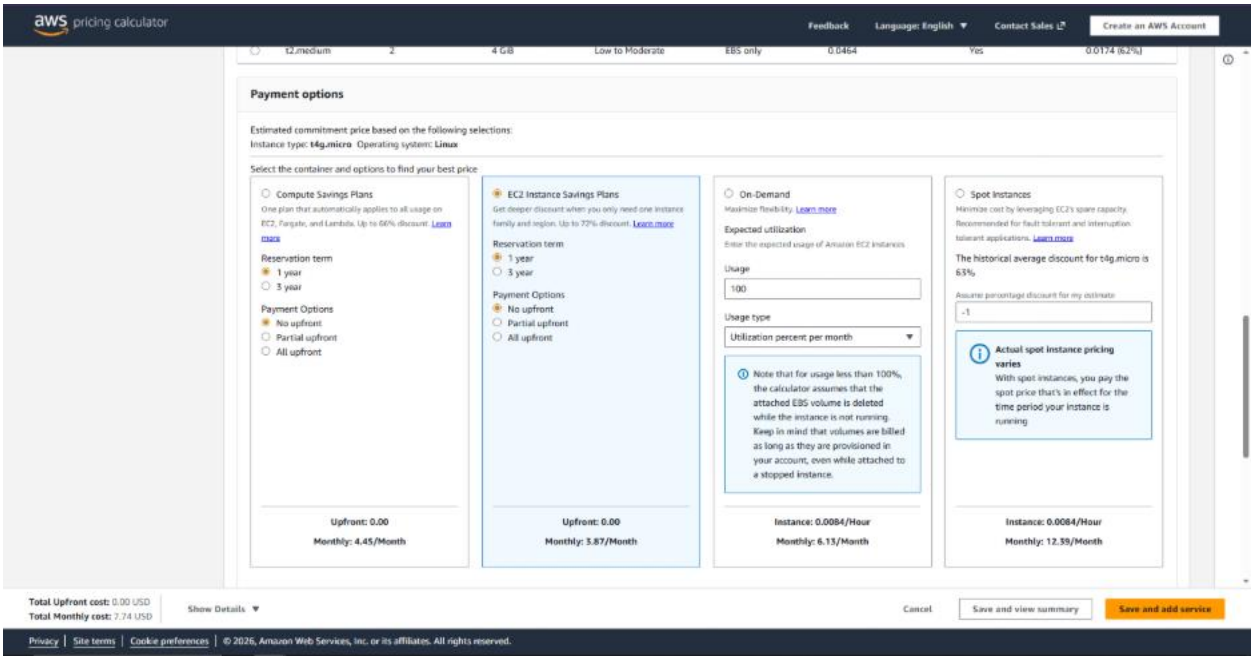


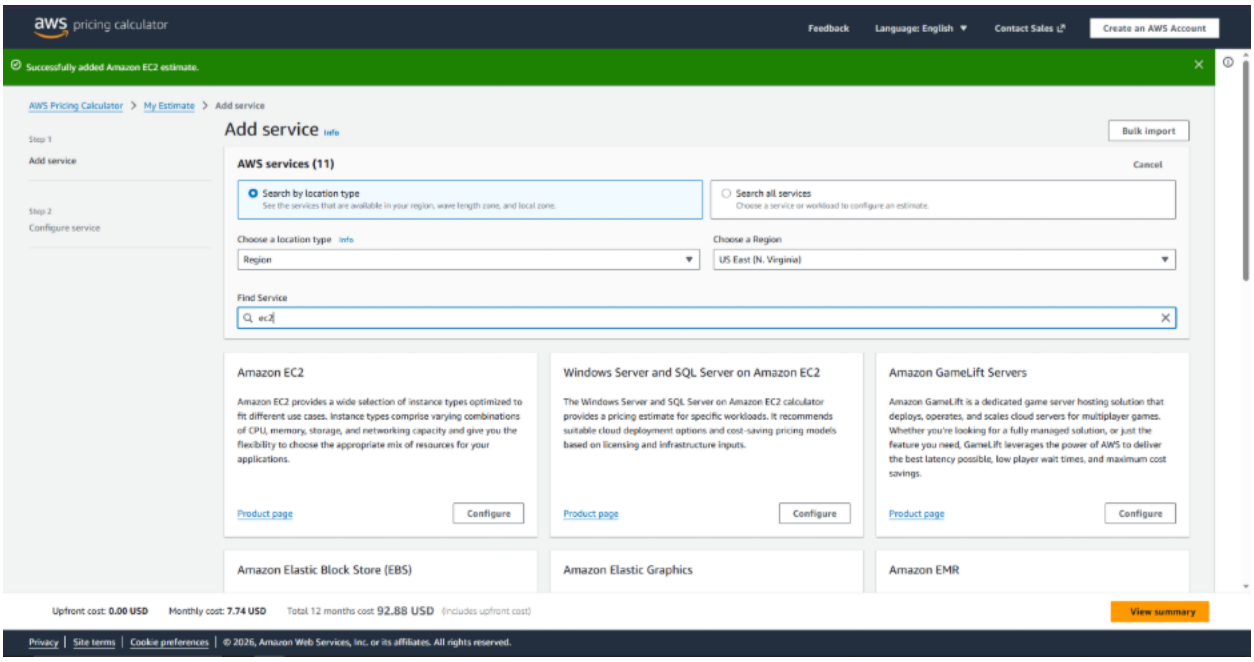


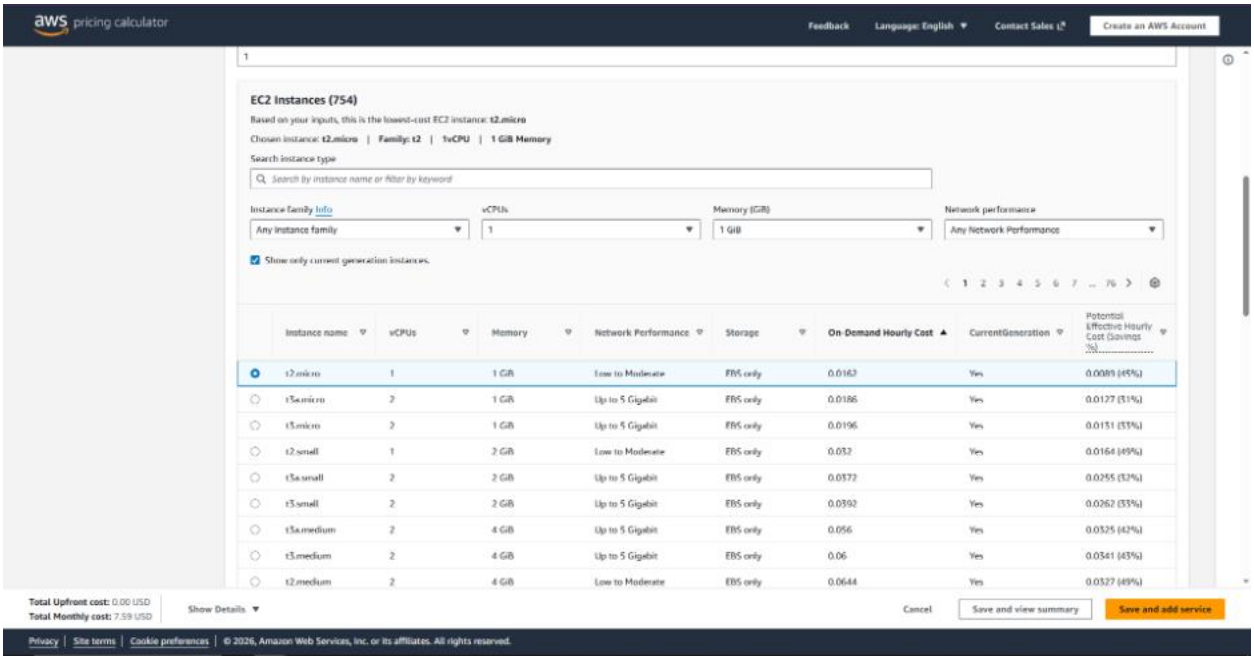

aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
AWS Pricing Calculator > My Estimate > Create estimate: Configure Amazon EC2
Create estimate: Configure Amazon EC2 Info
Step 1
Add service
Description
Enter a description for your estimate
Step 2
Configure service
Choose a location type Info
Region
Choose a Region
US East (N. Virginia)
EC2 specifications Info
Tenancy
Choose the tenancy type to run your Amazon EC2 instances on.
Shared Instances
Operating system
Choose the operating system to run your Amazon EC2 instances on.
Linux
Workloads
Choose the graph that best represents your monthly workload.
Constant usage
Daily spike traffic
Weekly spike traffic
Monthly spike traffic
Number of instances
Please specify the total number of instances that you need each month.
1
EC2 Instances (1129)
Based on your inputs, this is the lowest-cost EC2 instance: t4g.nano
Chosen instance: t4g.nano | Family: t4g | 2vCPU | 0.5 GiB Memory
Search instance type
Total Upfront cost: 0.00 USD
Total Monthly cost: 1.53 USD
Show Details
Cancel
Save and view summary
Save and add service
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

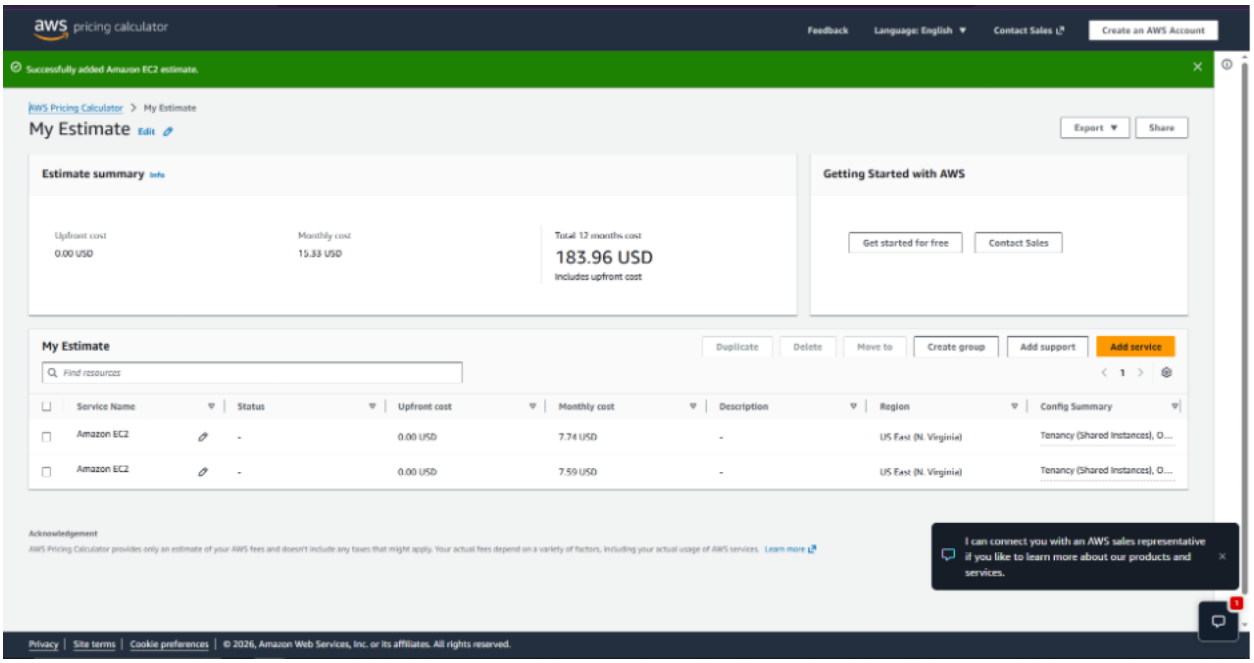

aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
Configure service
EC2 specifications Info
Tenancy
Shared Instances
Operating system
Linux
Workloads
Constant usage
Daily spike traffic
Weekly spike traffic
Monthly spike traffic
Number of instances
2
EC2 Instances (1087)
Based on your inputs, this is the lowest-cost EC2 instance: t4g.micro
Chosen instance: t4g.nano | Family: t4g | 2vCPU | 0.5 GiB Memory
Search instance type
Search by instance name or filter by keyword
Instance family Info
Any Instance family
vCPUs
2
Memory (GiB)
1 GiB
Network performance
Any Network Performance
Show only current generation instances.
1 2 3 4 5 6 7 ... 109
Total Upfront cost: 0.00 USD
Total Monthly cost: 3.07 USD
Show Details
Cancel
Save and view summary
Save and add service
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.


aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
Search instance type
Search by instance name or filter by keyword
Instance family Info
Any Instance family
vCPUs
2
Memory (GiB)
1 GiB
Network performance
Any Network Performance
Show only current generation instances.
1 2 3 4 5 6 7 ... 109
Instance name
vCPUs
Memory
Network Performance
Storage
On-Demand Hourly Cost
CurrentGeneration
Potential Effective Hourly Cost (Savings %)
t4g.micro 2 1 GiB Up to 5 Gigabit EBS only 0.0084 Yes 0.0032 (62%)
t3a.micro 2 1 GiB Up to 5 Gigabit EBS only 0.0094 Yes 0.0035 (62%)
t3.micro 2 1 GiB Up to 5 Gigabit EBS only 0.0104 Yes 0.0039 (62%)
t4g.small 2 2 GiB Up to 5 Gigabit EBS only 0.0168 Yes 0.0063 (62%)
t3a.small 2 2 GiB Up to 5 Gigabit EBS only 0.0188 Yes 0.0071 (62%)
t3.small 2 2 GiB Up to 5 Gigabit EBS only 0.0208 Yes 0.0078 (62%)
t4g.medium 2 4 GiB Up to 5 Gigabit EBS only 0.0336 Yes 0.0126 (62%)
t3a.medium 2 4 GiB Up to 5 Gigabit EBS only 0.0376 Yes 0.0142 (62%)
t3.medium 2 4 GiB Up to 5 Gigabit EBS only 0.0416 Yes 0.0156 (62%)
t2.medium 2 4 GiB Low to Moderate EBS only 0.0464 Yes 0.0174 (62%)
Payment options
Total Upfront cost: 0.00 USD
Total Monthly cost: 8.91 USD
Show Details
Cancel
Save and view summary
Save and add service
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

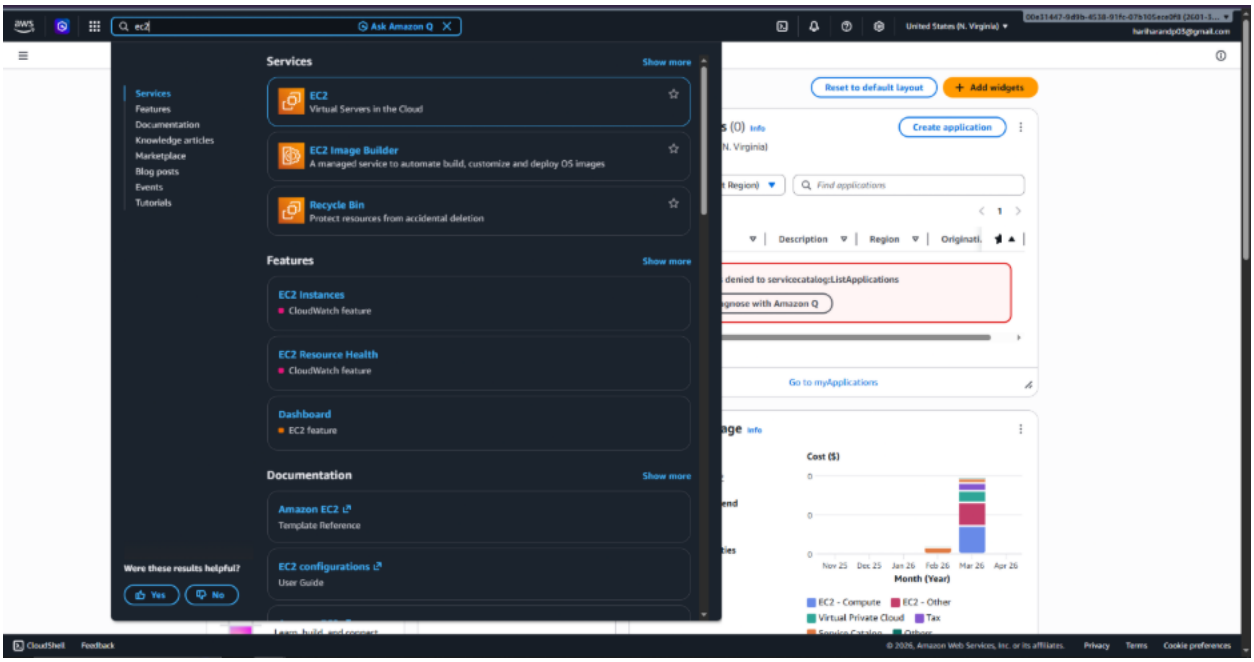

aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
t2.medium 2 4 GiB Low to Moderate EBS only 0.0464 Yes 0.0174 (62%)
Payment options
Estimated commitment price based on the following selections:
Instance type: t4g.micro Operating system: Linux
Select the container and options to find your best price
Compute Savings Plans
One plan that automatically applies to all usage on EC2, Fargate, and Lambda. Up to 66% discount. Learn more
Reservation term
1 year
3 year
Payment Options
No upfront
Partial upfront
All upfront
EC2 Instance Savings Plans
Get deeper discount when you only need one instance family and region. Up to 72% discount. Learn more
Reservation term
1 year
3 year
Payment Options
No upfront
Partial upfront
All upfront
On-Demand
Maximize flexibility. Learn more
Expected utilization
Enter the expected usage of Amazon EC2 instances
Usage
100
Usage type
Utilization percent per month
Note that for usage less than 100%, the calculator assumes that the attached EBS volume is deleted while the instance is not running. Keep in mind that volumes are billed as long as they are provisioned in your account, even while attached to a stopped instance.
Spot Instances
Minimize cost by leveraging EC2's spare capacity. Recommended for fault tolerant and interruption tolerant applications. Learn more
The historical average discount for t4g.micro is 63%
Assume percentage discount for my estimate
-1
Actual spot instance pricing varies
With spot instances, you pay the spot price that's in effect for the time period your instance is running
Upfront: 0.00
Monthly: 4.45/Month
Upfront: 0.00
Monthly: 3.87/Month
Instance: 0.0084/Hour
Monthly: 6.13/Month
Instance: 0.0084/Hour
Monthly: 12.39/Month
Total Upfront cost: 0.00 USD
Total Monthly cost: 7.74 USD
Show Details
Cancel
Save and view summary
Save and add service
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

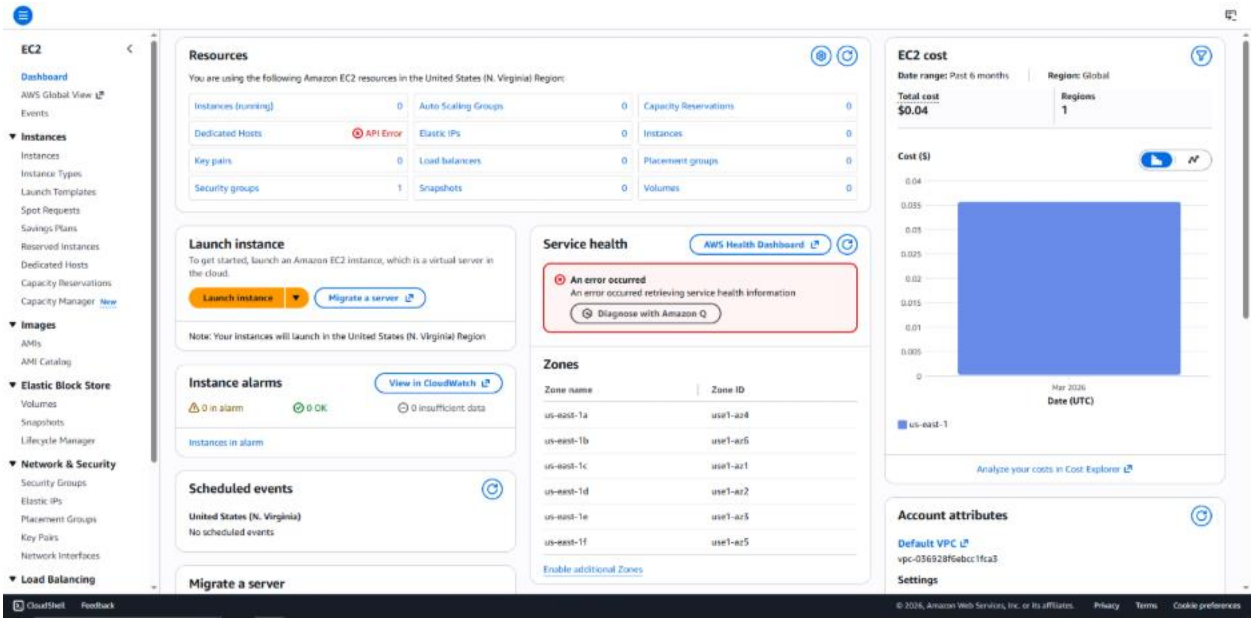

aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
Successfully added Amazon EC2 estimate.
AWS Pricing Calculator > My Estimate > Add service
Step 1
Add service
Step 2
Configure service
Add service Info
Bulk import
AWS services (11)
Cancel
Search by location type
See the services that are available in your region, wave length zone, and local zone.
Search all services
Choose a service or workload to configure an estimate.
Choose a location type Info
Region
Choose a Region
US East (N. Virginia)
Find Service
ec2
Amazon EC2
Amazon EC2 provides a wide selection of instance types optimized to fit different use cases. Instance types comprise varying combinations of CPU, memory, storage, and networking capacity and give you the flexibility to choose the appropriate mix of resources for your applications.
Product page
Configure
Windows Server and SQL Server on Amazon EC2
The Windows Server and SQL Server on Amazon EC2 calculator provides a pricing estimate for specific workloads. It recommends suitable cloud deployment options and cost-saving pricing models based on licensing and infrastructure inputs.
Product page
Configure
Amazon GameLift Servers
Amazon GameLift is a dedicated game server hosting solution that deploys, operates, and scales cloud servers for multiplayer games. Whether you're looking for a fully managed solution, or just the feature you need, GameLift leverages the power of AWS to deliver the best latency possible, low player wait times, and maximum cost savings.
Product page
Configure
Amazon Elastic Block Store (EBS)
Amazon Elastic Graphics
Amazon EMR
Upfront cost: 0.00 USD
Monthly cost: 7.74 USD
Total 12 months cost 92.88 USD (includes upfront cost)
View summary
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

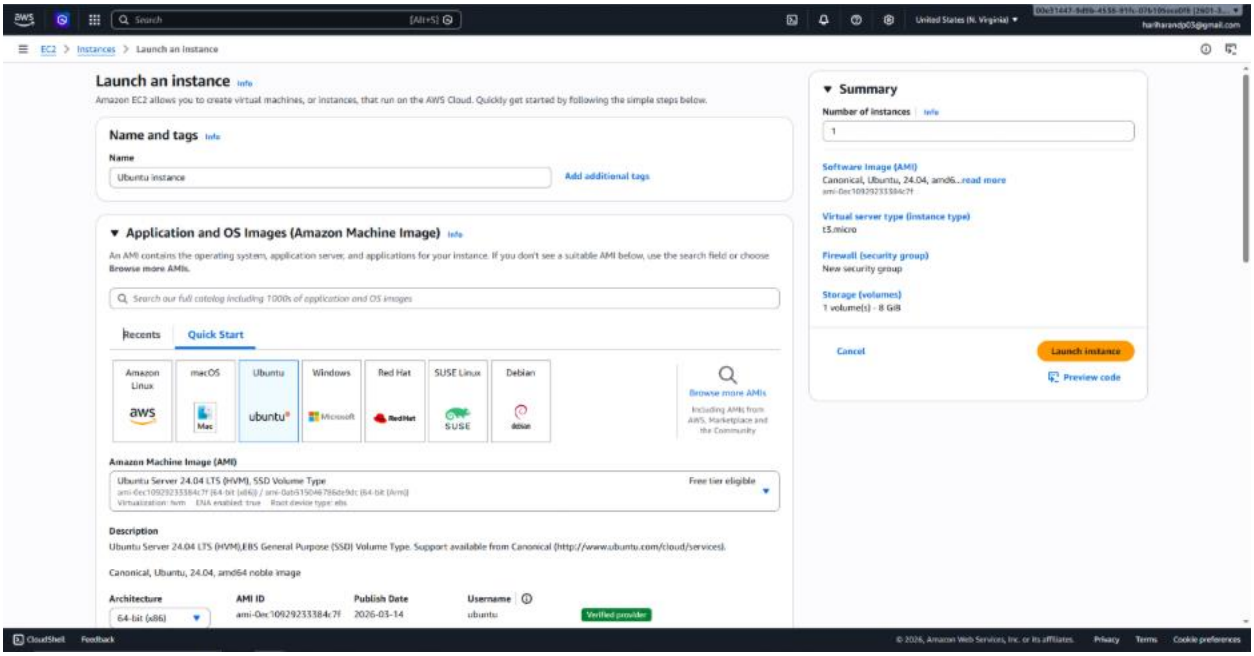

aws pricing calculator
Feedback
Language: English
Contact Sales
Create an AWS Account
EC2 Instances (754)
Based on your inputs, this is the lowest-cost EC2 instance: t2.micro
Chosen instance: t2.micro | Family: t2 | 1vCPU | 1 GiB Memory
Search instance type
Search by instance name or filter by keyword
Instance family Info
Any instance family
vCPUs
1
Memory (GiB)
1 GiB
Network performance
Any Network Performance
Show only current generation instances.
Instance name
vCPUs
Memory
Network Performance
Storage
On-Demand Hourly Cost
CurrentGeneration
Potential Effective Hourly Cost Savings %
t2.micro 1 1 GiB Low to Moderate EBS only 0.0162 Yes 0.0089 (45%)
t4g.micro 2 1 GiB Up to 5 Gigabit EBS only 0.0186 Yes 0.0127 (31%)
t3.micro 2 1 GiB Up to 5 Gigabit EBS only 0.0196 Yes 0.0131 (33%)
t2.small 1 2 GiB Low to Moderate EBS only 0.032 Yes 0.0164 (49%)
t3a.small 2 2 GiB Up to 5 Gigabit EBS only 0.0372 Yes 0.0255 (32%)
t3.small 2 2 GiB Up to 5 Gigabit EBS only 0.0392 Yes 0.0262 (33%)
t3a.medium 2 4 GiB Up to 5 Gigabit EBS only 0.056 Yes 0.0325 (42%)
t3.medium 2 4 GiB Up to 5 Gigabit EBS only 0.06 Yes 0.0341 (43%)
t2.medium 2 4 GiB Low to Moderate EBS only 0.0644 Yes 0.0327 (49%)
Total Upfront cost: 0.00 USD
Total Monthly cost: 7.59 USD
Show Details
Cancel
Save and view summary
Save and add service
Privacy | Site terms | Cookie preferences | © 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved.

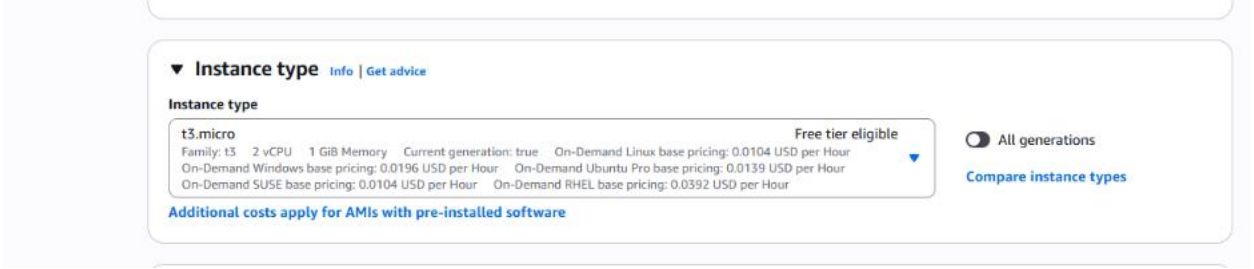


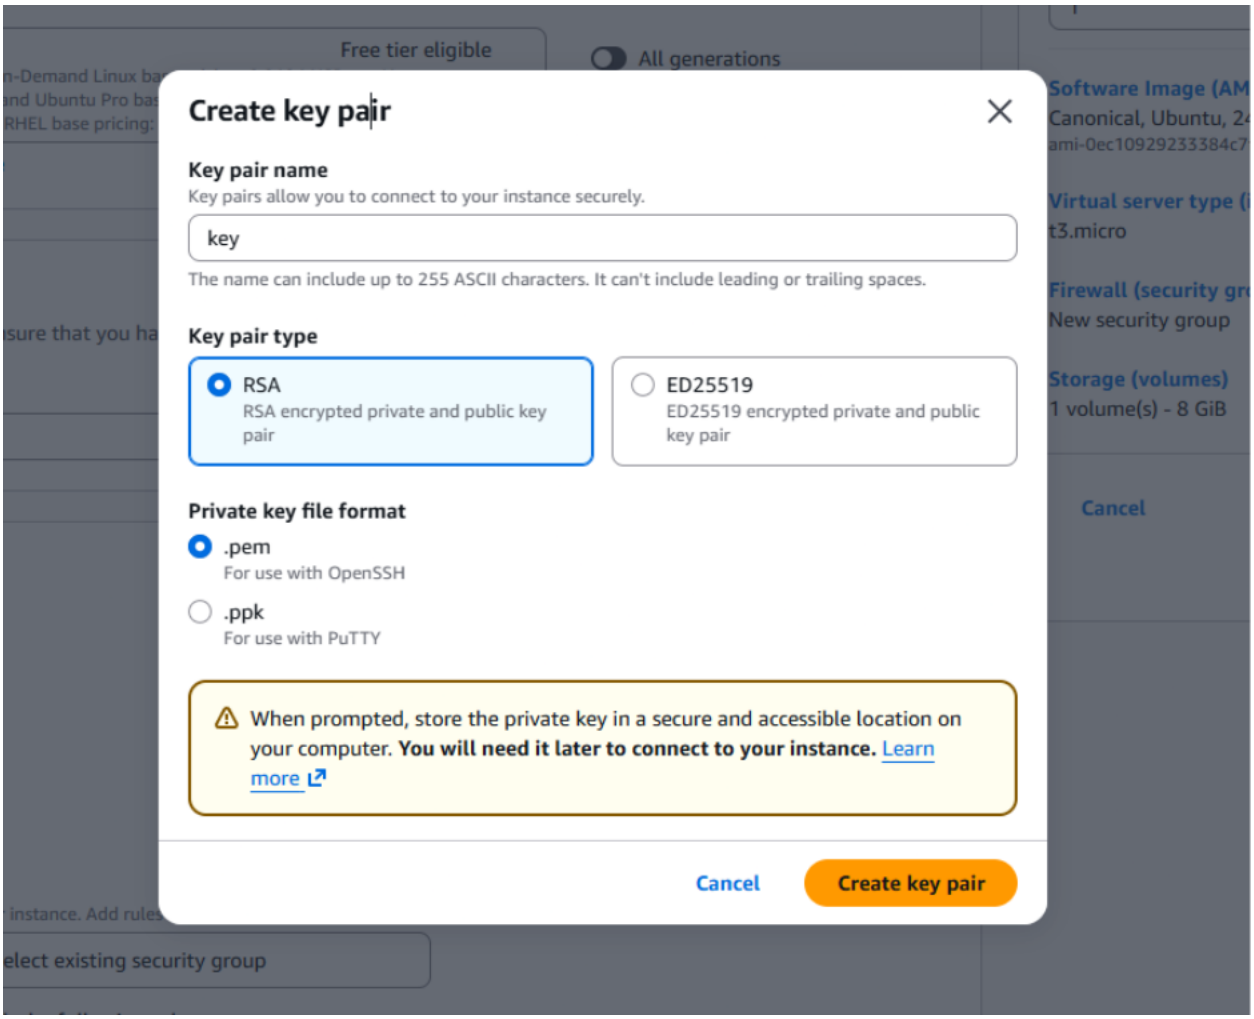
Task 2: Launch the Ubuntu Instance.




EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
Resources
You are using the following Amazon EC2 resources in the United States (N. Virginia) Region:
Instances (running) 0
Auto Scaling Groups 0
Capacity Reservations 0
Dedicated Hosts API Error
Elastic IPs 0
Instances 0
Key pairs 0
Load balancers 0
Placement groups 0
Security groups 1
Snapshots 0
Volumes 0
Launch instance
To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.
Launch instance
Migrate a server
Note: Your instances will launch in the United States (N. Virginia) Region
Instance alarms
View in CloudWatch
0 in alarm
0 OK
0 Insufficient data
Instances in alarm
Scheduled events
United States (N. Virginia)
No scheduled events
Migrate a server
Service health
AWS Health Dashboard
An error occurred
An error occurred retrieving service health information
Diagnose with Amazon Q
Zones
Zone name
Zone ID
us-east-1a
use1-az4
us-east-1b
use1-az6
us-east-1c
use1-az1
us-east-1d
use1-az2
us-east-1e
use1-az3
us-east-1f
use1-az5
Enable additional Zones
EC2 cost
Date range: Past 6 months
Region: Global
Total cost
$0.04
Regions
1
Cost ($)
Mar 2026
Date (UTC)
us-east-1
Analyze your costs in Cost Explorer
Account attributes
Default VPC
vpc-036928f6ebcc1fca3
Settings
CloudShell
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Search
[Alt+S]
United States (N. Virginia)
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
Ubuntu instance
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Amazon Machine Image (AMI)
Ubuntu Server 24.04 LTS (HVM), SSD Volume Type
Free tier eligible
Description
Ubuntu Server 24.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (http://www.ubuntu.com/cloud/services).
Canonical, Ubuntu, 24.04, amd64 noble image
Architecture
AMI ID
Publish Date
Username
64-bit (x86)
2026-03-14
ubuntu
Verified provider
Summary
Number of instances Info
1
Software Image (AMI)
Canonical, Ubuntu, 24.04, amd6...read more
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
CloudShell
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Instance type Info | Get advice
Instance type
t3.micro
Free tier eligible
Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour
All generations
Compare instance types
Additional costs apply for AMIs with pre-installed software


Free tier eligible
All generations
Create key pair
Key pair name
Key pairs allow you to connect to your instance securely.
key
The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.
Key pair type
RSA
RSA encrypted private and public key pair
ED25519
ED25519 encrypted private and public key pair
Private key file format
.pem
For use with OpenSSH
.ppk
For use with PuTTY
When prompted, store the private key in a secure and accessible location on your computer. You will need it later to connect to your instance. Learn more
Cancel
Create key pair
Software Image (AM
Canonical, Ubuntu, 2
Virtual server type (
t3.micro
Firewall (security gr
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
elect existing security group

Network settings Info

Edit

Network | Info

vpc-036928f6ebcc1fca3

Subnet | Info

No preference (Default subnet in any availability zone)

Auto-assign public IP | Info

Enable

Firewall (security groups) | Info

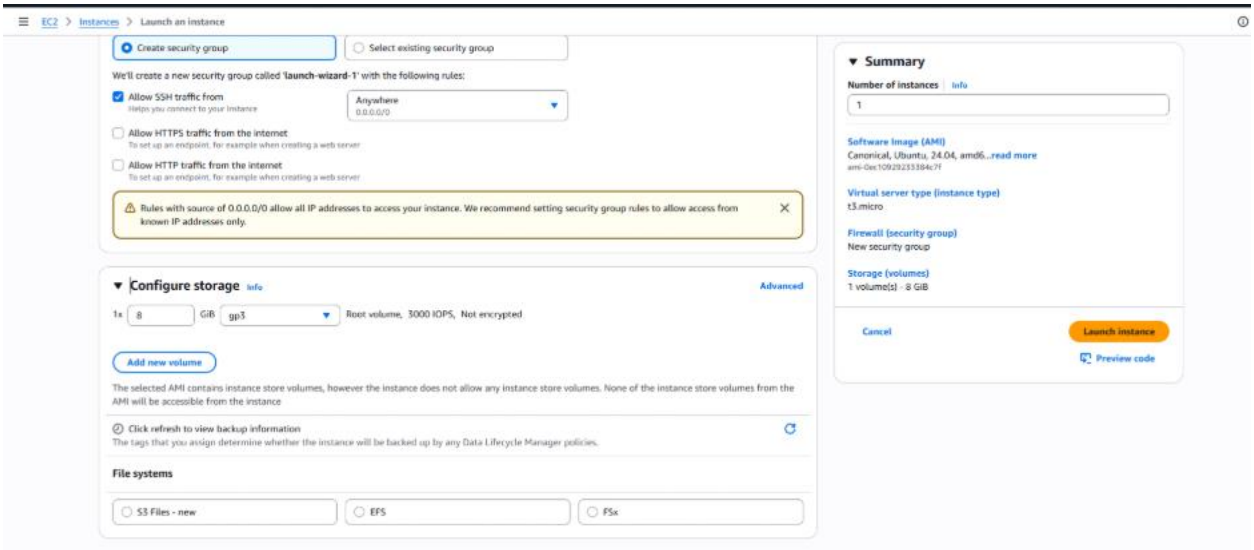
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

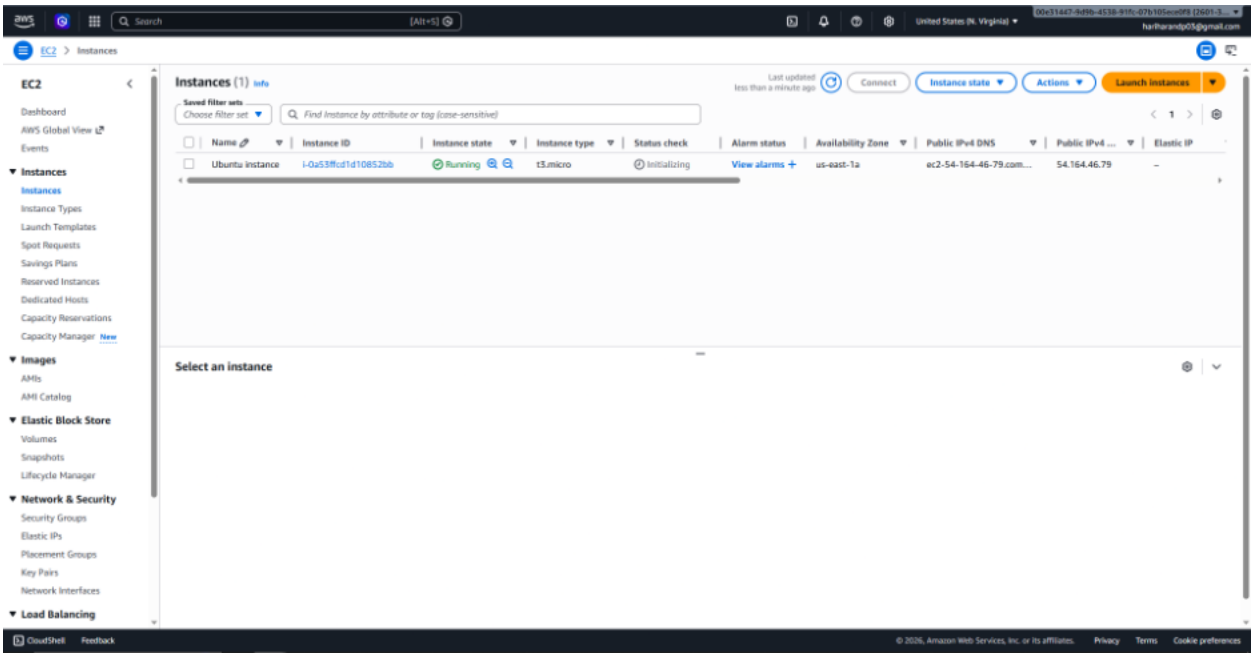
- (•) Create security group
- ( ) Select existing security group

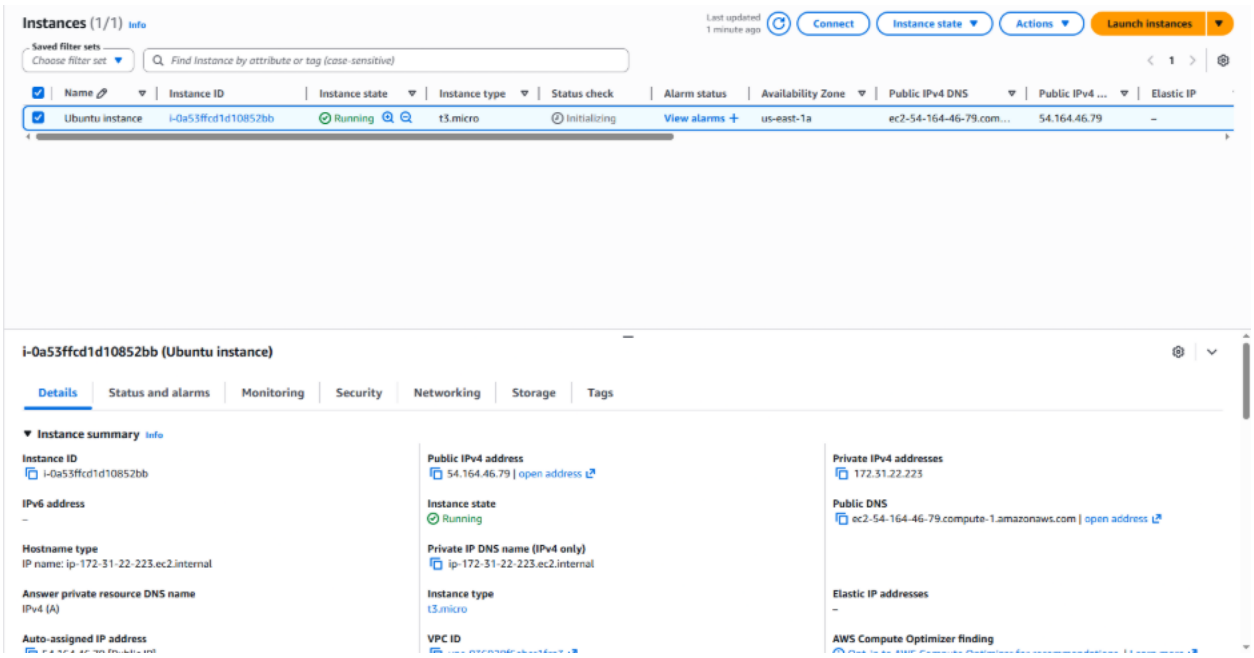
We'll create a new security group called '**launch-wizard-1**' with the following rules:

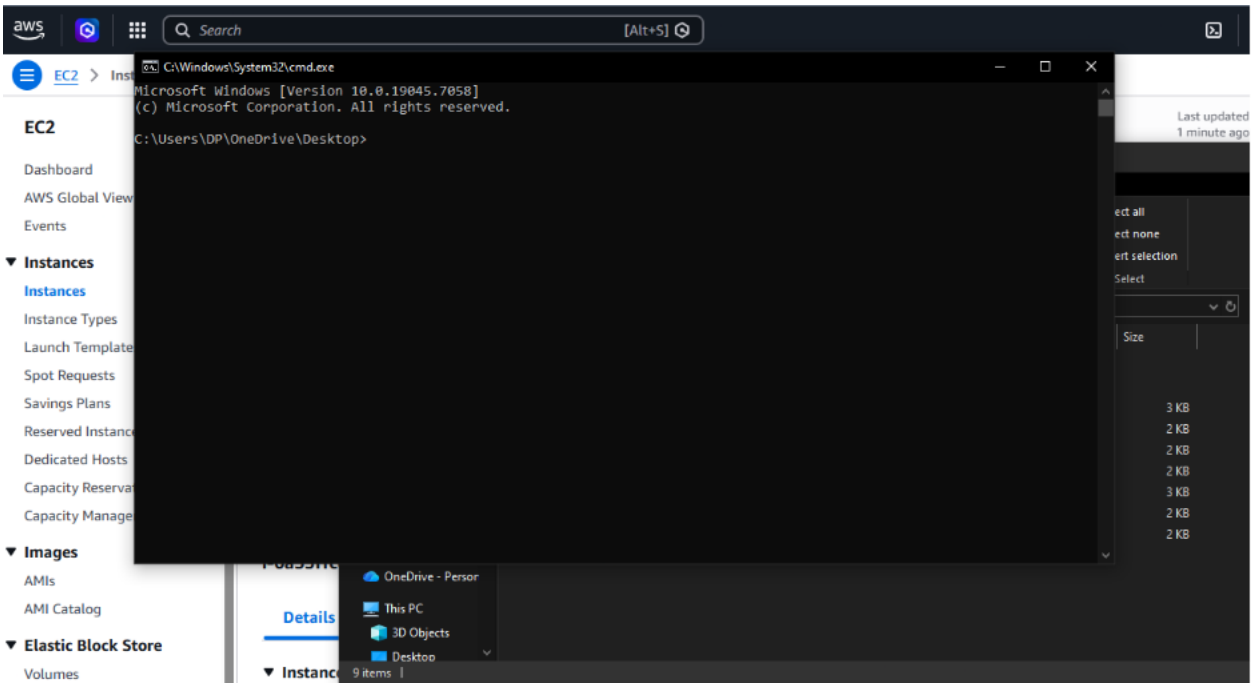
- [x] Allow SSH traffic from — Helps you connect to your instance — Anywhere 0.0.0.0/0
- [ ] Allow HTTPS traffic from the internet — To set up an endpoint, for example when creating a web server
- [ ] Allow HTTP traffic from the internet — To set up an endpoint, for example when creating a web server

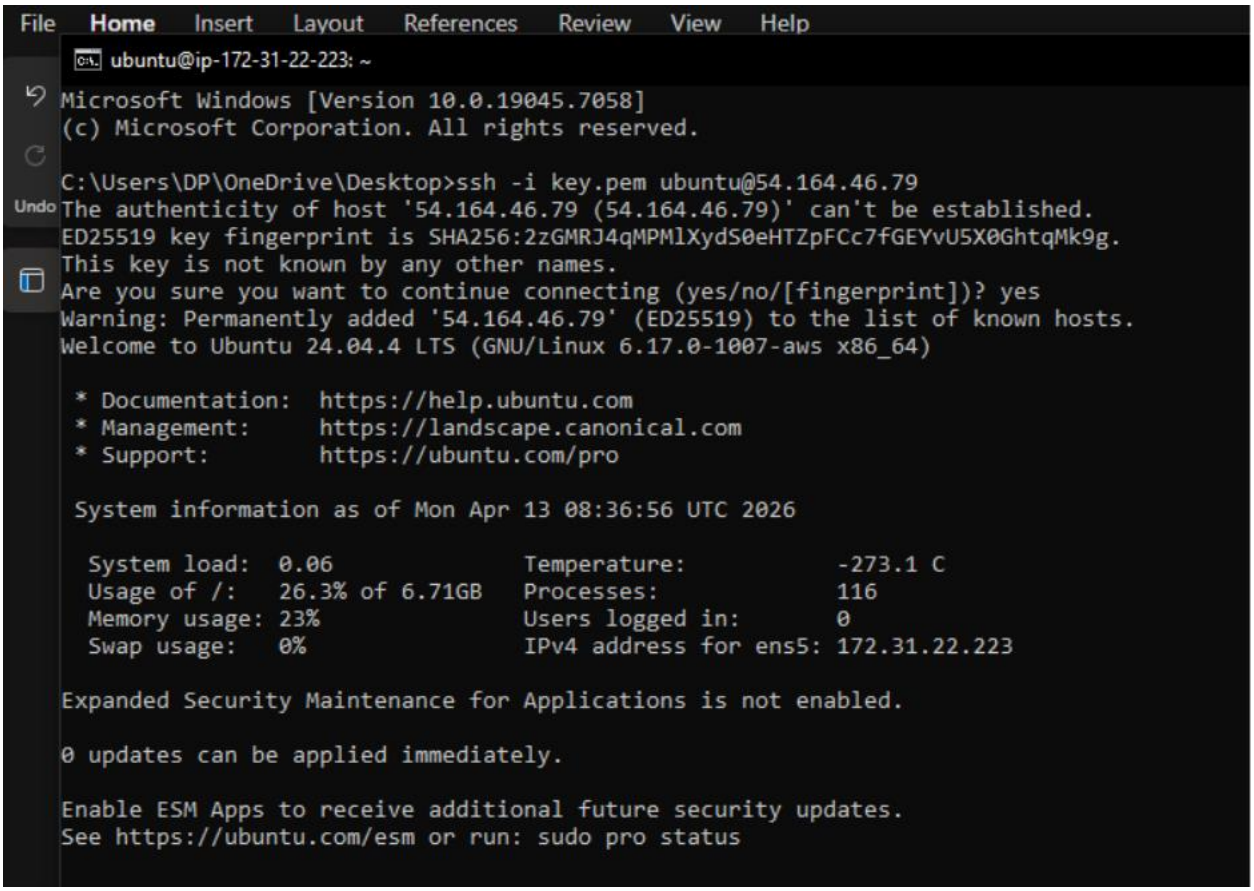
⚠ Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only. ×

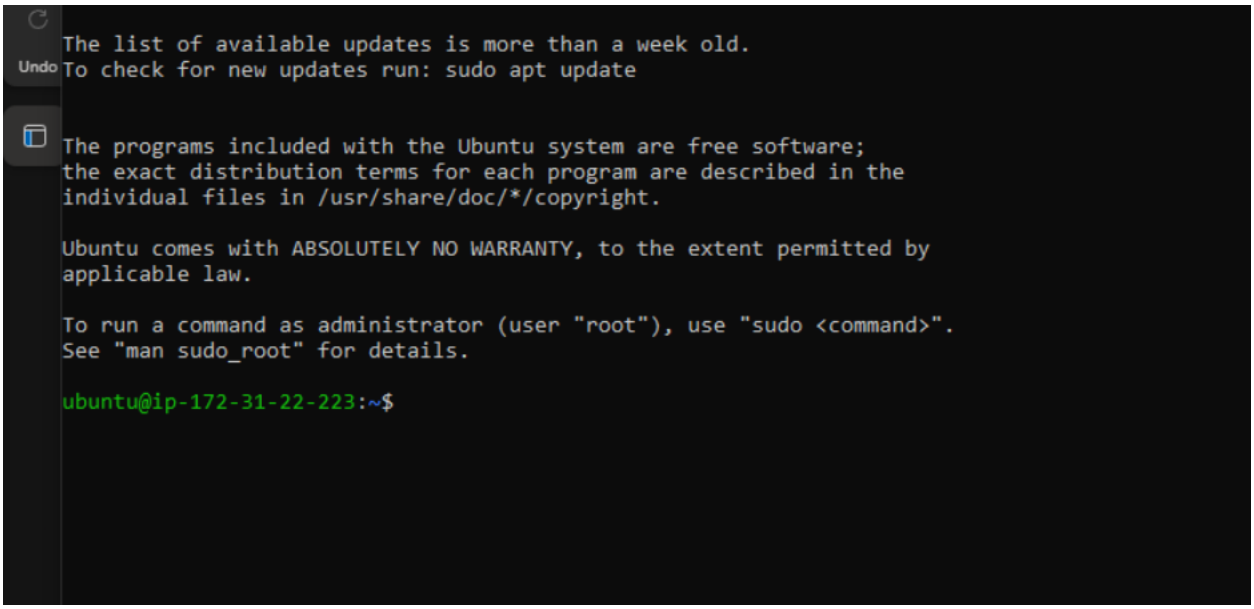



EC2 > Instances
Instances (1) Info
Last updated less than a minute ago
Connect
Instance state
Actions
Launch instances
Saved filter sets
Choose filter set
Find Instance by attribute or tag (case-sensitive)
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4 DNS
Public IPv4 ...
Elastic IP
Ubuntu instance
i-0a53ffcd1d10852bb
Running
t3.micro
Initializing
View alarms
us-east-1a
ec2-54-164-46-79.com...
54.164.46.79
Select an instance
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
CloudShell
Feedback
Privacy
Terms
Cookie preferences

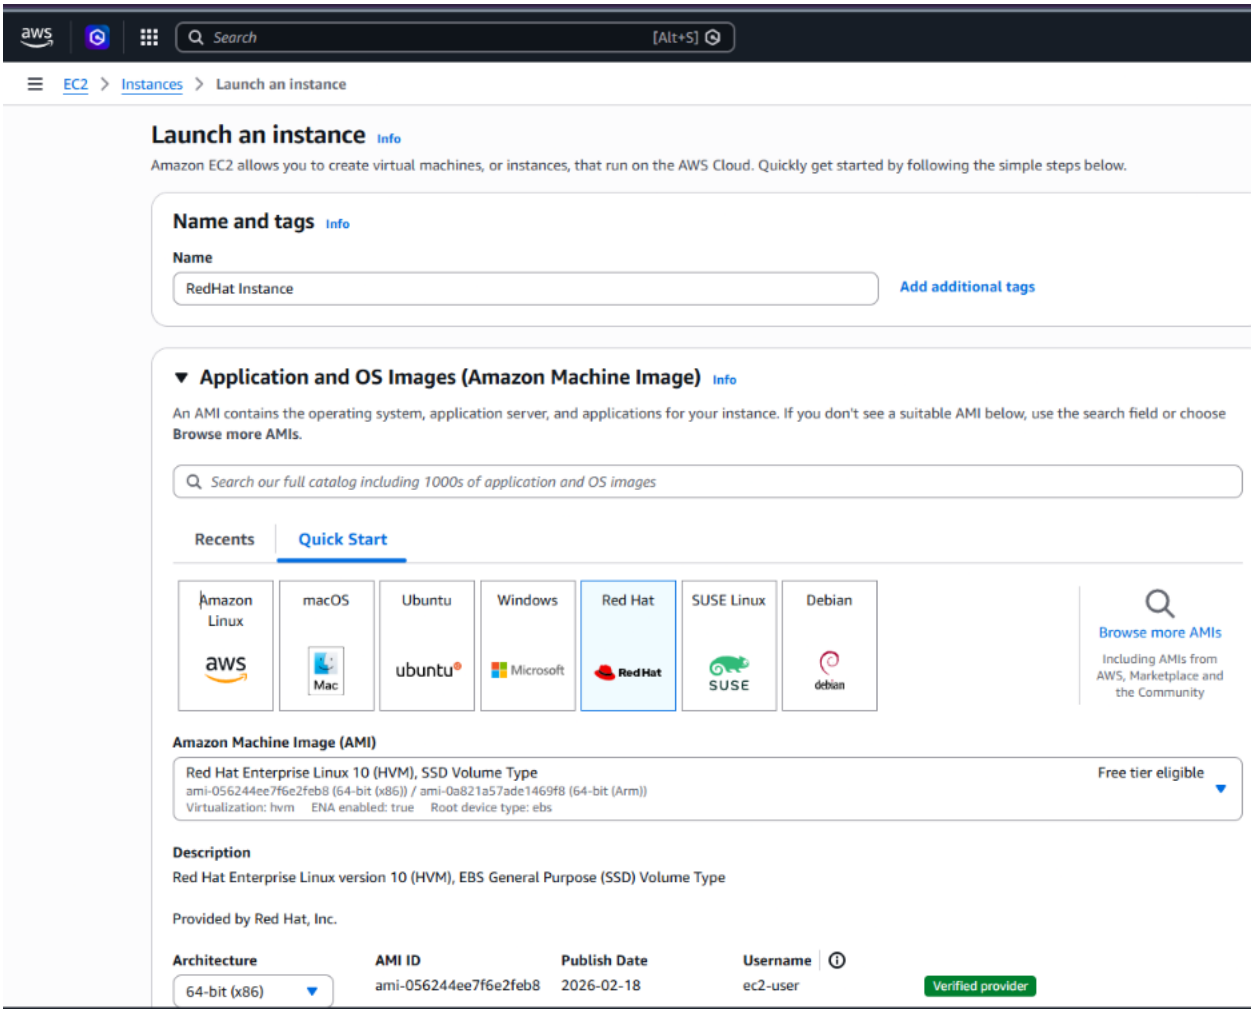

Instances (1/1) Info
Last updated 1 minute ago
Connect
Instance state
Actions
Launch instances
Saved filter sets
Choose filter set
Find Instance by attribute or tag (case-sensitive)
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4 DNS
Public IPv4 ...
Elastic IP
Ubuntu instance
i-0a53ffcd1d10852bb
Running
t3.micro
Initializing
View alarms
us-east-1a
ec2-54-164-46-79.com...
54.164.46.79
i-0a53ffcd1d10852bb (Ubuntu instance)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-0a53ffcd1d10852bb
IPv6 address
–
Hostname type
IP name: ip-172-31-22-223.ec2.internal
Answer private resource DNS name
IPv4 (A)
Auto-assigned IP address
Public IPv4 address
54.164.46.79 | open address
Instance state
Running
Private IP DNS name (IPv4 only)
ip-172-31-22-223.ec2.internal
Instance type
t3.micro
VPC ID
Private IPv4 addresses
172.31.22.223
Public DNS
ec2-54-164-46-79.compute-1.amazonaws.com | open address
Elastic IP addresses
–
AWS Compute Optimizer finding

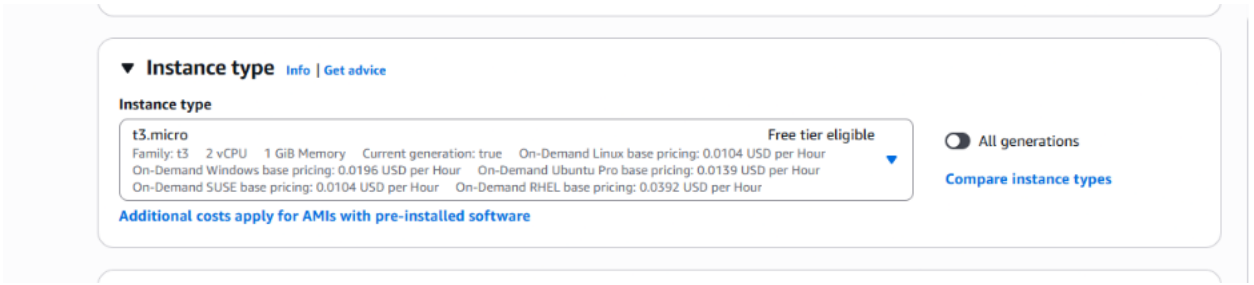

Search
[Alt+S]
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.7058]
(c) Microsoft Corporation. All rights reserved.
C:\Users\DP\OneDrive\Desktop>
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Template
Spot Requests
Savings Plans
Reserved Instanc
Dedicated Hosts
Capacity Reserva
Capacity Manage
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Last updated
1 minute ago
ect all
ect none
ert selection
Select
Size
3 KB
2 KB
2 KB
2 KB
3 KB
2 KB
2 KB
OneDrive - Persor
This PC
3D Objects
Desktop
Details
9 items

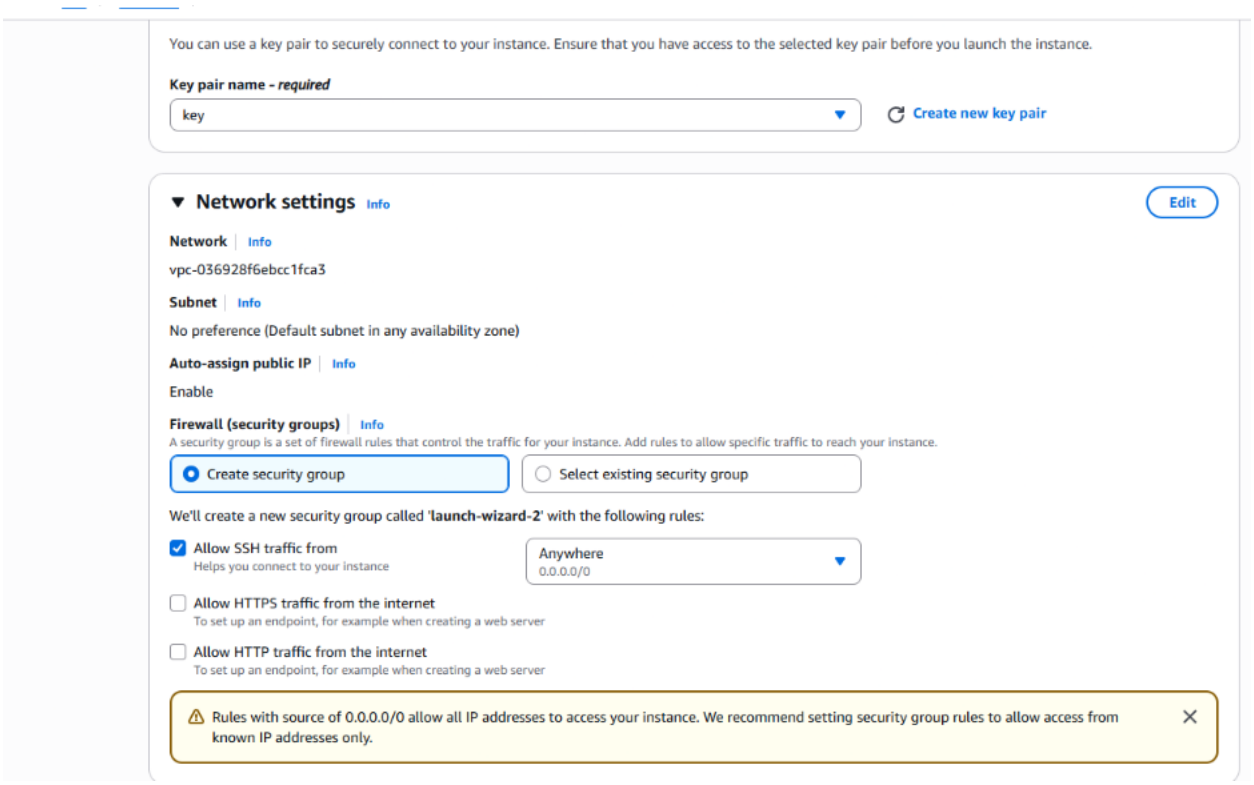

File
Home
Insert
Layout
References
Review
View
Help
ubuntu@ip-172-31-22-223: ~
Undo
Microsoft Windows [Version 10.0.19045.7058]
(c) Microsoft Corporation. All rights reserved.
C:\Users\DP\OneDrive\Desktop>ssh -i key.pem ubuntu@54.164.46.79
The authenticity of host '54.164.46.79 (54.164.46.79)' can't be established.
ED25519 key fingerprint is SHA256:2zGMRJ4qMPMlXydS0eHTZpFCc7fGEYvU5X0GhtqMk9g.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '54.164.46.79' (ED25519) to the list of known hosts.
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.17.0-1007-aws x86_64)
* Documentation: https://help.ubuntu.com
* Management: https://landscape.canonical.com
* Support: https://ubuntu.com/pro
System information as of Mon Apr 13 08:36:56 UTC 2026
System load: 0.06
Usage of /: 26.3% of 6.71GB
Memory usage: 23%
Swap usage: 0%
Temperature: -273.1 C
Processes: 116
Users logged in: 0
IPv4 address for ens5: 172.31.22.223
Expanded Security Maintenance for Applications is not enabled.
0 updates can be applied immediately.
Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

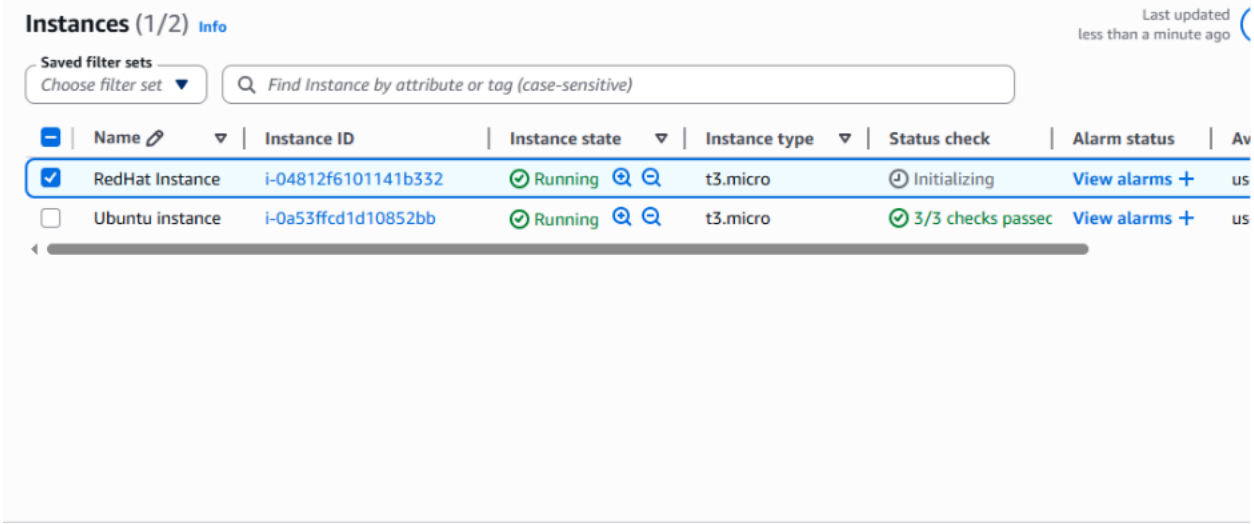

Undo
The list of available updates is more than a week old.
To check for new updates run: sudo apt update
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
ubuntu@ip-172-31-22-223:~$

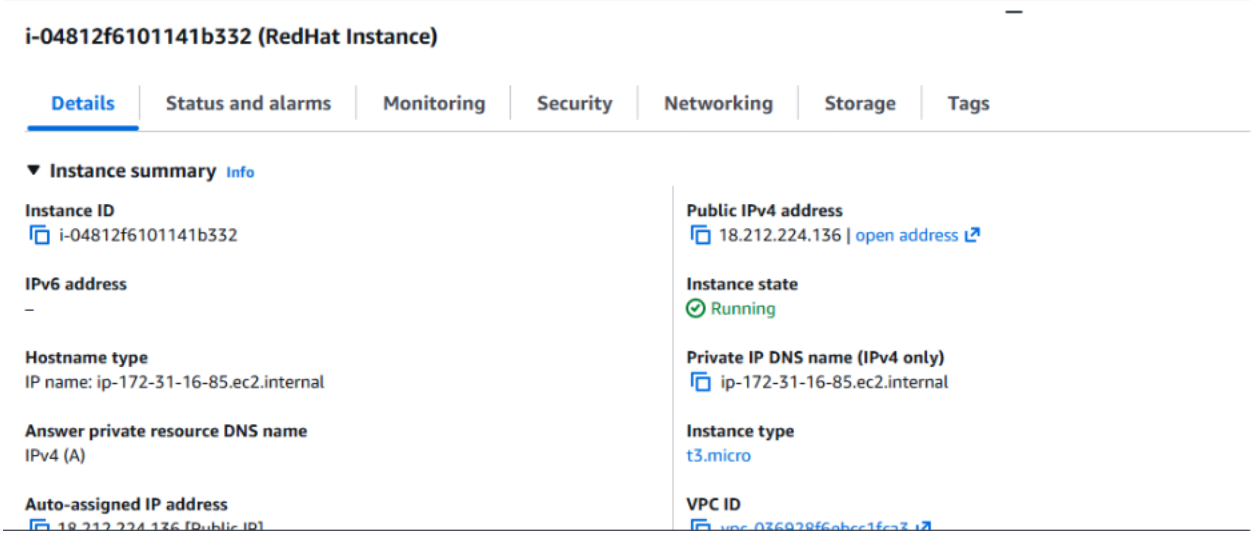
Task 3: Launch the Red Hat Instance.

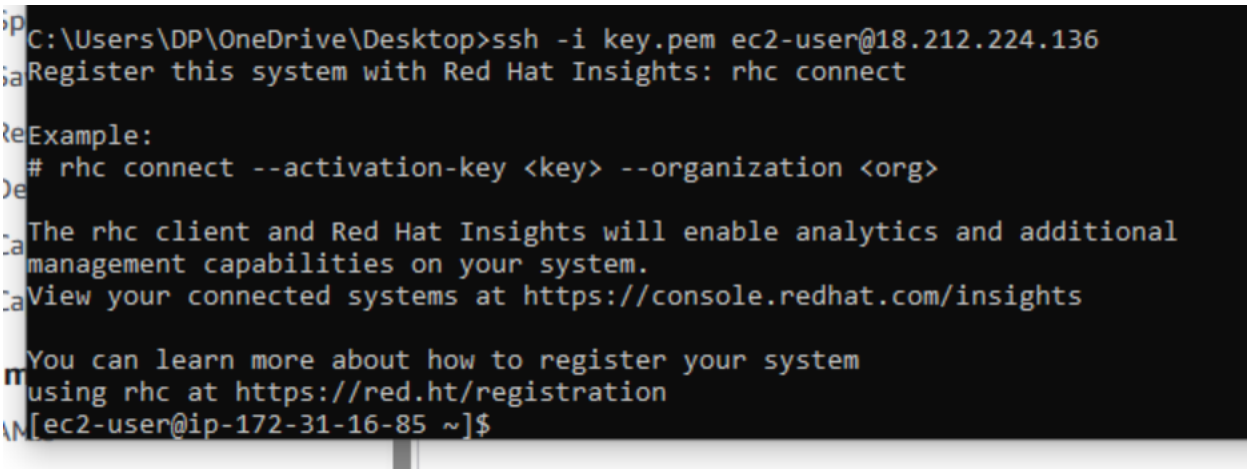




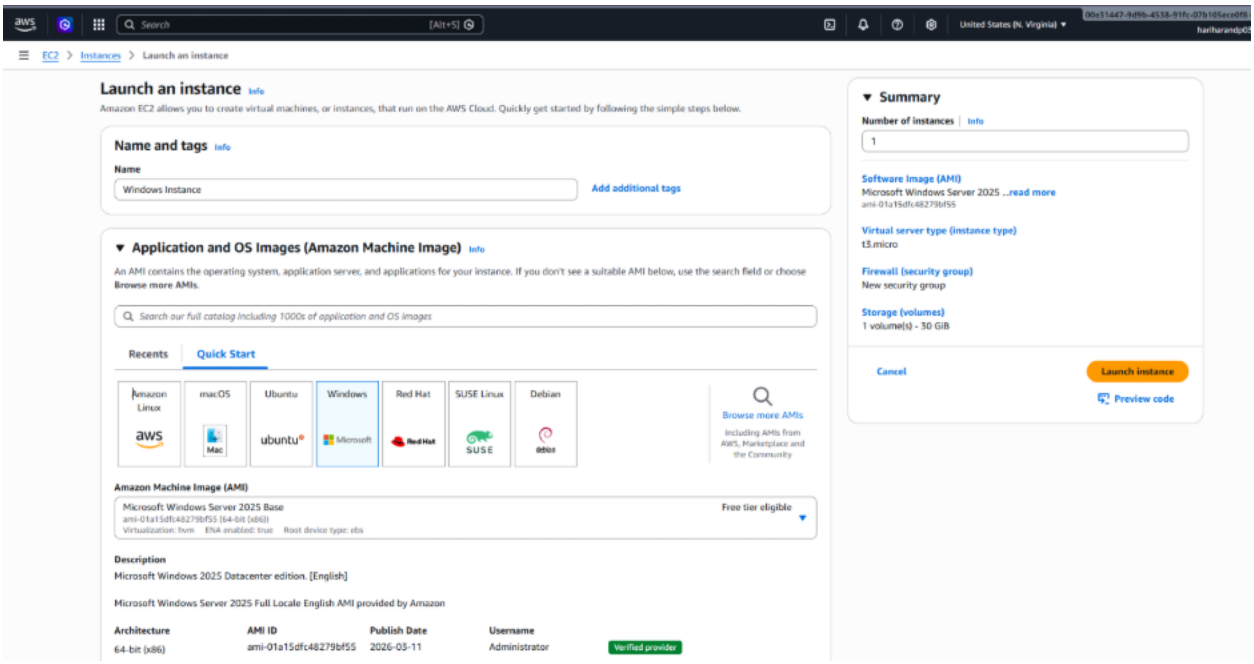

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
Key pair name - required
key
Create new key pair
Network settings Info
Edit
Network Info
vpc-036928f6ebcc1fca3
Subnet Info
No preference (Default subnet in any availability zone)
Auto-assign public IP Info
Enable
Firewall (security groups) Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Create security group
Select existing security group
We'll create a new security group called 'launch-wizard-2' with the following rules:
Allow SSH traffic from
Helps you connect to your instance
Anywhere
0.0.0.0/0
Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server
Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server
Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.







Task 4: Launch the Windows Instance.



Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Key pair (login) Info

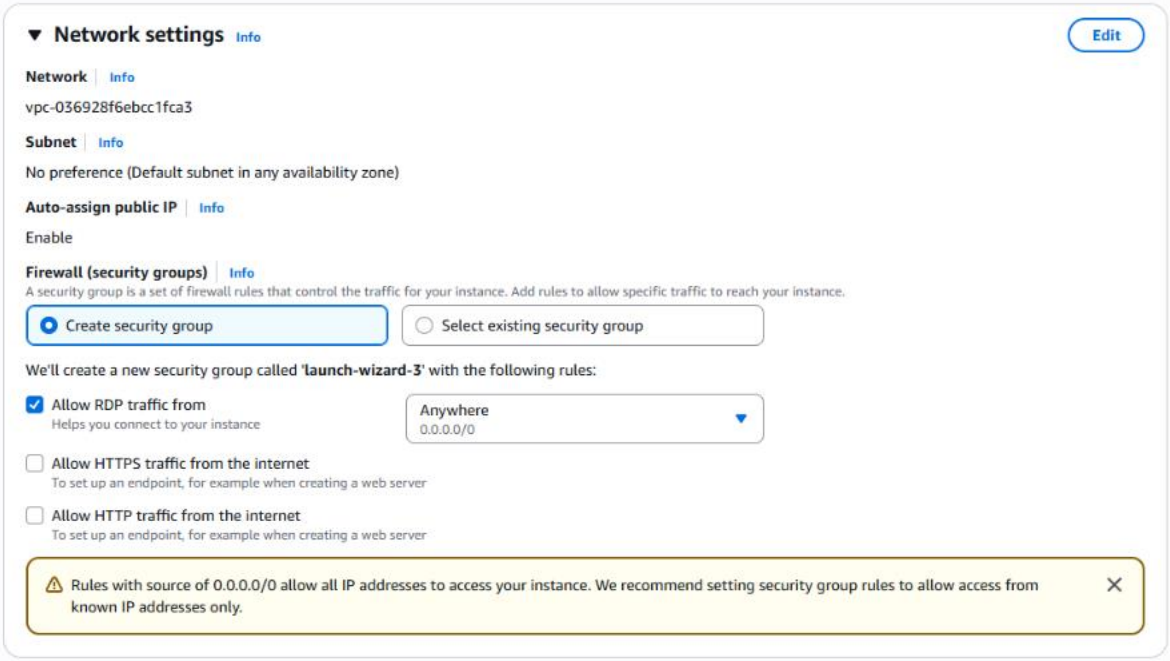
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

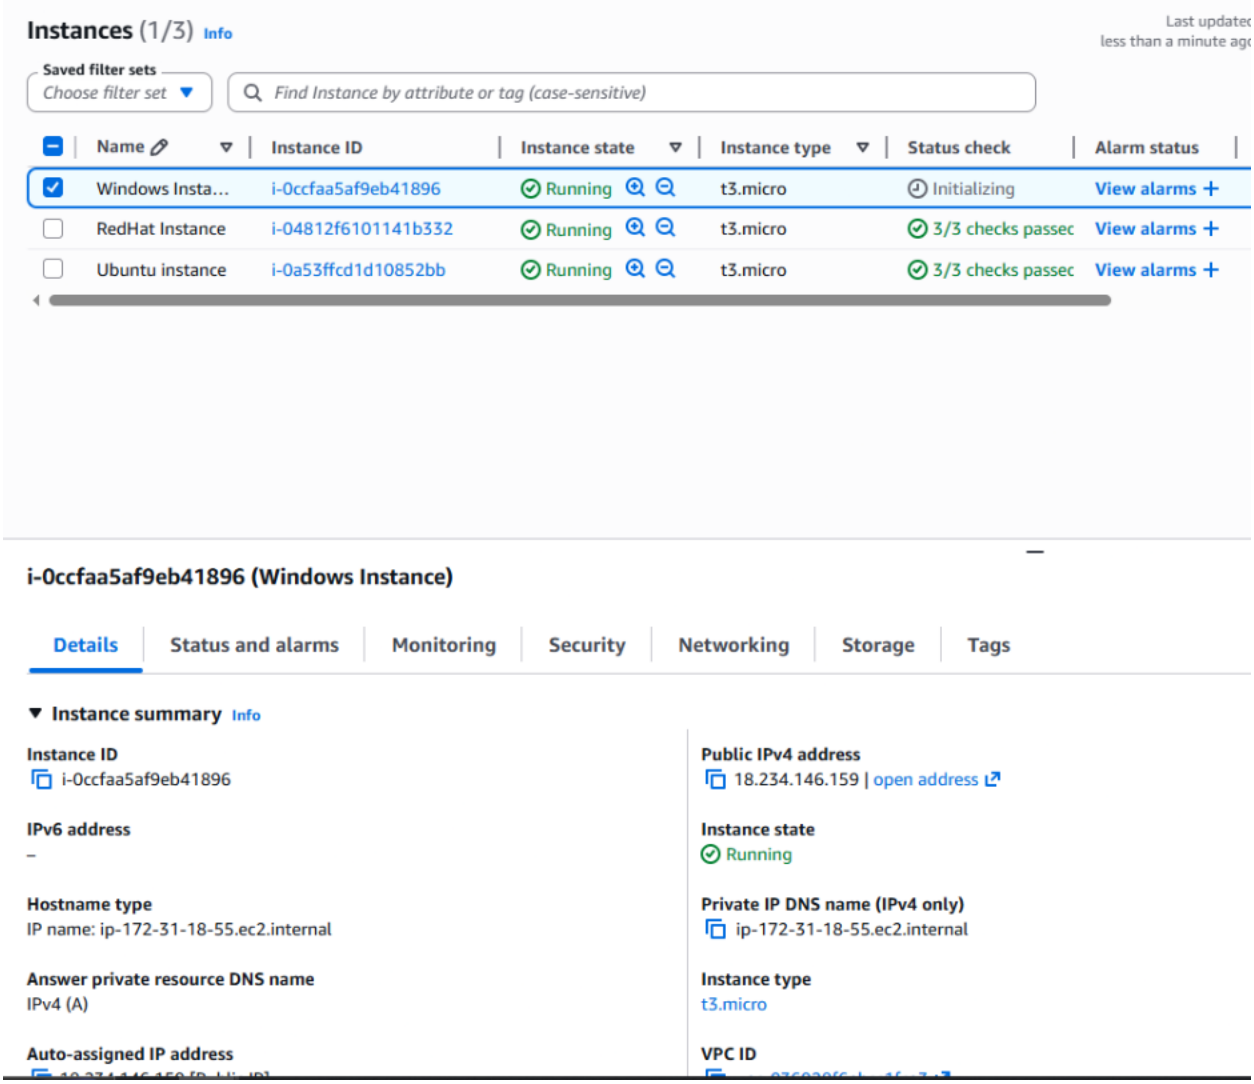
Key pair name - *required*

key

Create new key pair

For Windows instances, you use a key pair to decrypt the administrator password. You then use the decrypted password to connect to your instance.


Network settings Info
Edit
Network Info
vpc-036928f6ebcc1fca3
Subnet Info
No preference (Default subnet in any availability zone)
Auto-assign public IP Info
Enable
Firewall (security groups) Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Create security group
Select existing security group
We'll create a new security group called 'launch-wizard-3' with the following rules:
Allow RDP traffic from
Helps you connect to your instance
Anywhere
0.0.0.0/0
Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server
Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server
Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.


Instances (1/3) Info
Last updated less than a minute ago
Saved filter sets
Choose filter set
Find Instance by attribute or tag (case-sensitive)
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Windows Insta...
i-0ccfaa5af9eb41896
Running
t3.micro
Initializing
View alarms +
RedHat Instance
i-04812f6101141b332
Running
t3.micro
3/3 checks passed
View alarms +
Ubuntu instance
i-0a53ffcd1d10852bb
Running
t3.micro
3/3 checks passed
View alarms +
i-0ccfaa5af9eb41896 (Windows Instance)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-0ccfaa5af9eb41896
IPv6 address
–
Hostname type
IP name: ip-172-31-18-55.ec2.internal
Answer private resource DNS name
IPv4 (A)
Auto-assigned IP address
Public IPv4 address
18.234.146.159 | open address
Instance state
Running
Private IP DNS name (IPv4 only)
ip-172-31-18-55.ec2.internal
Instance type
t3.micro
VPC ID

Connect Info

Connect to an instance using the browser-based client.

Instance ID	VPC ID	Security groups	IAM role
i-0ccfaa5af9eb41896 (Windows Instance)	vpc-036928f6ebcc1fca3	sg-0e27efbae2bea33e9 (launch-wizard-3)	-

SSM Session Manager | **RDP client** | EC2 serial console

Record RDP connections
You can now record RDP connections using AWS Systems Manager just-in-time node access. Learn more

Try for free

Instance ID
i-0ccfaa5af9eb41896 (Windows Instance)

Connection Type

- (•) Connect using RDP client
  Download a file to use with your RDP client and retrieve your password.
- ( ) Connect using Fleet Manager
  To connect to the instance using Fleet Manager Remote Desktop, the SSM Agent must be installed and running on the instance. For more information, see Working with SSM Agent

You can connect to your Windows instance using a remote desktop client of your choice, and by downloading and running the RDP shortcut file below:

Download remote desktop file

When prompted, connect to your instance using the following username and password:

Public DNS
ec2-18-234-146-159.compute-1.amazonaws.com

Username Info
Administrator

Password Get password

If you've joined your instance to a directory, you can use your directory credentials to connect to your instance.

Cancel

Get Windows password Info

Use your private key to retrieve and decrypt the initial Windows administrator password for this instance.

Instance ID
i-0ccfaa5af9eb41896 (Windows Instance)

Key pair associated with this instance
key

Private key
Either upload your private key file or copy and paste its contents into the field below.

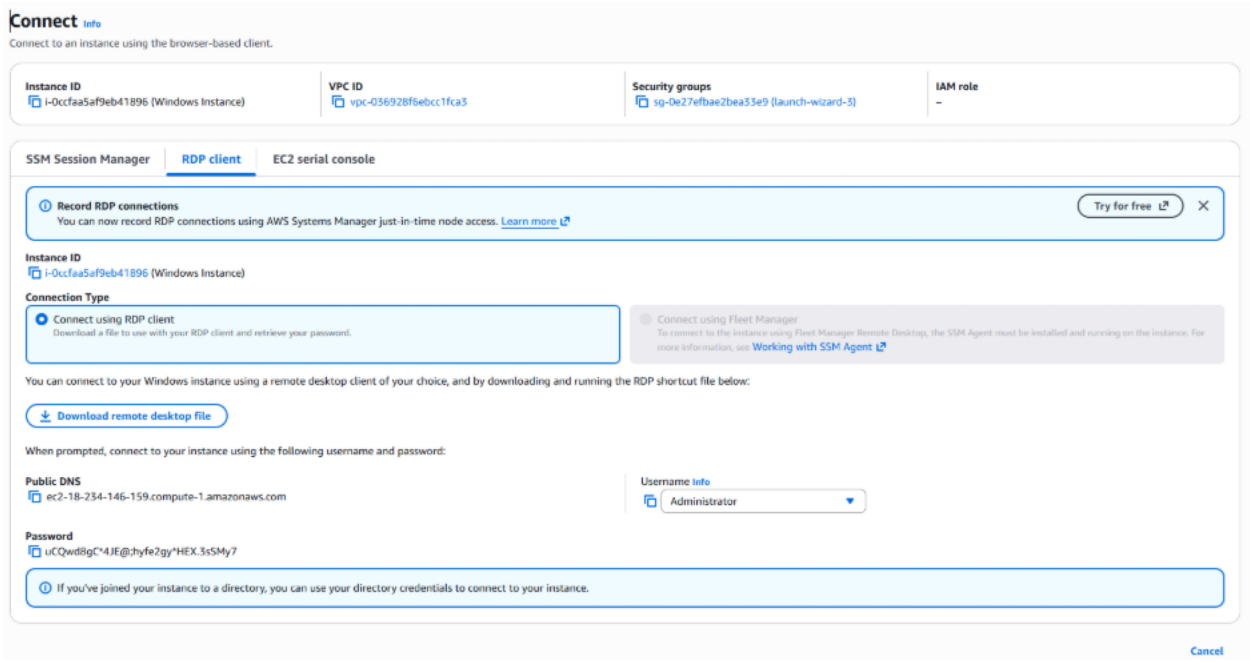
Upload private key file


key.pem
1.67 KB

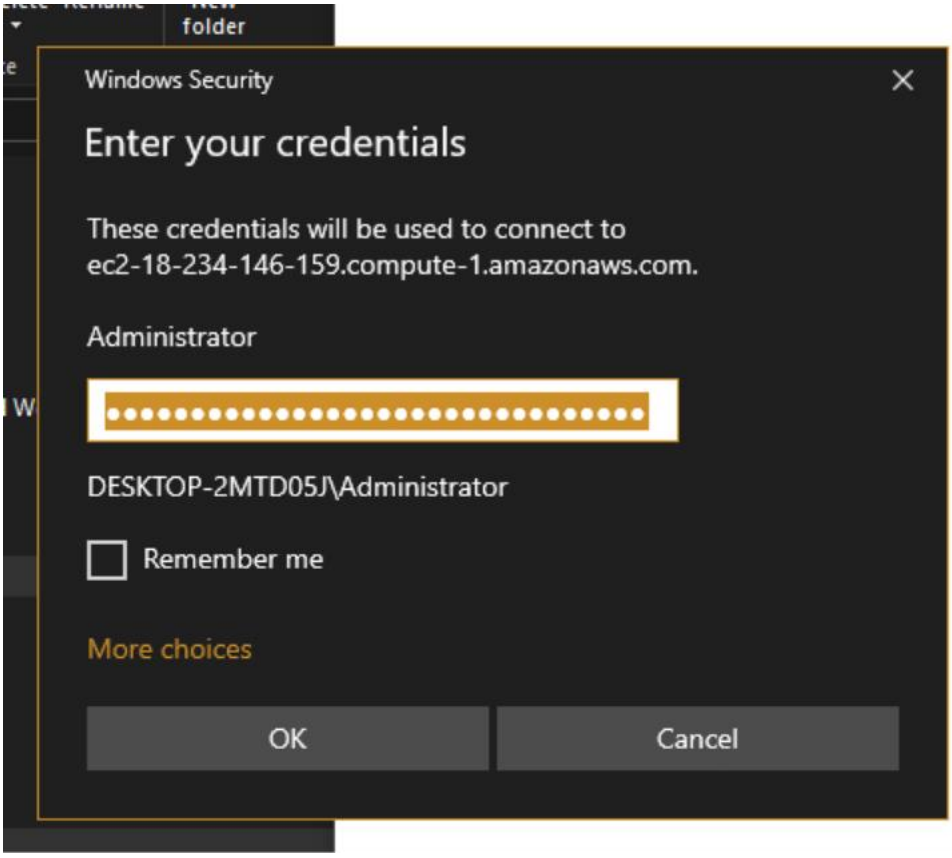
Private key contents

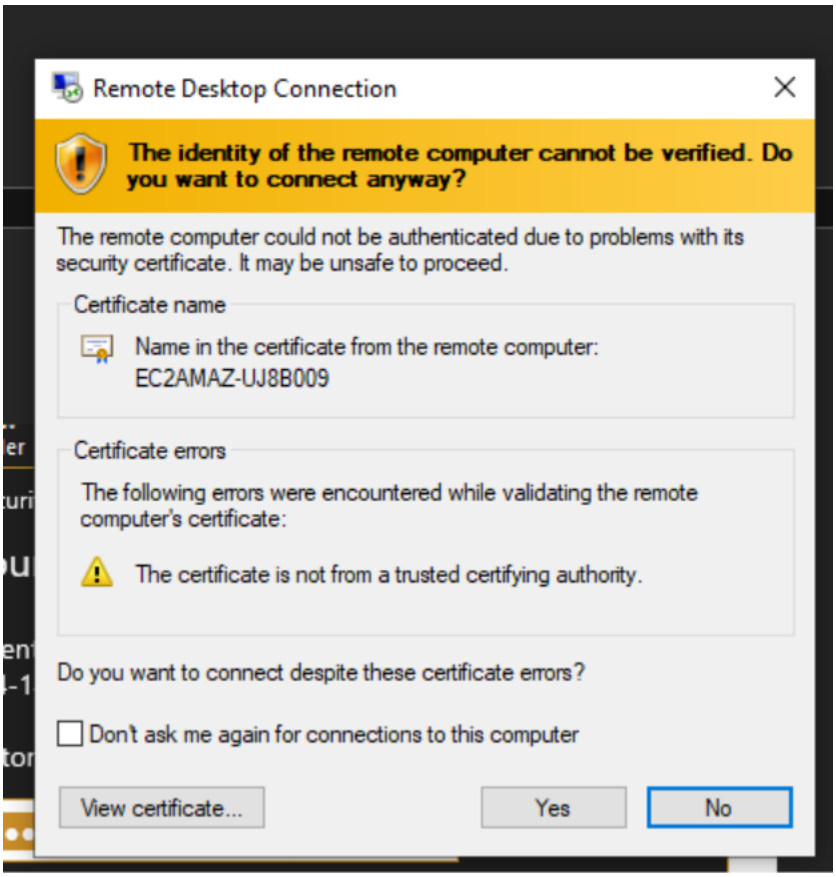
```
-----BEGIN RSA PRIVATE KEY-----
MIIEogIBAAKCAQEAq51eVGRkWa+J+41KElbQFmQDR8Go5mYfRx0Mh27bcNuUdusM
FjyaWb2Mjo9QIYZpOfzU3kcQNRI9W9Q/28qbZdyqbJQv0D8BX3bYrUcLXg5tUIw7
VN7WZDjBjccVAXtiwdpY57f9TgR9PNEaxY9pHkY4BafbZ83B2Pa1svIbEjGwgIIR
HRhTsNA20uq7GZwgNvRMw6pK6HxRk8a13DwoIKO9Pntf3GrKZ165kQo3rzFLq01N
azjVhnGwanN/LfgJ9bxiLhsc3+l4FvC1vkqSniu4U3GX71crg0Ydb1mwmlgjPLC2
hQFiretXLGUtt6JOikVUCXiCn4f0xb93vFZeiwIDAQABAoIBAA9hsXy66sunEiT7
yvHN2iTHingumbeENOixzjBXvd7er1qi59IFhuSvl810rtztPqsrJwIKTt/4pvlom
```

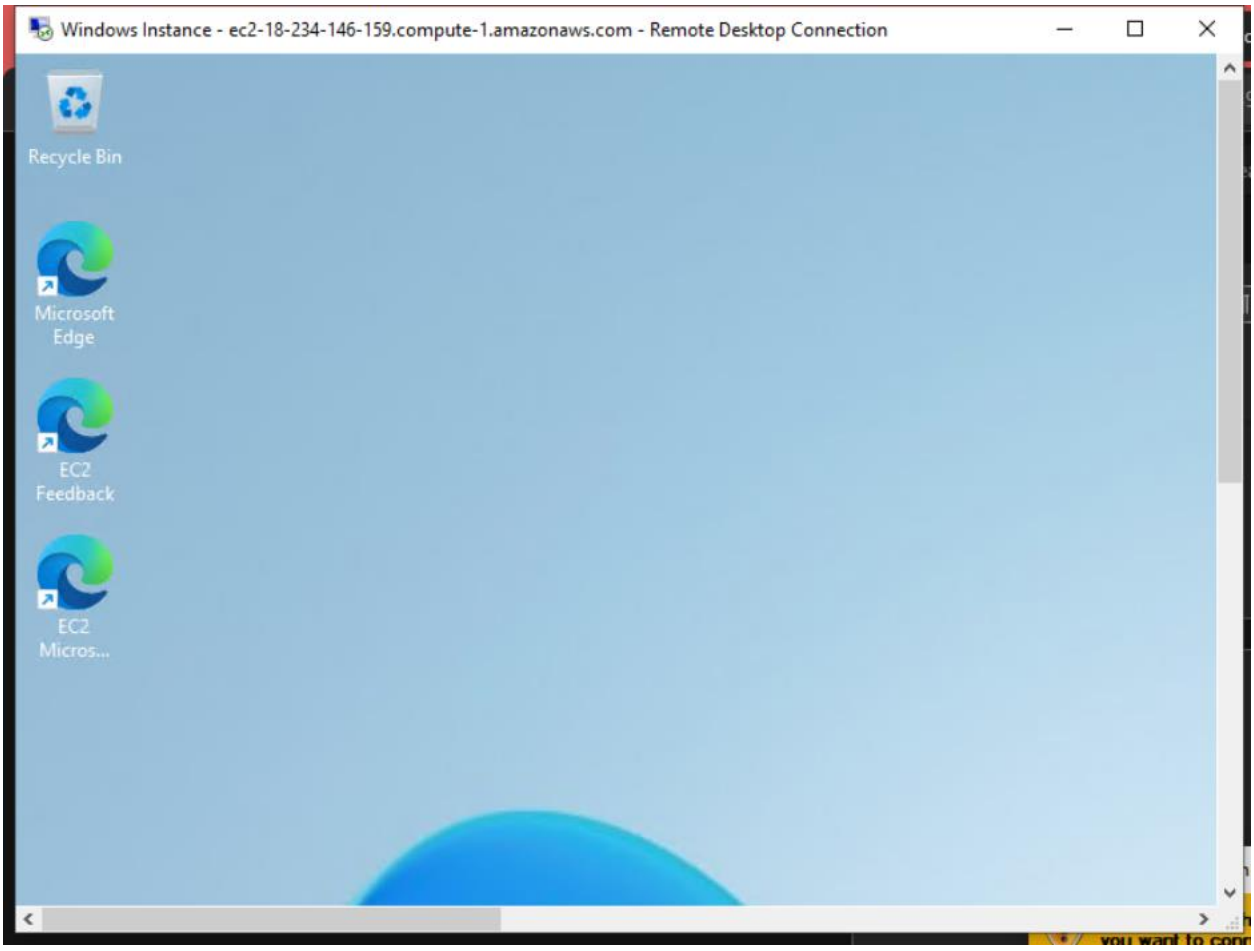
Cancel | **Decrypt password**


Connect Info
Connect to an instance using the browser-based client.
Instance ID
i-0ccfaa5af9eb41896 (Windows Instance)
VPC ID
vpc-036928f6ebcc1fca3
Security groups
sg-0e27efbae2bea33e9 (launch-wizard-3)
IAM role
-
SSM Session Manager
RDP client
EC2 serial console
Record RDP connections
You can now record RDP connections using AWS Systems Manager just-in-time node access. Learn more
Try for free
Instance ID
i-0ccfaa5af9eb41896 (Windows Instance)
Connection Type
Connect using RDP client
Download a file to use with your RDP client and retrieve your password.
Connect using Fleet Manager
To connect to the instance using Fleet Manager Remote Desktop, the SSM Agent must be installed and running on the instance. For more information, see Working with SSM Agent
You can connect to your Windows instance using a remote desktop client of your choice, and by downloading and running the RDP shortcut file below:
Download remote desktop file
When prompted, connect to your instance using the following username and password:
Public DNS
ec2-18-234-146-159.compute-1.amazonaws.com
Username Info
Administrator
Password
uCQwd8gC*4JE@;hyfe2gy*HEX.3sSMy7
If you've joined your instance to a directory, you can use your directory credentials to connect to your instance.
Cancel

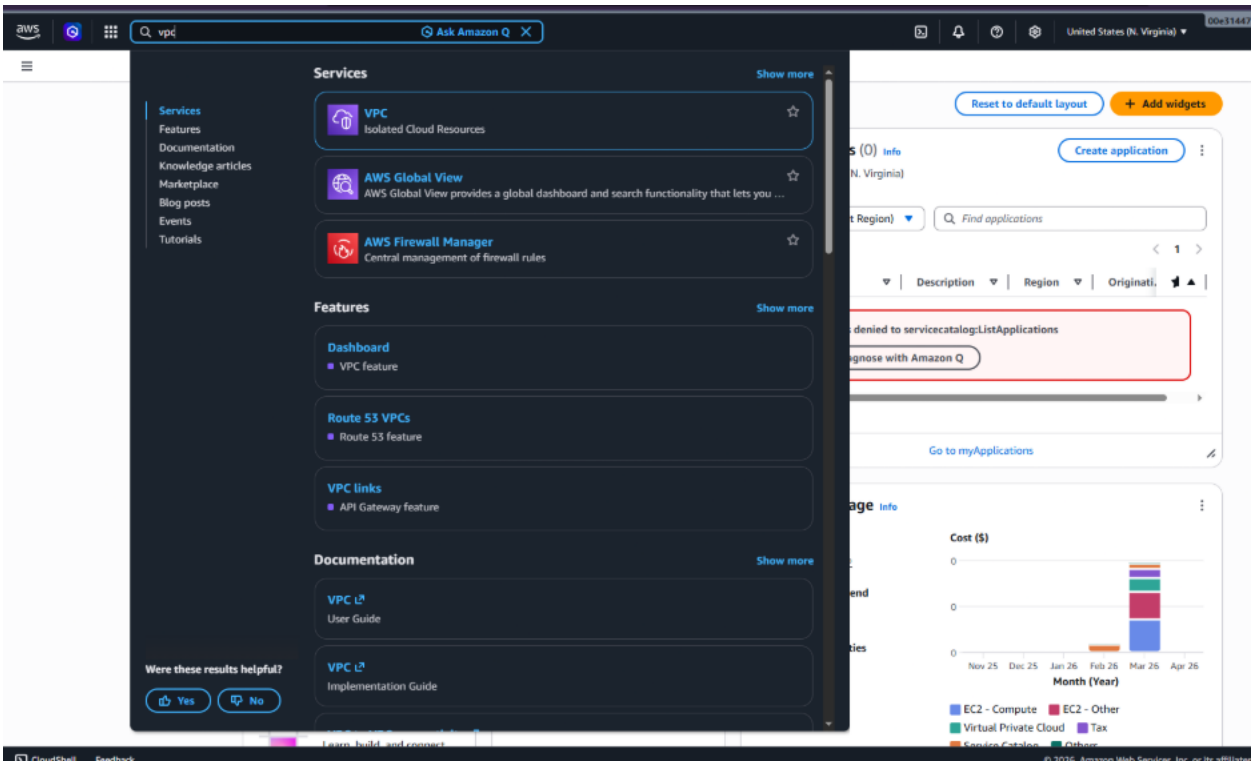

Windows Instance


folder
Windows Security
Enter your credentials
These credentials will be used to connect to ec2-18-234-146-159.compute-1.amazonaws.com.
Administrator
DESKTOP-2MTD05J\Administrator
Remember me
More choices
OK
Cancel


Remote Desktop Connection
The identity of the remote computer cannot be verified. Do you want to connect anyway?
The remote computer could not be authenticated due to problems with its security certificate. It may be unsafe to proceed.
Certificate name
Name in the certificate from the remote computer:
EC2AMAZ-UJ8B009
Certificate errors
The following errors were encountered while validating the remote computer's certificate:
The certificate is not from a trusted certifying authority.
Do you want to connect despite these certificate errors?
Don't ask me again for connections to this computer
View certificate...
Yes
No



Implement Virtual Private Cloud



Create VPC Info

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create Info

Create only the VPC resource or the VPC and other networking resources.

- (●) VPC only
- ( ) VPC and more

Name tag - *optional*

Creates a tag with a key of 'Name' and a value that you specify.

new-VPC

IPv4 CIDR block Info

- (●) IPv4 CIDR manual input
- ( ) IPAM-allocated IPv4 CIDR block

IPv4 CIDR

192.168.0.0/16

CIDR block size must be between /16 and /28.

IPv6 CIDR block Info

- (●) No IPv6 CIDR block
- ( ) IPAM-allocated IPv6 CIDR block
- ( ) Amazon-provided IPv6 CIDR block
- ( ) IPv6 CIDR owned by me

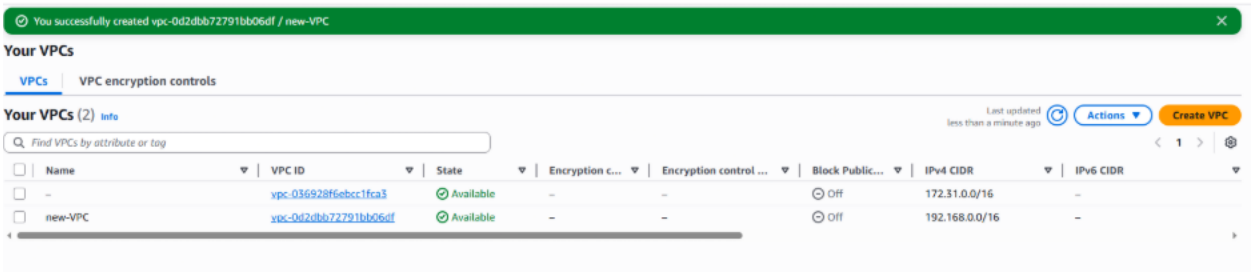
Tenancy Info

Default

VPC encryption control ($) Info

Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. Additional charges apply

- (●) None
- ( ) Monitor mode — See which resources in your VPC are unencrypted but allow the creation of unencrypted resources.
- ( ) Enforce mode — Requires all resources, except exclusions, in your VPC to be encryption-capable and blocks creation of unencrypted resources.


You successfully created vpc-0d2dbb72791bb06df / new-VPC
Your VPCs
VPCs
VPC encryption controls
Your VPCs (2) Info
Last updated less than a minute ago
Actions
Create VPC
Find VPCs by attribute or tag
1
Name
VPC ID
State
Encryption c...
Encryption control ...
Block Public...
IPv4 CIDR
IPv6 CIDR
–
vpc-036928f6ebcc1fca3
Available
–
–
Off
172.31.0.0/16
–
new-VPC
vpc-0d2dbb72791bb06df
Available
–
–
Off
192.168.0.0/16
–

Create subnet Info

VPC

VPC ID
Create subnets in this VPC.

vpc-0b71dbddee3095c76 (new-vpc)

Associated VPC CIDRs

IPv4 CIDRs
192.168.0.0/16

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.

public-subnet

The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.

United States (N. Virginia) / use1-az4 (us-east-1a)

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

192.168.0.0/16

IPv4 subnet CIDR block

192.168.1.0/24 256 IPs

Tags - *optional*

Key	Value - *optional*	
Name	public-subnet	Remove

Add new tag

You can add 49 more tags.

Remove

Add new subnet

Cancel Create subnet

Subnet 2 of 2

Subnet name

Create a tag with a key of 'Name' and a value that you specify.

private-subnet

The name can be up to 256 characters long.

Availability Zone Info

Choose the zone in which your subnet will reside, or let Amazon choose one for you.

United States (N. Virginia) / use1-az4 (us-east-1a)

IPv4 VPC CIDR block Info

Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

192.168.0.0/16

IPv4 subnet CIDR block

192.168.2.0/24 256 IPs

▼ **Tags - *optional***

Key	Value - *optional*	
Name	private-subnet	Remove

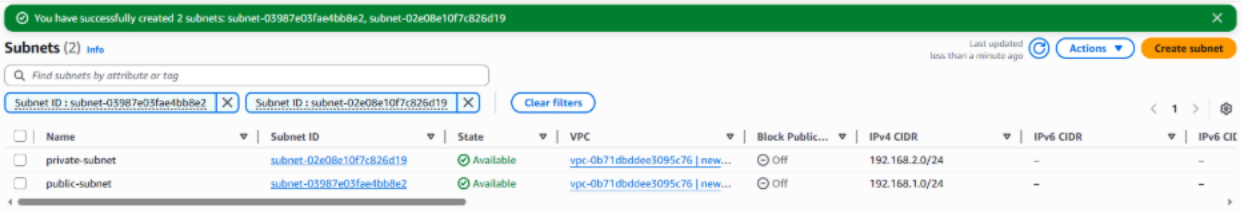
Add new tag

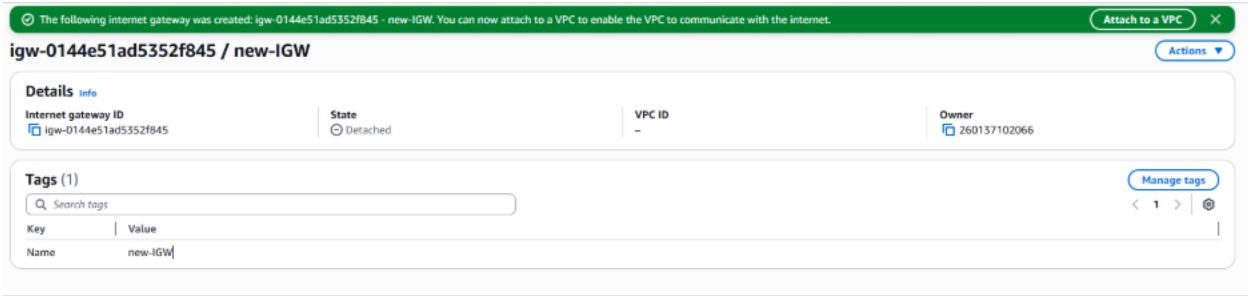
You can add 49 more tags.

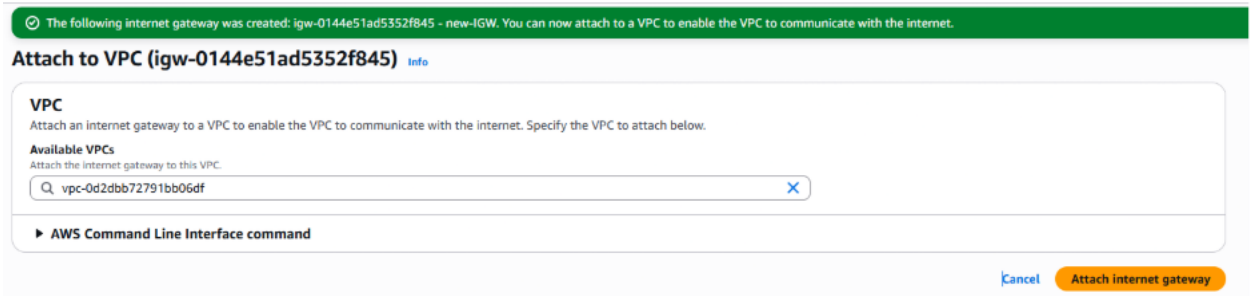
Remove

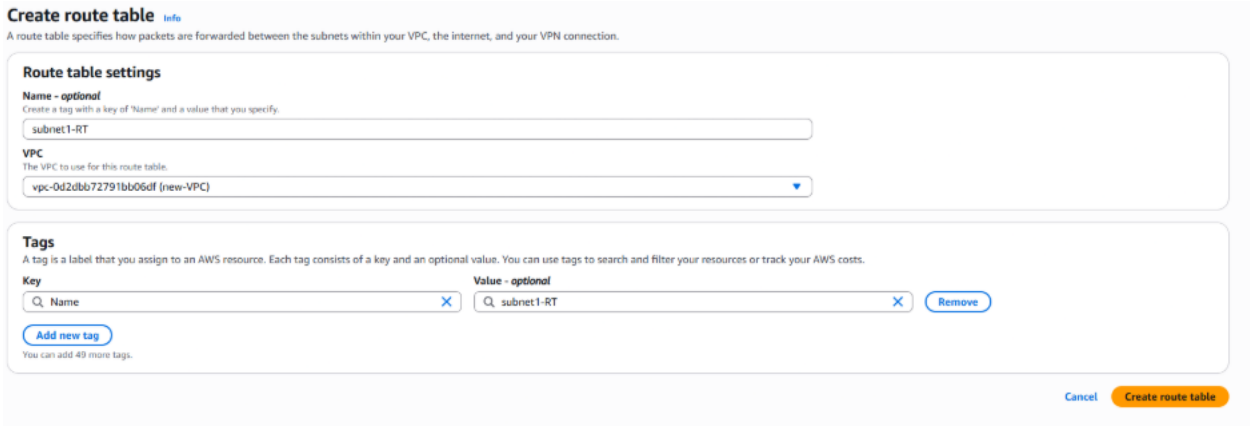
Add new subnet

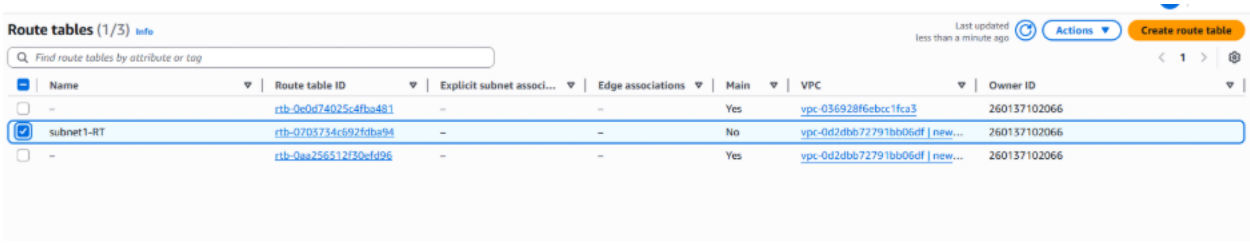
Cancel Create subnet

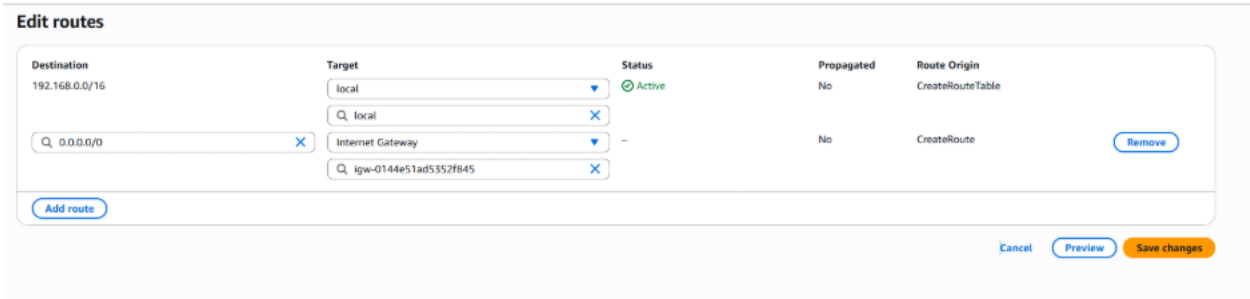


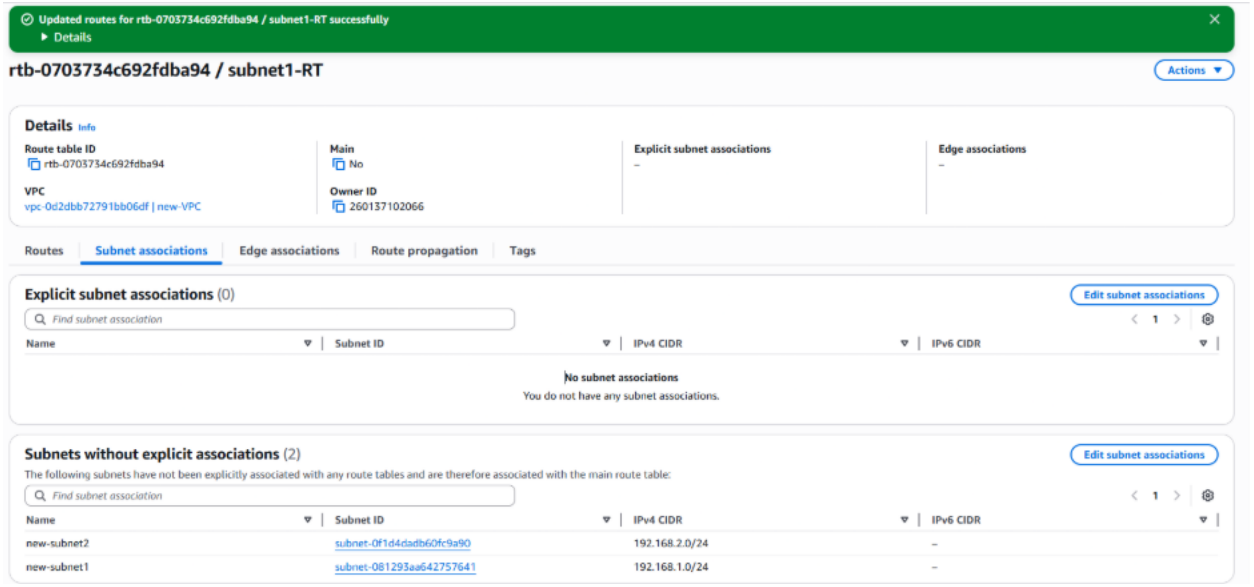

The following internet gateway was created: igw-0144e51ad5352f845 - new-IGW. You can now attach to a VPC to enable the VPC to communicate with the internet.
Attach to a VPC
igw-0144e51ad5352f845 / new-IGW
Actions
Details Info
Internet gateway ID
igw-0144e51ad5352f845
State
Detached
VPC ID
–
Owner
260137102066
Tags (1)
Manage tags
Search tags
Key
Value
Name
new-IGW

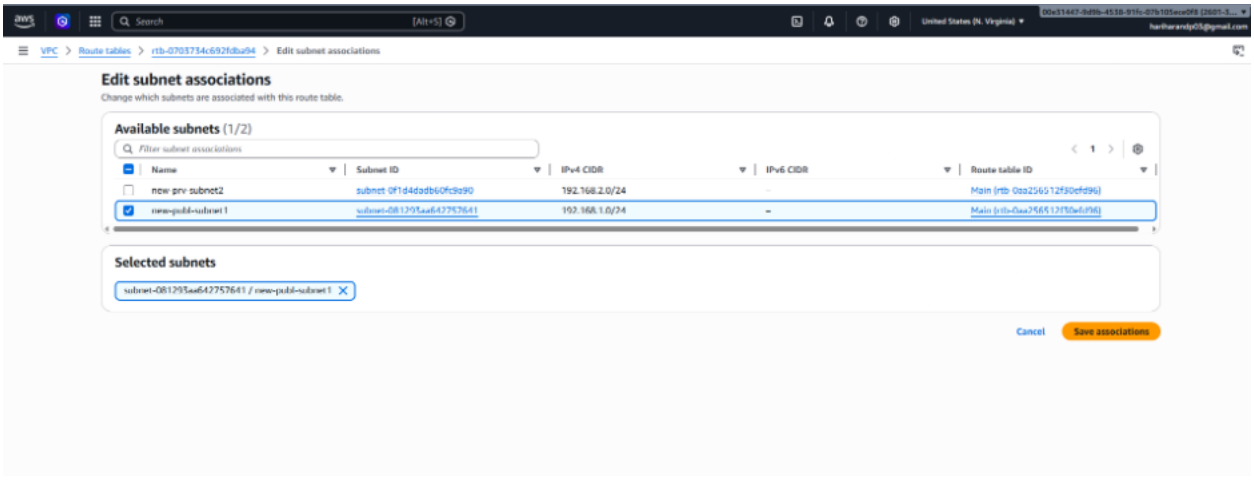

The following internet gateway was created: igw-0144e51ad5352f845 - new-IGW. You can now attach to a VPC to enable the VPC to communicate with the internet.
Attach to VPC (igw-0144e51ad5352f845) Info
VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.
Available VPCs
Attach the internet gateway to this VPC.
vpc-0d2dbb72791bb06df
AWS Command Line Interface command
Cancel
Attach internet gateway

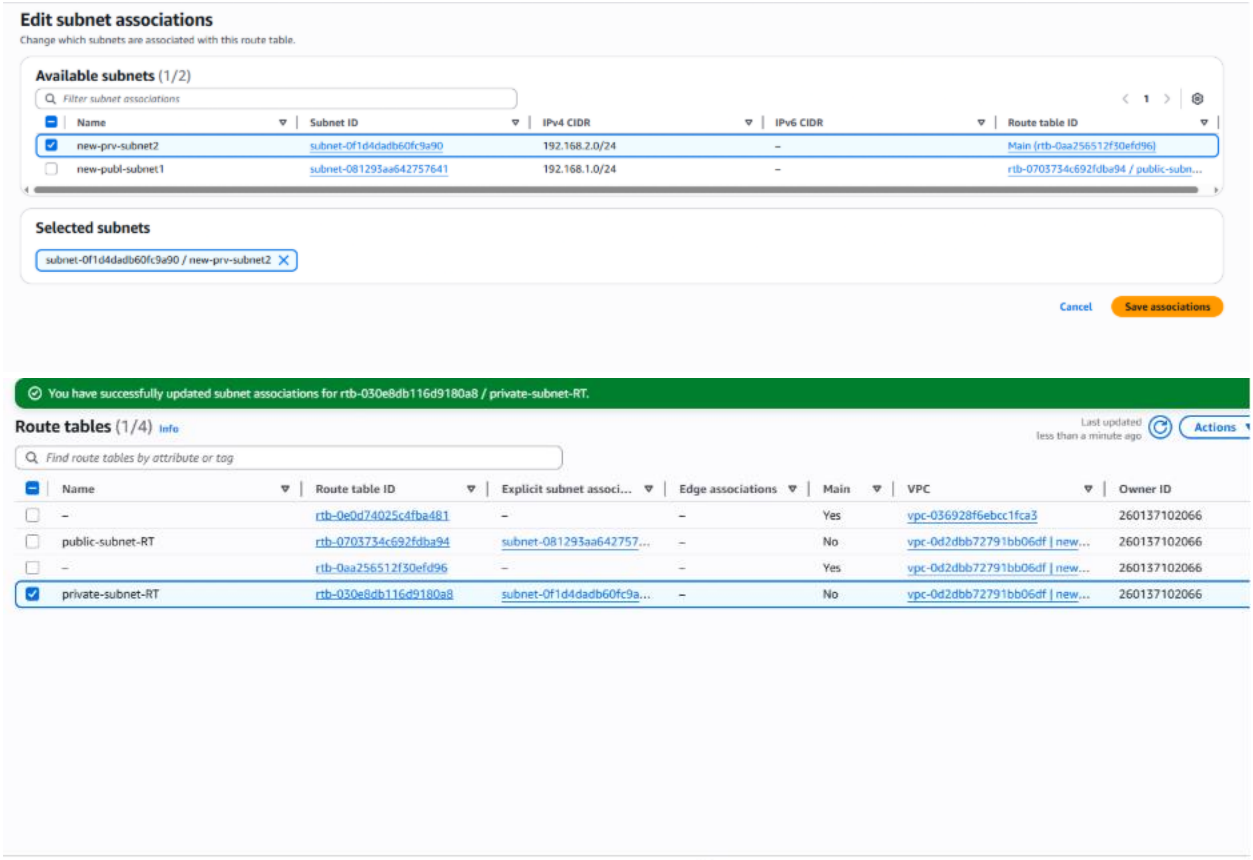

Create route table Info
A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.
Route table settings
Name - optional
Create a tag with a key of 'Name' and a value that you specify.
subnet1-RT
VPC
The VPC to use for this route table.
vpc-0d2dbb72791bb06df (new-VPC)
Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
Key
Value - optional
Name
subnet1-RT
Remove
Add new tag
You can add 49 more tags.
Cancel
Create route table


Route tables (1/3) Info
Last updated less than a minute ago
Actions
Create route table
Find route tables by attribute or tag
Name
Route table ID
Explicit subnet associ...
Edge associations
Main
VPC
Owner ID
rtb-0e0d74025c4fba481
Yes
vpc-036928f6ebcc1fca3
260137102066
subnet1-RT
rtb-0703734c692fdba94
No
vpc-0d2dbb72791bb06df | new...
260137102066
rtb-0aa256512f30efd96
Yes
vpc-0d2dbb72791bb06df | new...
260137102066

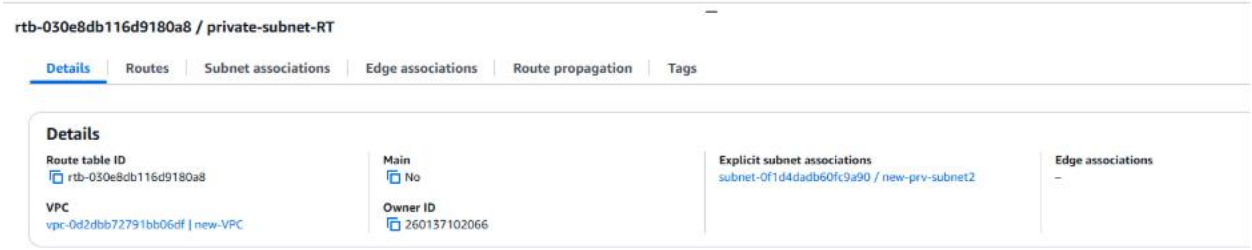

Edit routes
Destination
Target
Status
Propagated
Route Origin
192.168.0.0/16
local
Active
No
CreateRouteTable
local
0.0.0.0/0
Internet Gateway
No
CreateRoute
Remove
igw-0144e51ad5352f845
Add route
Cancel
Preview
Save changes


Updated routes for rtb-0703734c692fdba94 / subnet1-RT successfully
Details
rtb-0703734c692fdba94 / subnet1-RT
Actions
Details Info
Route table ID
rtb-0703734c692fdba94
Main
No
Explicit subnet associations
–
Edge associations
–
VPC
vpc-0d2dbb72791bb06df | new-VPC
Owner ID
260137102066
Routes
Subnet associations
Edge associations
Route propagation
Tags
Explicit subnet associations (0)
Edit subnet associations
Find subnet association
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
No subnet associations
You do not have any subnet associations.
Subnets without explicit associations (2)
Edit subnet associations
The following subnets have not been explicitly associated with any route tables and are therefore associated with the main route table:
Find subnet association
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
new-subnet2
subnet-0f1d4dadb60fc9a90
192.168.2.0/24
–
new-subnet1
subnet-081293aa642757641
192.168.1.0/24
–


Search
[Alt+S]
United States (N. Virginia)
VPC
Route tables
rtb-0703734c692fdba94
Edit subnet associations
Edit subnet associations
Change which subnets are associated with this route table.
Available subnets (1/2)
Filter subnet associations
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
Route table ID
new-prv-subnet2
subnet-0f1d4dadb60fc9a90
192.168.2.0/24
Main (rtb-0aa256512f30efd96)
new-publ-subnet1
subnet-081293aa642757641
192.168.1.0/24
–
Main (rtb-0aa256512f30efd96)
Selected subnets
subnet-081293aa642757641 / new-publ-subnet1
Cancel
Save associations


Edit subnet associations
Change which subnets are associated with this route table.
Available subnets (1/2)
Filter subnet associations
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
Route table ID
new-prv-subnet2
subnet-0f1d4dadb60fc9a90
192.168.2.0/24
–
Main (rtb-0aa256512f30efd96)
new-publ-subnet1
subnet-081293aa642757641
192.168.1.0/24
–
rtb-0703734c692fdba94 / public-subn...
Selected subnets
subnet-0f1d4dadb60fc9a90 / new-prv-subnet2
Cancel
Save associations

You have successfully updated subnet associations for rtb-030e8db116d9180a8 / private-subnet-RT.
Route tables (1/4) Info
Last updated less than a minute ago
Actions
Find route tables by attribute or tag
Name
Route table ID
Explicit subnet associ...
Edge associations
Main
VPC
Owner ID
–
rtb-0e0d74025c4fba481
–
–
Yes
vpc-036928f6ebcc1fca3
260137102066
public-subnet-RT
rtb-0703734c692fdba94
subnet-081293aa642757...
–
No
vpc-0d2dbb72791bb06df | new...
260137102066
–
rtb-0aa256512f30efd96
–
–
Yes
vpc-0d2dbb72791bb06df | new...
260137102066
private-subnet-RT
rtb-030e8db116d9180a8
subnet-0f1d4dadb60fc9a...
–
No
vpc-0d2dbb72791bb06df | new...
260137102066


rtb-030e8db116d9180a8 / private-subnet-RT
Details
Routes
Subnet associations
Edge associations
Route propagation
Tags
Details
Route table ID
rtb-030e8db116d9180a8
Main
No
Explicit subnet associations
subnet-0f1d4dadb60fc9a90 / new-prv-subnet2
Edge associations
–
VPC
vpc-0d2dbb72791bb06df | new-VPC
Owner ID
260137102066

Create security group Info

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name Info
public-instance-sg
Name cannot be edited after creation.

Description Info
SG for public instance

VPC Info
vpc-05135871a52ed197a (new-vpc)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
All ICMP - IPv4	ICMP	All	My IP	49.204.112.230/32		Delete
All ICMP - IPv4	ICMP	All	Custom	192.168.0.0/16, 192.168.0.0/16		Delete
SSH	TCP	22	My IP	49.204.112.230/32		Delete
SSH	TCP	22	Custom	192.168.0.0/16, 192.168.0.0/16		Delete
HTTP	TCP	80	Anywhe...	0.0.0.0/0		Delete

Add rule

Create security group Info

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name Info
private-instance-sg
Name cannot be edited after creation.

Description Info
SG for private instance

VPC Info
vpc-05135871a52ed197a (new-vpc)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
SSH	TCP	22	Custom	192.168.0.0/16, 192.168.0.0/16		Delete
All ICMP - IPv4	ICMP	All	Custom	192.168.0.0/16, 192.168.0.0/16		Delete
NFS	TCP	2049	Custom	192.168.0.0/16, 192.168.0.0/16		Delete

Add rule

Outbound rules Info

Type Info	Protocol Info	Port range Info	Destination Info		Description - optional Info	
All traffic	All	All	Anywhe...	0.0.0.0/0		Delete

Security Groups (4) Info

Actions | Export security groups to CSV | Create security group

Find security groups by attribute or tag

Name	Security group ID	Security group name	VPC ID	Description	Owner
-	sg-0a4c0d9097ce52669	public-instance-sg	vpc-05135871a52ed197a	SG for public instance	260137102066
-	sg-0ff119fe9527fe09f	default	vpc-036928f6ebcc1fca3	default VPC security group	260137102066
-	sg-0abc85c827e0aa846	private-instance-sg	vpc-05135871a52ed197a	SG for private instance	260137102066
-	sg-0d0432456bd949dc0	default	vpc-05135871a52ed197a	default VPC security group	260137102066

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

pubic-instance

Add additional tags

▼ Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI — Free tier eligible

ami-098e39bafa7e7303d (64-bit (x86), uefi-preferred) / ami-03ed25db53d8de46c (64-bit (Arm), uefi)

Virtualization: hvm ENA enabled: true Root device type: ebs

▼ Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

admin-key

Create new key pair

Network settings Info

VPC - *required* Info

vpc-05135871a52ed197a (new-vpc)
192.168.0.0/16

Subnet Info

subnet-06fe3ba75b650d684 public-subnet
VPC: vpc-05135871a52ed197a Owner: 260137102066 Availability Zone: us-east-1a (use1-az4)
Zone type: Availability Zone IP addresses available: 251 CIDR: 192.168.1.0/24)

Create new subnet

Auto-assign public IP Info

Enable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

- ○ Create security group
- ◉ Select existing security group

Common security groups Info

Select security groups

Compare security group rules

public-instance-sg sg-0a4c0d9097ce52669
VPC: vpc-05135871a52ed197a

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▶ **Advanced network configuration**

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

private-instance

Add additional tags

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs
Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI Free tier eligible
ami-098e39bafa7e7303d (64-bit (x86), uefi-preferred) / ami-03ed25db53d8de46c (64-bit (Arm), uefi)
Virtualization: hvm ENA enabled: true Root device type: ebs

Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

admin-key

Create new key pair

Network settings Info

VPC - *required* Info

vpc-05135871a52ed197a (new-vpc)
192.168.0.0/16

Subnet Info

subnet-0684ddf75028449a1 private-subnet
VPC: vpc-05135871a52ed197a Owner: 260137102066 Availability Zone: us-east-1a (use1-az4)
Zone type: Availability Zone IP addresses available: 251 CIDR: 192.168.2.0/24)

Create new subnet

Auto-assign public IP Info

Disable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

- ○ Create security group
- ◉ Select existing security group

Common security groups Info

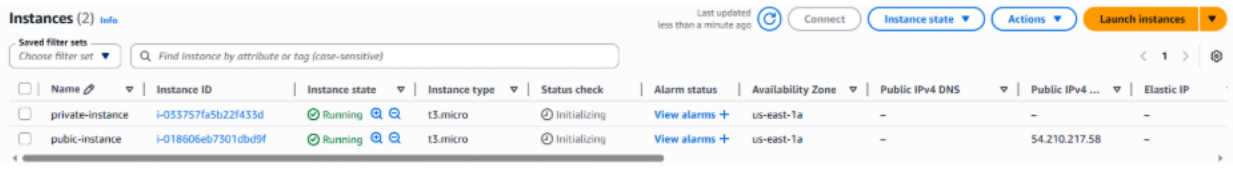
Select security groups

Compare security group rules

private-instance-sg sg-0abc85c827e0aa846
VPC: vpc-05135871a52ed197a

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▸ **Advanced network configuration**



Allocate Elastic IP address Info

Elastic IP address settings Info

Public IPv4 address pool

- (•) Amazon's pool of IPv4 addresses
- ( ) Public IPv4 address that you bring to your AWS account with BYOIP. (option disabled because no pools found) Learn more
- ( ) Customer-owned pool of IPv4 addresses created from your on-premises network for use with an Outpost. (option disabled because no customer owned pools found) Learn more
- ( ) Allocate using an IPv4 IPAM pool (option disabled because no public IPv4 IPAM pools with AWS service as EC2 were found)

Network border group Info

us-east-1

Global static IP addresses

AWS Global Accelerator can provide global static IP addresses that are announced worldwide using anycast from AWS edge locations. This can help improve the availability and latency for your user traffic by using the Amazon global network. Learn more

Create accelerator

Tags - *optional*

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tag

Cancel Allocate

Elastic IP addresses (1) Info

Actions Allocate Elastic IP address

Find elastic IP addresses by attribute or tag

Public IPv4 address : 32.195.192.100 Clear filters

1

Name	Allocated IPv4 addr...	Type	Allocation ID	Reverse DNS record	Associated instance ID	Private IP address
–	32.195.192.100	Public IP	eipalloc-0d260d00f13f9a27a	–	–	–

Associate Elastic IP address Info

Choose the instance or network interface to associate to this Elastic IP address (32.195.192.100)

Elastic IP address: 32.195.192.100

Resource type

Choose the type of resource with which to associate the Elastic IP address.

- (•) Instance
- ( ) Network interface

⚠ If you associate an Elastic IP address with an instance that already has an Elastic IP address associated, the previously associated Elastic IP address will be disassociated, but the address will still be allocated to your account. Learn more

If no private IP address is specified, the Elastic IP address will be associated with the primary private IP address.

Instance

i-018606eb7301dbd9f

Private IP address

The private IP address with which to associate the Elastic IP address.

192.168.1.87

Reassociation

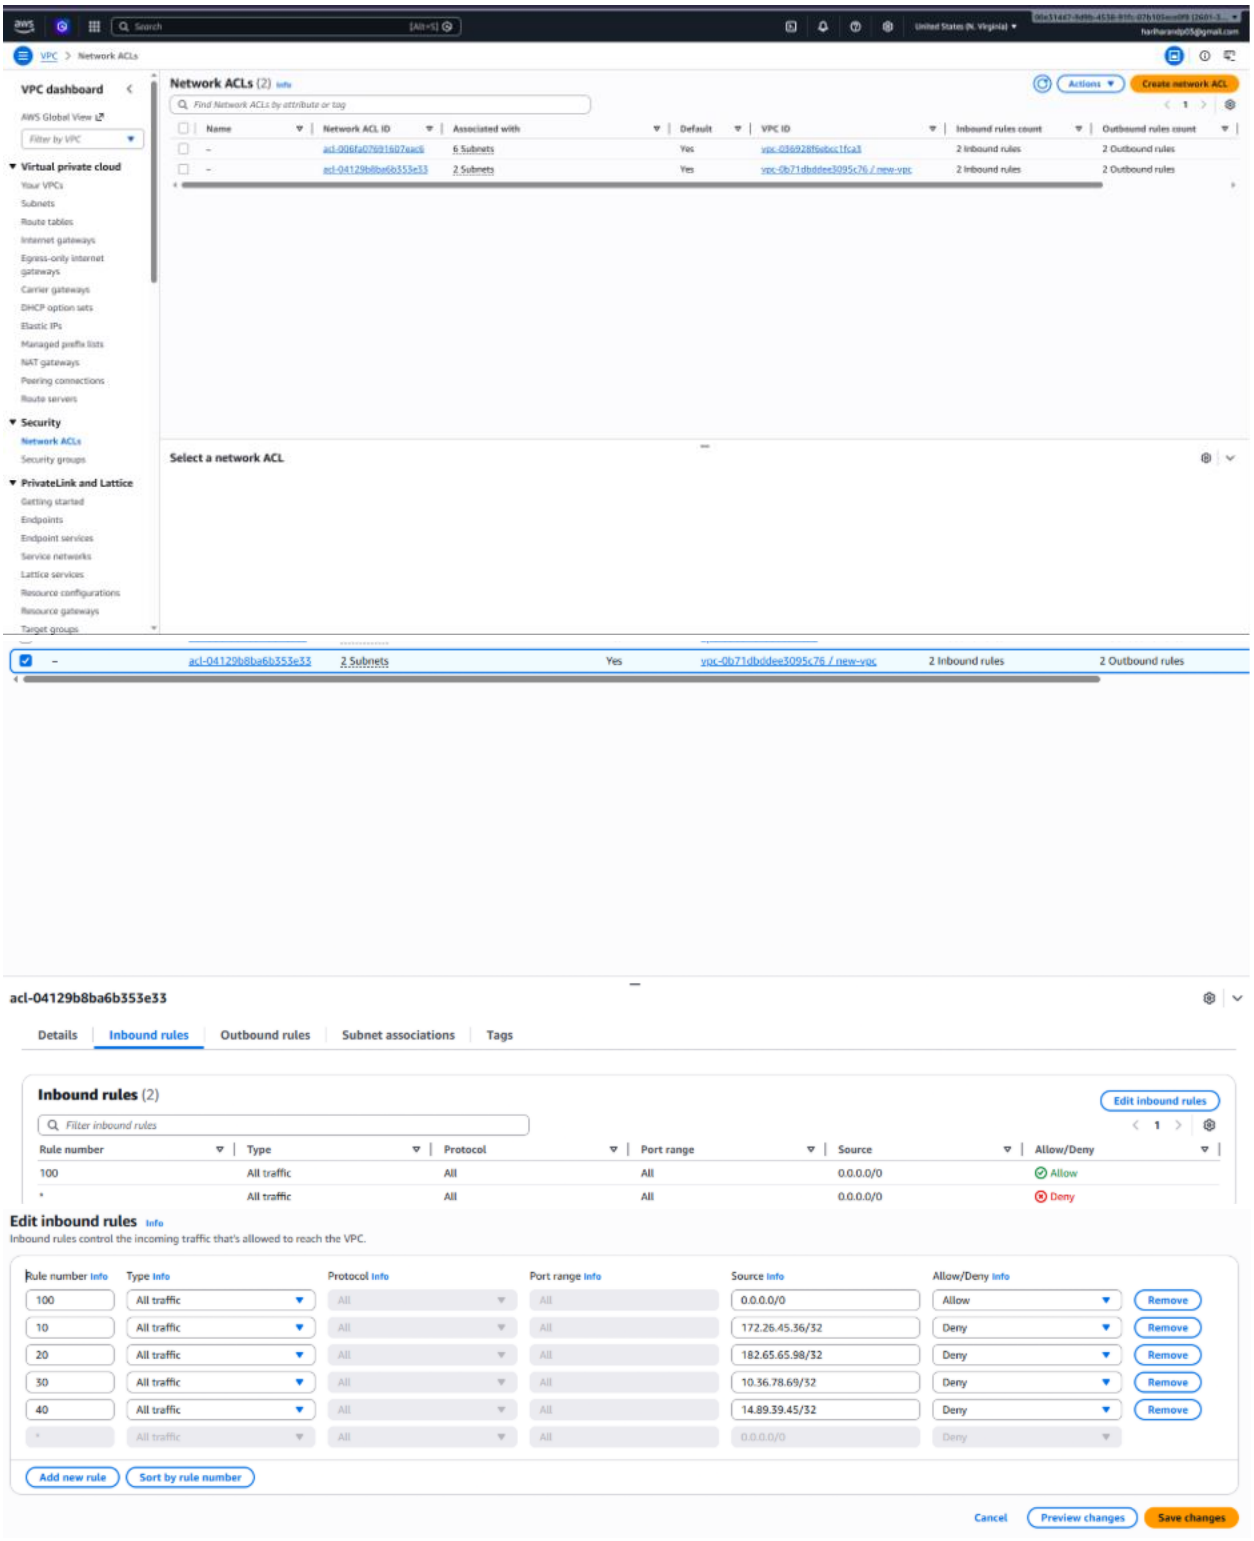
Specify whether the Elastic IP address can be reassociated with a different resource if it already associated with a resource.

[ ] Allow this Elastic IP address to be reassociated

Cancel Associate

```
C:\Users\DP\OneDrive\Desktop>ssh -i admin-key.pem ec2-user@3.216.85.37
The authenticity of host '3.216.85.37 (3.216.85.37)' can't be established.
ED25519 key fingerprint is SHA256:7jULivIhnozu7su5Mb4j9n7NMhkkyPhd+AcXlkM8pSM.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '3.216.85.37' (ED25519) to the list of known hosts.
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-192-168-1-128 ~]$
```

```
[ec2-user@ip-192-168-1-128 ~]$ ping 192.168.2.29
PING 192.168.2.29 (192.168.2.29) 56(84) bytes of data.
64 bytes from 192.168.2.29: icmp_seq=1 ttl=127 time=0.705 ms
64 bytes from 192.168.2.29: icmp_seq=2 ttl=127 time=0.261 ms
64 bytes from 192.168.2.29: icmp_seq=3 ttl=127 time=0.282 ms
64 bytes from 192.168.2.29: icmp_seq=4 ttl=127 time=0.262 ms
64 bytes from 192.168.2.29: icmp_seq=5 ttl=127 time=0.267 ms
64 bytes from 192.168.2.29: icmp_seq=6 ttl=127 time=0.254 ms
64 bytes from 192.168.2.29: icmp_seq=7 ttl=127 time=0.263 ms
64 bytes from 192.168.2.29: icmp_seq=8 ttl=127 time=0.264 ms
^C
--- 192.168.2.29 ping statistics ---
8 packets transmitted, 8 received, 0% packet loss, time 7313ms
rtt min/avg/max/mdev = 0.254/0.319/0.705/0.145 ms
[ec2-user@ip-192-168-1-128 ~]$
```



Planning and Implementing Virtual Storage

Create VPC Info

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create Info
Create only the VPC resource or the VPC and other networking resources.

- (•) VPC only
- ( ) VPC and more

Name tag - *optional*
Creates a tag with a key of 'Name' and a value that you specify.

new-vpc1

IPv4 CIDR block Info

- (•) IPv4 CIDR manual input
- ( ) IPAM-allocated IPv4 CIDR block

IPv4 CIDR

192.168.0.0/16

CIDR block size must be between /16 and /28.

IPv6 CIDR block Info

- (•) No IPv6 CIDR block
- ( ) IPAM-allocated IPv6 CIDR block
- ( ) Amazon-provided IPv6 CIDR block
- ( ) IPv6 CIDR owned by me

Tenancy Info

Default

VPC encryption control ($) | Info
Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. Additional charges apply

- (•) None
- ( ) Monitor mode — See which resources in your VPC are unencrypted but allow the creation of unencrypted resources.
- ( ) Enforce mode — Requires all resources, except exclusions, in your VPC to be encryption-capable and blocks creation of unencrypted resources.

Your VPCs

VPCs | VPC encryption controls

Your VPCs (2) Info

Last updated less than a minute ago | Actions | Create VPC

Find VPCs by attribute or tag

Name	VPC ID	State	Encryption c...	Encryption control ...	Block Public...	IPv4 CIDR	IPv6 CIDR
–	vpc-036928f6ebcc1fca3	Available	–	–	Off	172.31.0.0/16	–
new-vpc1	vpc-0fdfd6cc76529c57f	Available	–	–	Off	192.168.0.0/16	–

You have successfully created 2 subnets: subnet-03f999989126ec4a3, subnet-07ecc63df0ba3f900

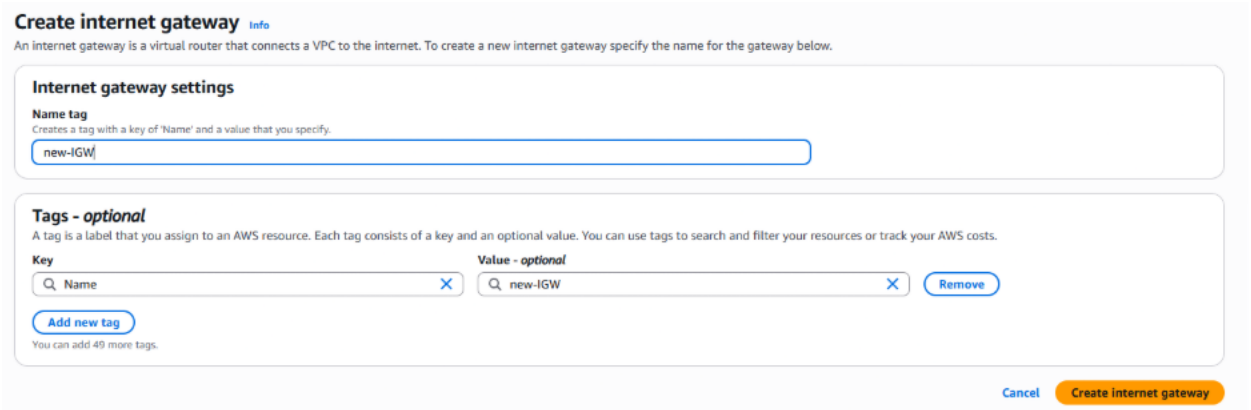
Subnets (2) Info

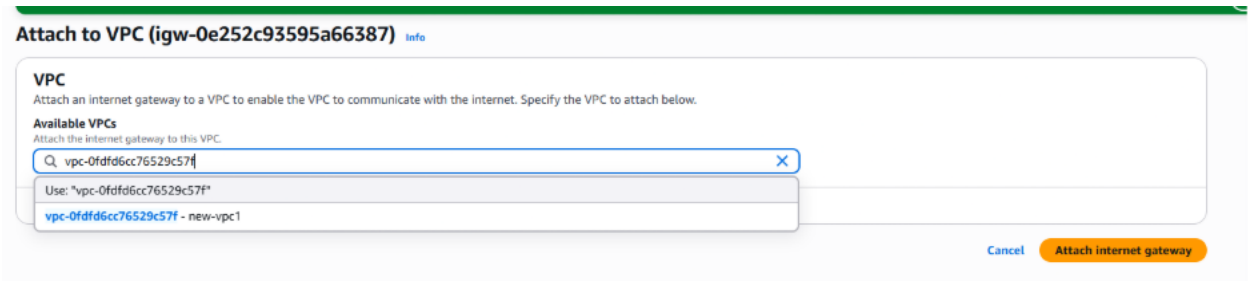
Last updated less than a minute ago | Actions | Create subnet

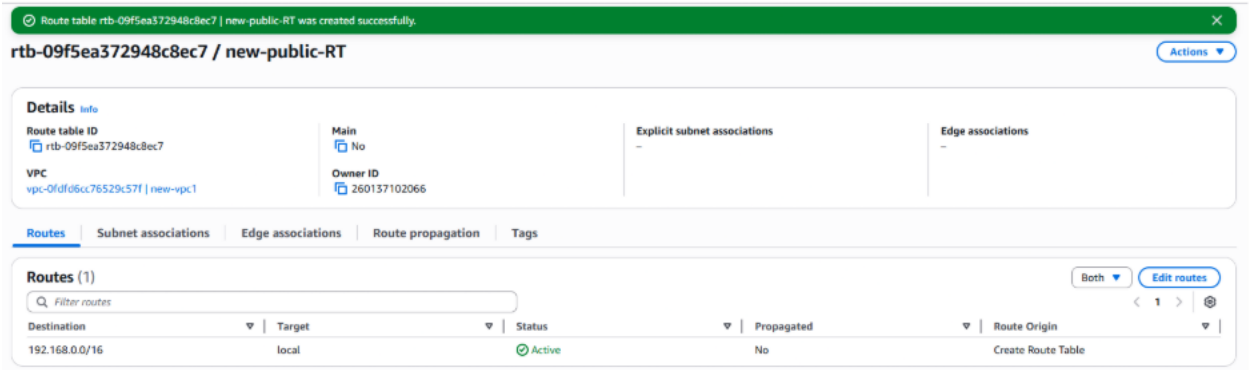
Find subnets by attribute or tag

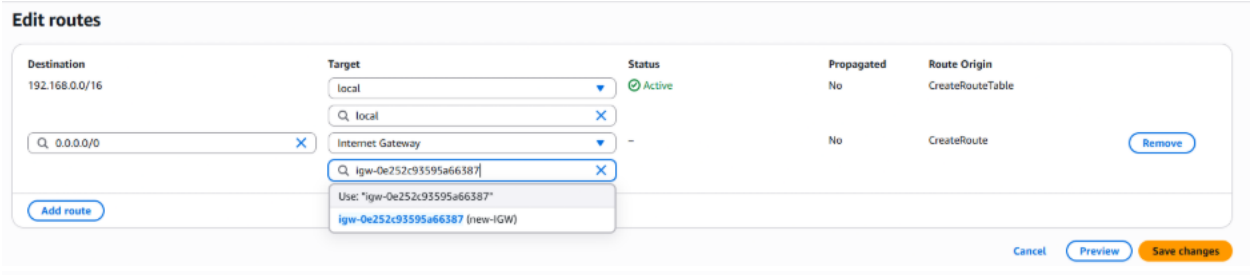
Subnet ID : subnet-03f999989126ec4a3 | Subnet ID : subnet-07ecc63df0ba3f900 | Clear filters

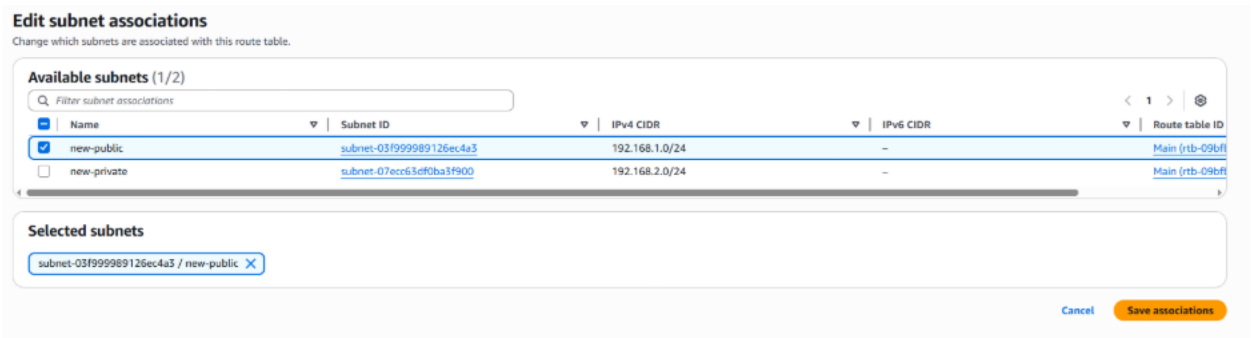
Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR	IPv6 CIDR	IPv6 CIE
new-public	subnet-03f999989126ec4a3	Available	vpc-0fdfd6cc76529c57f | new-v...	Off	192.168.1.0/24	–	–
new-private	subnet-07ecc63df0ba3f900	Available	vpc-0fdfd6cc76529c57f | new-v...	Off	192.168.2.0/24	–	–

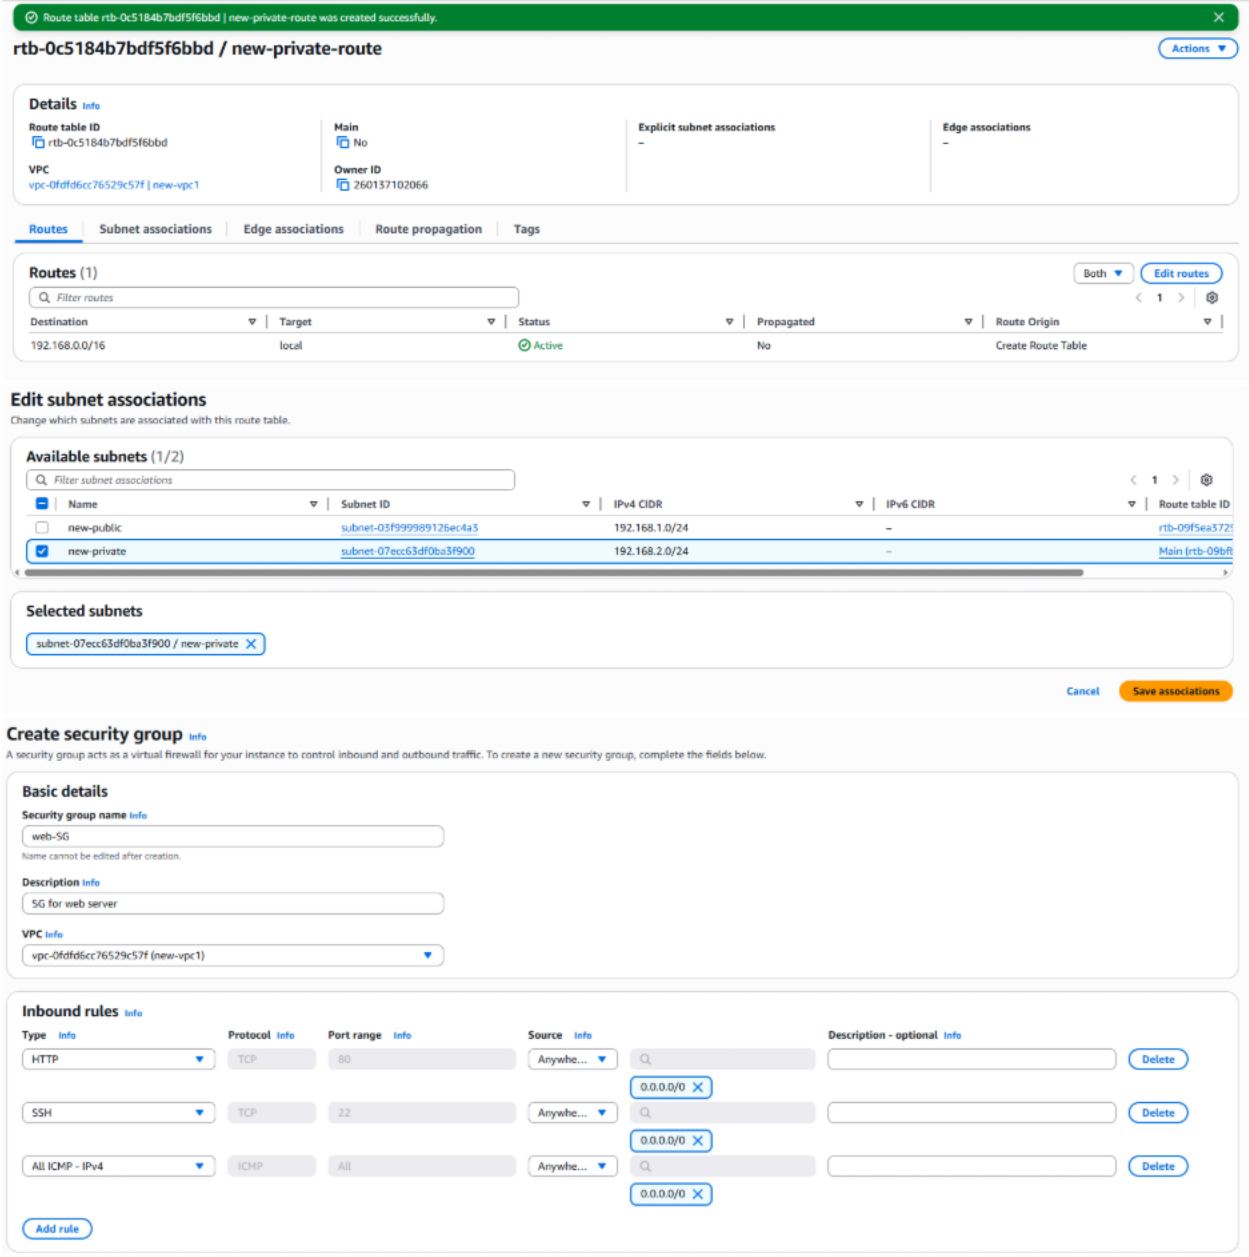

Create internet gateway Info
An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.
Internet gateway settings
Name tag
Creates a tag with a key of 'Name' and a value that you specify.
new-IGW
Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
Key
Name
Value - optional
new-IGW
Remove
Add new tag
You can add 49 more tags.
Cancel
Create internet gateway


Attach to VPC (igw-0e252c93595a66387) Info
VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.
Available VPCs
Attach the internet gateway to this VPC.
vpc-0fdfd6cc76529c57f
Use: "vpc-0fdfd6cc76529c57f"
vpc-0fdfd6cc76529c57f - new-vpc1
Cancel
Attach internet gateway


Route table rtb-09f5ea372948c8ec7 | new-public-RT was created successfully.
rtb-09f5ea372948c8ec7 / new-public-RT
Actions
Details Info
Route table ID
rtb-09f5ea372948c8ec7
Main
No
Explicit subnet associations
Edge associations
VPC
vpc-0fdfd6cc76529c57f | new-vpc1
Owner ID
260137102066
Routes
Subnet associations
Edge associations
Route propagation
Tags
Routes (1)
Both
Edit routes
Filter routes
Destination
Target
Status
Propagated
Route Origin
192.168.0.0/16
local
Active
No
Create Route Table


Edit routes
Destination
Target
Status
Propagated
Route Origin
192.168.0.0/16
local
Active
No
CreateRouteTable
local
0.0.0.0/0
Internet Gateway
No
CreateRoute
Remove
igw-0e252c93595a66387
Use: "igw-0e252c93595a66387"
igw-0e252c93595a66387 (new-IGW)
Add route
Cancel
Preview
Save changes


Edit subnet associations
Change which subnets are associated with this route table.
Available subnets (1/2)
Filter subnet associations
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
Route table ID
new-public
subnet-03f999989126ec4a3
192.168.1.0/24
new-private
subnet-07ecc63df0ba3f900
192.168.2.0/24
Selected subnets
subnet-03f999989126ec4a3 / new-public
Cancel
Save associations


Route table rtb-0c5184b7bdf5f6bbd | new-private-route was created successfully.
rtb-0c5184b7bdf5f6bbd / new-private-route
Actions
Details Info
Route table ID
rtb-0c5184b7bdf5f6bbd
Main
No
Explicit subnet associations
–
Edge associations
–
VPC
vpc-0fdfd6cc76529c57f | new-vpc1
Owner ID
260137102066
Routes
Subnet associations
Edge associations
Route propagation
Tags
Routes (1)
Both
Edit routes
Filter routes
Destination
Target
Status
Propagated
Route Origin
192.168.0.0/16
local
Active
No
Create Route Table
Edit subnet associations
Change which subnets are associated with this route table.
Available subnets (1/2)
Filter subnet associations
Name
Subnet ID
IPv4 CIDR
IPv6 CIDR
Route table ID
new-public
subnet-03f999989126ec4a3
192.168.1.0/24
–
new-private
subnet-07ecc63df0ba3f900
192.168.2.0/24
Selected subnets
subnet-07ecc63df0ba3f900 / new-private
Cancel
Save associations

Create security group Info
A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.
Basic details
Security group name Info
web-SG
Name cannot be edited after creation.
Description Info
SG for web server
VPC Info
vpc-0fdfd6cc76529c57f (new-vpc1)
Inbound rules Info
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
HTTP
TCP
80
Anywhe...
0.0.0.0/0
Delete
SSH
TCP
22
Anywhe...
0.0.0.0/0
Delete
All ICMP - IPv4
ICMP
All
Anywhe...
0.0.0.0/0
Delete
Add rule

Create security group Info

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name Info

DB-sg

Name cannot be edited after creation.

Description Info

SG for data base

VPC Info

vpc-0fdfd6cc76529c57f (new-vpc1)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
All ICMP - IPv4	ICMP	All	Custom	192.168.0.0/16		Delete
SSH	TCP	22	Custom	192.168.0.0/16		Delete
MYSQL/Aurora	TCP	3306	Custom	192.168.0.0/16		Delete

Add rule

Use: "192.168.0.0/16"

CIDR blocks

192.168.0.0/16

Security group (sg-04de62efed92050f8 | DB-sg) was created successfully

Details

Security Groups (4) Info

Actions | Export security groups to CSV | Create security group

Find security groups by attribute or tag

Name	Security group ID	Security group name	VPC ID	Description	Owner	Inbound rules count
-	sg-04dc73d09bcec4859	default	vpc-0fdfd6cc76529c57f	default VPC security group	260137102066	1 Permission entry
-	sg-0ff119fe95277fe09ff	default	vpc-036928ffe6ebc1fca1	default VPC security group	260137102066	1 Permission entry
-	sg-04de62efed92050f8	DB-sg	vpc-0fdfd6cc76529c57f	SG for data base	260137102066	3 Permission entries
-	sg-0868ae609c8e38b65	web-SG	vpc-0fdfd6cc76529c57f	SG for web server	260137102066	3 Permission entries

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

web-instance

Add additional tags

▼ Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI — Free tier eligible

ami-098e39bafa7e7303d (64-bit (x86), uefi-preferred) / ami-03ed25db53d8de46c (64-bit (Arm), uefi)

Virtualization: hvm ENA enabled: true Root device type: ebs

Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

admin-key

Create new key pair

Network settings Info

VPC - *required* Info

vpc-0fdfd6cc76529c57f (new-vpc1)
192.168.0.0/16

Subnet Info

subnet-03f999989126ec4a3 — new-public
VPC: vpc-0fdfd6cc76529c57f Owner: 260137102066 Availability Zone: us-east-1a (use1-az4)
Zone type: Availability Zone IP addresses available: 251 CIDR: 192.168.1.0/24)

Create new subnet

Auto-assign public IP Info

Enable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

- ○ Create security group
- ◉ Select existing security group

Common security groups Info

Select security groups

Compare security group rules

web-SG sg-0868ee609c8e38b65 ✕
VPC: vpc-0fdfd6cc76529c57f

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▶ **Advanced network configuration**

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

DB-instance

Add additional tags

▼ Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI — Free tier eligible

ami-098e39bafa7e7303d (64-bit (x86), uefi-preferred) / ami-03ed25db53d8de46c (64-bit (Arm), uefi)

Virtualization: hvm ENA enabled: true Root device type: ebs

▼ Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand RHEL base pricing: 0.0392 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

admin-key

Create new key pair

Network settings Info

VPC - *required* Info

vpc-0fdfd6cc76529c57f (new-vpc1)
192.168.0.0/16

Subnet Info

subnet-07ecc63df0ba3f900 new-private
VPC: vpc-0fdfd6cc76529c57f Owner: 260137102066 Availability Zone: us-east-1a (use1-az4)
Zone type: Availability Zone IP addresses available: 251 CIDR: 192.168.2.0/24)

Create new subnet

Auto-assign public IP Info

Disable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

- ○ Create security group
- ◉ Select existing security group

Common security groups Info

Select security groups

Compare security group rules

DB-sg sg-04de62efed92050f8
VPC: vpc-0fdfd6cc76529c57f

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▶ **Advanced network configuration**

Instances (2) Info

Last updated less than a minute ago | Connect | Instance state | Actions | Launch instances

Saved filter sets: Choose filter set | Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS	Public IPv4 ...	Elastic IP
web-instance	i-02cf6c66e3087ef43	Running	t3.micro	Initializing	View alarms +	us-east-1a	–	3.91.16.116	–
DB-instance	i-0a7e19c3747811666	Running	t3.micro	–	View alarms +	us-east-1a	–	–	–

Instances (1/2) Info

Last updated 4 minutes ago | Connect | Instance state | Actions | Launch instances

Saved filter sets: Choose filter set | Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS	Public IPv4 ...	Elastic IP
web-instance	i-02cf6c66e3087ef43	Running	t3.micro	Initializing	View alarms +	us-east-1a	–	3.91.16.116	–
DB-instance	i-0a7e19c3747811666	Running	t3.micro	–	View alarms +	us-east-1a	–	–	–

Create volume Info

Create an Amazon EBS volume to attach to any EC2 instance in the same Availability Zone.

Volume settings

Volume type Info

General Purpose SSD (gp3)

Size (GiB) Info

10

Min: 1 GiB, Max: 65536 GiB.

IOPS Info

3000

Min: 3000 IOPS, Max: 80000 IOPS.

Throughput (MiB/s) Info

125

Min: 125 MiB, Max: 2000 MiB. Baseline: 125 MiB/s.

Availability Zone Info

use1-az4 (us-east-1a)

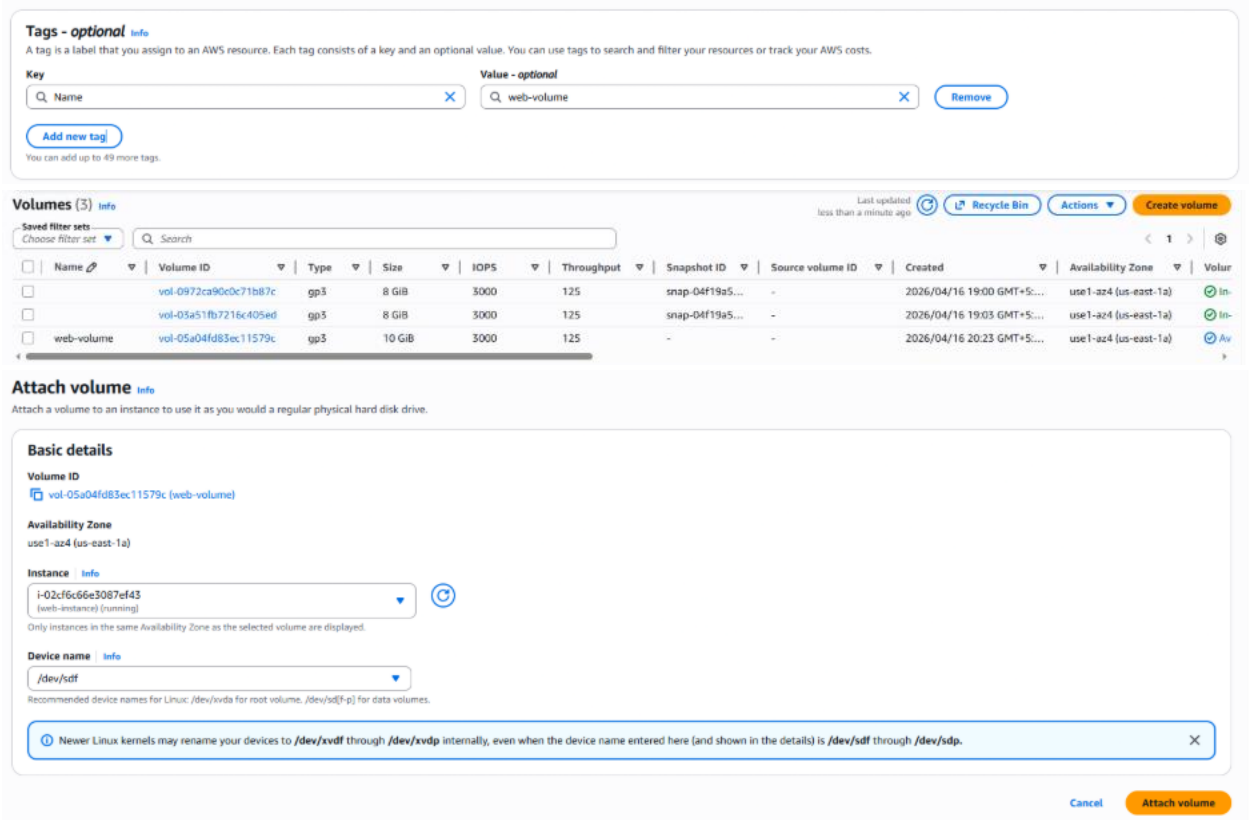
Snapshot ID - *optional* Info

Don't create volume from a snapshot

Encryption Info

Use Amazon EBS encryption as an encryption solution for your EBS resources associated with your EC2 instances.

☐ Encrypt this volume



Attach volume Info

Attach a volume to an instance to use it as you would a regular physical hard disk drive.

Basic details

Volume ID

vol-05a04fd83ec11579c (web-volume)

Availability Zone

use1-az4 (us-east-1a)

Instance Info

i-02cf6c66e3087ef43
(web-instance) (running)

Only instances in the same Availability Zone as the selected volume are displayed.

Device name Info

/dev/sdf

Recommended device names for Linux: /dev/xvda for root volume. /dev/sd[f-p] for data volumes.

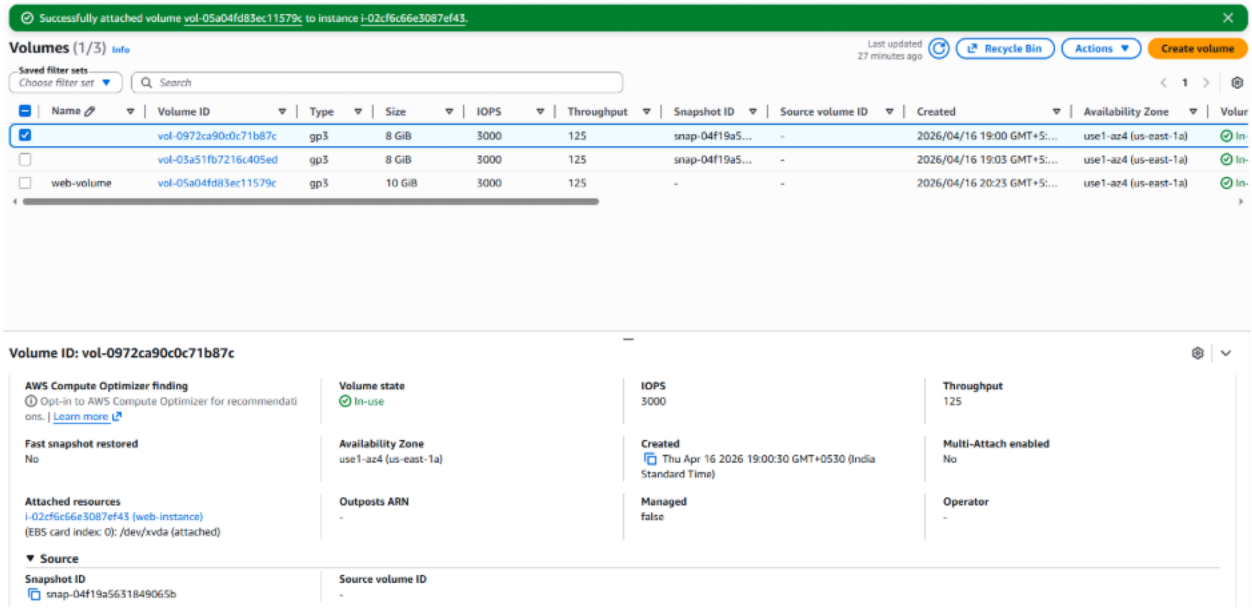
Newer Linux kernels may rename your devices to **/dev/xvdf** through **/dev/xvdp** internally, even when the device name entered here (and shown in the details) is **/dev/sdf** through **/dev/sdp.**

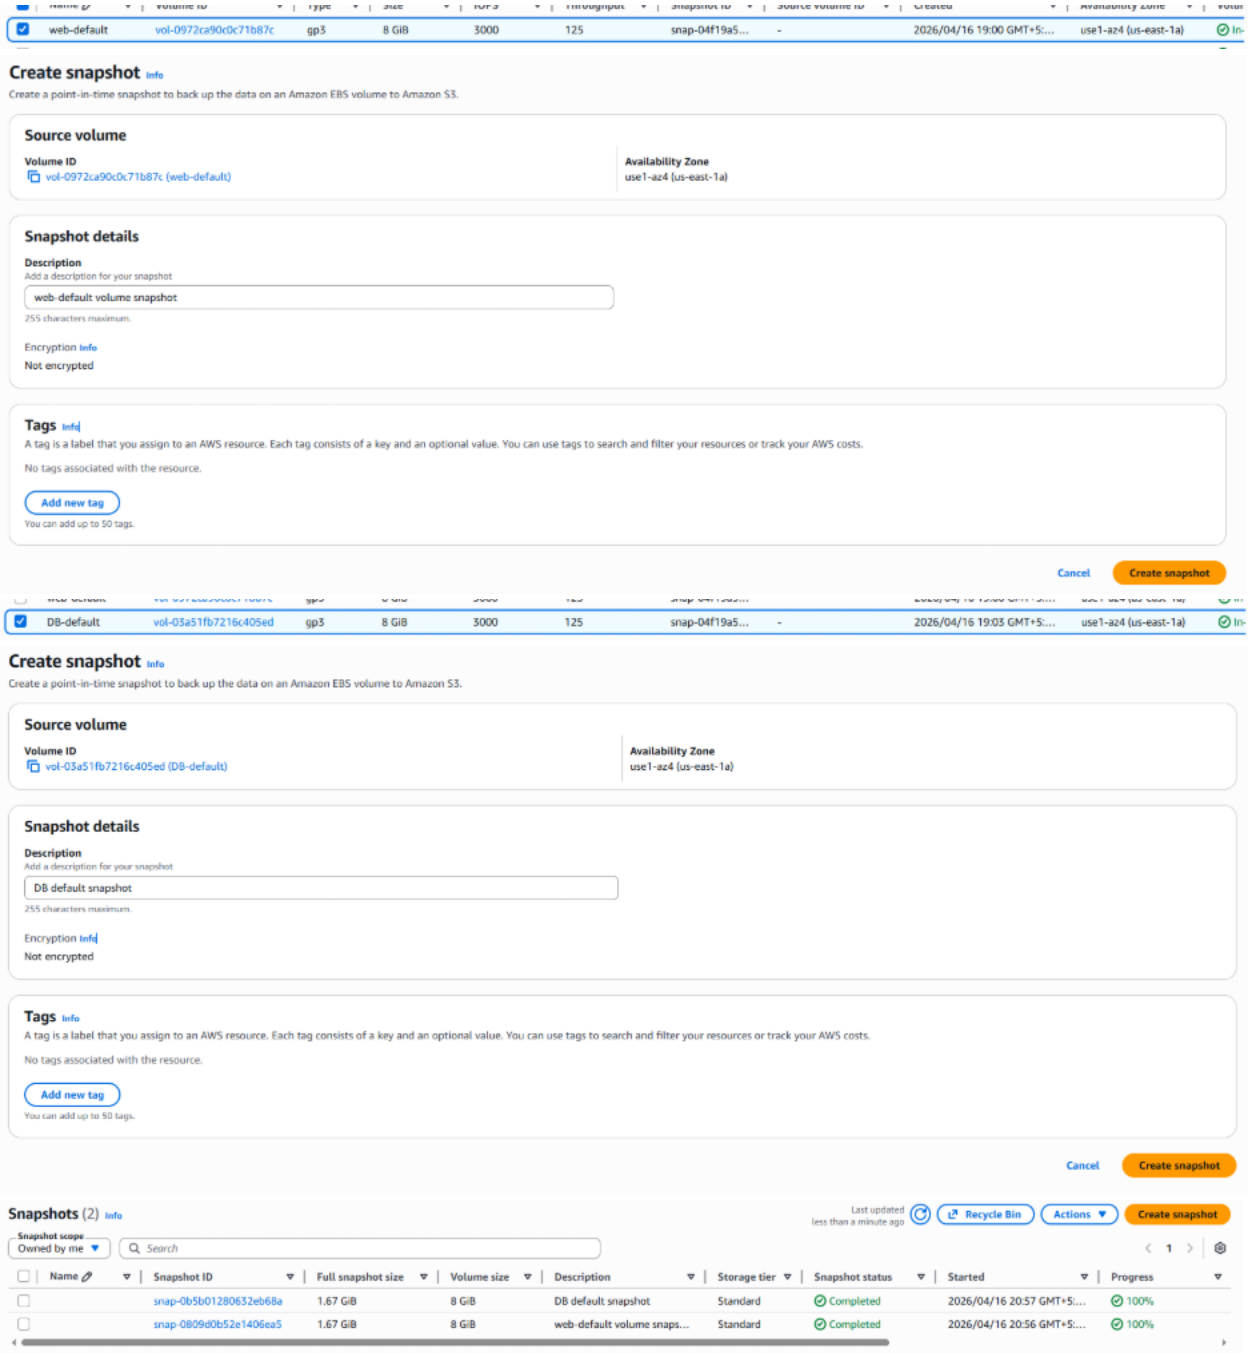
Cancel | Attach volume

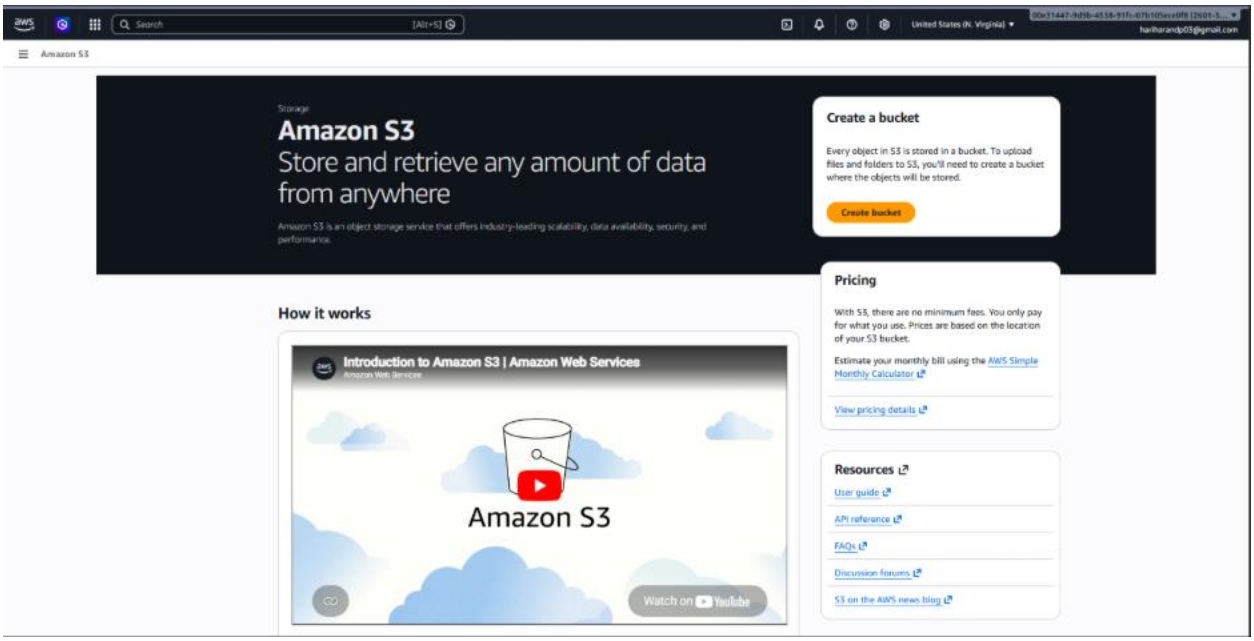
```
C:\Users\DP\OneDrive\Desktop>ssh -i admin-key.pem ec2-user@3.91.16.116
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-192-168-1-32 ~]$
```

```
C:\Users\DP\OneDrive\Desktop>ssh -i admin-key.pem ec2-user@3.91.16.116
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Thu Apr 16 15:02:07 2026 from 49.204.115.6
[ec2-user@ip-192-168-1-32 ~]$ lsblk
NAME          MAJ:MIN RM SIZE RO TYPE MOUNTPOINTS
nvme0n1       259:0    0   8G  0 disk
├─nvme0n1p1   259:1    0   8G  0 part /
├─nvme0n1p127 259:2    0   1M  0 part
└─nvme0n1p128 259:3    0  10M  0 part /boot/efi
nvme1n1       259:4    0  10G  0 disk
[ec2-user@ip-192-168-1-32 ~]$
```

```
[ec2-user@ip-192-168-1-32 ~]$ sudo mkfs.xfs /dev/nvme1n1
meta-data=/dev/nvme1n1           isize=512    agcount=16, agsize=163840 blks
         =                       sectsz=512   attr=2, projid32bit=1
         =                       crc=1        finobt=1, sparse=1, rmapbt=0
         =                       reflink=1    bigtime=1 inobtcount=1 nrext64=0
         =                       exchange=0
data     =                       bsize=4096   blocks=2621440, imaxpct=25
         =                       sunit=1      swidth=1 blks
naming   =version 2              bsize=4096   ascii-ci=0, ftype=1, parent=0
log      =internal log           bsize=4096   blocks=16384, version=2
         =                       sectsz=512   sunit=1 blks, lazy-count=1
realtime =none                   extsz=4096   blocks=0, rtextents=0
[ec2-user@ip-192-168-1-32 ~]$ sudo mkdir /mount
[ec2-user@ip-192-168-1-32 ~]$ sudo mount /dev/nvme1n1 /mount
[ec2-user@ip-192-168-1-32 ~]$ df-h /mount
-bash: df-h: command not found
[ec2-user@ip-192-168-1-32 ~]$ df -h /mount
Filesystem      Size  Used Avail Use% Mounted on
/dev/nvme1n1     10G  104M  9.9G   2% /mount
[ec2-user@ip-192-168-1-32 ~]$
```




web-default vol-0972ca90c0c71b87c gp3 8 GiB 3000 125 snap-04f19a5... - 2026/04/16 19:00 GMT+5:... use1-az4 (us-east-1a)
Create snapshot Info
Create a point-in-time snapshot to back up the data on an Amazon EBS volume to Amazon S3.
Source volume
Volume ID
vol-0972ca90c0c71b87c (web-default)
Availability Zone
use1-az4 (us-east-1a)
Snapshot details
Description
Add a description for your snapshot
web-default volume snapshot
255 characters maximum.
Encryption Info
Not encrypted
Tags Info
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
No tags associated with the resource.
Add new tag
You can add up to 50 tags.
Cancel
Create snapshot
DB-default vol-03a51fb7216c405ed gp3 8 GiB 3000 125 snap-04f19a5... - 2026/04/16 19:03 GMT+5:... use1-az4 (us-east-1a)
Create snapshot Info
Create a point-in-time snapshot to back up the data on an Amazon EBS volume to Amazon S3.
Source volume
Volume ID
vol-03a51fb7216c405ed (DB-default)
Availability Zone
use1-az4 (us-east-1a)
Snapshot details
Description
Add a description for your snapshot
DB default snapshot
255 characters maximum.
Encryption Info
Not encrypted
Tags Info
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
No tags associated with the resource.
Add new tag
You can add up to 50 tags.
Cancel
Create snapshot
Snapshots (2) Info
Last updated less than a minute ago
Recycle Bin
Actions
Create snapshot
Snapshot scope
Owned by me
Search
1
Name
Snapshot ID
Full snapshot size
Volume size
Description
Storage tier
Snapshot status
Started
Progress
snap-0b5b01280632eb68a 1.67 GiB 8 GiB DB default snapshot Standard Completed 2026/04/16 20:57 GMT+5:... 100%
snap-0809d0b52e1406ea5 1.67 GiB 8 GiB web-default volume snaps... Standard Completed 2026/04/16 20:56 GMT+5:... 100%



General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type Info

- (●) General purpose — Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
- ( ) Directory — Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. Learn more

- (●) Global namespace — By default, S3 creates general purpose buckets in the global namespace.
- ( ) Account Regional namespace (recommended) — General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name Info
test-bucket-1962
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more

Copy settings from existing bucket - *optional*
Only the bucket settings in the following configuration are copied.
Choose bucket
Format: s3://bucket/prefix

Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- (●) ACLs disabled (recommended) — All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ( ) ACLs enabled — Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more

Bucket Versioning

- ( ) Disable
- (●) Enable

Buckets

General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (1) Info
Buckets are containers for data stored in S3.

Copy ARN | Empty | Delete | Create bucket

Find buckets by name

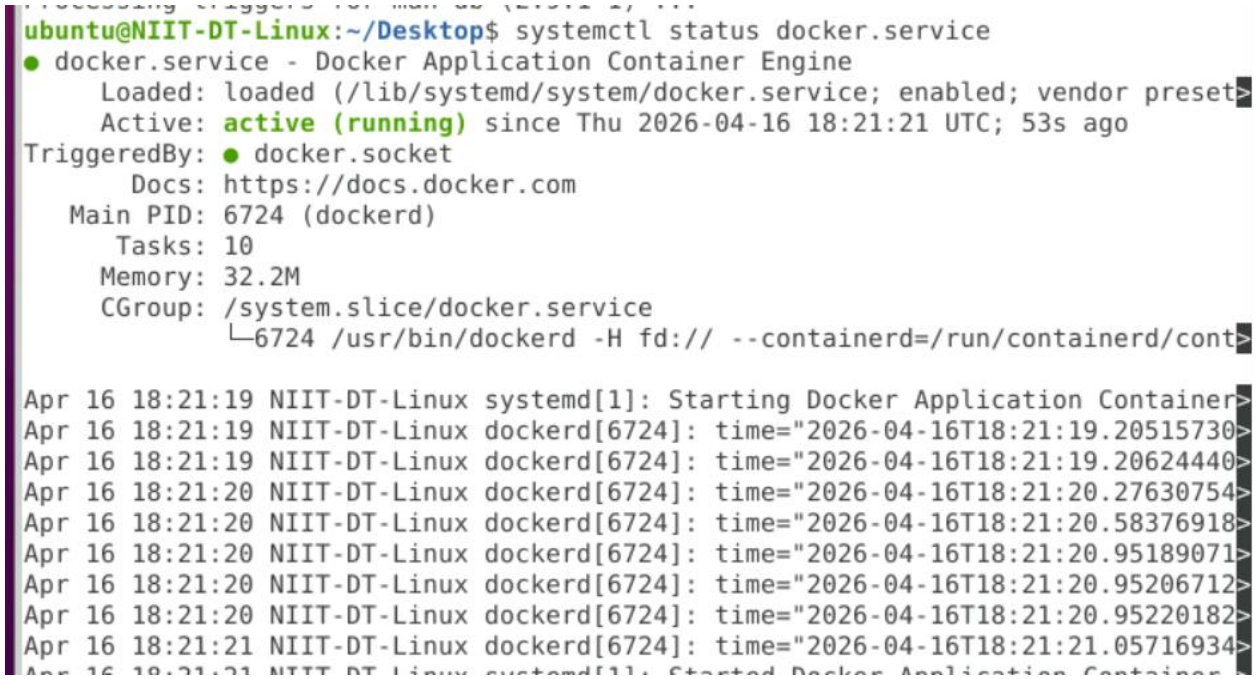
Name	AWS Region	Creation date
test-bucket-1962	US East (N. Virginia) us-east-1	April 16, 2026, 21:03:22 (UTC+05:30)

Account snapshot Info — View dashboard
Updated daily
Storage Lens provides visibility into storage usage and activity trends.

External access summary Info
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

```
ubuntu@NIIT-DT-Linux:~/Desktop$ sudo apt update
Hit:1 http://azure.archive.ubuntu.com/ubuntu focal InRelease
Get:2 http://azure.archive.ubuntu.com/ubuntu focal-updates InRelease [128 kB]
Get:4 http://azure.archive.ubuntu.com/ubuntu focal-backports InRelease [128 kB]
Get:5 http://azure.archive.ubuntu.com/ubuntu focal-security InRelease [128 kB]
Get:3 https://packages.microsoft.com/repos/code stable InRelease [3590 B]
Get:6 https://dl.google.com/linux/chrome/deb stable InRelease [1825 B]
Get:7 https://packages.microsoft.com/repos/code stable/main armhf Packages [25.8
 kB]
Get:8 https://packages.microsoft.com/repos/code stable/main amd64 Packages [25.6
 kB]
Get:9 https://packages.microsoft.com/repos/code stable/main arm64 Packages [25.7
 kB]
Err:6 https://dl.google.com/linux/chrome/deb stable InRelease
  The following signatures couldn't be verified because the public key is not av
ailable: NO_PUBKEY 32EE5355A6BC6E42
Hit:10 http://ppa.launchpad.net/linuxuprising/shutter/ubuntu focal InRelease
Fetched 466 kB in 2s (230 kB/s)
Reading package lists... Done
Building dependency tree
Reading state information... Done
436 packages can be upgraded. Run 'apt list --upgradable' to see them.
W: An error occurred during the signature verification. The repository is not up
```

```
ubuntu@NIIT-DT-Linux:~/Desktop$ sudo apt install docker docker.io
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  bridge-utils containerd pigz runc ubuntu-fan wmdocker
Suggested packages:
  ifupdown aufs-tools cgroupfs-mount | cgroup-lite debootstrap docker-buildx
  docker-compose-v2 docker-doc rinse zfs-fuse | zfsutils
The following NEW packages will be installed:
  bridge-utils containerd docker docker.io pigz runc ubuntu-fan wmdocker
0 upgraded, 8 newly installed, 0 to remove and 436 not upgraded.
Need to get 71.2 MB of archives.
After this operation, 300 MB of additional disk space will be used.
Do you want to continue? [Y/n] Y
Get:1 http://azure.archive.ubuntu.com/ubuntu focal/universe amd64 pigz amd64 2.4
-1 [57.4 kB]
Get:2 http://azure.archive.ubuntu.com/ubuntu focal/main amd64 bridge-utils amd64
 1.6-2ubuntu1 [30.5 kB]
Get:3 http://azure.archive.ubuntu.com/ubuntu focal-updates/main amd64 runc amd64
 1.1.12-0ubuntu2~20.04.1 [8066 kB]
Get:4 http://azure.archive.ubuntu.com/ubuntu focal-updates/main amd64 containerd
```


ubuntu@NIIT-DT-Linux:~/Desktop$ systemctl status docker.service
● docker.service - Docker Application Container Engine
Loaded: loaded (/lib/systemd/system/docker.service; enabled; vendor preset
Active: active (running) since Thu 2026-04-16 18:21:21 UTC; 53s ago
TriggeredBy: ● docker.socket
Docs: https://docs.docker.com
Main PID: 6724 (dockerd)
Tasks: 10
Memory: 32.2M
CGroup: /system.slice/docker.service
└─6724 /usr/bin/dockerd -H fd:// --containerd=/run/containerd/cont
Apr 16 18:21:19 NIIT-DT-Linux systemd[1]: Starting Docker Application Container
Apr 16 18:21:19 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:19.20515730
Apr 16 18:21:19 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:19.20624440
Apr 16 18:21:20 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:20.27630754
Apr 16 18:21:20 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:20.58376918
Apr 16 18:21:20 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:20.95189071
Apr 16 18:21:20 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:20.95206712
Apr 16 18:21:20 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:20.95220182
Apr 16 18:21:21 NIIT-DT-Linux dockerd[6724]: time="2026-04-16T18:21:21.05716934

```
root@NIIT-DT-Linux:/home/ubuntu/Desktop# docker network inspect bridge
[
    {
        "Name": "bridge",
        "Id": "e7428758500a8de0da1c78e34b89ae81cc860fc45cd0774455de46714579a8db"
,
        "Created": "2026-04-17T02:58:41.909512202Z",
        "Scope": "local",
        "Driver": "bridge",
        "EnableIPv6": false,
        "IPAM": {
            "Driver": "default",
            "Options": null,
            "Config": [
                {
                    "Subnet": "172.17.0.0/16",
                    "Gateway": "172.17.0.1"
                }
            ]
        },
        "Internal": false,
        "Attachable": false,
        "Ingress": false,
```

```
root@NIIT-DT-Linux:/home/ubuntu/Desktop# docker rm -f mysql
mysql
root@NIIT-DT-Linux:/home/ubuntu/Desktop# docker run -d --name mysql -e MYSQL_ROO
T_PASSWORD=root -p 3306:3306 mysql
4b9eb8bad2c299f90c383a5cf58b28ceeb2e8eb7b14002403fdc3c7508fccdb9
root@NIIT-DT-Linux:/home/ubuntu/Desktop# docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED          STATUS
   PORTS                                                  NAMES
4b9eb8bad2c2   mysql     "docker-entrypoint.s…"   18 seconds ago   Up 17 seconds
   0.0.0.0:3306->3306/tcp, :::3306->3306/tcp, 33060/tcp   mysql
root@NIIT-DT-Linux:/home/ubuntu/Desktop#
```

```
        "ConfigOnly": false,
        "Containers": {
            "4b9eb8bad2c299f90c383a5cf58b28ceeb2e8eb7b14002403fdc3c7508fccdb9":
{
                "Name": "mysql",
                "EndpointID": "79d3097b28727ae8ec745d665b71fdaa9a2479010ee7784ed
c18bdb593560971",
                "MacAddress": "02:42:ac:11:00:02",
                "IPv4Address": "172.17.0.2/16",
                "IPv6Address": ""
            }
        },
        "Options": {
            "com.docker.network.bridge.default_bridge": "true",
            "com.docker.network.bridge.enable_icc": "true",
            "com.docker.network.bridge.enable_ip_masquerade": "true",
            "com.docker.network.bridge.host_binding_ipv4": "0.0.0.0",
            "com.docker.network.bridge.name": "docker0",
            "com.docker.network.driver.mtu": "1500"
        },
        "Labels": {}
    }
]
root@NIIT-DT-Linux:/home/ubuntu/Desktop#
```

```
root@NIIT-DT-Linux:/home/ubuntu/Desktop# apt install mysql-client
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  mysql-client-8.0 mysql-client-core-8.0
The following NEW packages will be installed:
  mysql-client mysql-client-8.0 mysql-client-core-8.0
0 upgraded, 3 newly installed, 0 to remove and 299 not upgraded.
Need to get 5122 kB of archives.
After this operation, 74.7 MB of additional disk space will be used.
Do you want to continue? [Y/n] Y
Get:1 http://azure.archive.ubuntu.com/ubuntu focal-updates/main amd64 mysql-clie
nt-core-8.0 amd64 8.0.42-0ubuntu0.20.04.1 [5091 kB]
Get:2 http://azure.archive.ubuntu.com/ubuntu focal-updates/main amd64 mysql-clie
nt-8.0 amd64 8.0.42-0ubuntu0.20.04.1 [22.0 kB]
Get:3 http://azure.archive.ubuntu.com/ubuntu focal-updates/main amd64 mysql-clie
nt all 8.0.42-0ubuntu0.20.04.1 [9364 B]
Fetched 5122 kB in 0s (13.3 MB/s)
Selecting previously unselected package mysql-client-core-8.0.
(Reading database ... 193721 files and directories currently installed.)
Preparing to unpack .../mysql-client-core-8.0_8.0.42-0ubuntu0.20.04.1_amd64.deb
```

```
root@NIIT-DT-Linux:/home/ubuntu/Desktop# mysql -u root -h 172.17.0.2 -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 9.6.0 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

```
mysql> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
4 rows in set (0.00 sec)

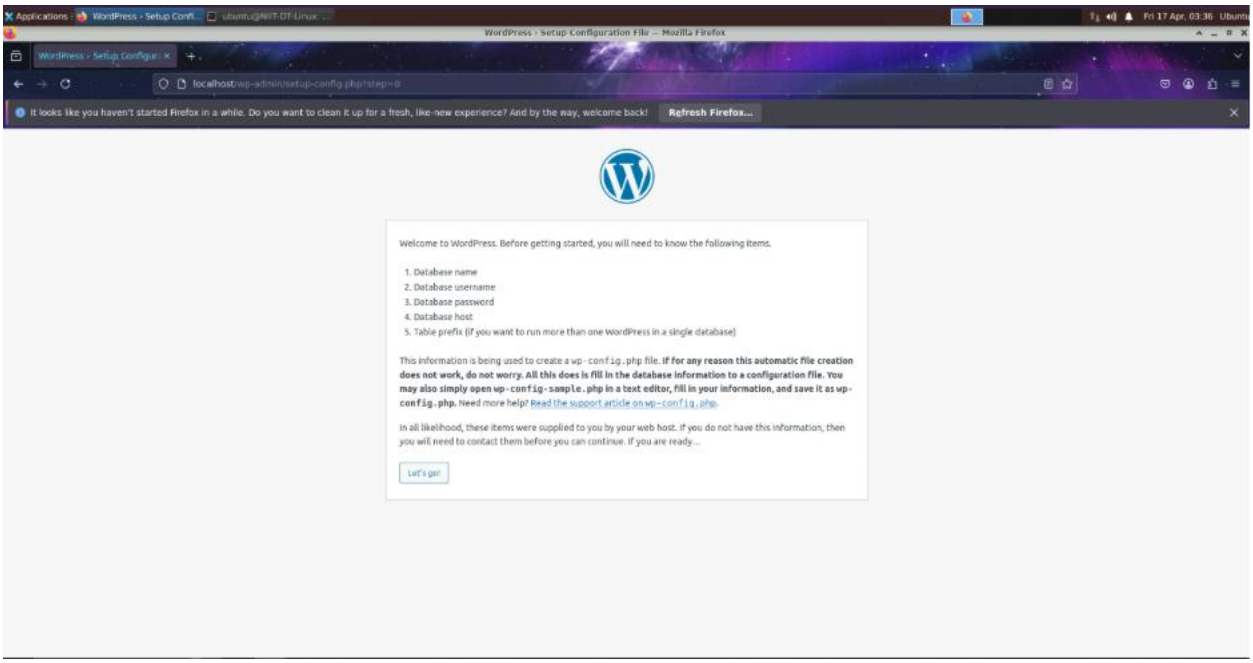
mysql>
```

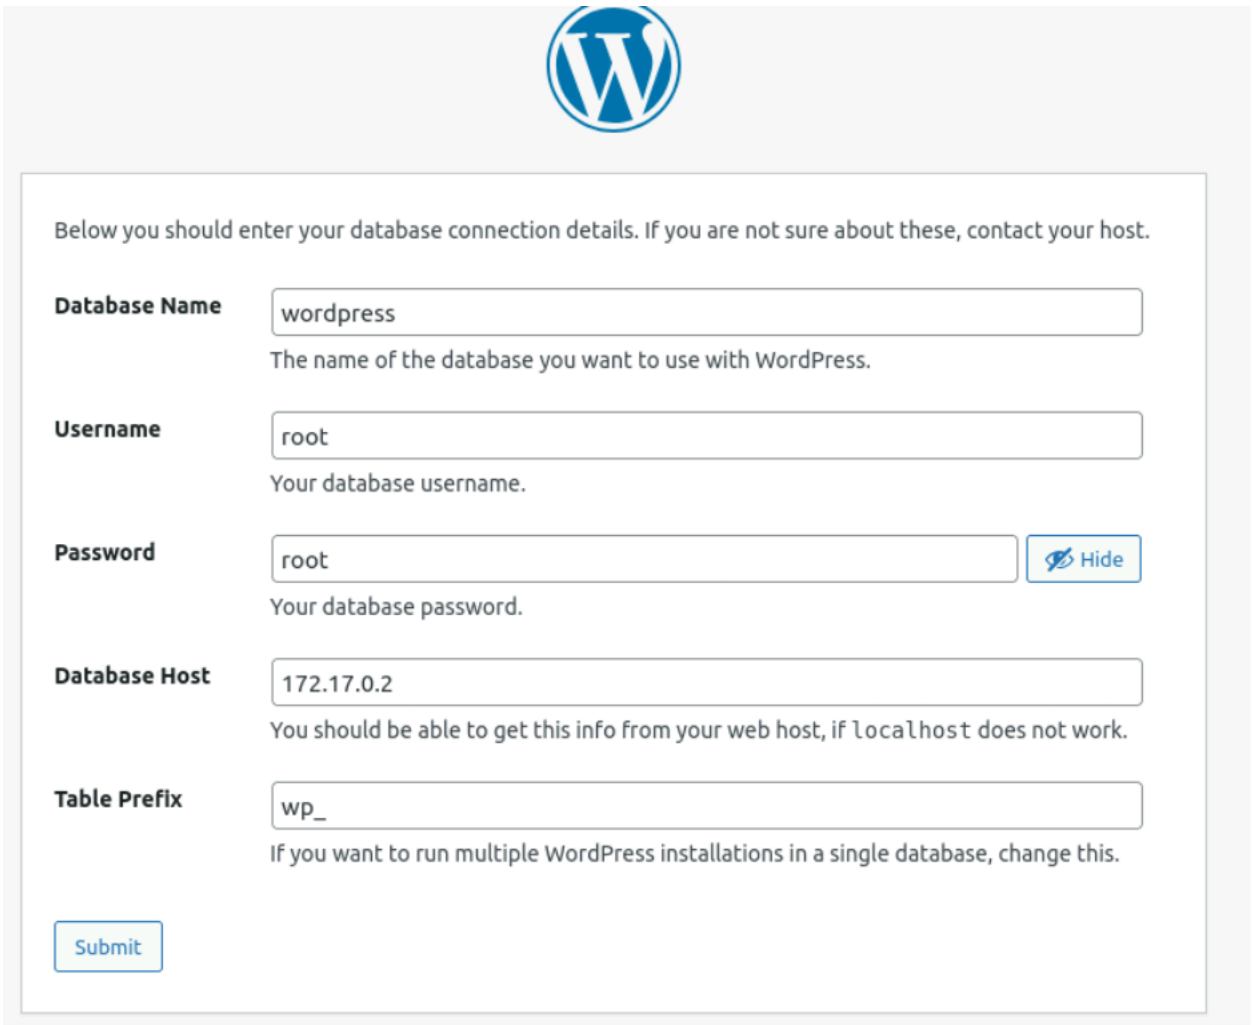
```
mysql> create database wordpress;
Query OK, 1 row affected (0.02 sec)

mysql> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
| wordpress          |
+--------------------+
5 rows in set (0.00 sec)

mysql> exit
Bye
root@NIIT-DT-Linux:/home/ubuntu/Desktop#
```

```
root@NIIT-DT-Linux:/home/ubuntu/Desktop# sudo docker run --name wordpress -p 80:
80 -d wordpress
Unable to find image 'wordpress:latest' locally
latest: Pulling from library/wordpress
5435b2dcdf5c: Pulling fs layer
0dbbd63ae63a: Pull complete
d5af5dfa43d4: Pull complete
e24121de25e6: Pull complete
de502dcf081a: Pull complete
79e11af4b256: Pull complete
90be0470639d: Pull complete
1fa182c1d458: Pull complete
4443d9c71a47: Pull complete
9bde0c34d1f4: Pull complete
871c6a1a47cc: Pull complete
9cb746f747ab: Pull complete
6562f7228ec3: Pull complete
568912d7e28d: Pull complete
4f4fb700ef54: Pull complete
3f3cb8cd0960: Pull complete
73ce216c5445: Pull complete
7d9f8a57d57a: Pull complete
5020203f7d33: Pull complete
Digest: sha256:1a758de2f424f735a9f8ad181783a9ed29e028594869a3323903d92532b35102
Status: Downloaded newer image for wordpress:latest
ec8b6752bc234c629067c27b648d3bce9f68cdf91a9b7085a35b8335df624630
root@NIIT-DT-Linux:/home/ubuntu/Desktop#
```


WordPress › Setup Configuration File — Mozilla Firefox
It looks like you haven't started Firefox in a while. Do you want to clean it up for a fresh, like-new experience? And by the way, welcome back!
Refresh Firefox...
Welcome to WordPress. Before getting started, you will need to know the following items.
1. Database name
2. Database username
3. Database password
4. Database host
5. Table prefix (if you want to run more than one WordPress in a single database)
This information is being used to create a wp-config.php file. If for any reason this automatic file creation does not work, do not worry. All this does is fill in the database information to a configuration file. You may also simply open wp-config-sample.php in a text editor, fill in your information, and save it as wp-config.php. Need more help? Read the support article on wp-config.php.
In all likelihood, these items were supplied to you by your web host. If you do not have this information, then you will need to contact them before you can continue. If you are ready...
Let's go!


Below you should enter your database connection details. If you are not sure about these, contact your host.
Database Name
wordpress
The name of the database you want to use with WordPress.
Username
root
Your database username.
Password
root
Hide
Your database password.
Database Host
172.17.0.2
You should be able to get this info from your web host, if localhost does not work.
Table Prefix
wp_
If you want to run multiple WordPress installations in a single database, change this.
Submit



All right, sparky! You've made it through this part of the installation. WordPress can now communicate with your database. If you are ready, time now to…

Run the installation

Welcome

Welcome to the famous five-minute WordPress installation process! Just fill in the information below and you'll be on your way to using the most extendable and powerful personal publishing platform in the world.

Information needed

Please provide the following information. Do not worry, you can always change these settings later.

Site Title Hello World

Username Charels

Usernames can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.

Password Charels@123 Hide

Weak

Important: You will need this password to log in. Please store it in a secure location.

Confirm Password Confirm use of weak password

Your Email Charels@example.com

Double-check your email address before continuing.

Search engine visibility Discourage search engines from indexing this site

It is up to search engines to honor this request.

Install WordPress

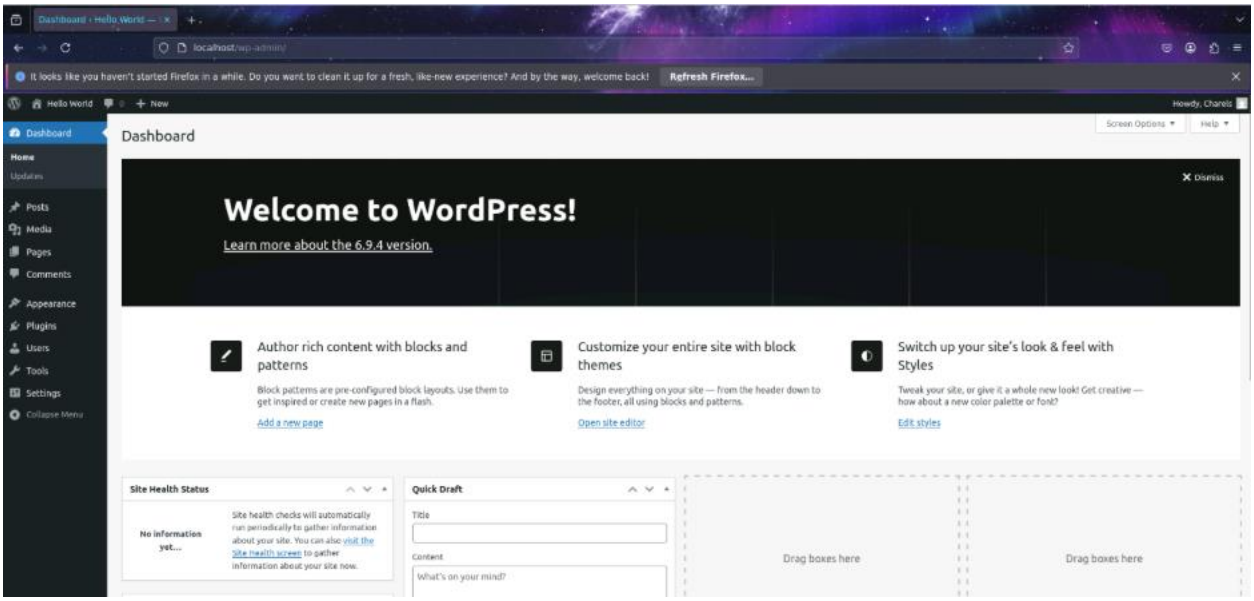
Success!

WordPress has been installed. Thank you, and enjoy!

Username Charels

Password *Your chosen password.*

Log In



```
ubuntu@NIIT-DT-Linux:~/Desktop$ mysql -u root -h 172.17.0.2 -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 33
Server version: 9.6.0 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use wordpress;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

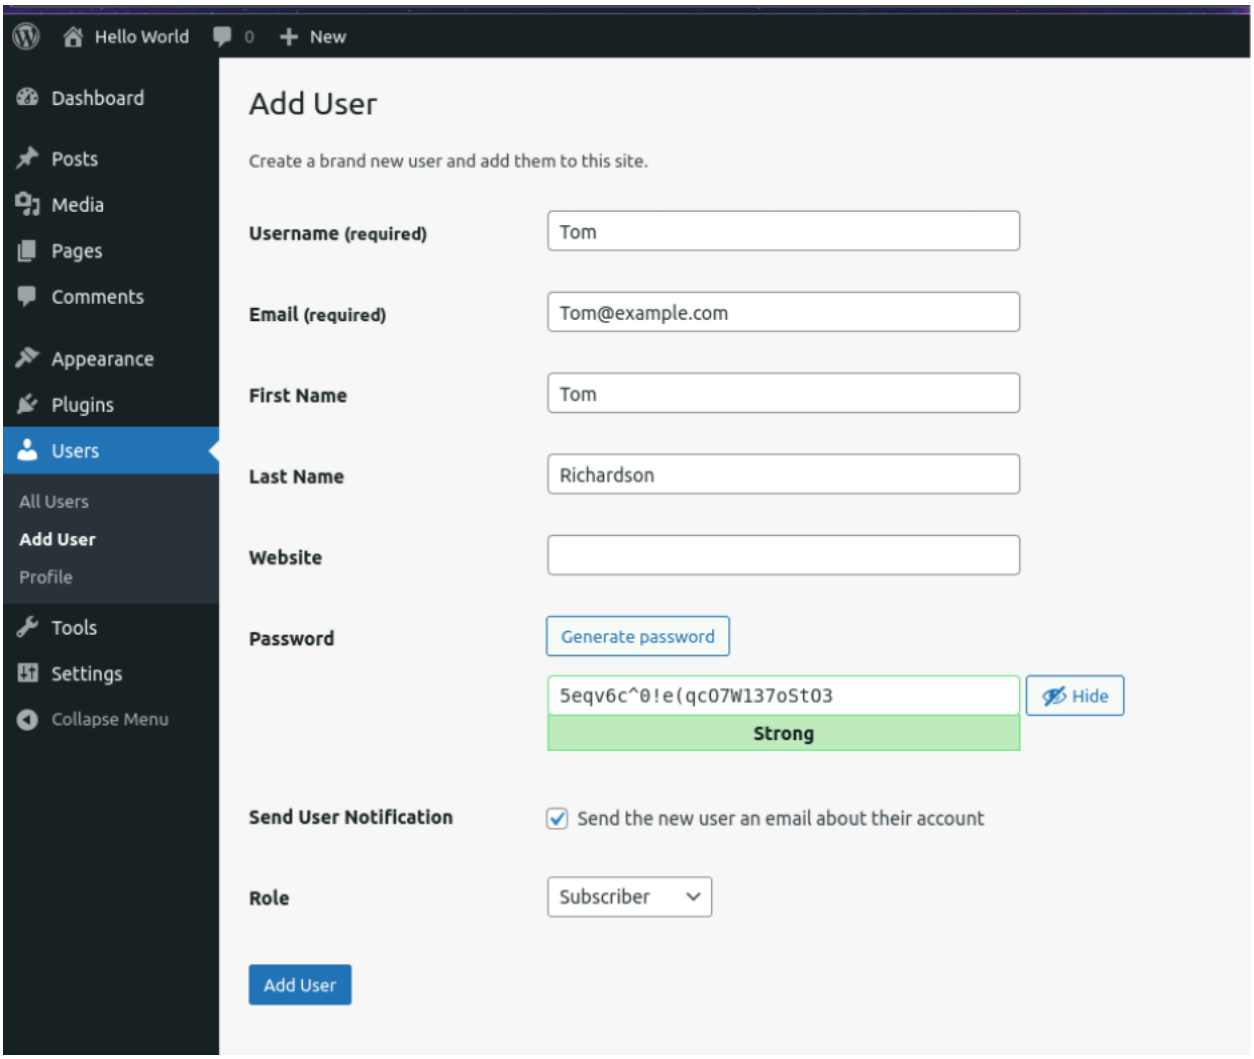
Database changed
mysql> show tables;
+-----------------------+
| Tables_in_wordpress   |
```

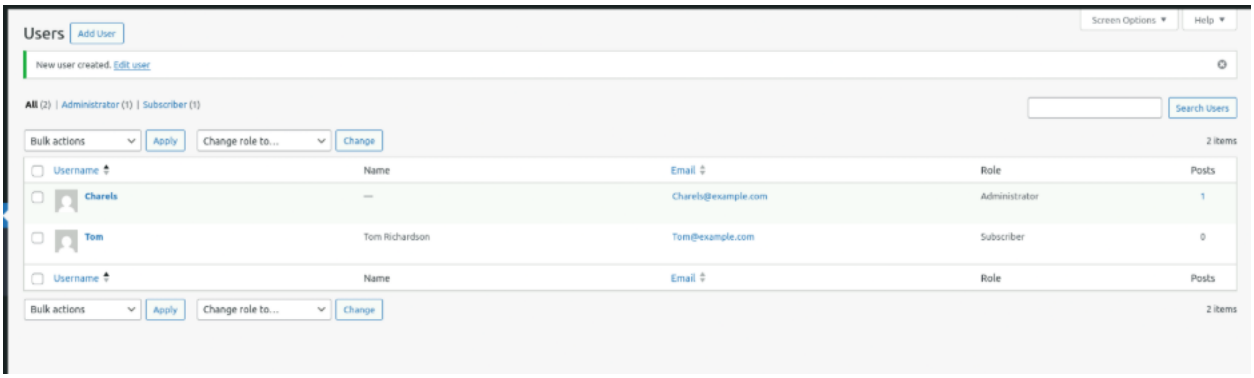
```
mysql> show tables;
+-----------------------+
| Tables_in_wordpress   |
+-----------------------+
| wp_commentmeta        |
| wp_comments           |
| wp_links              |
| wp_options            |
| wp_postmeta           |
| wp_posts              |
| wp_term_relationships |
| wp_term_taxonomy      |
| wp_termmeta           |
| wp_terms              |
| wp_usermeta           |
| wp_users              |
+-----------------------+
12 rows in set (0.00 sec)

mysql> select * wp_users;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that
corresponds to your MySQL server version for the right syntax to use near 'wp_us
ers' at line 1
mysql> select * from  wp_users;
```

```
mysql> select * from  wp_users;
+----+------------+------------------------------------------------------------------
----+--------------+--------------------+-----------------+-----------------
---+---------------------+-------------+--------------+
| ID | user_login | user_pass
    | user_nicename | user_email          | user_url         | user_registered
   | user_activation_key | user_status | display_name |
+----+------------+------------------------------------------------------------------
----+--------------+--------------------+-----------------+-----------------
---+---------------------+-------------+--------------+
|  1 | Charels    | $wp$2y$10$oIFzyUC2StdnHkzQcf9yWeDCREDdwxnFa/vP07LuYntRcBDeWQ
5AW | charels       | Charels@example.com | http://localhost | 2026-04-17 04:08:
12 |                     |           0 | Charels      |
+----+------------+------------------------------------------------------------------
----+--------------+--------------------+-----------------+-----------------
---+---------------------+-------------+--------------+
1 row in set (0.00 sec)

mysql>
```


Hello World
0
New
Dashboard
Posts
Media
Pages
Comments
Appearance
Plugins
Users
All Users
Add User
Profile
Tools
Settings
Collapse Menu
Add User
Create a brand new user and add them to this site.
Username (required)
Tom
Email (required)
Tom@example.com
First Name
Tom
Last Name
Richardson
Website
Password
Generate password
5eqv6c^0!e(qcO7W137oStO3
Hide
Strong
Send User Notification
Send the new user an email about their account
Role
Subscriber
Add User


Users
Add User
New user created. Edit user
All (2) | Administrator (1) | Subscriber (1)
Search Users
Bulk actions
Apply
Change role to...
Change
2 items
Username
Name
Email
Role
Posts
Charels
Charels@example.com
Administrator
1
Tom
Tom Richardson
Tom@example.com
Subscriber
0

```
mysql> select * from  wp_users;
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------+-------------+-----------
---+
| ID | user_login | user_pass                                                        | user_nicename | user_email      | user_url      | user_registered     | user_activation_key | user_status | display_na
me |
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------+-------------+-----------
---+
|  1 | Charels    | $wp$2y$10$oIFzyUC25tdnHkzQcf9yWeDCREDdwxnFa/vP07LuYntRcBDeWQ5AW | charels       | Charels@example.com | http://localhost | 2026-04-17 04:08:12 |                     |           0 | Charels
   |
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------+-------------+-----------
---+
1 row in set (0.00 sec)

mysql> select * from  wp_users;
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------------------------------------------------------------------------------------+-------------+--------------
--------+
| ID | user_login | user_pass                                                        | user_nicename | user_email      | user_url      | user_registered     | user_activation_key                                                                               | user_status | display_name   |
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------------------------------------------------------------------------------------+-------------+--------------
--------+
|  1 | Charels    | $wp$2y$10$oIFzyUC25tdnHkzQcf9yWeDCREDdwxnFa/vP07LuYntRcBDeWQ5AW | charels       | Charels@example.com | http://localhost | 2026-04-17 04:08:12 |                                                                                                   |           0 | Charels        |
|  2 | Tom        | $wp$2y$10$X6Df00Ld5Xhv0U5x1KL/HOTK.4Bb3/82tXyaPEIaOzXtaebFItyjO | tom           | Tom@example.com |               | 2026-04-17 04:17:57 | 1776399477:$generic$gqOgyIEtPr4xjZ3BjQeAkdjpI5VavXiwIApkMxcA |           0 | Tom Richardson |
+----+------------+------------------------------------------------------------------+---------------+-----------------+---------------+---------------------+---------------------------------------------------------------------------------------------------+-------------+--------------
--------+
2 rows in set (0.01 sec)
```