

REACT 13

CODE:

Data.js

```
export const books = [
  { id: 101, bname: 'Master React', price: 670 },
  { id: 102, bname: 'Deep Dive into Angular 11', price: 800 },
  { id: 103, bname: 'Mongo Essentials', price: 450 },
];

export const courses = [
  { id: 201, cname: 'Angular', cdate: '4/5/2021' },
  { id: 202, cname: 'React', cdate: '6/3/2021' },
];

export const blog = {
  title: 'React Learning',
  author: 'Stephen Biz',
  intro: 'Welcome to learning React!',
  body: 'You can install React from npm.',
};
```

App.js

```
import React from 'react';
import './App.css';
import { books, courses, blog } from './data';

function Details(props) {
  // List rendering with map() + key, for the Book Details section
  const bookdet = (
    <ul>
      {props.books.map((book) => (
        <div key={book.id}>
          <h3>{book.bname}</h3>
          <h4>{book.price}</h4>
        </div>
      ))}
    </ul>
  );
};

// List rendering with map() + key, for the course Details section
const coursedet = (
  <ul>
    {props.courses.map((course) => (
      <div key={course.id}>
        <h3>{course.cname}</h3>
        <h4>{course.cdate}</h4>
      </div>
    ))}
  </ul>
);
```

```

// Blog Details is a single object, so no list/map is needed here
const content = (
  <div>
    <h3>{props.blog.title}</h3>
    <h4>{props.blog.author}</h4>
    <p>{props.blog.intro}</p>
    <h4>Installation</h4>
    <p>{props.blog.body}</p>
  </div>
);

return (
  <div>
    <div className="container">
      <div className="st2">
        <h1>Book Details</h1>
        {bookdet}
      </div>
      <div className="v1">
        <h1>Blog Details</h1>
        {content}
      </div>
      <div className="mystyle1">
        <h1>Course Details</h1>
        {coursedet}
      </div>
    </div>
  </div>
);
}

```

```

function App() {
  return (
    <div className="App">
      <Details books={books} courses={courses} blog={blog} />
    </div>
  );
}

export default App;

```

App.css


```

1 .App {
2   font-family: Arial, sans-serif;
3   padding: 20px;
4 }
5
6 .container {
7   display: flex;
8   gap: 40px;
9 }
10
11 .mystyle1 {
12   order: 1;
13 }
14
15 .st2 {
16   order: 2;
17 }
18
19 .v1 {
20   order: 3;
21 }
22
23 h1 {
24   font-size: 18px;
25 }
26
27 h3 {
28   margin: 8px 0 2px 0;
29 }
30
31 h4 {
32   margin: 0 0 8px 0;
33   font-weight: normal;
34 }
35

```

OUTPUT:


Guest

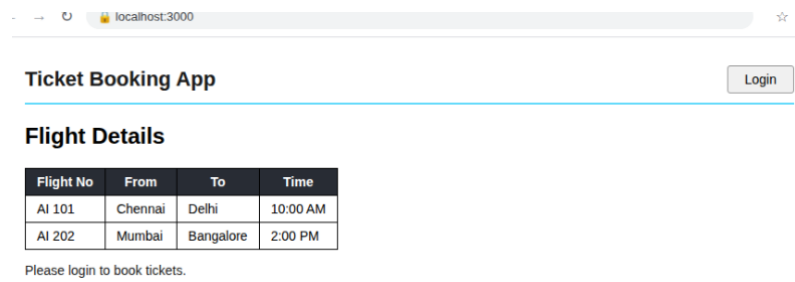

The screenshot shows a web browser window with the address bar displaying 'localhost:3000'. The page title is 'Ticket Booking App' and there is a 'Login' button in the top right corner. Below the title, the section 'Flight Details' contains a table with flight information. Below the table, a message states 'Please login to book tickets.'

Flight No	From	To	Time
AI 101	Chennai	Delhi	10:00 AM
AI 202	Mumbai	Bangalore	2:00 PM

User

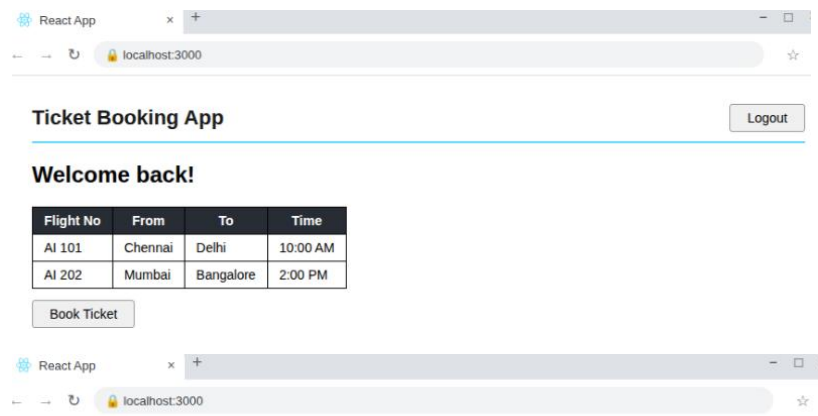

The first screenshot shows the 'Ticket Booking App' with a 'Logout' button in the top right corner. Below the title, the section 'Welcome back!' is displayed. Below this, the same flight details table is shown. At the bottom, there is a 'Book Ticket' button.

Flight No	From	To	Time
AI 101	Chennai	Delhi	10:00 AM
AI 202	Mumbai	Bangalore	2:00 PM

The second screenshot shows the same application with a different layout. It features three columns of content: 'Course Details', 'Book Details', and 'Blog Details'.

Course Details

Angular
4/5/2021
React
6/3/2021

Book Details

Master React
670
Deep Dive into Angular 11
800
Mongo Essentials
450

Blog Details

React Learning
Stephen Biz
Welcome to learning React!
Installation
You can install React from npm.