jQuery_Day – 1_Week3_Hands_On -- Kaveri Harish Babu

Problem 1

Problem Statement:

Problem 1 (Level-1): Student Feedback Form Interaction

Scenario:

A training institute wants to collect feedback from students through a simple web form. They want to enhance user experience using jQuery to validate inputs and display messages dynamically without reloading the page.

Requirements

• Create a feedback form with fields: Name, Email, Course Rating (dropdown), and Comments.

• Use jQuery selectors to capture form inputs.

• On clicking the Submit button, validate that Name and Email are not empty.

• Display a success message dynamically below the form using jQuery DOM manipulation.

• Clear the form fields after successful submission.

⚙ Technical Constraints

• Use jQuery CDN for integration.

• Use basic jQuery syntax: $(selector).action().

• Do not use plain JavaScript for validation (only jQuery methods).

• No backend integration required.

Expectations:

• Proper use of jQuery selectors and event handling.

• Clean and readable code structure.

• Validation messages should be user-friendly.

Learning Outcome:

- Understand jQuery syntax and selectors.
- Learn basic DOM manipulation using jQuery.

Source Code:

File Name: Index.html

```html
<!--jQuery_Day11_Hands_on_Problem_Statement1_HarishBabuKaveri-->
<!DOCTYPE html>
<html>
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Student Feedback Form</title>

    <!-- jQuery CDN -->
    <script src="https://code.jquery.com/jquery-3.7.1.min.js"></script>

    <style>
        body {
            font-family: Arial, sans-serif;
            background-color:#007bff;
        }

        h2{
            text-align: center;
            margin-top: 20px;
            margin-bottom: 20px;
        }

        .container {
            width: 400px;
            margin: 50px auto;
            padding: 20px;
            background:white;
            border-radius: 8px;
        }

        input, select, textarea {
            width: 100%;
            padding: 8px;
            margin-top: 8px;
            margin-bottom: 15px;
```

```
37                  border: 1px solid #ccc;
38                  border-radius: 4px;
39              }
40
41              button {
42                  width: 100%;
43                  padding: 10px;
44                  background: #007bff;
45                  color: white;
46                  border: none;
47                  border-radius: 5px;
48                  cursor: pointer;
49              }
50
51              button:hover {
52                  background: #0056b3;
53              }
54
55              .message {
56                  margin-top: 20px;
57                  font-weight: bold;
58              }
59
60              .error {
61                  text-align: center;
62                  color: red;
63              }
64
65              .success {
66                  text-align: center;
67                  color: green;
68              }
69          </style>
70      </head>
71
72      <body>
```

```
<div class="container">
    <h2>Feedback Form</h2>

    <form id="feedbackForm">
        <label>Name</label>
        <input type="text" id="name">

        <label>Email</label>
        <input type="email" id="email">

        <label>Course Rating</label>
        <select id="rating">
            <option value="">Select Rating</option>
            <option>5 - Excellent</option>
            <option>4 - Good</option>
            <option>3 - Average</option>
            <option>2 - Poor</option>
            <option>1 - Very Poor</option>
        </select>

        <label>Comments</label>
        <textarea id="comments" rows="3" cols="3"></textarea>

        <button type="submit">Submit</button>

    </form>

    <div id="responseMessage" class="message"></div>
</div>

<script>
    $(document).ready(function () {

        $("#feedbackForm").submit(function (event) {
            event.preventDefault();
```

```
        $("#feedbackForm").submit(function (event) {
            event.preventDefault();

            var name = $("#name").val().trim();
            var email = $("#email").val().trim();

            if (name === "" && email === "") {
                $("#responseMessage")
                    .removeClass("success")
                    .addClass("error")
                    .text("Please Enter Your Name and Email.");
            } else if (name === "") {
                $("#responseMessage")
                    .removeClass("success")
                    .addClass("error")
                    .text("Please Enter Your Name.");
            } else if (email === "") {
                $("#responseMessage")
                    .removeClass("success")
                    .addClass("error")
                    .text("Please Enter Your Email.");
            } else {
                $("#responseMessage")
                    .removeClass("error")
                    .addClass("success")
                    .text("Thank You, " + name + "! Your feedback has been submitted successfully.");

                $("#feedbackForm")[0].reset();
            }
        });
    });
</script>

</body>
</html>
```

Output:

Output File: index.html

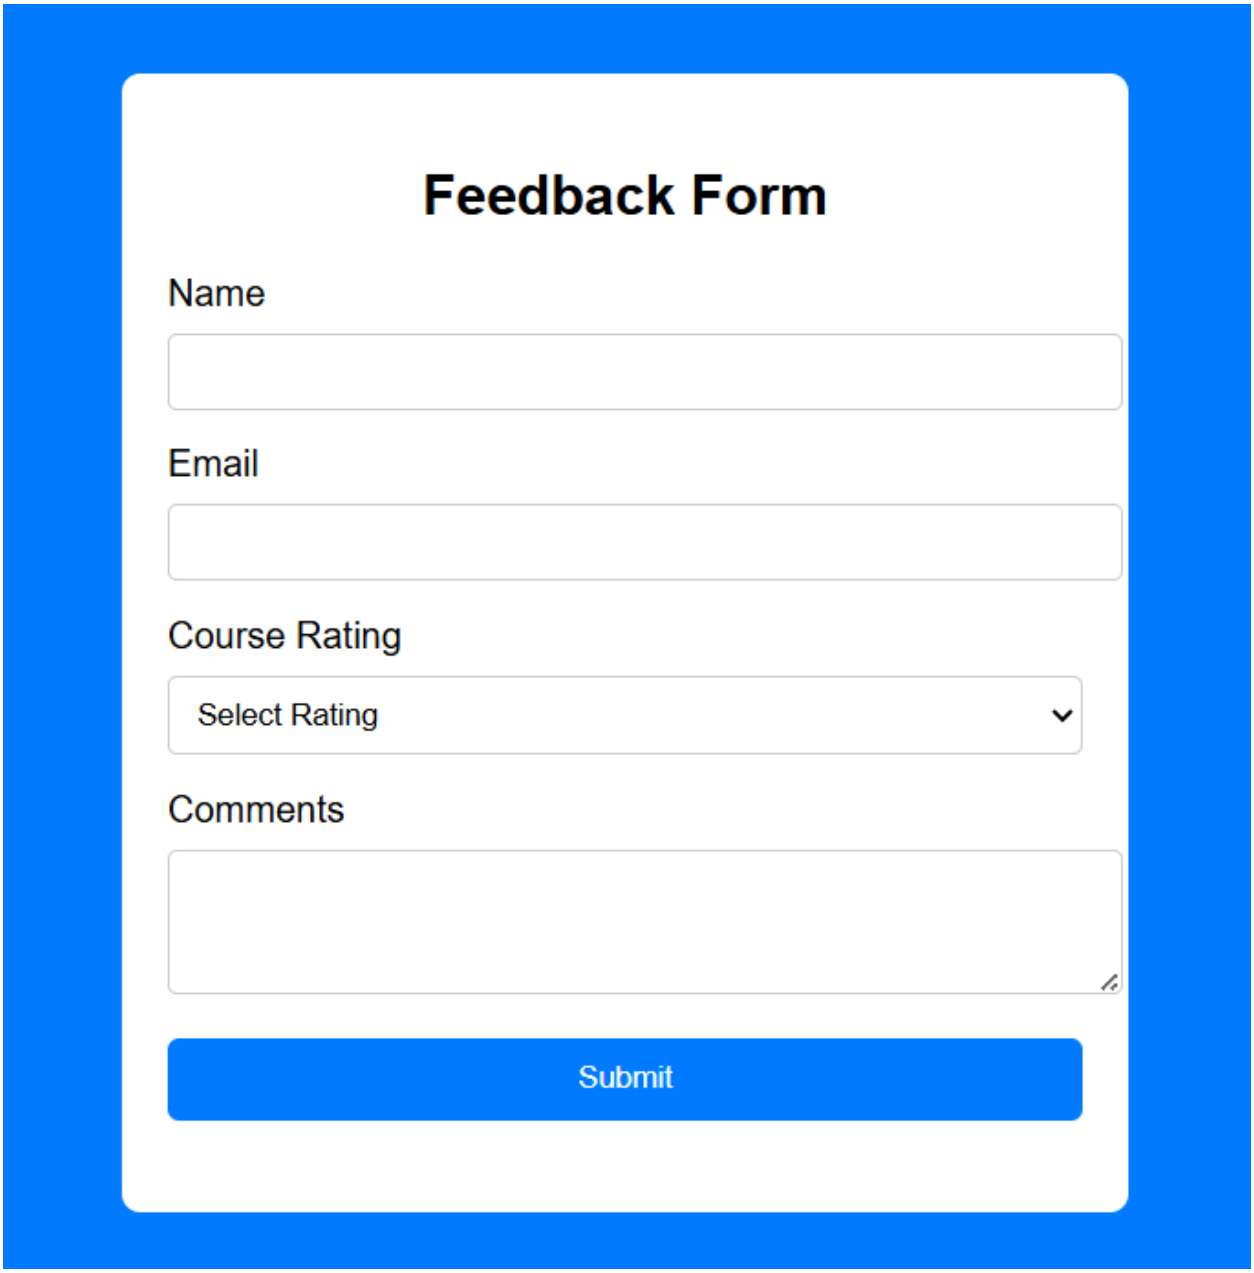

Feedback Form

Name

Harish

Email

Course Rating

4 - Good

Comments

Good

Submit

Please Enter Your Email.

Feedback Form

Name

Email

harish@gmail.com

Course Rating

4 - Good

Comments

Good

Submit

Please Enter Your Name.

Feedback Form

Name

Harish

Email

harish@gmail.com

Course Rating

4 - Good

Comments

Good

Submit

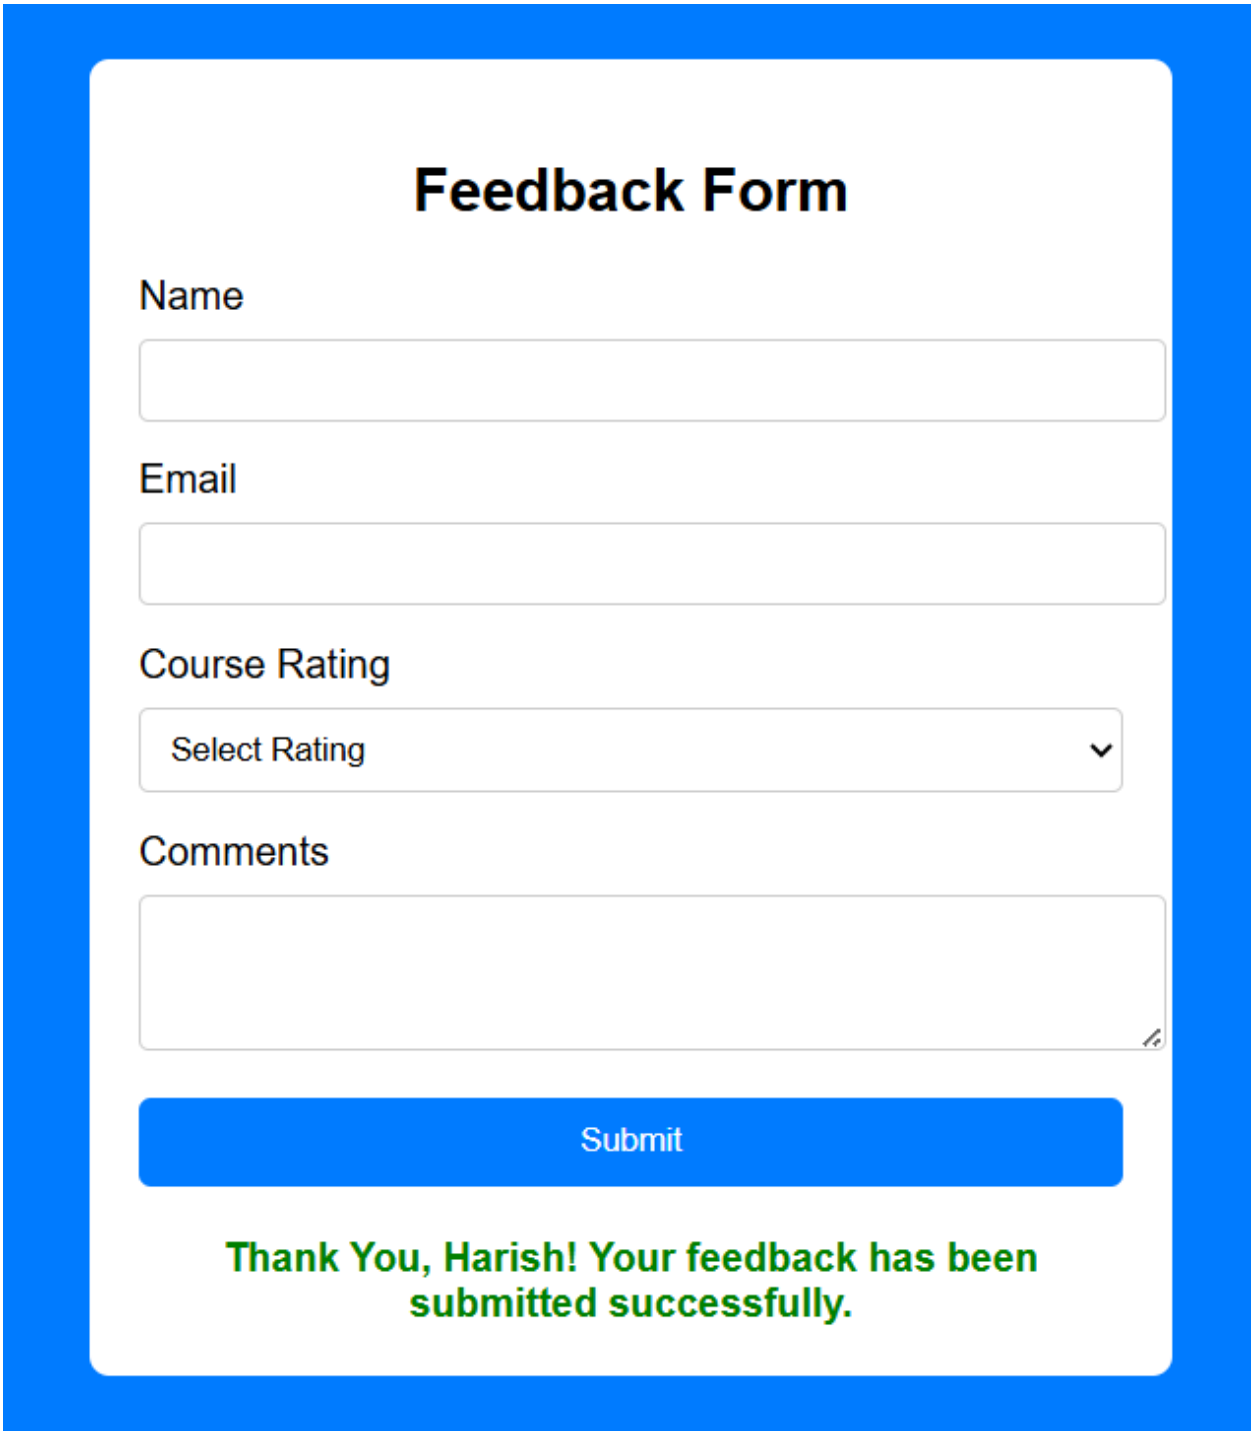

Explanation:

This code creates a **Feedback Form** using HTML, CSS, and jQuery. When you click Submit, jQuery checks if the Name and Email fields are filled and shows error messages if they're empty. If everything is filled correctly, it shows a green success message like "Thank You, Your_Name! Your feedback has been submitted successfully." and then clears the form.

Problem 2

Problem Statement: (Level-1): Dynamic FAQ Toggle Section

Scenario:

A website contains a Frequently Asked Questions (FAQ) section. The company wants answers to appear and disappear when users click on the questions.

Requirements

• Create at least 5 FAQ questions with hidden answers.

• Use jQuery click() event to toggle answers.

• Apply slideToggle() or show()/hide() methods.

• Highlight the selected question using CSS class manipulation.

⚙ Technical Constraints

• Use only jQuery methods for DOM manipulation.

• Use class selectors and ID selectors appropriately.

• Avoid inline JavaScript.

Expectations:

• Smooth UI interaction.

• Proper use of jQuery effects.

• Organized HTML structure.

Learning Outcome

• Implement event handling using jQuery.

• Use basic jQuery effects.

• Practice DOM traversal and manipulation.

Source Code:

File Name: index.html

```html
<!--jQuery_Day11_Hands_on_Problem_Statement2_HarishBabuKaveri-->
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Dynamic FAQ Section</title>

    <!-- jQuery CDN -->
    <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>

    <style>
        body {
            font-family: Arial, sans-serif;
            background: #78a8f06c;
            padding: 40px;
        }

        h2 {
            text-align: center;
            margin-bottom: 30px;
        }

        .faq-container {
            max-width: 600px;
            margin: auto;
        }

        .faq-item {
            margin-bottom: 10px;
            border-radius: 6px;
            overflow: hidden;
        }

        .question {
            background: #2490efe0;
            color: white;
            padding: 15px;
            cursor: pointer;
            font-weight: bold;
            transition: 0.3s;
        }

```

```html
        .question:hover {
            background:rgba(68, 196, 64, 0.9);
        }

        .answer {
            background: white;
            padding: 15px;
            display: none; /* Hidden by default */
            border: 1px solid #ddd;
        }

        /* Highlight active question */
        .active {
            background: #1abc9c !important;
        }
    </style>
</head>

<body>

    <h2>Frequently Asked Questions</h2>

    <div class="faq-container">

        <div class="faq-item">
            <div class="question">1. What is jQuery?</div>
            <div class="answer">
                jQuery is a fast, lightweight JavaScript library used for DOM manipulation and event handling.
            </div>
        </div>

        <div class="faq-item">
            <div class="question">2. What is slideToggle()?</div>
            <div class="answer">
                slideToggle() is a jQuery method that smoothly shows or hides elements with sliding animation.
            </div>
        </div>

        <div class="faq-item">
            <div class="question">3. What is DOM manipulation?</div>
            <div class="answer">
                DOM manipulation means modifying HTML elements dynamically using JavaScript or jQuery.
            </div>
```

```html
            </div>
        </div>

        <div class="faq-item">
            <div class="question">4. What is event handling?</div>
            <div class="answer">
                Event handling allows you to run functions when a user performs actions like clicking or typing.
            </div>
        </div>

        <div class="faq-item">
            <div class="question">5. Why use jQuery effects?</div>
            <div class="answer">
                jQuery effects make UI interactions smooth and visually appealing with minimal code.
            </div>
        </div>

    </div>

    <script>
        $(document).ready(function () {

            $(".question").click(function () {

                // Toggle current answer
                $(this).next(".answer").slideToggle(300);

                // Toggle active class
                $(this).toggleClass("active");

                // Optional: Close other answers
                $(".question").not(this).removeClass("active");
                $(".question").not(this).next(".answer").slideUp(300);
            });

        });
    </script>

</body>
</html>
```

Output:

Output File: index.html

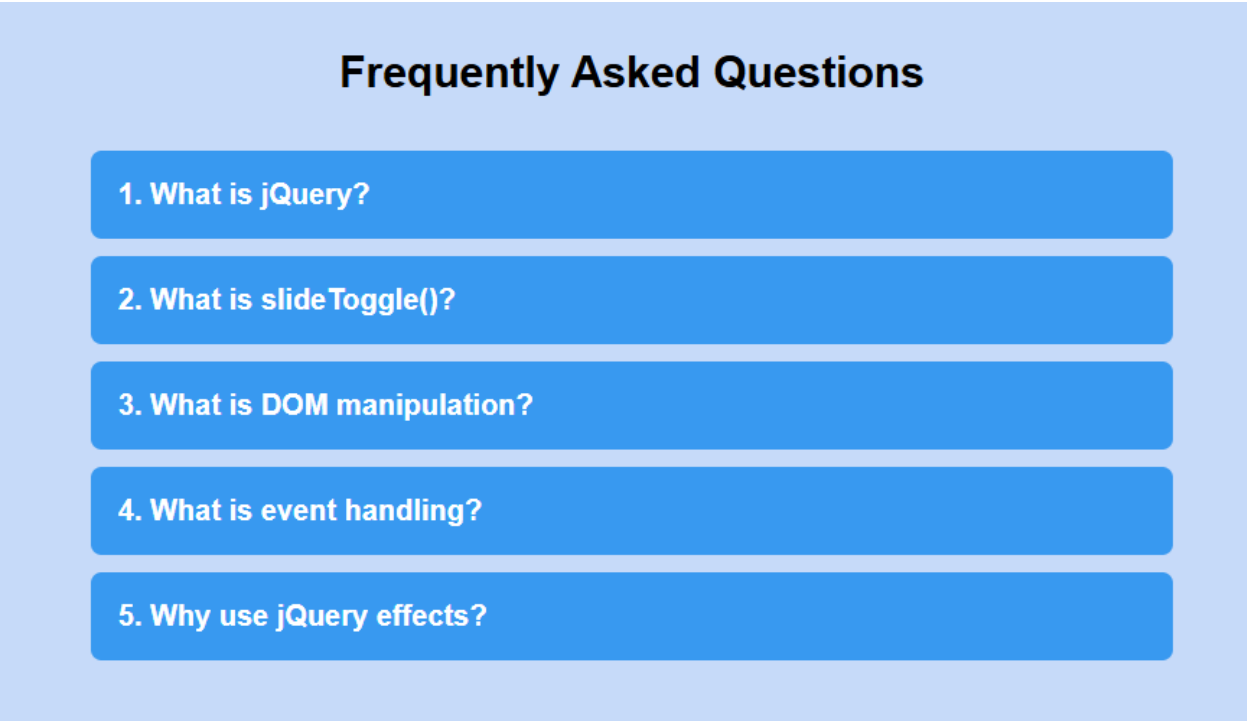

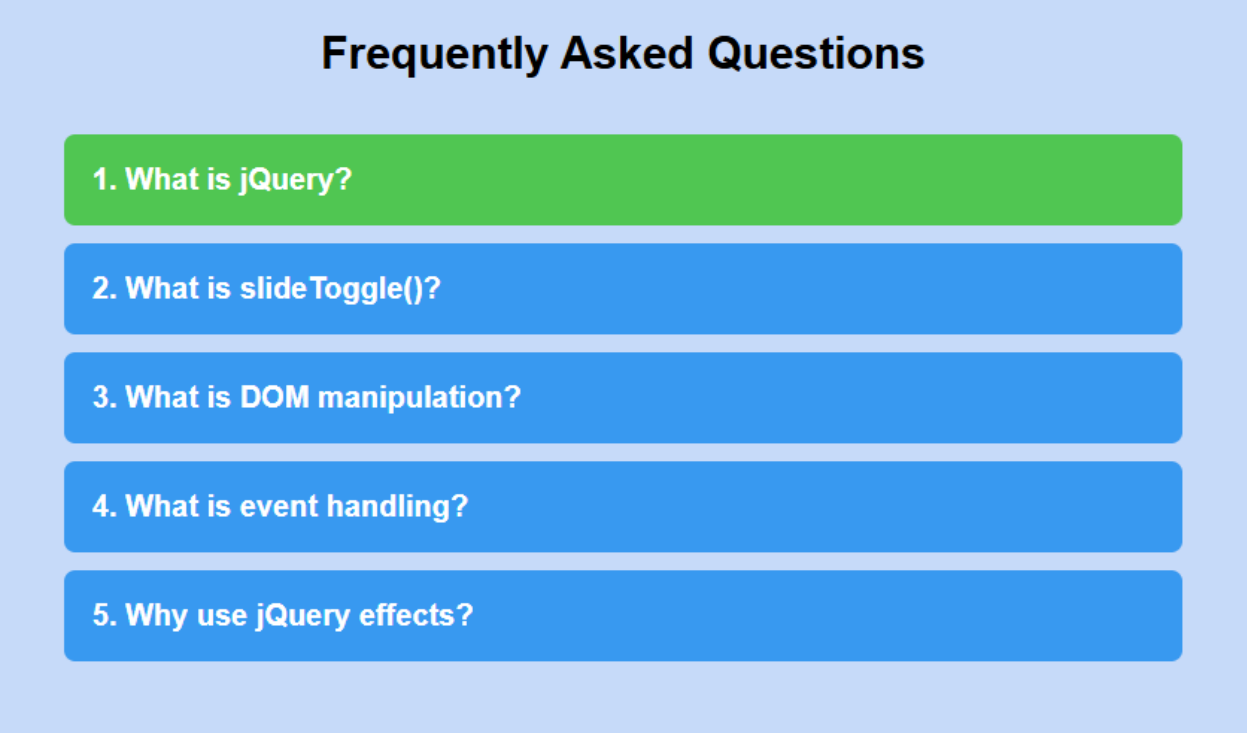

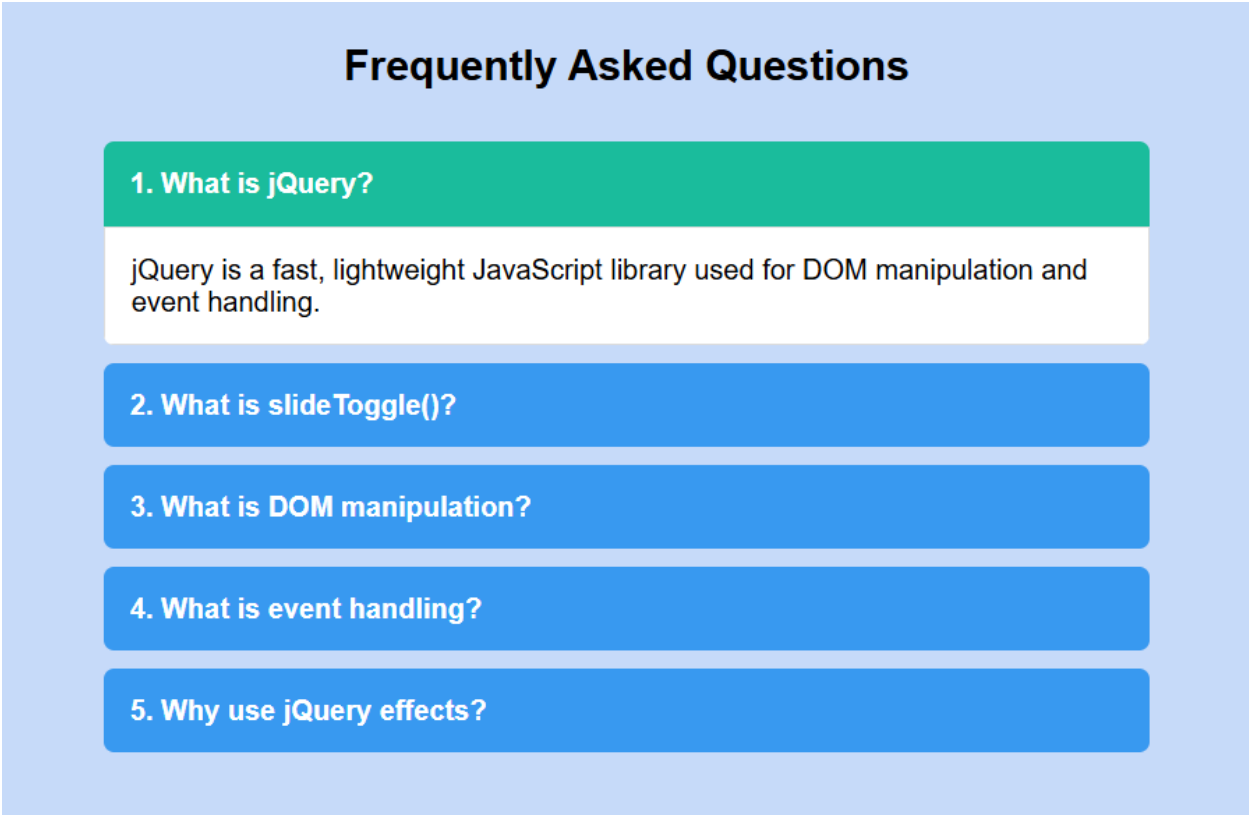

Explanation:

This code creates a **FAQ section** where answers are hidden by default. When you click on a question, jQuery uses slideToggle() to smoothly show or hide the answer and highlights the selected question. If you click another question, the previous one closes automatically, making it look clean and interactive.

Problem 3

Problem Statement: (Level-2): Product List with Add to Cart Counter

Scenario:

An e-commerce website wants to display a list of products. When users click 'Add to Cart', the cart counter at the top should increase dynamically.

Requirements

• Display at least 4 products with 'Add to Cart' buttons.

• Use jQuery to handle button click events.

• Increase the cart counter dynamically without page refresh.

• Disable the button once the product is added.

• Display a small confirmation message beside the product.

⚙ Technical Constraints

• Use jQuery event delegation if needed.

• Use .text(), .attr(), and .prop() methods.

• No backend or database integration.

Expectations:

• Efficient event handling.

• Proper use of jQuery methods for attribute manipulation.

• Clean UI updates.

Learning Outcome

• Understand advanced DOM manipulation.

• Use jQuery methods for dynamic content updates.

• Apply event delegation concepts.

Source Code:

File Name: index.html

```html
<!--jQuery_Day11_Hands_on_Problem_Statement3_HarishBabuKaveri-->
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <title>Product Cart Counter</title>

    <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>

    <style>
        body {
            font-family: Arial;
            text-align: center;
            background:honeydew;
        }

        .cart {
            font-size: 20px;
            margin: 20px;
        }

        .products {
            display: flex;
            justify-content: center;
            gap: 20px;
        }

        .product {
            background: white;
            padding: 20px;
            border-radius: 8px;
            width: 180px;
            box-shadow: 0 0 5px gray;
        }

        button {
            padding: 6px 12px;
            margin-top: 5px;
            cursor: pointer;
        }

        .msg {
```

```html
        .msg {
            color: green;
            font-size: 14px;
        }
    </style>
</head>

<body>

    <h2>E-Commerce Store</h2>

    <div class="cart">
        🛒 Cart Items: <span id="cartCount">0</span>
    </div>

    <div class="products">

        <div class="product">
            <h4>Laptop</h4>
            <p>₹25,000</p>
            <button class="addCart">Add to Cart</button>
            <button class="removeCart" disabled>Remove</button>
            <p class="msg"></p>
        </div>

        <div class="product">
            <h4>Mobile</h4>
            <p>₹10,000</p>
            <button class="addCart">Add to Cart</button>
            <button class="removeCart" disabled>Remove</button>
            <p class="msg"></p>
        </div>

        <div class="product">
            <h4>Headphones</h4>
            <p>₹500</p>
            <button class="addCart">Add to Cart</button>
            <button class="removeCart" disabled>Remove</button>
            <p class="msg"></p>
        </div>

        <div class="product">
            <h4>Smart Watch</h4>
```

```html
            <h4>Smart Watch</h4>
            <p>₹1,200</p>
            <button class="addCart">Add to Cart</button>
            <button class="removeCart" disabled>Remove</button>
            <p class="msg"></p>
        </div>

    </div>

    <script>

        let cart = 0;

        // Add to Cart
        $(".addCart").click(function () {

            cart++;
            $("#cartCount").text(cart);

            $(this).prop("disabled", true);
            $(this).siblings(".removeCart").prop("disabled", false);

            $(this).siblings(".msg").text("Added to Cart ✓");

        });

        // Remove from Cart
        $(".removeCart").click(function () {

            cart--;
            $("#cartCount").text(cart);

            $(this).prop("disabled", true);
            $(this).siblings(".addCart").prop("disabled", false);

            $(this).siblings(".msg").text("Removed from Cart");

        });

    </script>
</body>
</html>
```

Output:

Output File: index.html

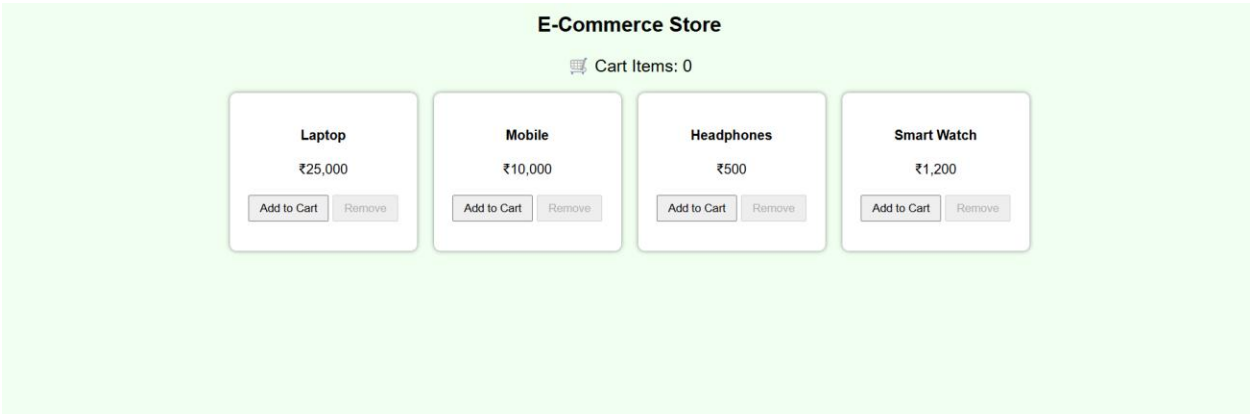

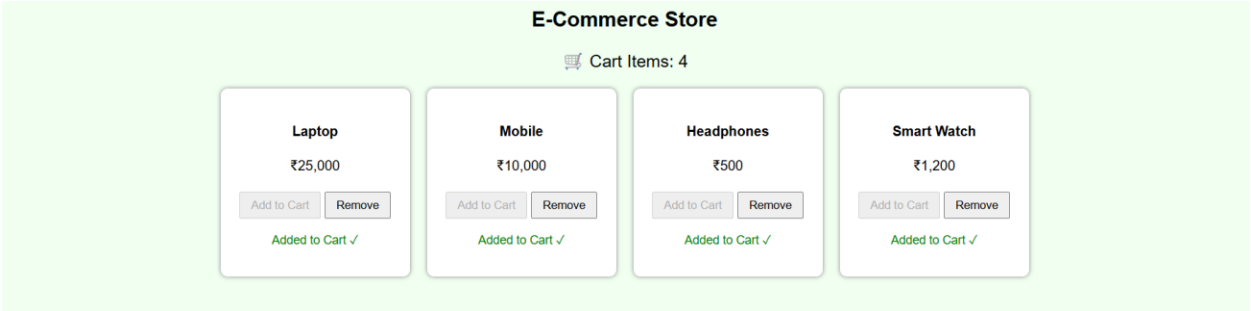

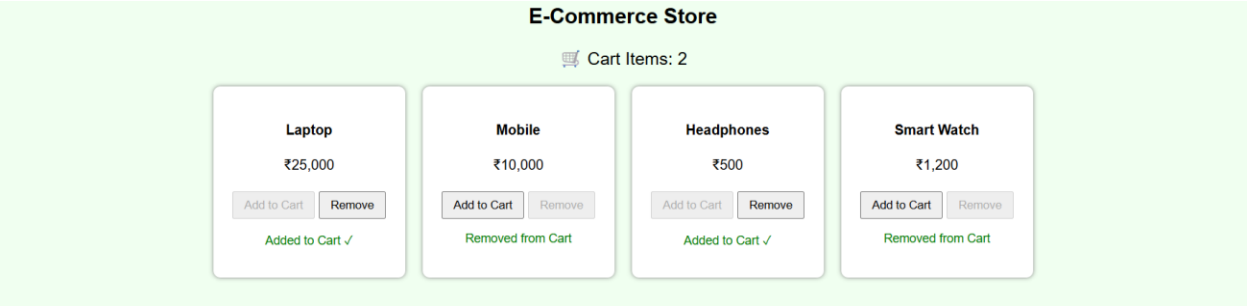

Explanation:

This code creates a simple **E-Commerce product list using jQuery** with **Add to Cart and Remove buttons**. When a user clicks **Add to Cart**, the cart counter at the top increases, the button gets disabled, and a message shows **"Added to Cart ✓"**. If the user clicks **Remove**, the counter decreases and the message changes to **"Removed from Cart"** without refreshing the page.

Problem 4

Problem Statement: (Level-2): Interactive To-Do List Application

Scenario:

A productivity web app requires a dynamic To-Do List where users can add, mark as complete, and remove tasks using jQuery.

Requirements

- Provide an input field and Add button to insert tasks.
- Display tasks dynamically in a list.
- Allow users to mark tasks as completed (strike-through effect).
- Provide a delete button for each task.
- Display total task count and completed task count dynamically.

⚙ Technical Constraints

- Use jQuery for all DOM manipulation and event handling.
- Use append(), remove(), toggleClass(), and on() methods.
- No external libraries except jQuery.

Expectations:

- Proper dynamic element handling.
- Efficient event binding for dynamically created elements.
- Responsive and interactive UI behavior.

Learning Outcome

- Master jQuery DOM manipulation.
- Implement dynamic event handling.
- Build a small interactive application using jQuery.

Source Code:

File Name: index.html

```html
<!--jQuery_Day11_Hands_on_Problem_Statement4_HarishBabuKaveri-->
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <title>jQuery To-Do List</title>

    <!-- jQuery CDN -->
    <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>

    <style>
        body {
            font-family: Arial;
            background:lightblue;
            text-align: center;
            margin-top: 50px;
        }

        .container {
            width: 400px;
            margin: auto;
            background: white;
            padding: 20px;
            border-radius: 8px;
            box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
        }

        input {
            padding: 8px;
            width: 70%;
        }

        button {
            padding: 8px 12px;
            cursor: pointer;
        }

        ul {
            list-style: none;
            padding: 0;
```

```
            padding: 0;
            margin-top: 20px;
        }

        li {
            padding: 10px;
            background: #eee;
            margin-bottom: 10px;
            display: flex;
            justify-content: space-between;
            align-items: center;
        }

        .completed {
            text-decoration: line-through;
            color: gray;
        }

        .delete {
            background: red;
            color: white;
            border: none;
            padding: 5px 10px;
        }

        .stats {
            margin-top: 15px;
            font-weight: bold;
        }
    </style>

</head>

<body>

    <div class="container">

        <h2>To-Do List</h2>

        <input type="text" id="taskInput" placeholder="Enter a task">
        <button id="addTask">Add</button>

        <ul id="taskList"></ul>
```

```
        <ul id="taskList"></ul>

        <div class="stats">
            Total Tasks: <span id="total">0</span> |
            Completed: <span id="completed">0</span>
        </div>

    </div>


    <script>

        $(document).ready(function () {

            function updateCount() {

                let total = $("#taskList li").length;
                let completed = $(".completed").length;

                $("#total").text(total);
                $("#completed").text(completed);

            }

            // Add Task
            $("#addTask").click(function () {

                let task = $("#taskInput").val();

                if (task === "") {
                    alert("Enter a task");
                    return;
                }

                $("#taskList").append(`
<li>
<span class="taskText">${task}</span>
<button class="delete">Delete</button>
</li>
`);

                $("#taskInput").val("");
```

```
                updateCount();

            });

            // Mark Completed
            $("#taskList").on("click", ".taskText", function () {

                $(this).toggleClass("completed");

                updateCount();

            });

            // Delete Task
            $("#taskList").on("click", ".delete", function () {

                $(this).parent().remove();

                updateCount();

            });

        });

    </script>

</body>

</html>
```

Output:

Output File: index.html

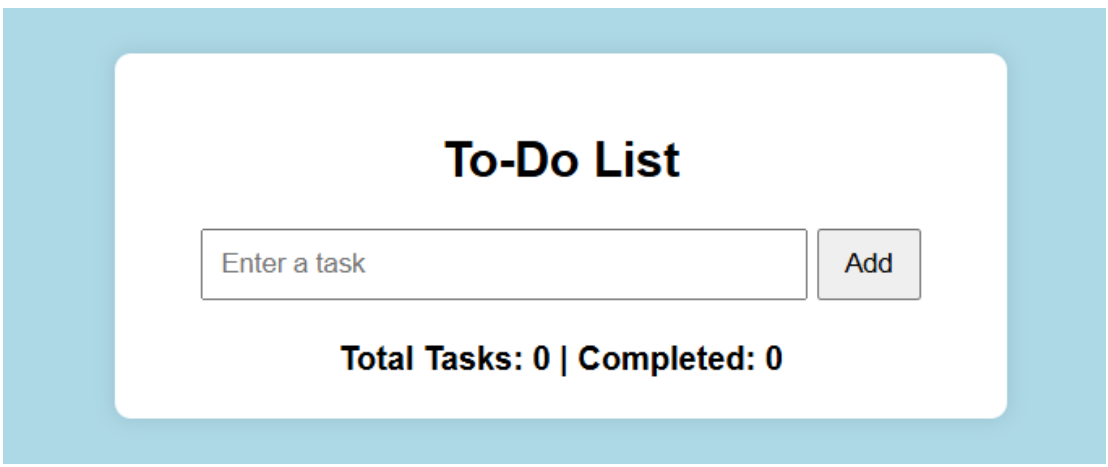

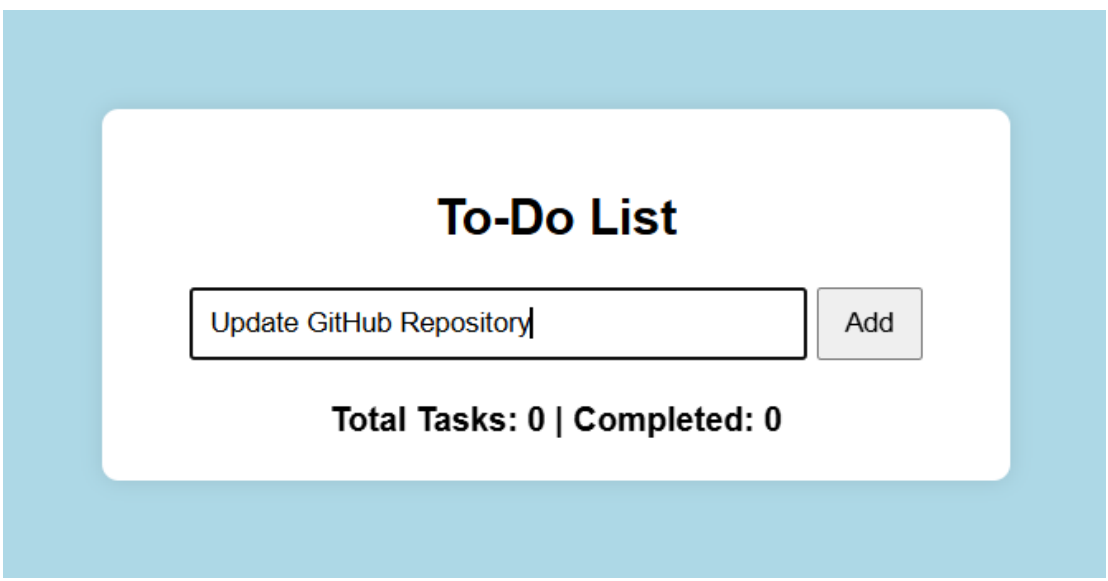

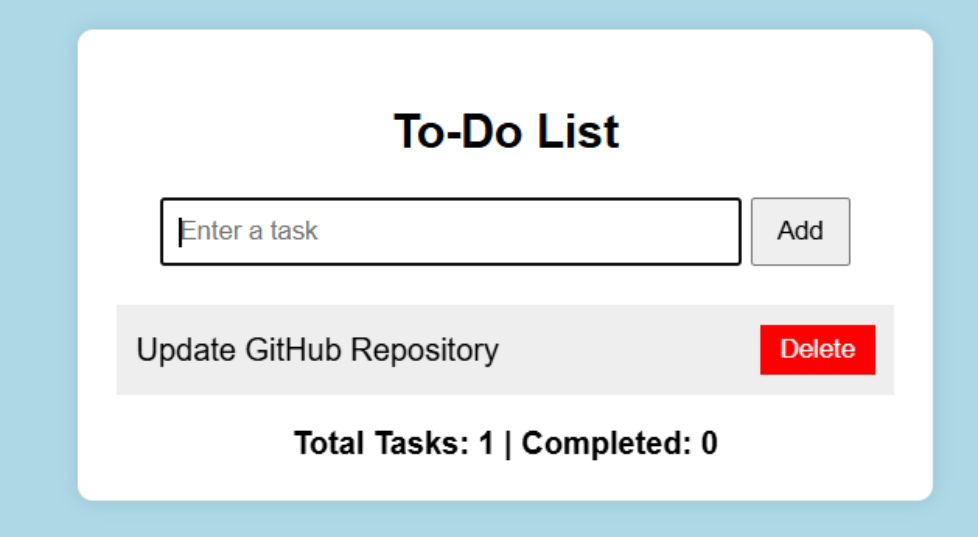

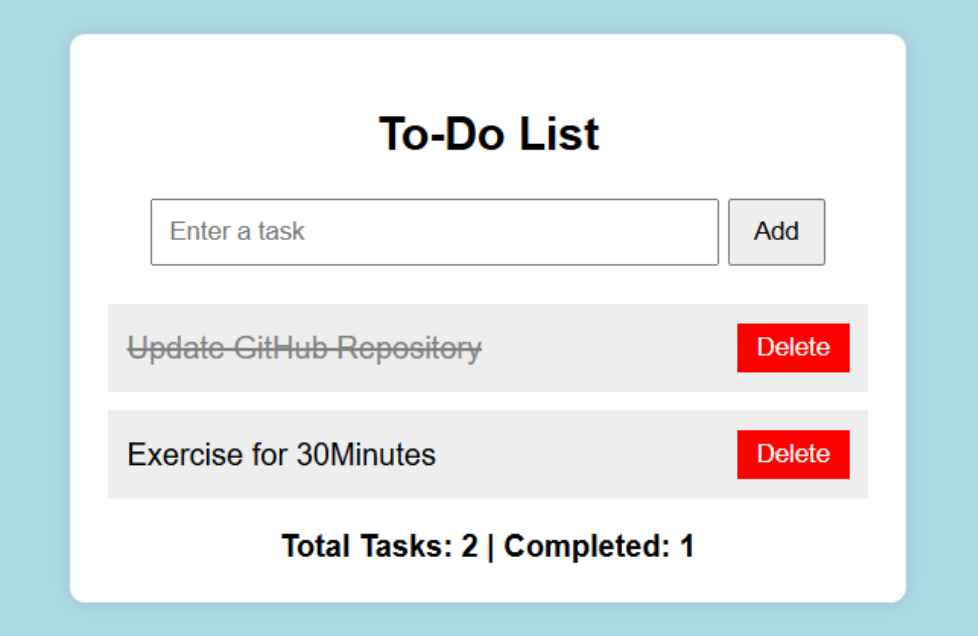

Explanation:

This code creates a **simple To-Do List using jQuery** where users can type a task and click **Add** to display it in the list. When a task is clicked, it gets **marked as completed (strikethrough)**, and users can also **delete tasks using the Delete button**. The app also updates the **total tasks and completed tasks count dynamically** without refreshing the page.