



1.Continuous example

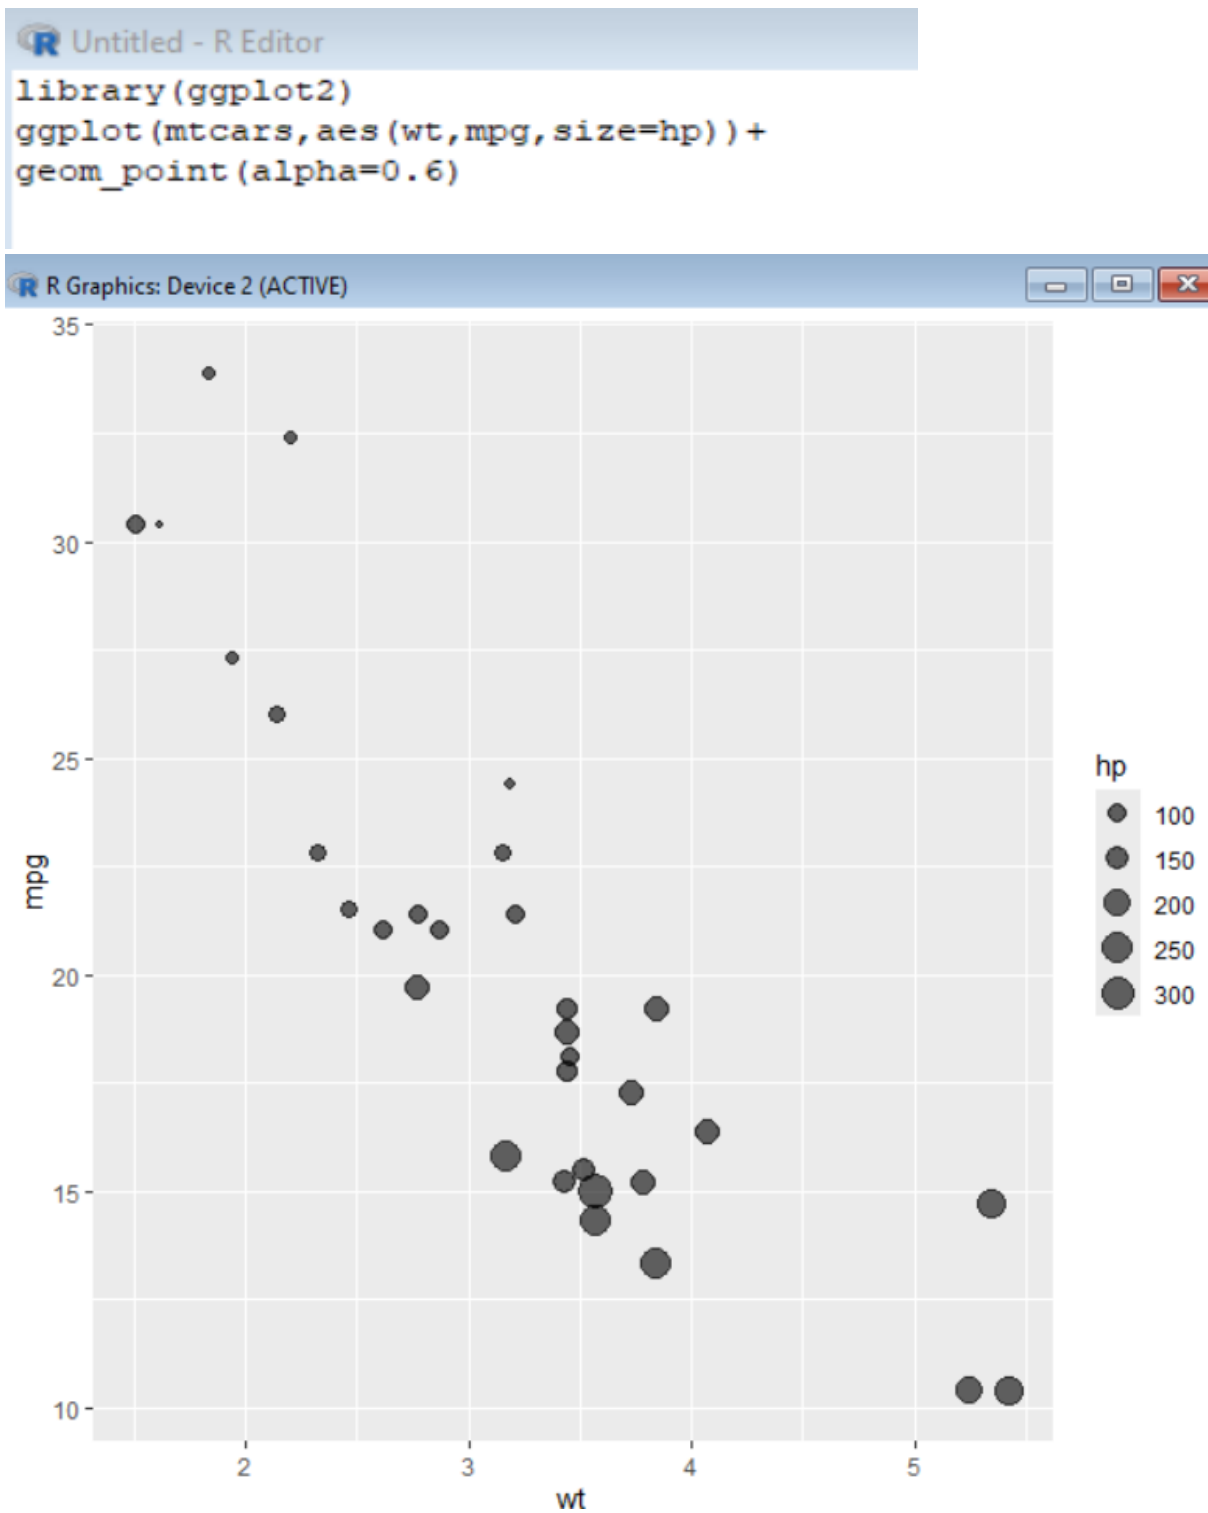


2. mapping color

```
ggplot(mtcars, aes(x=wt, y=mpg, color=factor(cyl))) + geom_point(size=3)
```

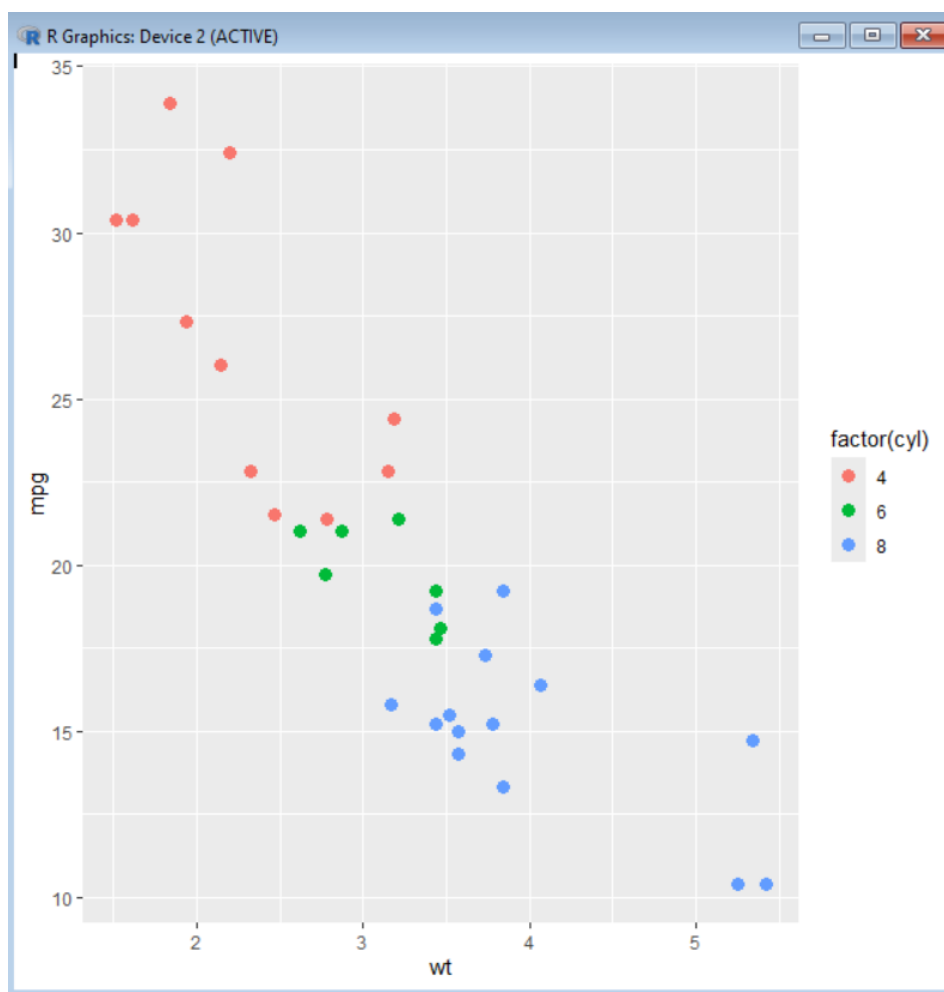


3.custom breaks

```
ggplot(mtcars, aes(x=wt, y=mpg)) + geom_point() + scale_x_continuous(breaks=seq(1, 6, 1))
```

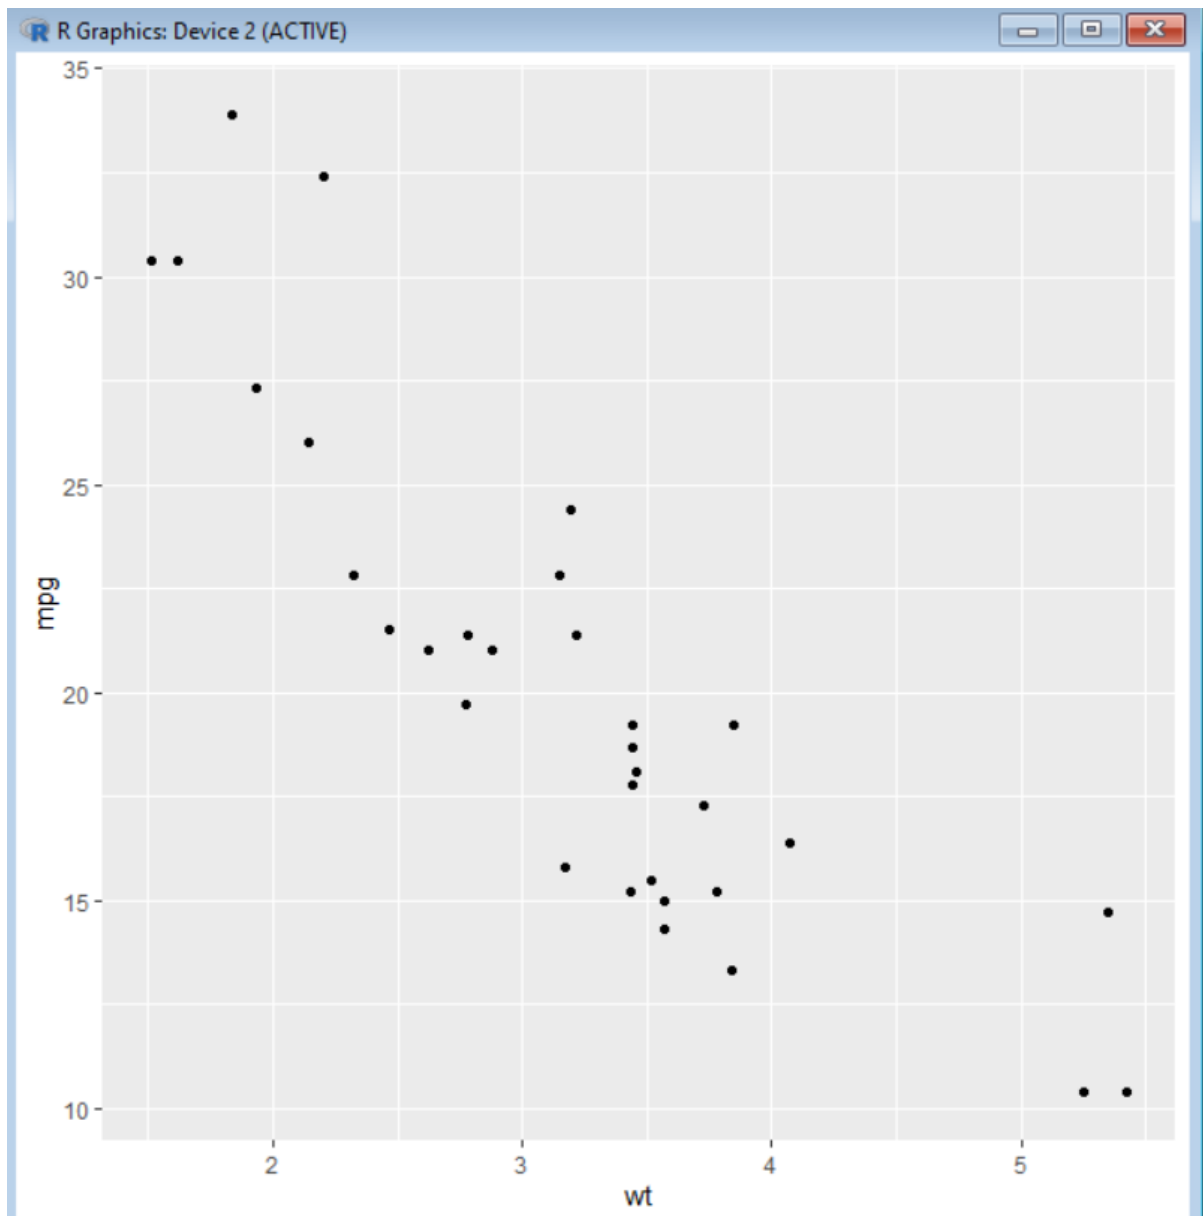


4.cartesian coordinates

```
ggplot(mtcars, aes(x=wt, y=mpg)) + geom_point() + coord_cartesian(xlim=c(2,5))
```

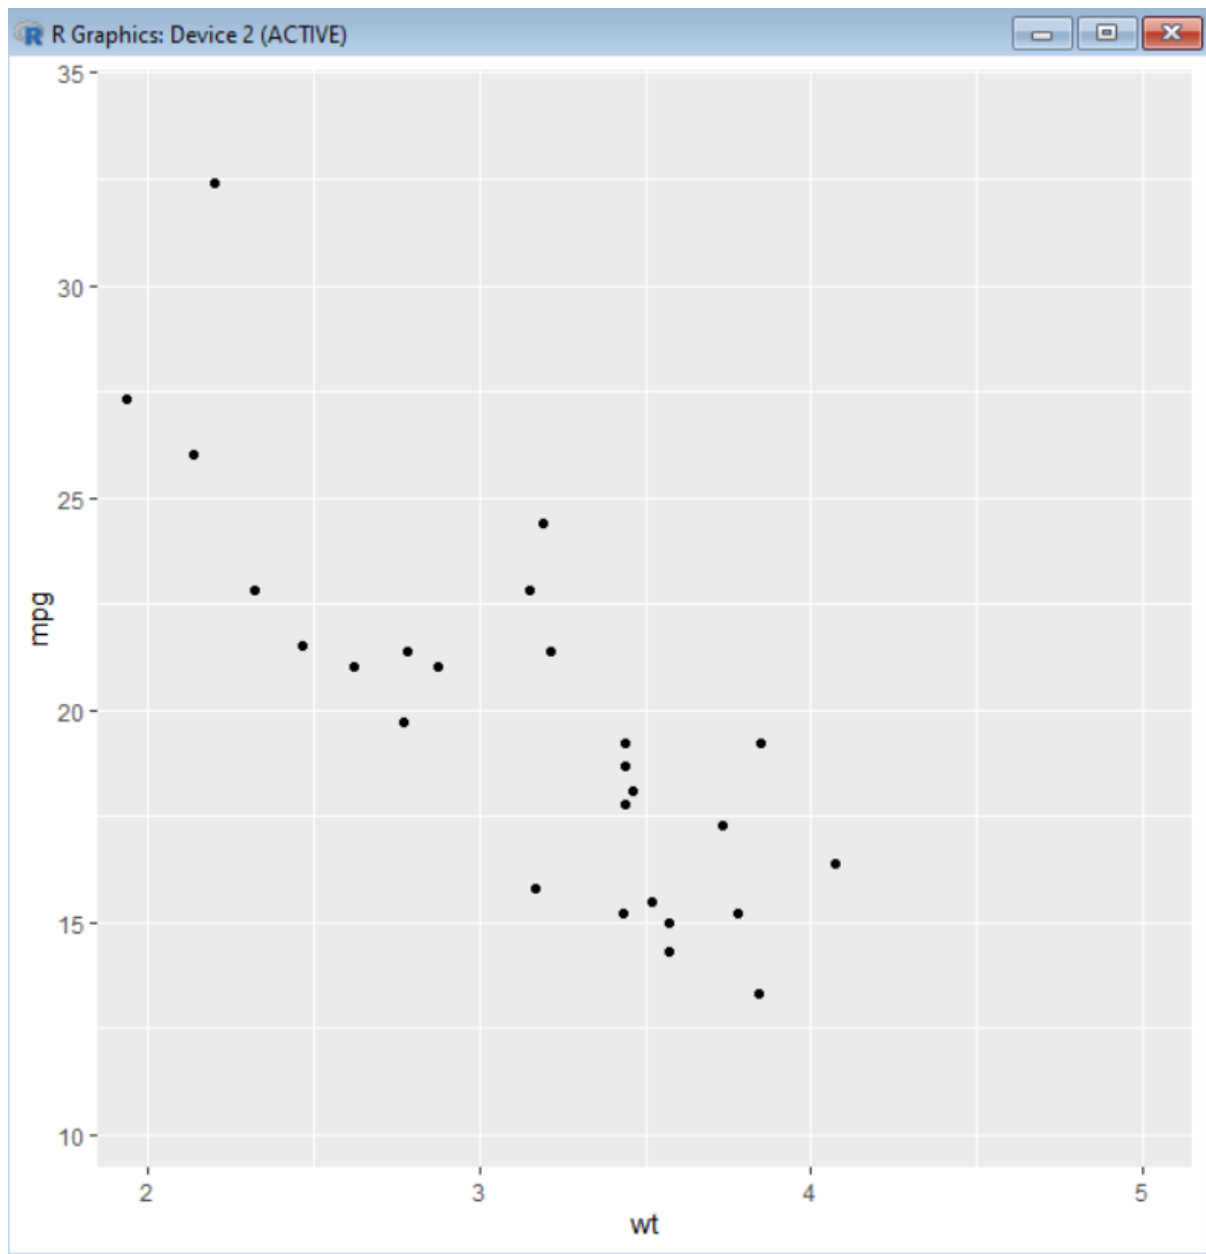


5.log scale

```
ggplot(mtcars, aes(x=wt, y=mpg)) + geom_point() + scale_y_log10()
```

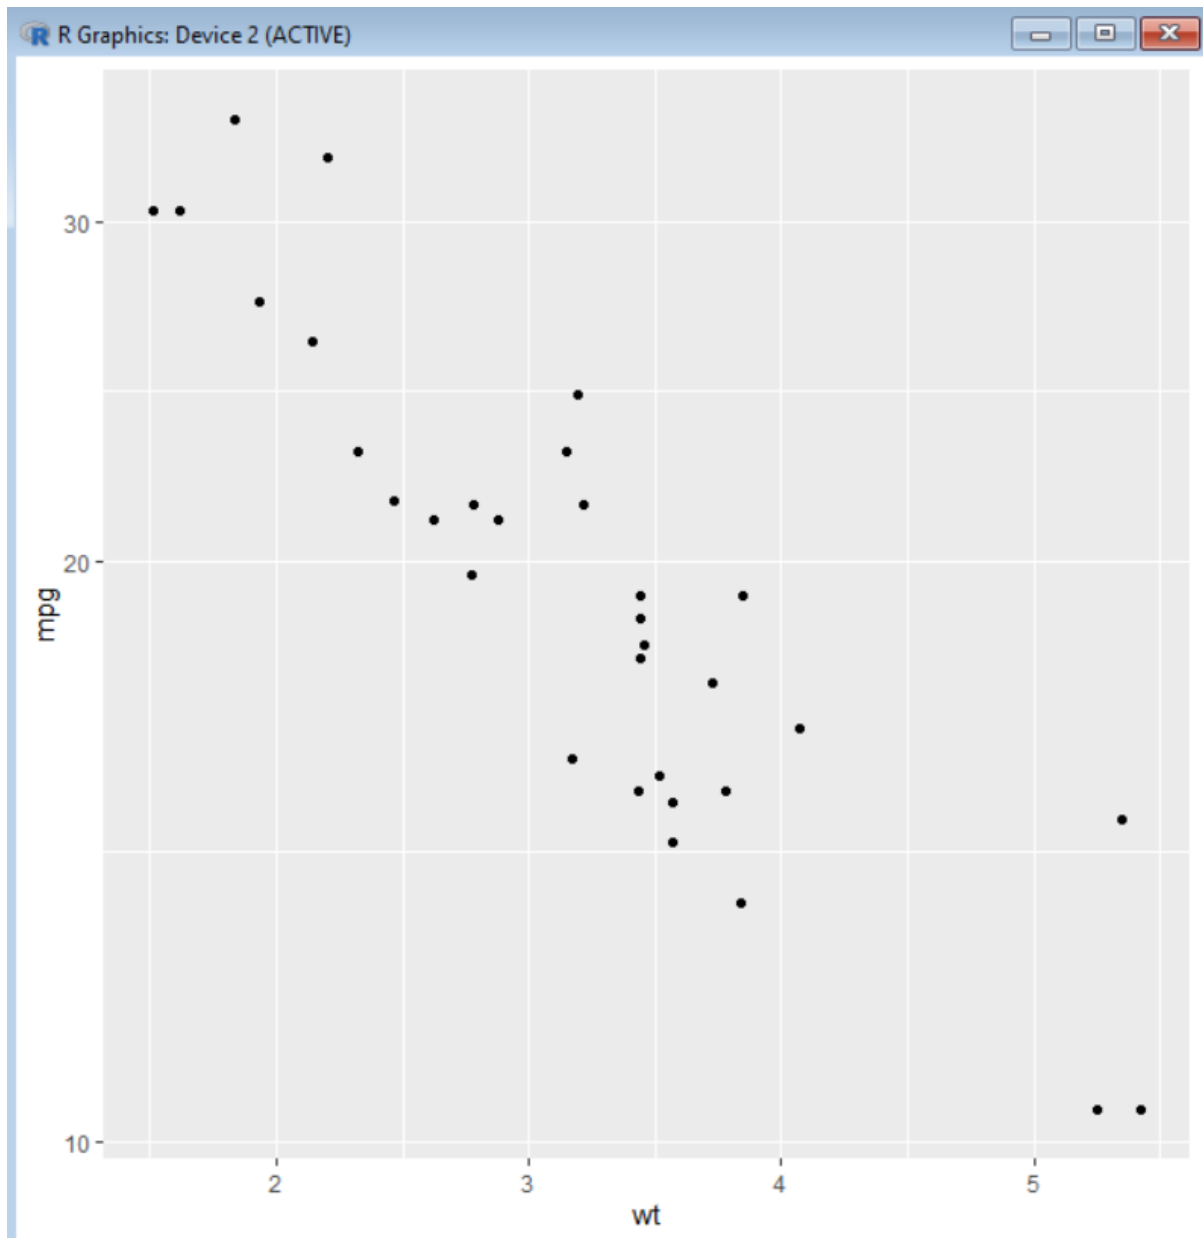

6. built-in-dataset


```
ggplot(mtcars, aes(x=wt, y=mpg)) + geom_point()
```

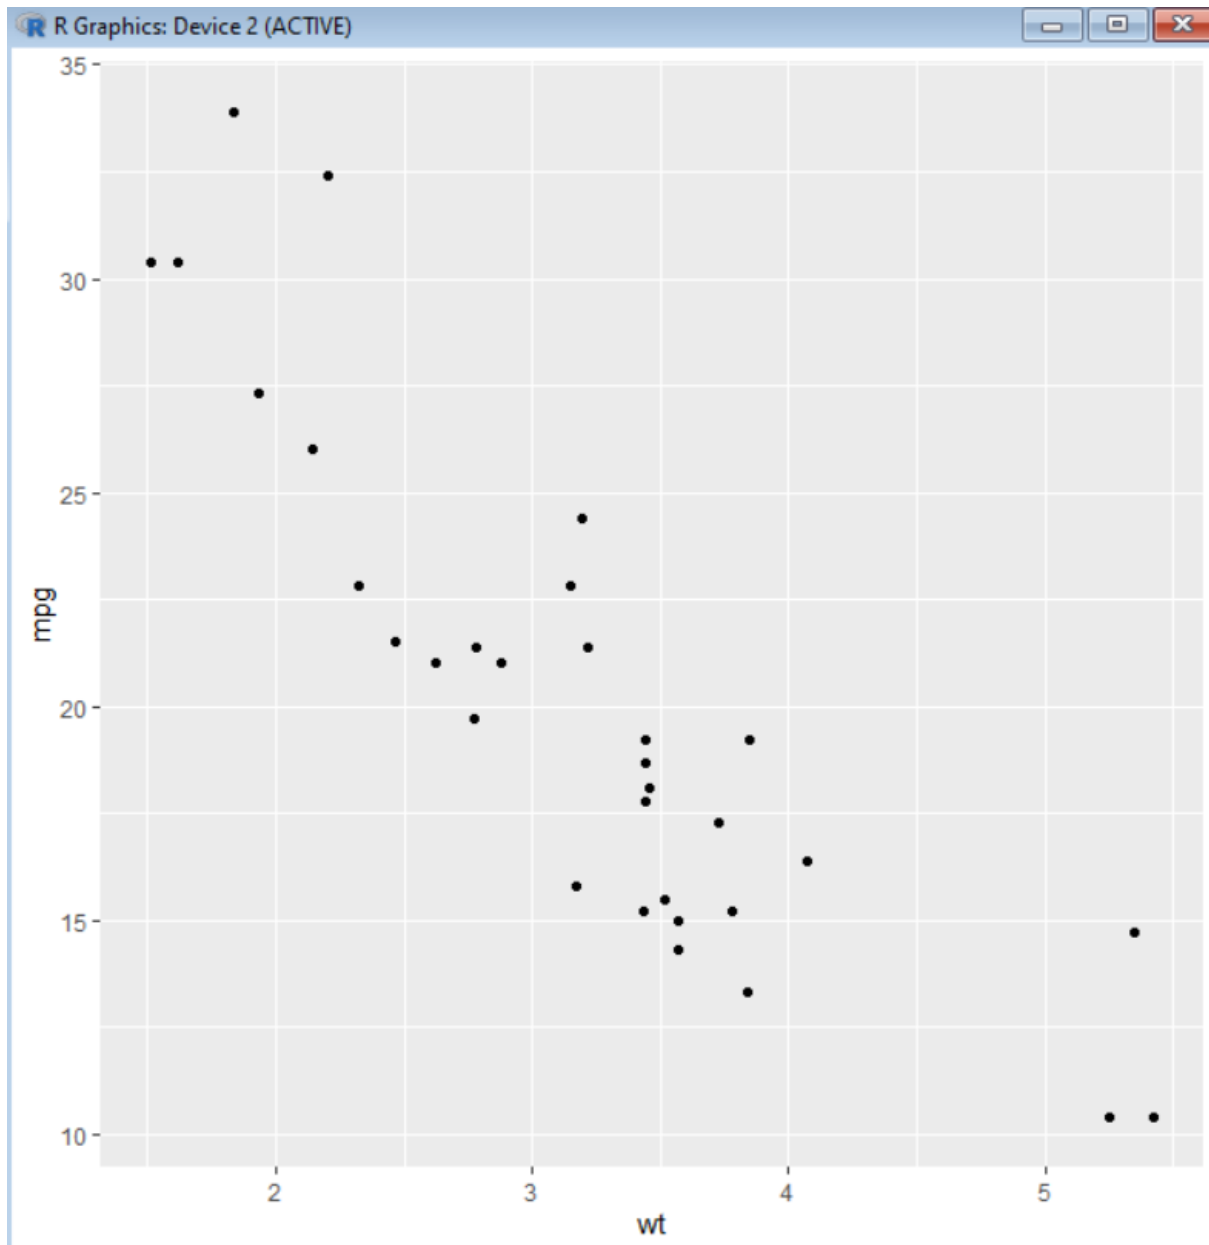

7.polar coordinates


```
ggplot(mtcars, aes(x=factor(cyl))) + geom_bar() + coord_polar() -
```

R Graphics: Device 2 (ACTIVE)

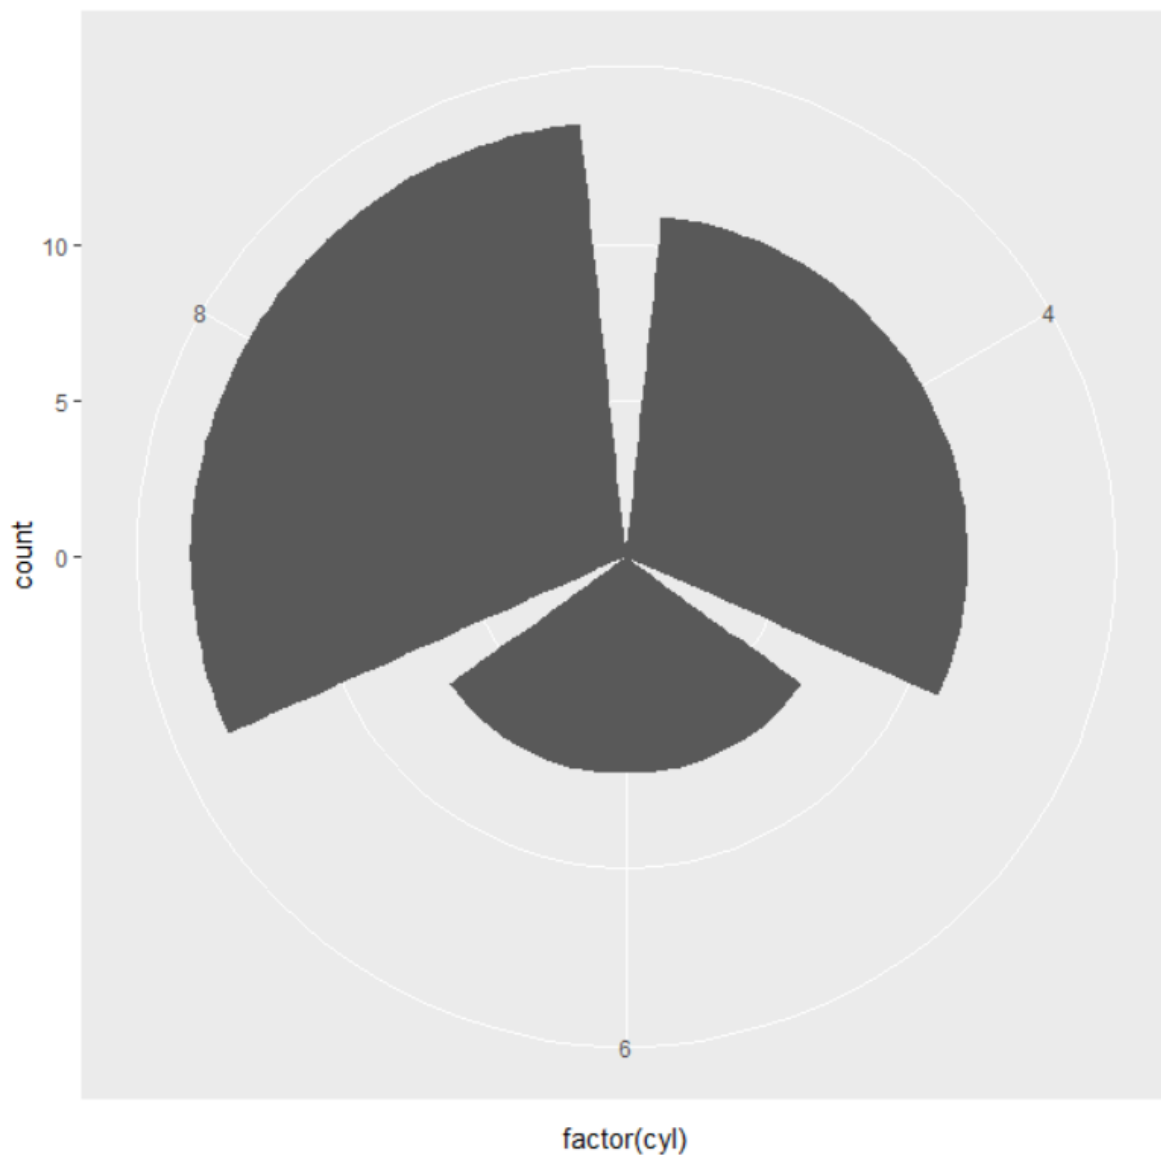


8 sequential color

```
ggplot(mtcars, aes(wt, mpg, color=hp)) + geom_point(size=3) + scale_color_viridis_c()
```

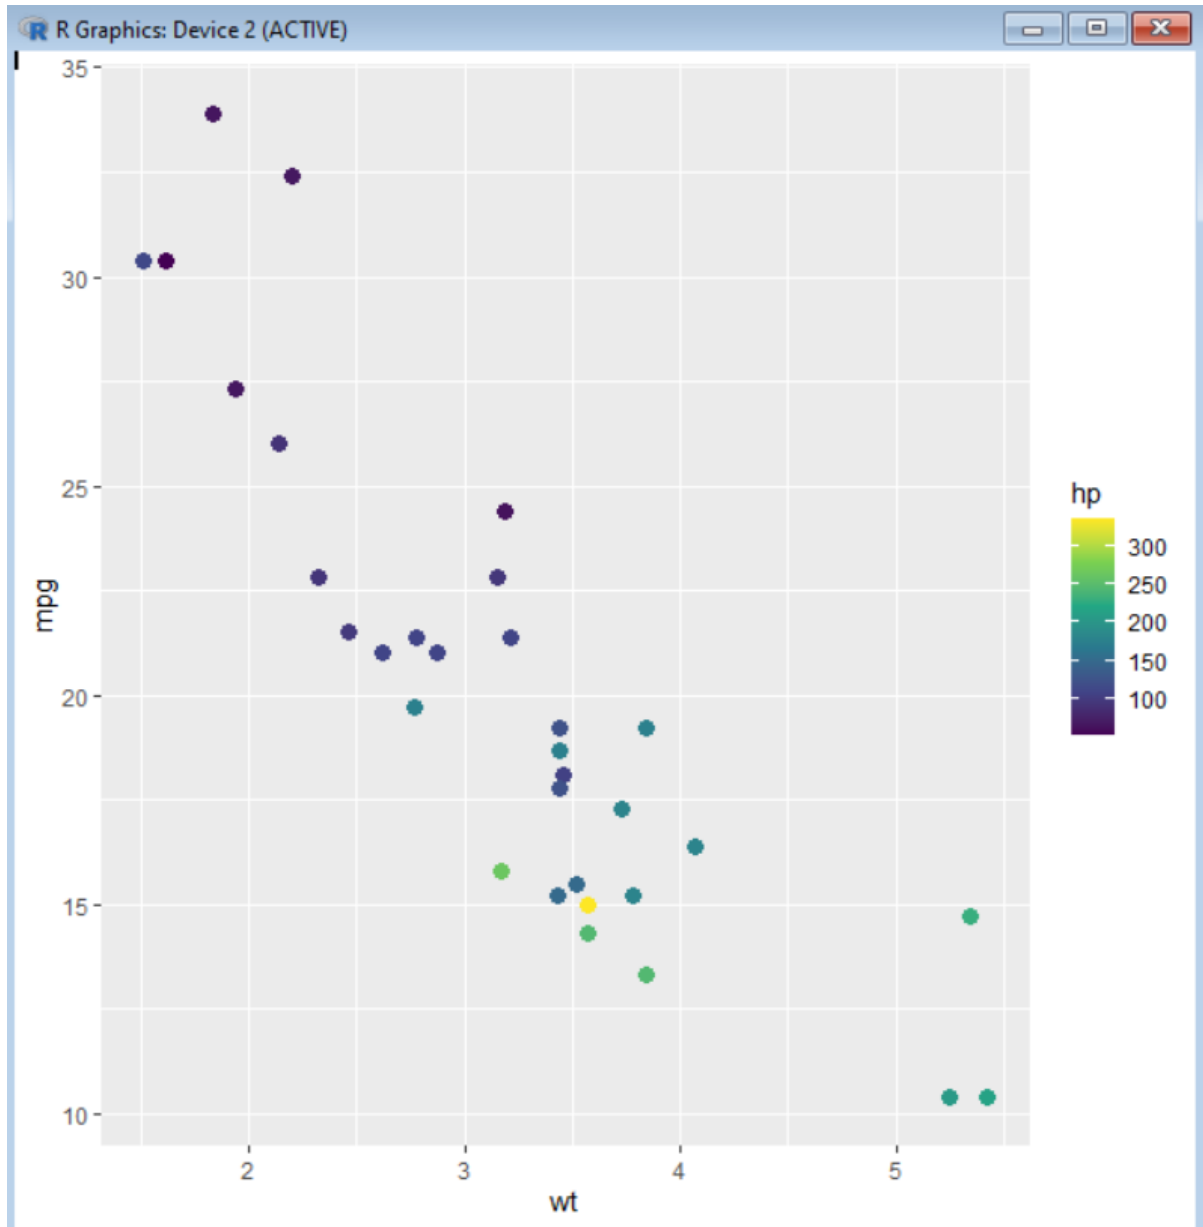

9 diverging color

```
ggplot(mtcars, aes(wt, mpg, color=mpg-mean(mpg))) + geom_point(size=3) +  
scale_color_gradient2(low="blue", mid="white", high="red")
```

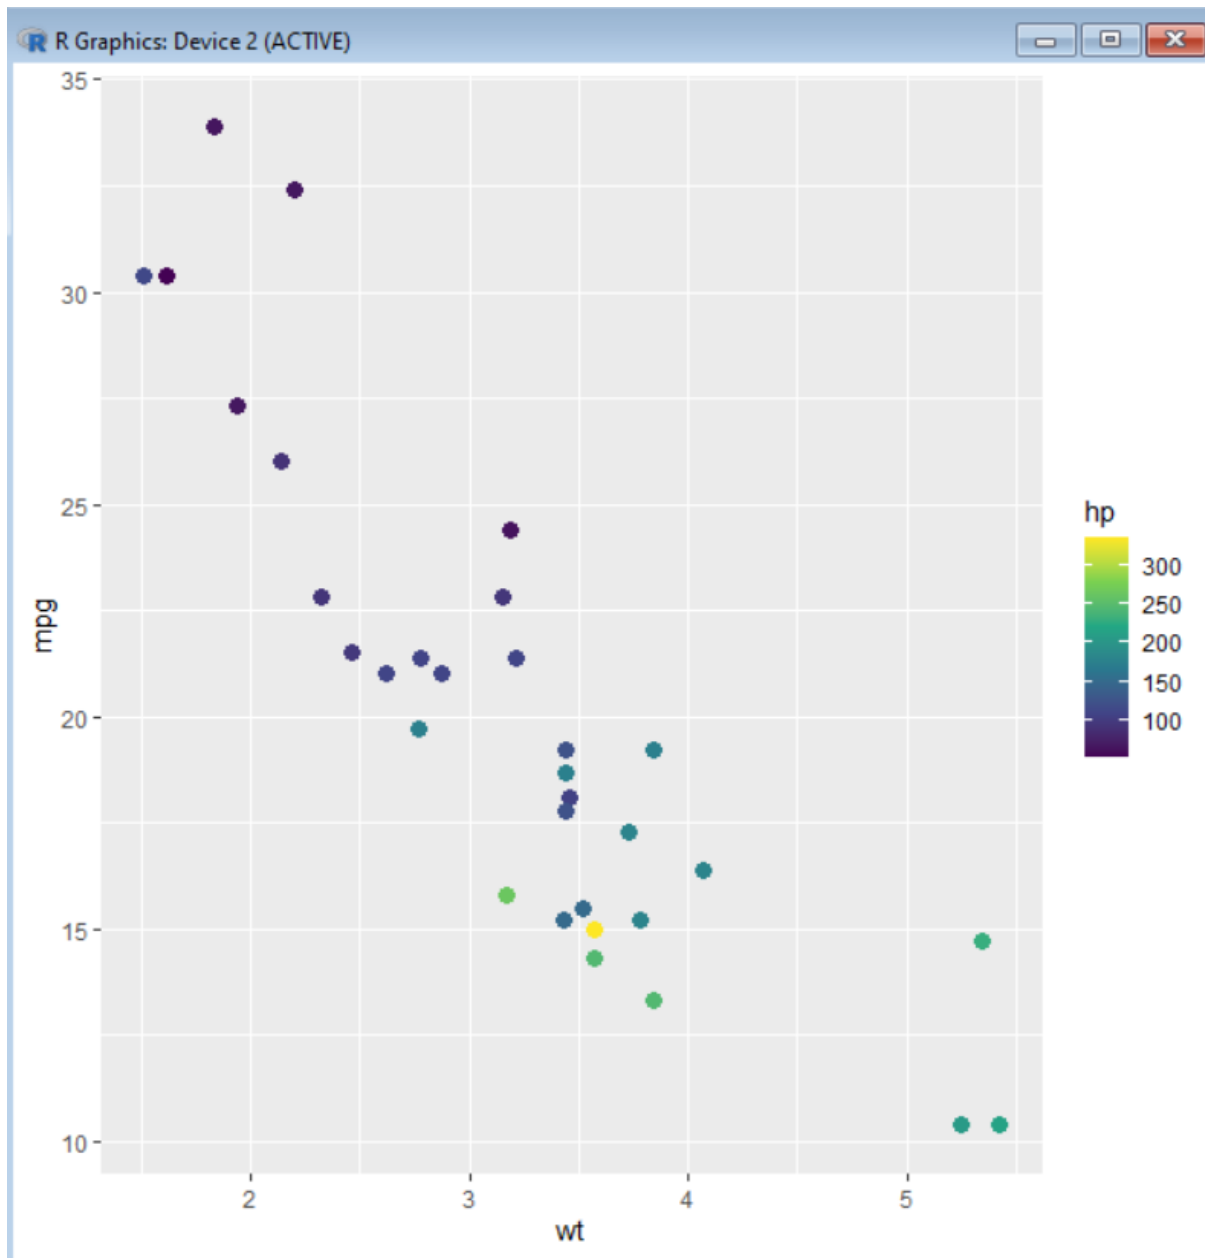

10 Discrete color

```
library(ggplot2)
library(viridis)

ggplot(mtcars, aes(wt, mpg, color = factor(cyl))) +
  geom_point(size = 3) +
  scale_color_viridis_d()
```

