```javascript
      You, seconds ago | 3 authors (You and others)
 1    import React, { useState } from "react";
 2    import ReactDOM from "react-dom";
 3    import "antd/dist/antd.css";
 4    import "./antd.css";
 5    import "./index.scss";
 6    import App from "./App";
 7    import "./i18n";
 8    import { ConfigProvider, Button } from "antd";
 9
10    import frFR from "antd/lib/locale/ar_EG";
11    import enUS from "antd/lib/locale/en_US";
12    import zhCN from "antd/lib/locale/zh_CN";
13    import zhCN1 from "antd/lib/locale/az_AZ";
14    import zhCN2 from "antd/lib/locale/bn_BD";
15    import zhCN3 from "antd/lib/locale/da_DK";
16    import zhCN4 from "antd/lib/locale/et_EE";
17    import zhCN5 from "antd/lib/locale/fa_IR";
18    import zhCN6 from "antd/lib/locale/fi_FI";
19    import zhCN7 from "antd/lib/locale/fr_FR";
20    const obj = [
21      frFR,
22      enUS,
23      zhCN,
24      zhCN1,
25      zhCN2,
26      zhCN3,        You, seconds ago • Uncommitted changes
27      zhCN4,
28      zhCN5,
29      zhCN6,
30      zhCN7,
31    ];
32    const Componetss = () => {
33      const [lang, setLang] = useState(obj[1]);
34      setInterval(() => {
35        setLang(obj[Math.floor(Math.random() * 8)]);
36      }, 1500);
37      return (
38        <ConfigProvider locale={lang}>
39          <App />
40        </ConfigProvider>
41      );
42    };
43
44    ReactDOM.render(
45      <>
46        {/* <Provider store={store}>
```

we need to import like these

we need to use it in these way

in these Way these Only Changes

Locale - antd@4.18.5

Open in New Window LIVE · Close · Sign in

ex.js · en_US.d.ts · P · ··· · uvamfb--run.stackblitz.io

```
        content: 'some info',
    });
};
const confirm = () => {
    Modal.confirm({
        title: 'some info',
        content: 'some info',
    });
};
    return (
        <div className="locale-components">
            <div className="example">
                <Pagination defaultCurrent={1} total={50}
                showSizeChanger />
            </div>
            <div className="example">
                <Select showSearch style={{ width: 200 }}>
                    <Option value="jack">jack</Option>
                    <Option value="lucy">lucy</Option>
                </Select>
                <DatePicker />
                <TimePicker />
                <RangePicker style={{ width: 200 }} />
            </div>
            <div className="example">
                <Button type="primary" onClick={this.showModal}
                >
                    Show Modal
```

Change locale of components: English11   中文

‹ · 1 · 2 · 3 · 4 · 5 · ›

请选择日期

请选择时   « ‹   2022年 1月   › »

Show Mo   to

confirm   一   二   三   四   五   六   日

☐ ∨ 0 项   27   28   29   30   31   1   2

             3   4   5   6   7   8   9

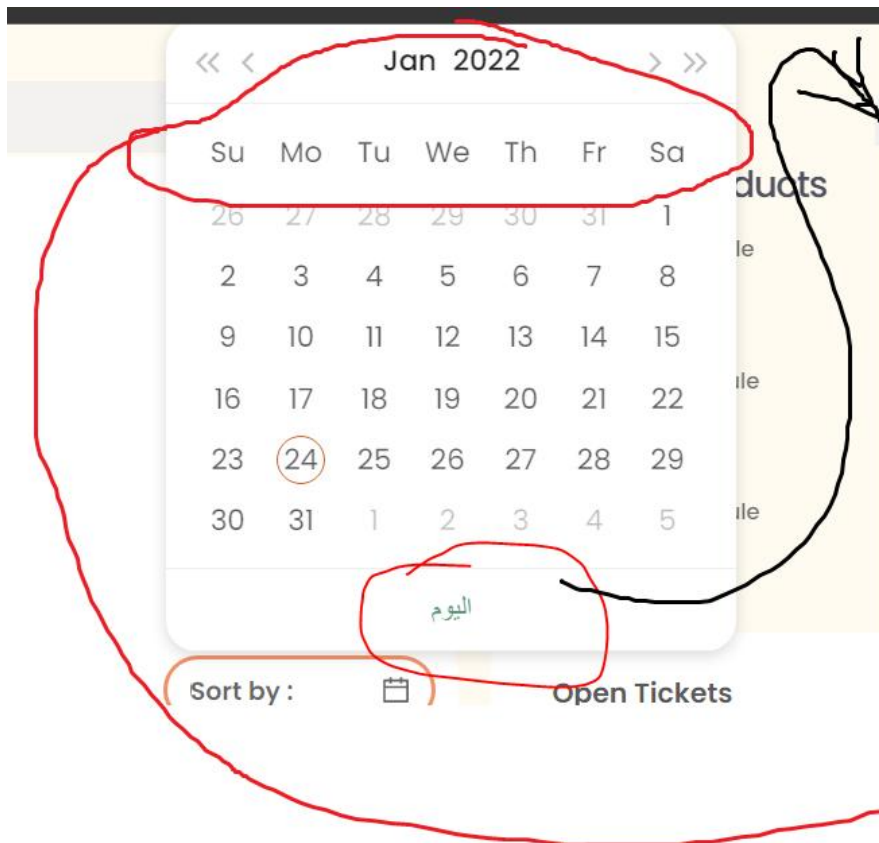🔍 请输   10   11   12   13   14   15   16

             17   18   19   20   21   22   23

             24   25   26   27   28   29   30

             31   1   2   3   4   5   6

                    今天   Activate Windows
                          Go to Settings to activate Windows.

2022年

Console

Type here to search

```
return (
  <ConfigProvider locale={frFR}>
    <App />
  </ConfigProvider>
);
```

(handwritten note: these aare the langauge supported (around 70 languages))

You can see the complete configuration here: ConfigProvider.

Note: `fr_FR` is the filename, the following table also follows the same rules.

The following languages are currently supported:

Supported languages:

Language	Filename
Arabic	ar_EG
Azerbaijani	az_AZ
Bulgarian	bg_BG

for me this worked as localprovider deprecated and configprovider is replaced with

1

Changes done in below piece of code

1. Week should start with Monday

2. day changed from Mo to M

import { Calendar, ConfigProvider } from 'antd'; import en_GB from 'antd/lib/locale-provider/en_GB'; import moment from 'moment'; import 'moment/locale/en-gb'; import React from 'react'; import './scheduler.scss';

```
const Scheduler = () => {

  moment.locale('en-gb');  // important!
  moment.updateLocale('en', {
    weekdaysMin: ["M", "T", "W", "T", "F", "S", "S"]
  });

  return (
    <div class='scheduler-dashboard'>
      <ConfigProvider locale={en_GB}>
        <Calendar
        />
      </ConfigProvider >
    </div>
  );
};
```

if we want to use differnt Languege then we must need to manual adjust the Moment package

there are some of the case where locale may not work as we except

Posted by u/Mistraelt 2 years ago

How do you even use ant design's ConfigProvider?

Needs Help

In Ant Design's docs, under Usage, it simply writes:

```
<ConfigProvider {...yourConfig}> <App /> </ConfigProvider>
```

My impression of this was simply to wrap ConfigProvider around my ant design components and the components would somehow be able to consume my configurations, but it doesn't:

```
import locale from 'antd/es/date-picker/locale/zh_CN';
<ConfigProvider locale={locale}>
    <DatePicker /> // DatePicker should be accepting locale, but it isn't
</ConfigProvider>
```

Also, React's docs on Context mention that I'm supposed to have access to the Context if I want to have a component consume it, but I don't have access to it in this case.

Of course, I could simply directly pass the locale as props to DatePicker, but I don't want to do that. Any idea how to make my child components consume the locale prop? I've completely stumped.
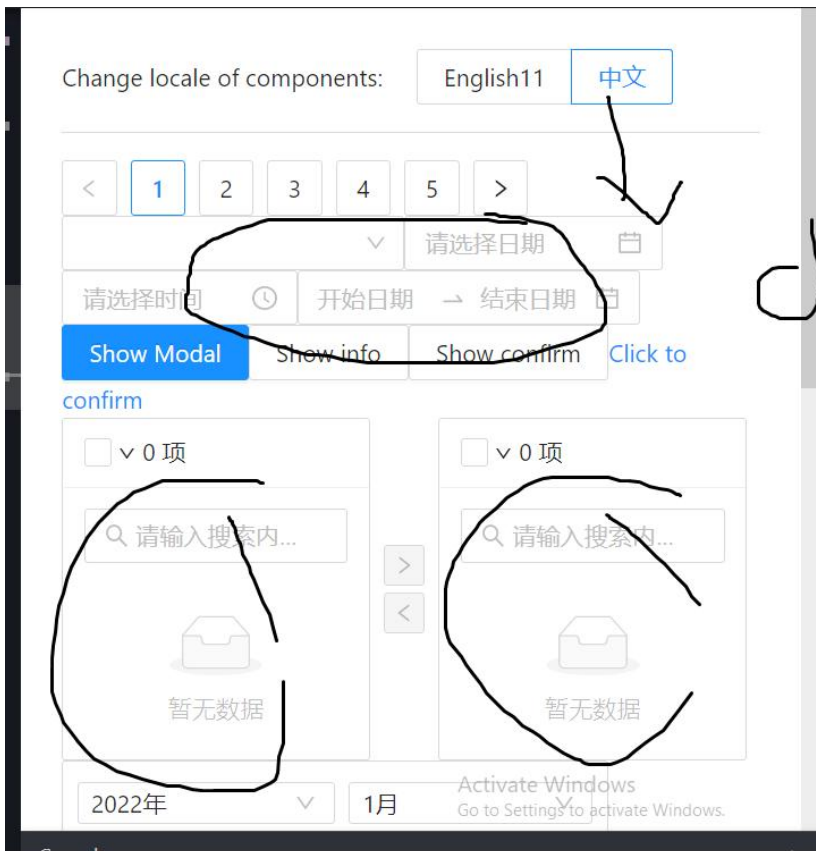
☐ **1 Comment**   ↗ **Share**   ☐ **Save**   ⊘ **Hide**   ⚑ **Report**   66% Upvoted
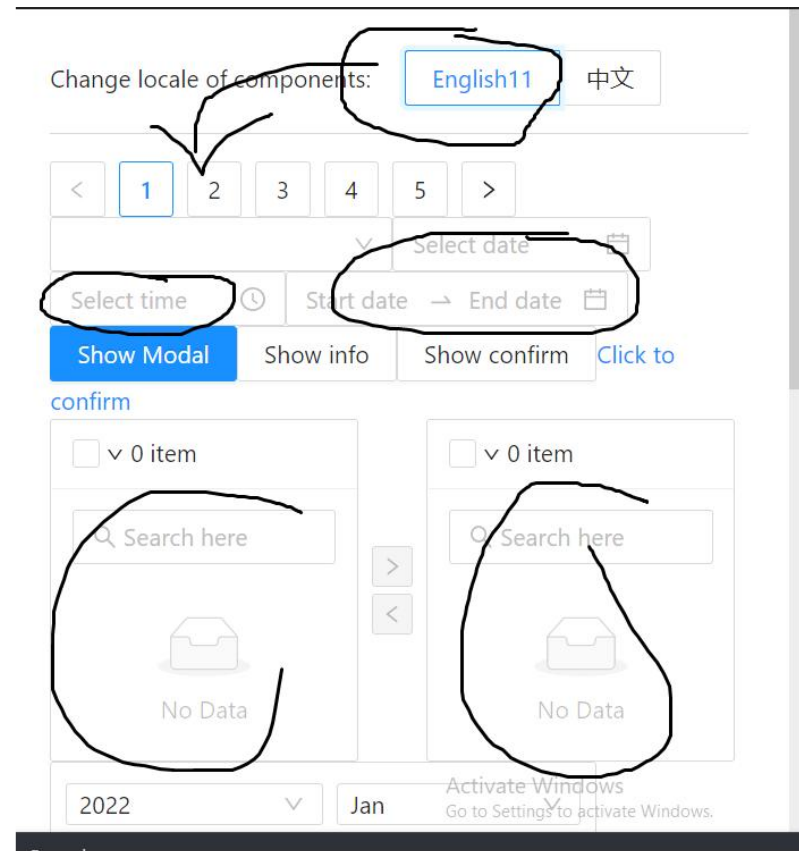
I got the answer by using the moment we have to initiate the moment locally for that config provider. Config provider will wrap the locale around the components and I was using the global locale but with moment.locale('de') we will set the moments locale to german and the config provider uses that. Go through react context docs to get a better idea of how context provider works.

0

```jsx
import React,{useState} from "react";
import { DatePicker } from 'antd';
import { ConfigProvider} from 'antd';
import deDE from 'antd/lib/locale/de_DE';
import * as moment from 'moment';
const { RangePicker } = DatePicker;
const Datepicker = ({ value}) => {
  if (value ==='de'){
    moment.locale('de', {
      months : 'Januar_Februar_Marz_April_Mai_Juni_Juli_August_September_Octobre_Novmber
      monthsShort : 'Jan_Feb_Mar_Apr_Mai_Juni_Juli_Aug_Sept_Oct_Nov_Dez'.split('_'),
      monthsParseExact : true,
      weekdays : 'sunday_montag_dienstag_mittwoch_donnerstag_fritag_samstag'.split('_'),
      weekdaysShort : 'sun._mon._die._mit._don._fri._sam.'.split('_'),
      weekdaysMin : 'Su_Mo_Di_Mi_Do_Fr_Sa'.split('_'),
      weekdaysParseExact : true,
      longDateFormat : {
          LT : 'HH:mm',
          LTS : 'HH:mm:ss',
          L : 'DD/MM/YYYY',
          LL : 'D MMMM YYYY'
```

we must need to manually write the Code for DateRangePicker and antd Date Componets in some case

Left panel:

Change locale of components: English11 中文

< 1 2 3 4 5 >

请选择日期

请选择时间 开始日期 → 结束日期

Show Modal Show info Show confirm Click to confirm

☐ ∨ 0 项

🔍 请输入搜索内... 🔍 请输入搜索内...

暂无数据 暂无数据

2022年 ∨ 1月

changes

Right panel:

Change locale of components: English11 中文

< 1 2 3 4 5 >

Select date

Select time Start date → End date

Show Modal Show info Show confirm Click to confirm

☐ ∨ 0 item

🔍 Search here 🔍 Search here

No Data No Data

2022 ∨ Jan

Jan 2022   Feb 2022

Su	Mo	Tu	We	Th	Fr	Sa		Su	Mo	Tu	We	Th
26	27	28	29	30	31	1		30	31	1	2	3
2	3	4	5	6	7	8		6	7	8	9	10
9	10	11	12	13	14	15		13	14	15	16	17
16	17	18	19	20	21	22		20	21	22	23	24
23	24	25	26	27	28	29		27	28	1	2	3
30	31	1	2	3	4	5		6	7	8	9	10

请选择时间　🕐　开始日期 → 结束日期 📅

2022年 1月   2022年 2月

一	二	三	四	五	六	日		一	二	三	四	五
27	28	29	30	31	1	2		31	1	2	3	4
3	4	5	6	7	8	9		7	8	9	10	11
10	11	12	13	14	15	16		14	15	16	17	18
17	18	19	20	21	22	23		21	22	23	24	25
24	25	26	27	28	29	30		28	1	2	3	4

changes