


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	validate the adding address feature for web application	1	0	1	0	1 m 12.394 s

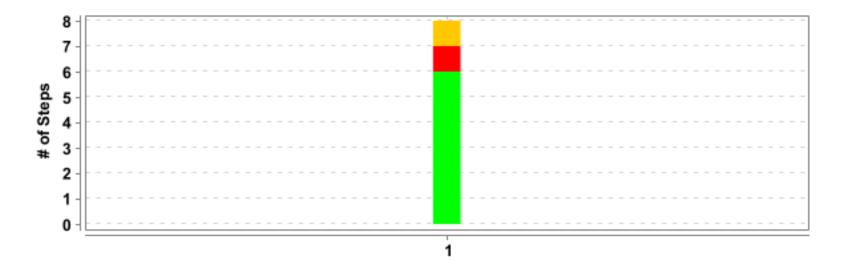


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	validate the adding address feature for	Test the add address feature	8	6	1	1	1 m 12.390 s
	web application						

DETAILED SECTION -- 4 --

## (F)- validate the adding address feature for web application

FAILED	DURATION - 1 m 12.394 s	Scenarios		Steps	
		Total - 1		Total - 8	
/ 10:24:55.485 A	AM // 10:26:07.879 AM /	Pass - 0	1	Pass - 6	8
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

## (S)- Test the add address feature

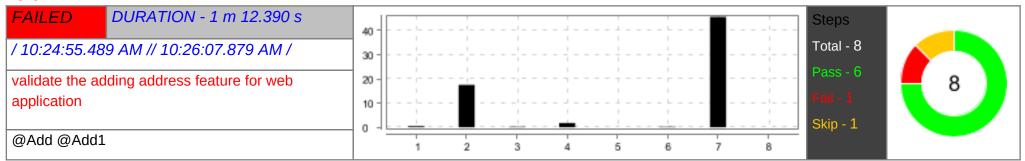

#	Step / Hook Details	Status	Duration
1	Given The tester click the signin link	PASSED	0.450 s
2	And tester enters the valid usernameharithilagar99@gmail.com	PASSED	17.558 s
3	And tester enters the valid passwordhari5678	PASSED	0.181 s
4	When the tester clickon the login button	PASSED	1.742 s
5	Then the tester should be logged in successfully	PASSED	0.001 s
6	Given The tester click the address button	PASSED	0.235 s
7	And The tester fill the address data	FAILED	45.670 s
	Notc1firstname1lastname1address1city1a1234Yestc2firstname2lastname2address2city2b1234		
	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for element to be clickable: Proxy element for: DefaultElementLocator 'By.xpath: //a[text()='New Address']' (tried for 30 second(s) with 500 milliseconds interval) at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:95) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:272) at cucumberframework.pageobjects.BasePage.click(BasePage.java:24) at cucumberframework.pageobjects.AddAddress.newAddress(AddAddress.java:39) at cucumberframework.methods.TestMethods.clickNewAddres(TestMethods.java:46) at cucumberframework.steps.TestAddressSteps.theTesterFillTheAddressData(TestAddressSteps.java:53)		

#	Step / Hook Details	Status	Duration
	at ?.The tester fill the address data(file:///D:/cucumber/cucumberframework/src/test/java/cucumberframework/featurefiles/AddAddress.		
	feature:12)		
	Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element:		
	{"method":"xpath", "selector":"//a[text()='New Address']"} (Session info: chrome=90.0.4430.212) For documentation on this error, please visit:		
	https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'HARISH', ip: '192.168.43.79', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.		
	version: '11.0.10' Driver info: org.openga.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, browserName: chrome,		
	browserVersion: 90.0.4430.212, chrome: {chromedriverVersion: 90.0.4430.24 (4c6d850f087da, userDataDir: C:\Users\haris\AppData\Loca},		
	goog:chromeOptions: {debuggerAddress: localhost:62391}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy:		
	normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit:		
	0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:largeBlob: true,		
	webauthn:virtualAuthenticators: true} Session ID: b144dd1dad5647e00447fca0c4e27a4d *** Element info: {Using=xpath, value=//a[text()='New Address: III		
	Address']} at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/juk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java.02) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java.45)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490)		
	at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)		
	at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)		
	at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428)		
	at org.openqa.selenium.By\$ByXPath.findElement(By.java:353)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:69)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)		
	at com.sun.proxy.\$Proxy30.isDisplayed(Unknown Source)		
	at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:314)		
	at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:43) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:300)		
	at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java.soo) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java.soo)		
	at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java.237)		
	at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:666)		
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249)		
	at cucumberframework.pageobjects.BasePage.click(BasePage.java:24)		
	at cucumberframework.pageobjects.AddAddress.newAddress(AddAddress.java:39)		
	at cucumberframework.methods.TestMethods.clickNewAddres(TestMethods.java:46)		
	at cucumberframework.steps.TestAddressSteps.theTesterFillTheAddressData(TestAddressSteps.java:53)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:104)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)		
	at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:110)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:115)		
	at org.junit.vintage.engine.execution.RunnerExecutor.execute(RunnerExecutor.java:43)		
	at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.accept(ForEachOps.java:183)		
	at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:195)		
	at java.base/java.util.Iterator.forEachRemaining(Iterator.java:133)		
	at java.base/java.util.Spliterators\$IteratorSpliterator.forEachRemaining(Spliterators.java:1801)		
	at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:484)		

DETAILED SECTION -- 7 --

#	Step / Hook Details	Status	Duration
	at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:474)		
	at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150)		
	at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173)		
	at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234)		
	at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:497)		
	at org.junit.vintage.engine.VintageTestEngine.executeAllChildren(VintageTestEngine.java:82)		
	at org.junit.vintage.engine.VintageTestEngine.execute(VintageTestEngine.java:73)		
	at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:108)		
	at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:88)		
	at org.junit.platform.launcher.core.EngineExecutionOrchestrator.lambda\$execute\$0(EngineExecutionOrchestrator.java:54)		
	at org.junit.platform.launcher.core.EngineExecutionOrchestrator.withInterceptedStreams(EngineExecutionOrchestrator.java:67)		
	at org.junit.platform.launcher.core.EngineExecutionOrchestrator.execute(EngineExecutionOrchestrator.java:52)		
	at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:96)		
	at org.junit.platform.launcher.core.DefaultLauncher.execute(DefaultLauncher.java:84)		
	at org.eclipse.jdt.internal.junit5.runner.JUnit5TestReference.run(JUnit5TestReference.java:98)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:541)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:768)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:464)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	* Not displayable characters are replaced by '?'.		
8	Then the address should be added successfully	SKIPPED	0.026 s