

## **Screen Shots**

```
user@LAPTOP-LCI60ILG MINGW64 /d/study/Devlopment project/Simpli-Pro/phase 5/Event Finder (master)
$ npm run dev


> eventfinder@0.1.0 dev
> concurrently "npm start" "npm run json-server"


[0]
[0] > eventfinder@0.1.0 start
[0] > react-scripts start
[0]
[1]
[1] > eventfinder@0.1.0 json-server
[1] > json-server --watch db.json --port 5000
[1]
[1]
[1] \{^_A}\ hi!
[1]
[1] Loading db.json
[1] Done
[1]
[1] Resources
[1] http://localhost:5000/logs
[1] http://localhost:5000/techs
[1]
[1] Home
[1] htme
[1] http://localhost:5000
```

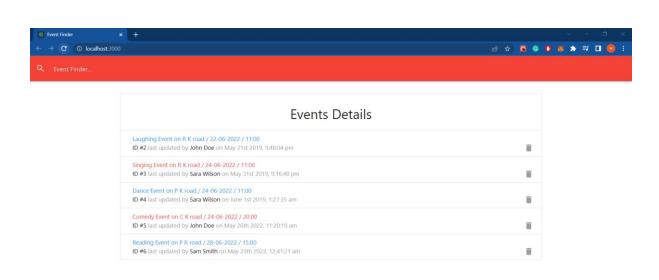

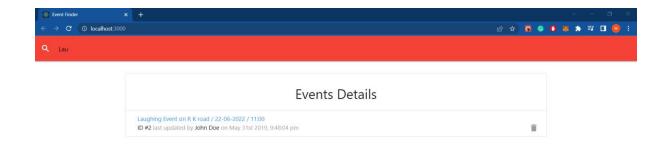



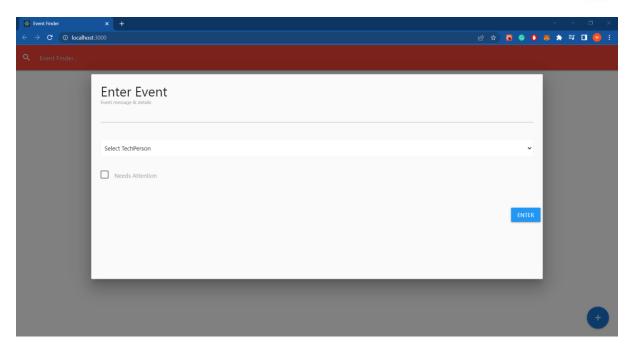

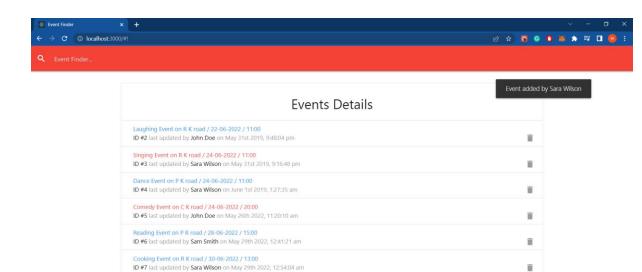

î

