


Target Lambda-SQS-S3 Flow

Flow diagram

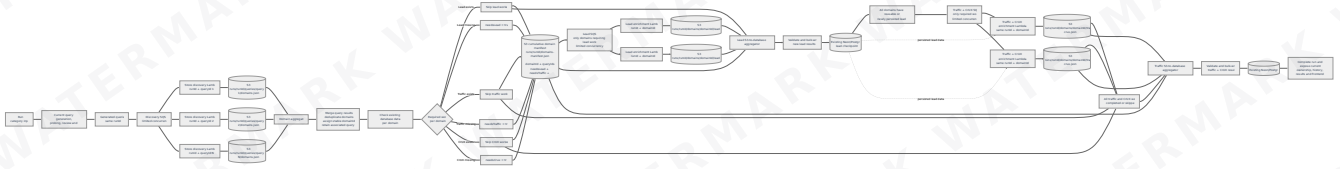

Text flow

1. Start a run from the current category input flow.
2. Generate, probe, review, and confirm queries using the current query flow.
3. Keep the same `runId` across every generated query.
4. Send one discovery job per query to SQS with limited Lambda concurrency.
5. Each discovery Lambda processes one `runId` and `queryId`.
6. Each discovery Lambda writes its domain results to `runs/{runId}/queries/{queryId}/domains.json` in S3.
7. After every query job finishes, the domain aggregator reads all query files.
8. Merge the query results, deduplicate domains, assign each domain a stable `domainId`, and retain every associated `queryId`.
9. Check existing lead, traffic, and CrUX data for every unique domain.
10. Mark lead, traffic, and CrUX work independently as required or reusable.
11. Write the complete domain list and required-work flags to `runs/{runId}/domains-manifest.json`.
12. Send only domains requiring lead enrichment to the lead SQS queue with limited Lambda concurrency.
13. Each lead Lambda processes one `runId` and `domainId` and writes `runs/{runId}/domains/{domainId}/lead.json`.
14. After all required lead jobs finish, the lead aggregator reads the domain manifest and lead files.
15. Validate and bulk-write new lead results to Neon/Postgres.
16. Treat existing reusable leads and newly persisted leads as the completed lead checkpoint.
17. Send only required traffic and CrUX work to SQS with limited Lambda concurrency.
18. Each traffic and CrUX Lambda processes the same `runId` and `domainId` using the persisted lead data.
19. Each traffic and CrUX Lambda writes `runs/{runId}/domains/{domainId}/traffic-crux.json`.

20. After all required traffic and CrUX jobs finish, the final aggregator reads the domain manifest and traffic/CrUX files.
21. Validate and bulk-write traffic and CrUX results to Neon/Postgres.
22. Complete the run and expose it through the current ownership, run history, results, and frontend flow.