

→ input labelled image


- input unlabelled image

pseudo-labelling via
Ranking-based Sampling

X stop using noisy image

labelled important person

non-important person from unlabelled image

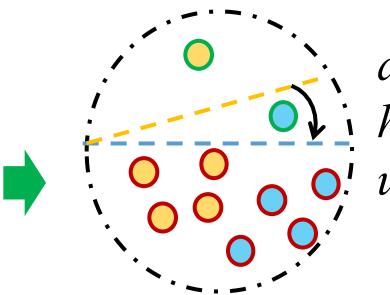

adaptinghyperplane usingunlabelled data

classification space



