

VS Code help

Last amended: 27th July, 2026
GitHub folder: install_ai_tools/quick_flowise_ollama/venv
My folder: C:\Users\ashok\OneDrive\Documents\visualstudiocode

Contents

1. Some shortcuts:	1
2. Ubuntu: How to access python virtual environment in VSCode:	1
2. Ubuntu: Which is my current working python Virtual environment:	1
3. WSL: Selecting python environment while in WSL.....	2
Google AI generated reply is as below:	3
4. WSL: Setting Working folder in terminal window	3

1. Some shortcuts:

Shortcut	Purpose
Ctrl+shift+p	Python: Select Interpreter
Ctrl+,	Open Settings menu
Ctrl+shift+V	Markdown preview

2. Ubuntu: How to access python virtual environment in VSCode:

This is the recommended method for selecting an environment for your current workspace.

1. **Open the Command Palette:** Press Ctrl+Shift+P (Windows/Linux) or Cmd+Shift+P (macOS).
2. **Search for the command:** Type "Python: Select Interpreter" and select it from the list of commands.
3. **From WSL Ubuntu:** However, if you want to select a virtual environment into VSCode from WSL Ubuntu, first you must connect to WSL Ubuntu in VSCode (See below)

2. Ubuntu: Which is my current working python Virtual environment:

1. Check the Status Bar

The easiest way to see the active interpreter is to look at the bottom-right corner of the VSCode window. The name and version of the currently selected Python interpreter will be displayed there.

- If no interpreter is selected, it might say something like "Python" or "Select Interpreter".
- Clicking on this area is a shortcut to change the interpreter.

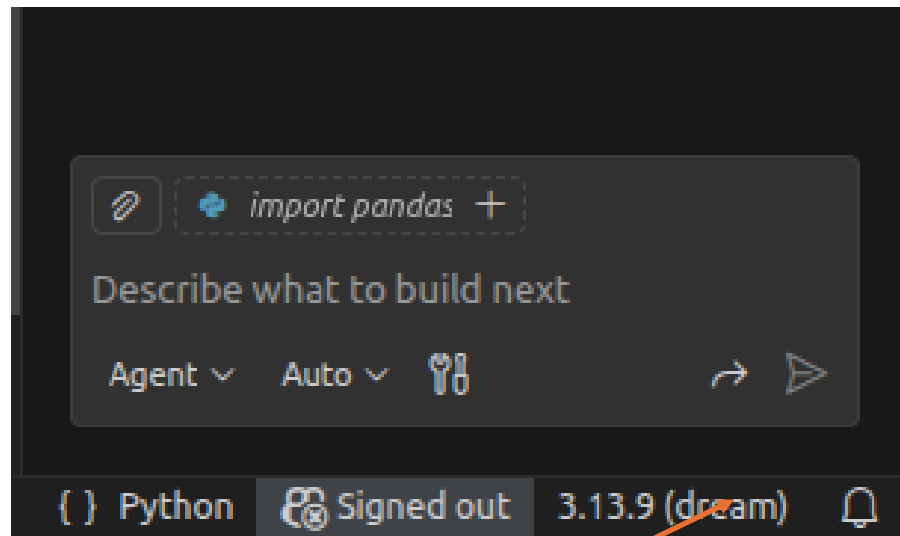


Figure 1: Bottom right of VS code mentions 'dream' as the active python interpreter

3. WSL: Selecting python environment while in WSL

See this Microsoft help link.

Broadly steps are:

1. Install WSL2 in Windows
2. Install Visual Studio Code in Windows
3. Install almost all *WSL: Extensions* in VSCode. No need to install python extensions first, if we are not working in a python virtual environment within Windows.
5. Quit VSCode in Windows.
6. Open now: WSL terminal. Install therein either anaconda3 and then create a conda virtual environment or install a python virtual environment (say for *crewai_env*).
7. Switch to this python environment. Type command **code .** (note that 'dot' is a part of command). This will start VSCode and on bottom left you will have *WSL: Ubuntu22.04*

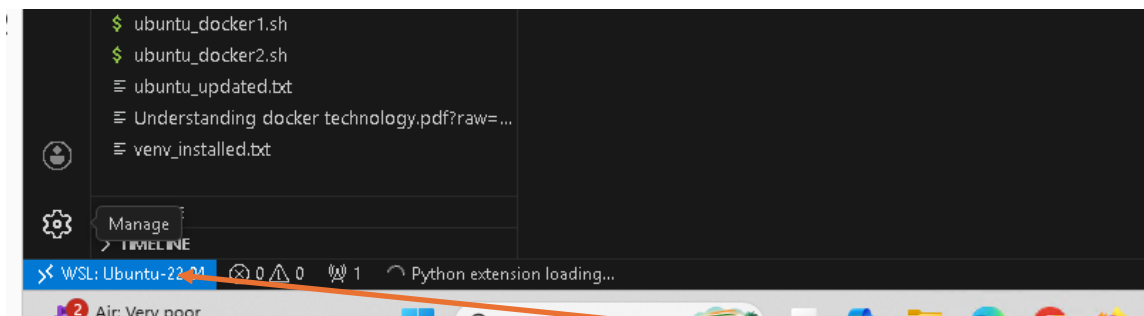


Figure 2: Visual Studio Code started in WSL. Note the blue label *WSL: Ubuntu*. Click it to connect to WSL Ubuntu-22.04

6. Next install necessary python extensions in this VSCode for WSL.
7. Once done, you can then select a python interpreter, as usual, with ctrl+shift+P. You will see all your python virtual environments that exist in WSL.

Google AI generated reply is as below:

To select a Python interpreter in WSL within VS Code, you **must be running VS Code in a WSL remote window**. The main reasons for this issue are typically running VS Code in Windows mode instead of WSL mode, or problems with the Python extension.

Primary Solution: Ensure VS Code is running in WSL Mode. You cannot select a Linux Python executable (which does not have a .exe extension) from a Windows instance of VS Code.

1. **Install the Remote - WSL extension** in VS Code if you haven't already. You can find it in the Extensions marketplace (Ctrl+Shift+X).
2. **Open your project from within WSL:**
 1. Open your WSL terminal (e.g., Ubuntu) in Windows.
 2. Navigate to your project directory in the Linux file system.
 3. Type `code .` and press Enter. This command launches VS Code and automatically connects to the WSL environment.
3. **Verify the connection:** The lower-left corner of the VS Code status bar should show "WSL: [YourDistroName]".
4. **Select the interpreter:** Once in WSL mode, open the Command Palette (Ctrl+Shift+P) and type "**Python: Select Interpreter**". You should now see the available Linux Python interpreters and virtual environments.

4. WSL: Setting Working folder in terminal window

When you open a terminal window in VSCode, the default terminal path may not be what you want.

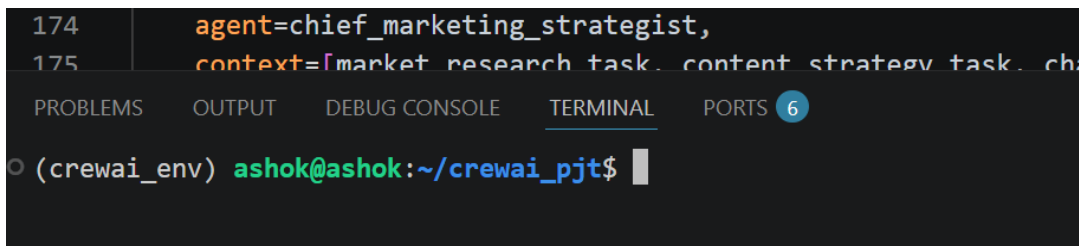
A screenshot of a VS Code interface. The top part shows a code editor with a Python script. Line 174 has `agent=chief_marketing_strategist,` and line 175 has `context=[market_research_task, content_strategy_task, ch`. Below the editor is a panel with tabs for PROBLEMS, OUTPUT, DEBUG CONSOLE, TERMINAL, and PORTS. The TERMINAL tab is active, showing a terminal window with the prompt `(crewai_env) ashok@ashok:~/crewai_pjt$` and a cursor.

Figure 1: Terminal window in VSCode.

To set the terminal window's path to your working folder, issue the following PowerShell command directly in WSL Ubuntu:

```
cd /home/$USER
wget -c
https://raw.githubusercontent.com/harnalashok/LLMs/refs/heads/main/install\_ai\_tools/misc/script.ps1
powershell.exe -ExecutionPolicy Bypass -File '/home/ashok/script.ps1'
```

This assumes that you have first installed VSCode in Windows. It also assumes that configuration file of VSCode, *settings.json*, is in folder: `C:\Users\ashok\AppData\Roaming\Code\User\settings.json`.

BETTER RUN THE WHOLE OF FOLLOWING IN POWERSHELL. Available here also

```
# 1. Target the correct Windows folder path
$dirPath = "$env:C:\Users\ashok\AppData\Roaming\Code\User"
$settingsPath = "$dirPath\settings.json"

# 2. Force create the folder path if it does not exist yet
```

```

if (!(Test-Path $dirPath)) {
    New-Item -ItemType Directory -Path $dirPath -Force
}

# 3. Read existing settings or build a clean object if it is a brand new file
if (Test-Path $settingsPath) {
    $settings = Get-Content $settingsPath -Raw | ConvertFrom-Json
} else {
    $settings = [PSCustomObject]@{ }
}

# 4. Inject the directory execution properties
$settings | Add-Member -NotePropertyName "python.terminal.executeInFileDir" -NotePropertyValue $true -Force
$settings | Add-Member -NotePropertyName "terminal.integrated.cwd" -NotePropertyValue '${fileDirname}' -Force

# 5. Convert back to JSON format and save
$settings | ConvertTo-Json -Depth 100 | Set-Content $settingsPath

# Last amended: 27th July, 2026
# Powershell script
## Script to set VSCode to always open in the same folder
## It configures VSCode's Settings through powershell script.

# 1. Define the VS Code settings file path
$dirPath = "$env:C:\Users\ashok\AppData\Roaming\Code\User"
$settingsPath = "$dirPath\settings.json"

# 2. Check if the file exists; if not, create an empty JSON object
if (-not (Test-Path $settingsPath)) {
    New-Item -ItemType File -Path $settingsPath -Force | Out-Null
    Set-Content -Path $settingsPath -Value "{}"
}

# 3. Read and parse the existing JSON data
$settings = Get-Content -Path $settingsPath -Raw | ConvertFrom-Json

# 4. Add or update the window.restoreWindows setting
$settings | Add-Member -NotePropertyName "window.restoreWindows" -NotePropertyValue 'preserve' -Force
$settings | Add-Member -NotePropertyName "window.restoreWindows" -NotePropertyValue 'folders' -Force

# 5. Save the updated configuration back to the file
$settings | ConvertTo-Json -Depth 10 | Set-Content -Path $settingsPath

Write-Host "VS Code setting updated successfully!" -ForegroundColor Green

```

Here is how to do it through VSCode interface:

If you run your code via the built-in VS Code play button or debugger, you must tell the debugger to execute from the file's location rather than the root workspace folder. [Stack Overflow +3](#)

- **For Python:**

- Open VS Code Settings (`Ctrl + ,` on Windows/Linux or `Cmd + ,` on Mac).
- Search for `executeInFileDir`.
- Check the box for **Python > Terminal: Execute In File Dir.** [Stack Overflow](#)

- **For C++, Java, Node.js, and others (`launch.json`):**

- Go to the Run and Debug tab on the left sidebar.
- Click the gear icon to open your `launch.json` file.
- Inside your configuration block, add or change the `cwd` attribute:

```
json

"cwd": "${fileDirname}"
```

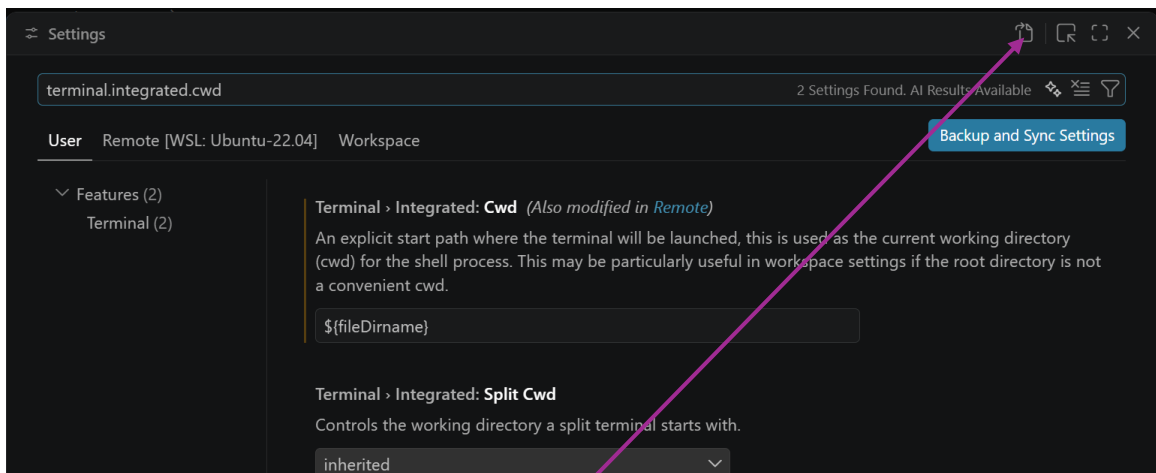


Figure 2: Click this icon to open json settings

#####