Twilio

Monitor if a page is alive and notify via Twilio SMS if not

Last amended: 23rd March, 2026
My folder: D:\Documents\OneDrive\Documents\n8n\2.twilio
GitHub: [This link]

1. Ensure that Apache2 is started on the same machine as postfix is installed: Only apache2 is required and not postfix.

```
./start_apache2.sh

./stop_apache2.sh
```

2. Workflow:

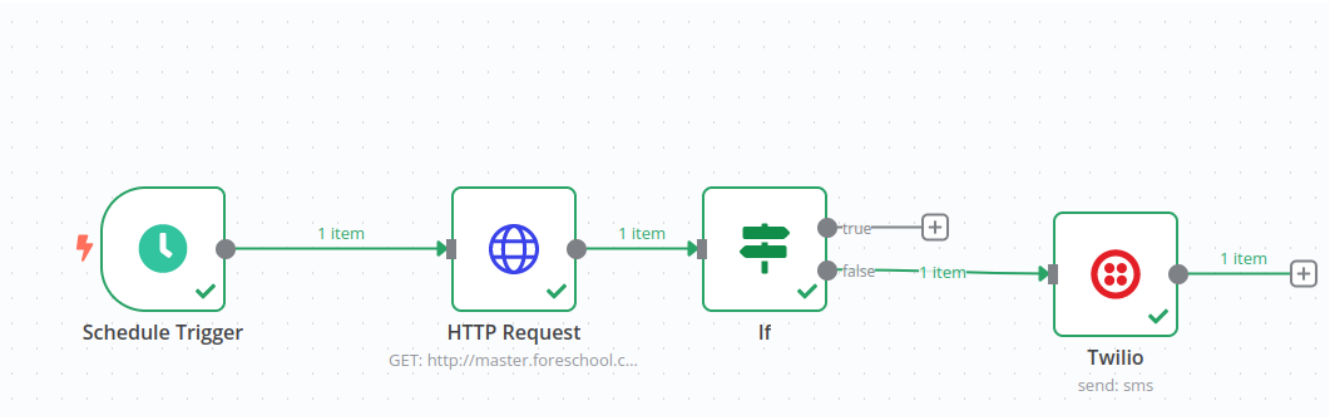

Illustration 1: If Bad Request (400) is True, send an SMS.. True branch is connected to Twilio.

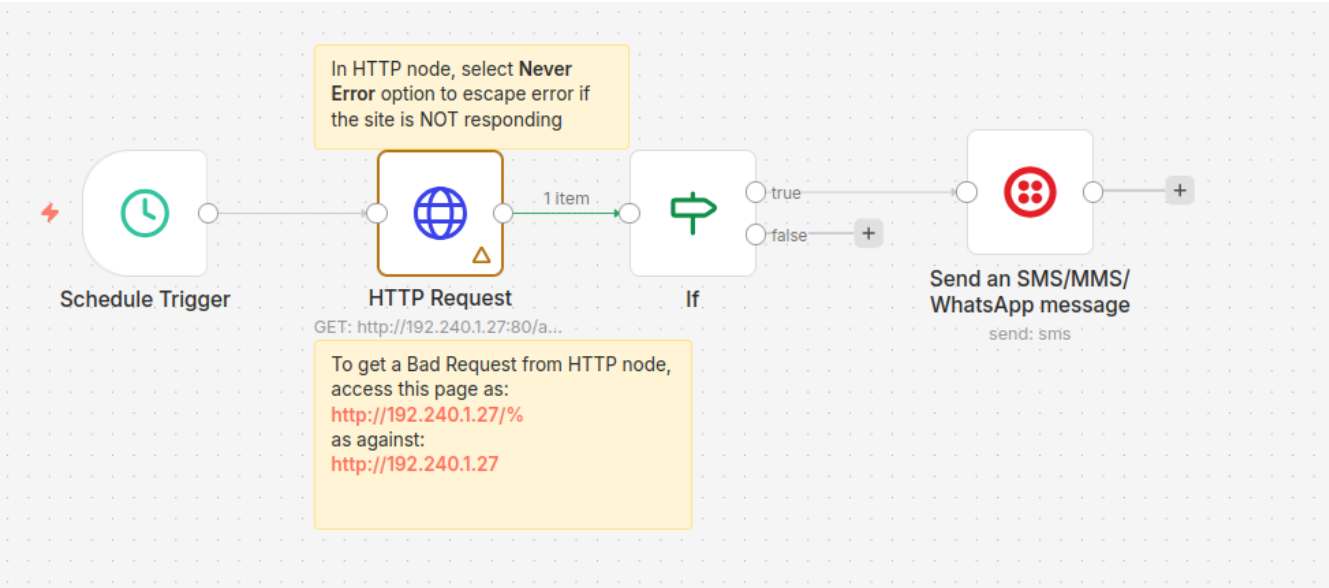

Figure 1: Another workflow

Schedule trigger

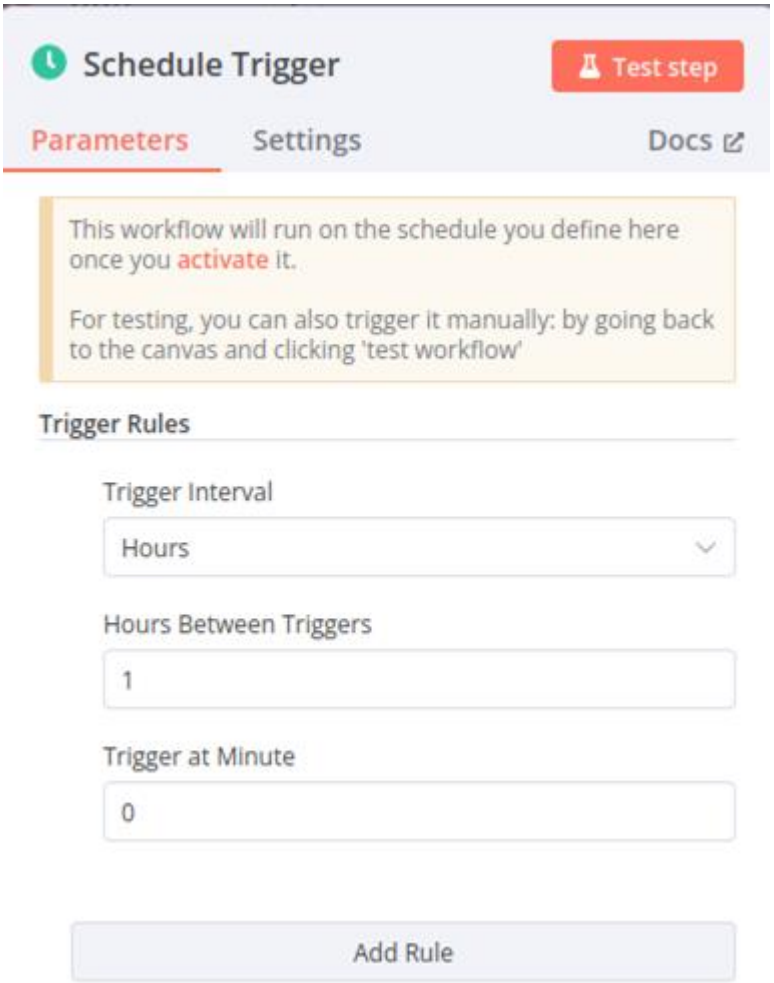

Figure 2: Decide interval of trigger

HTTP Request configuration:

To get Bad Request, you can try:

http://192.240.1.27/%

OR

http://192.240.1.27:11434/%

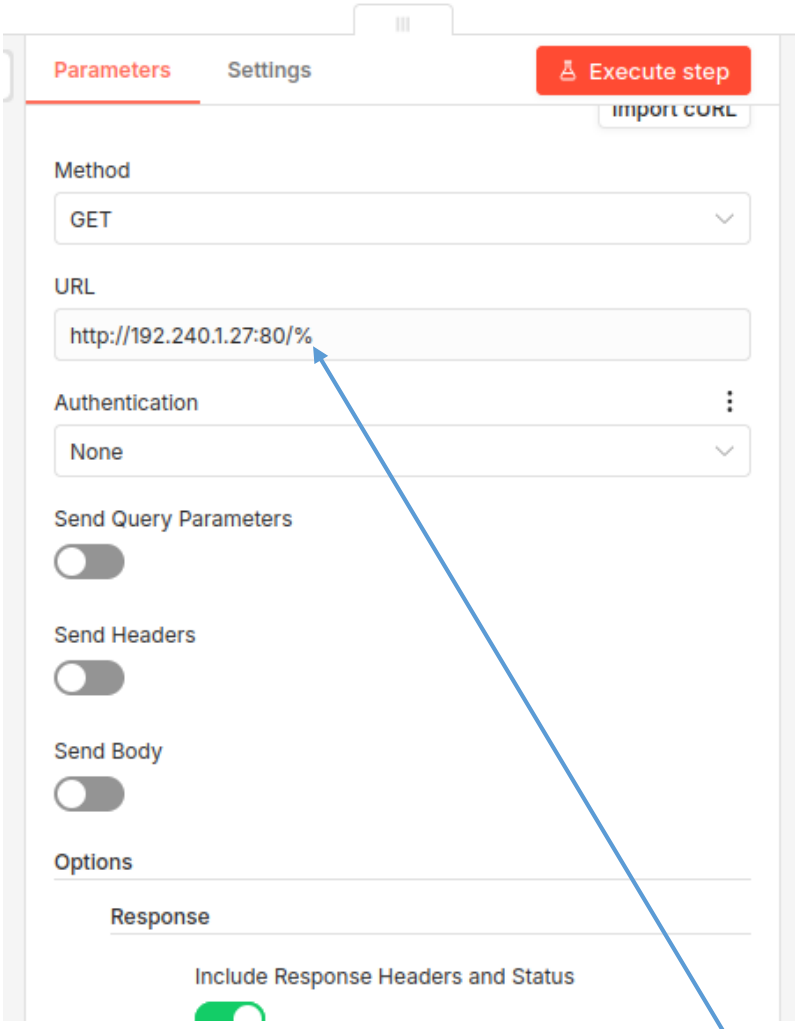

Figure 3:HTTP Request node—Top part of configuration. Note if you have '%' sign at the end of URL, (ie: http://192.240.1.27/%) you will get an Error of status code: 400, else you will get the web page

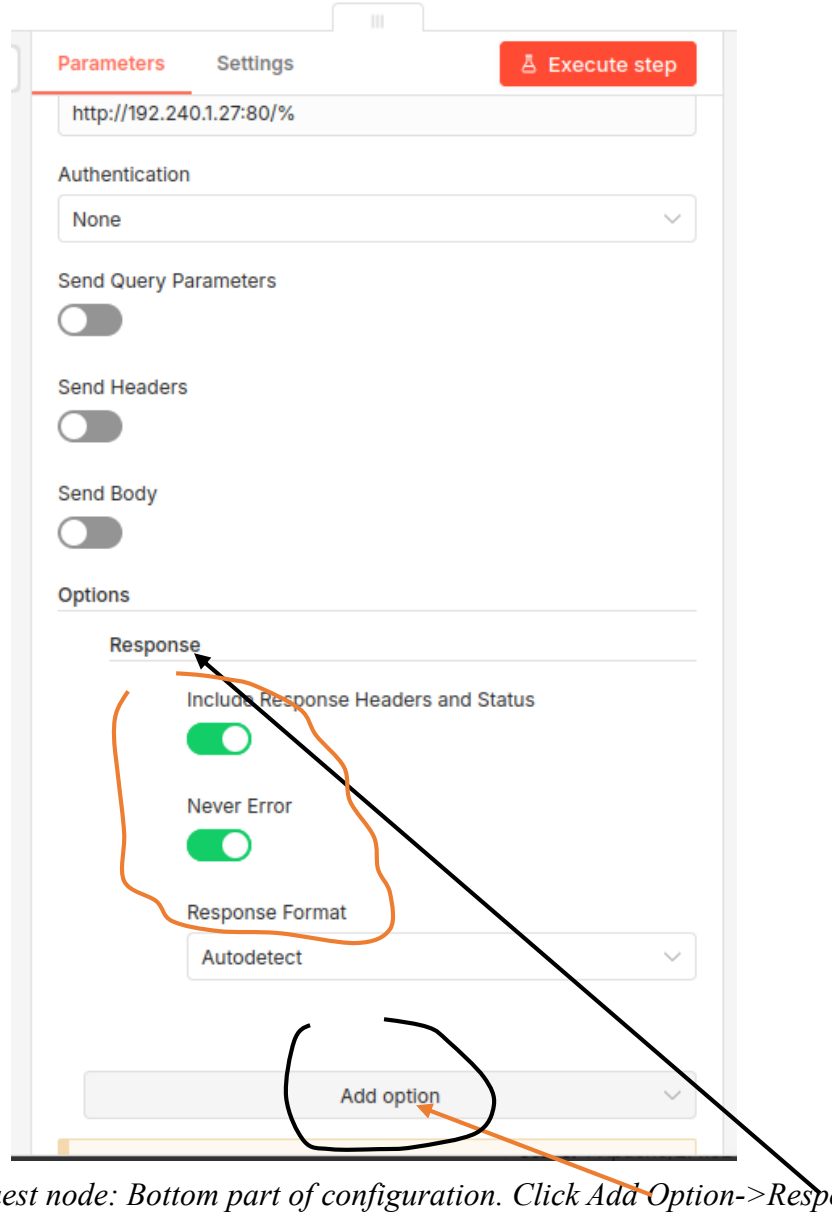

Figure 4: HTTP Request node: Bottom part of configuration. Click Add Option->Response and select the two switches.

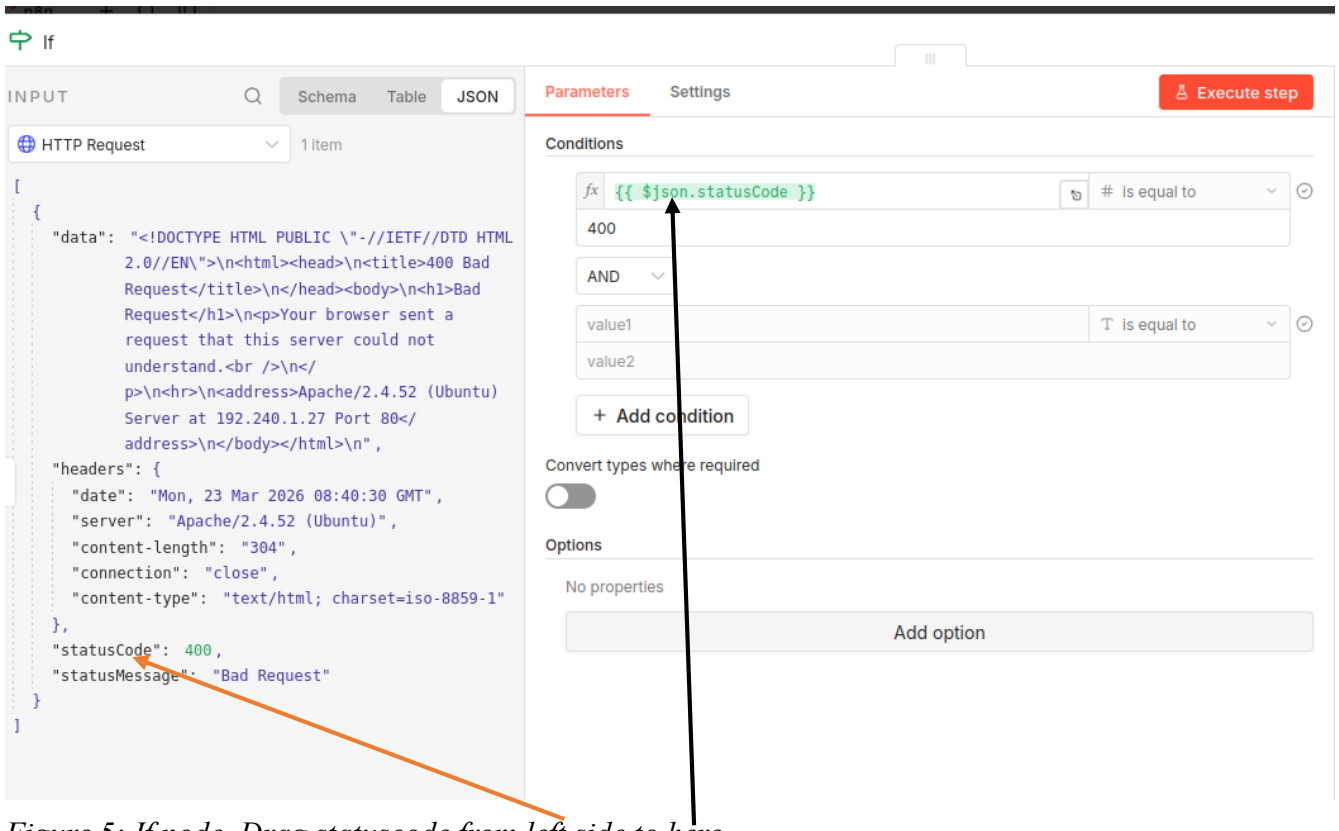

Figure 5: If node. Drag statuscode from left side to here.

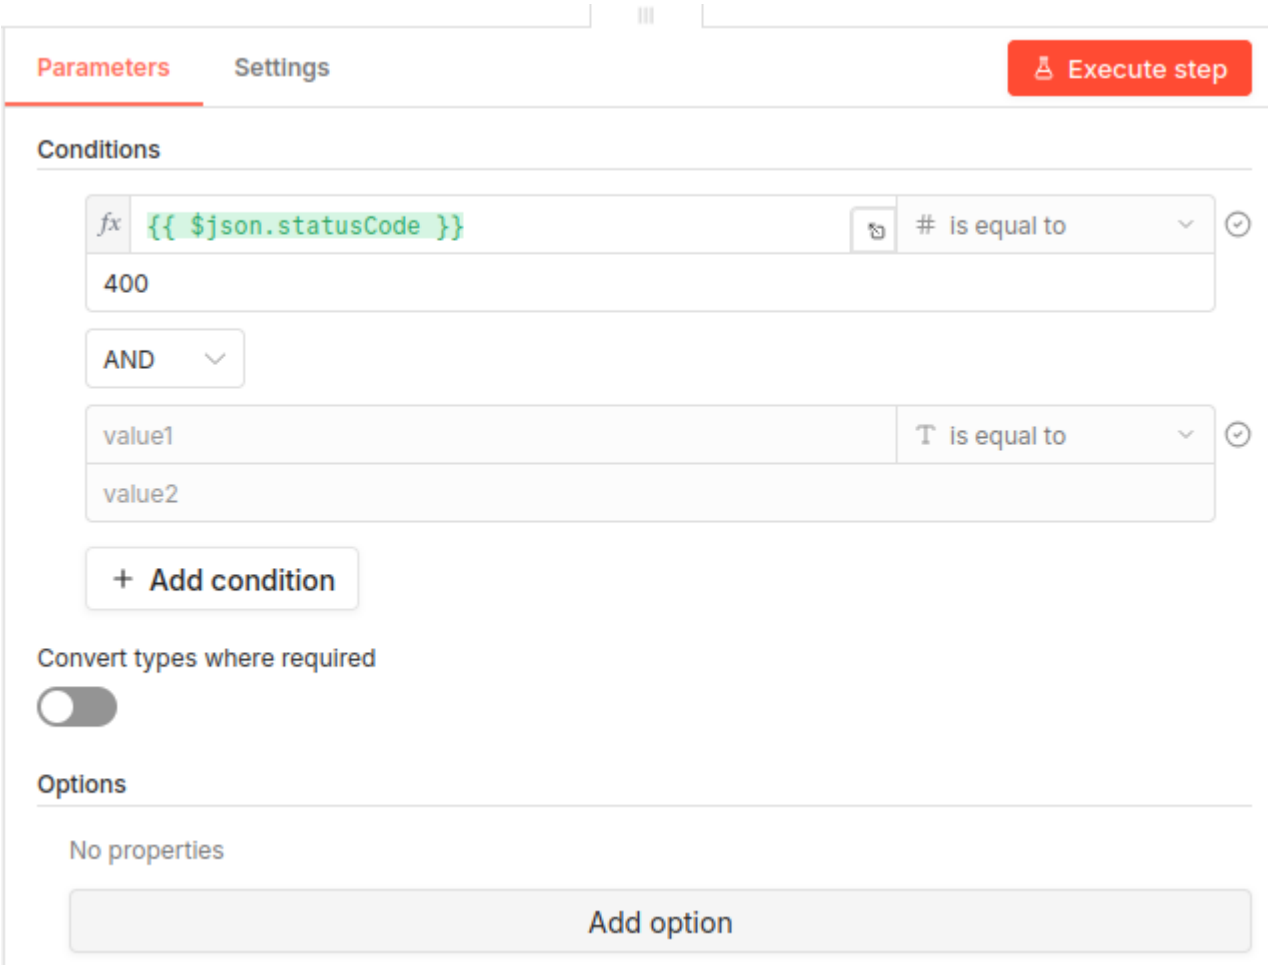

Figure 6: If node with status code dragged.

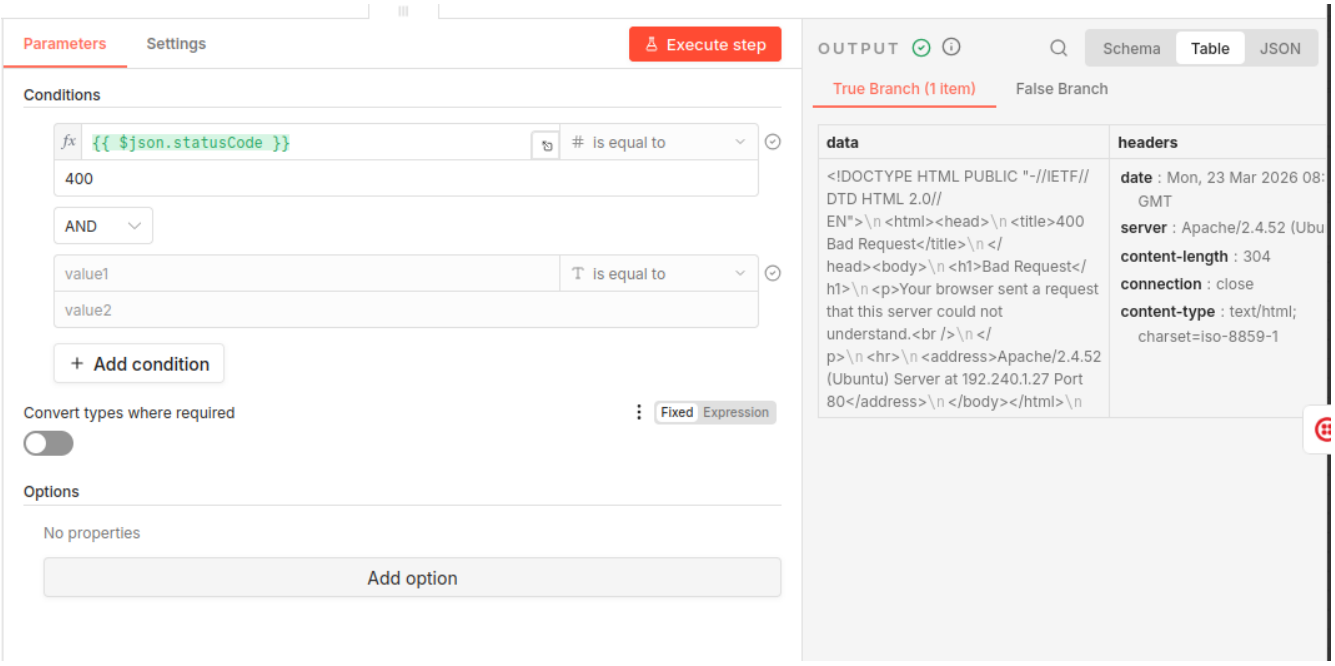

Figure 7: Right side of If node.

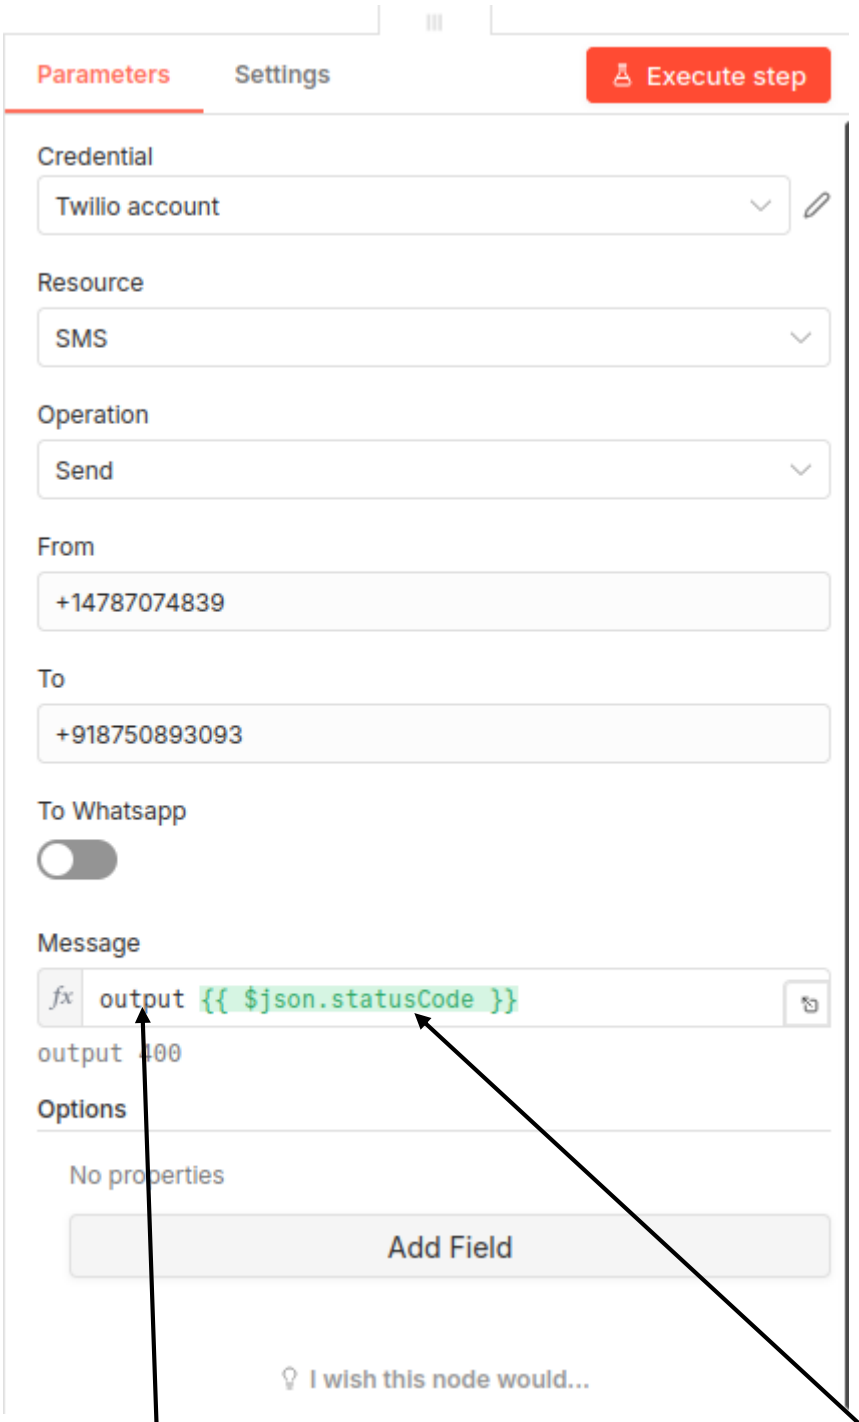

Figure 8: Twilio. Message field also has Status output from previous node dragged here. The message 'output' is ANY message or sentence you may wite.

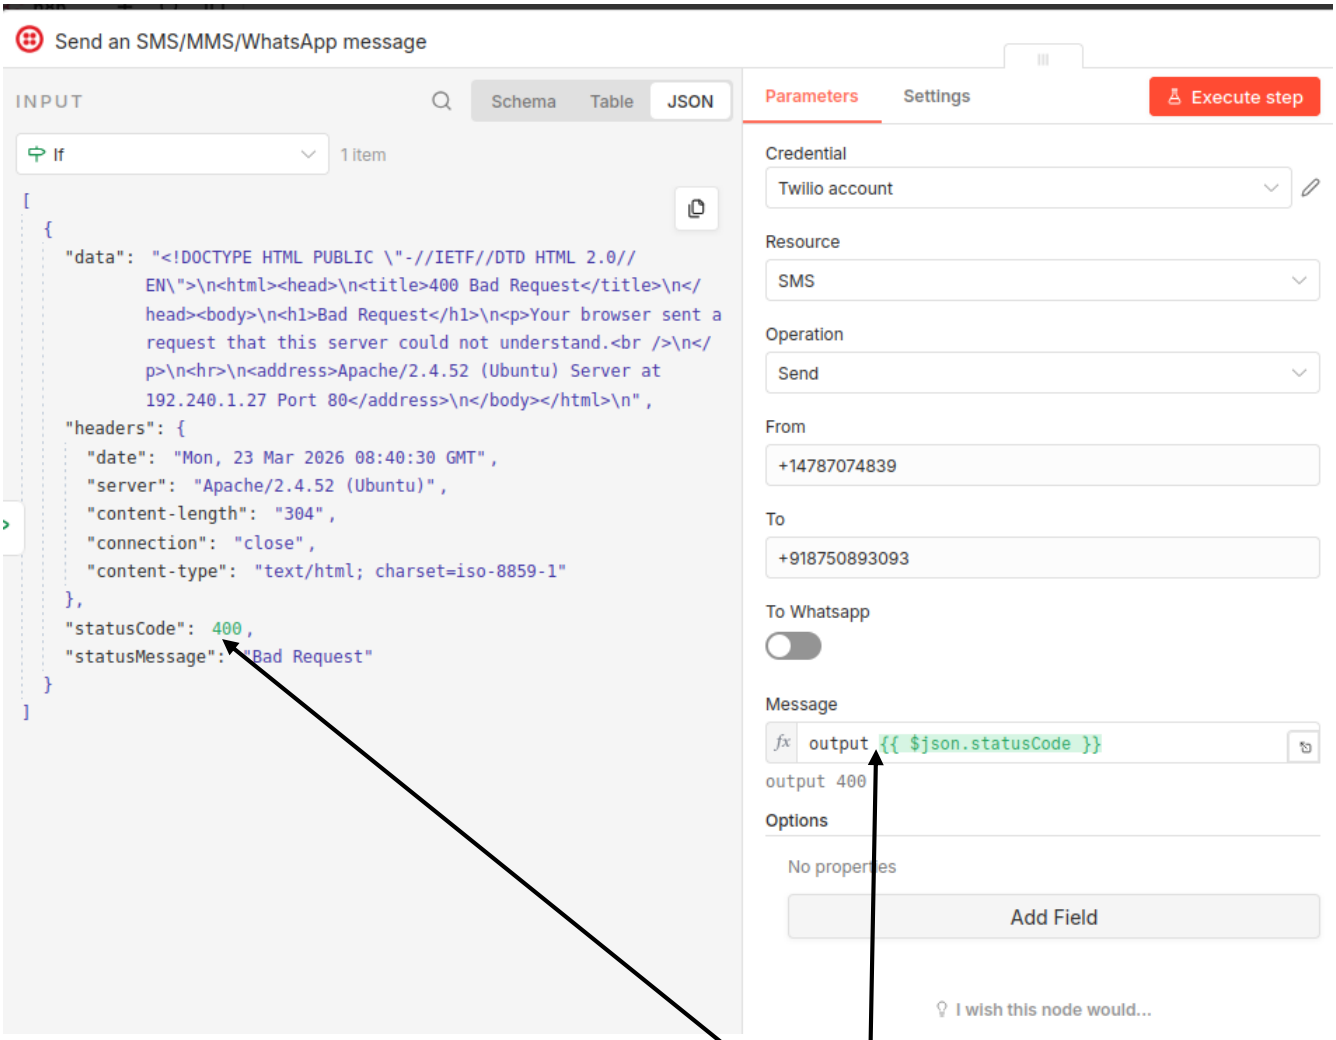

Figure 9: Twilio node. Drag Status Code dragged from left to Message field

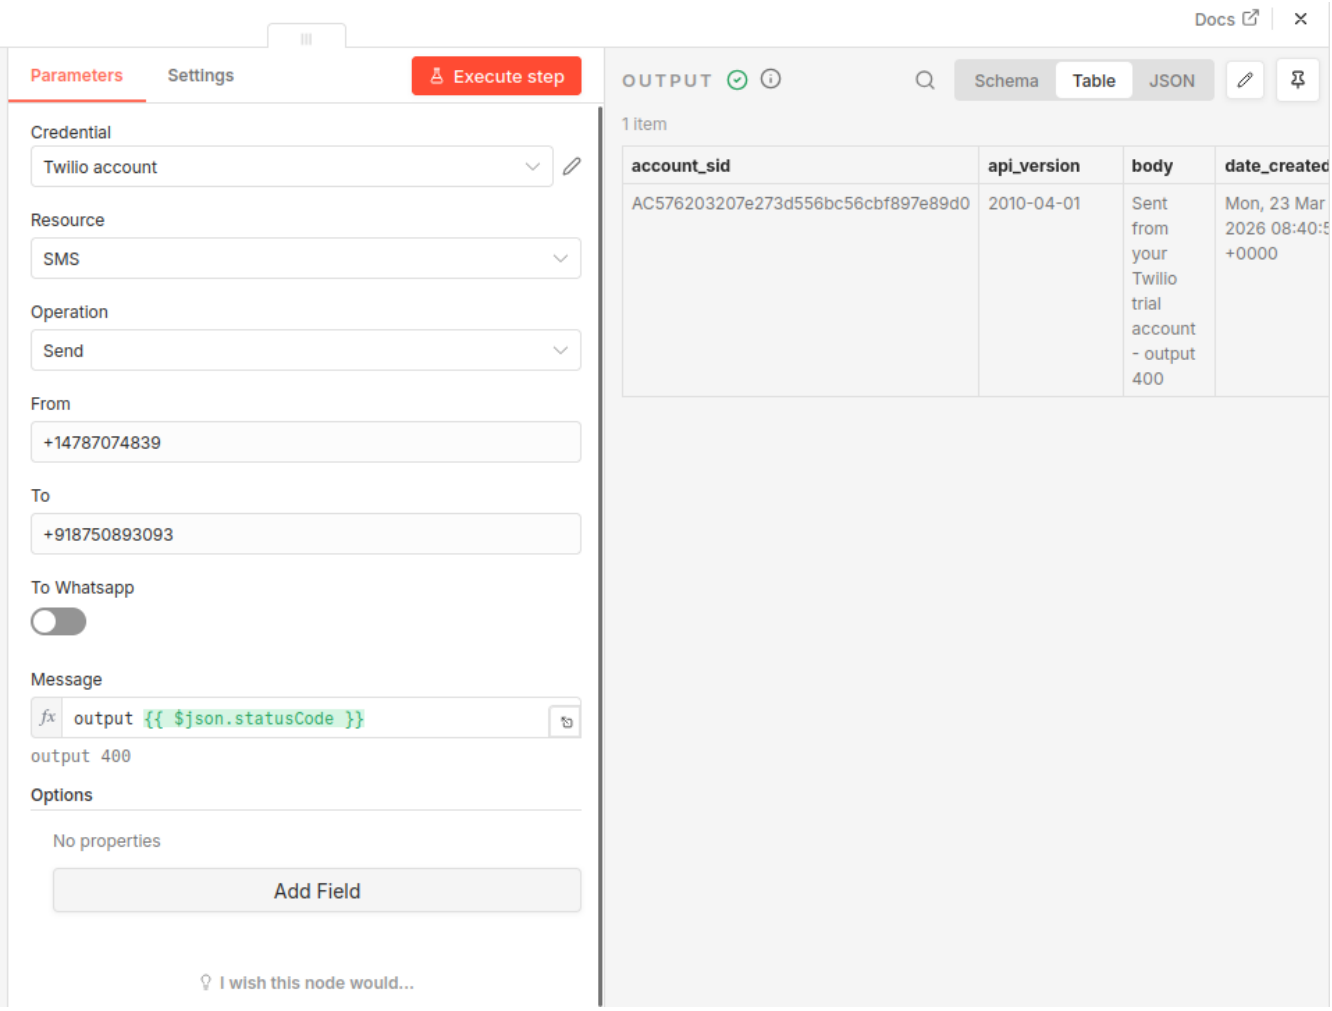

Figure 10: Right side of Twilio node.

Refer here to configure Twilio.

Using Auth Token#

To configure this credential, you'll need a Twilio account and:

- Your Twilio **Account SID**
- Your Twilio **Auth Token**

To set up the credential:

1. In n8n, select **Auth Token** as the **Auth Type**.
2. In Twilio, go to **Console Dashboard > Account Info**.
3. Copy your **Account SID** and enter this in your n8n credential. This acts as a username.
4. Cop your **Auth Token** and enter this in your n8n credential. This acts as a password.

Refer to Auth Tokens and How to Change Them for more information.

####################