

VS Code help

=====\\

Last amended: 25th July, 2026

GitHub folder: install_ai_tools/quick_flowise_ollama/venv

My folder: C:\Users\ashok\OneDrive\Documents\visualstudiocode

Contents

1. Some shortcuts:	1
2. Ubuntu: How to access python virtual environment in VSCode:	1
2. Ubuntu: Which is my current working python Virtual environment:	1
3. WSL: Selecting python environment while in WSL.....	2
Google AI generated reply is as below:	3
4. WSL: Setting Working folder in terminal window	3

1. Some shortcuts:

Shortcut	Purpose
Ctrl+shift+p	Python: Select Interpreter
Ctrl+,	Open Settings menu
Ctrl+shift+V	Markdown preview

2. Ubuntu: How to access python virtual environment in VSCode:

This is the recommended method for selecting an environment for your current workspace.

1. **Open the Command Palette:** Press Ctrl+Shift+P (Windows/Linux) or Cmd+Shift+P (macOS).
2. **Search for the command:** Type "Python: Select Interpreter" and select it from the list of commands.
3. **From WSL Ubuntu:** However, if you want to select a virtual environment into VSCode from WSL Ubuntu, first you must connect to WSL Ubuntu in VSCode (See below)

2. Ubuntu: Which is my current working python Virtual environment:

1. Check the Status Bar

The easiest way to see the active interpreter is to look at the bottom-right corner of the VSCode window. The name and version of the currently selected Python interpreter will be displayed there.

- If no interpreter is selected, it might say something like "Python" or "Select Interpreter".
- Clicking on this area is a shortcut to change the interpreter.

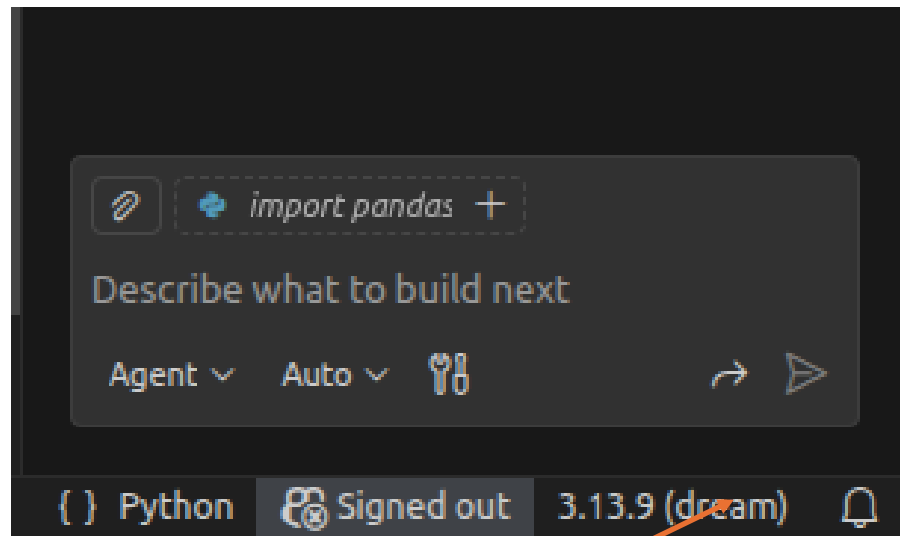


Figure 1: Bottom right of VS code mentions 'dream' as the active python interpreter

3. WSL: Selecting python environment while in WSL

See this Microsoft help link.

Broadly steps are:

1. Install WSL2 in Windows
2. Install Visual Studio Code in Windows
3. Install almost all *WSL: Extensions* in VSCode. No need to install python extensions first, if we are not working in a python virtual environment within Windows.
5. Quit VSCode in Windows.
6. Open now: WSL terminal. Install therein either anaconda3 and then create a conda virtual environment or install a python virtual environment (say for *crewai_env*).
7. Switch to this python environment. Type command **code .** (note that 'dot' is a part of command). This will start VSCode and on bottom left you will have *WSL: Ubuntu22.04*

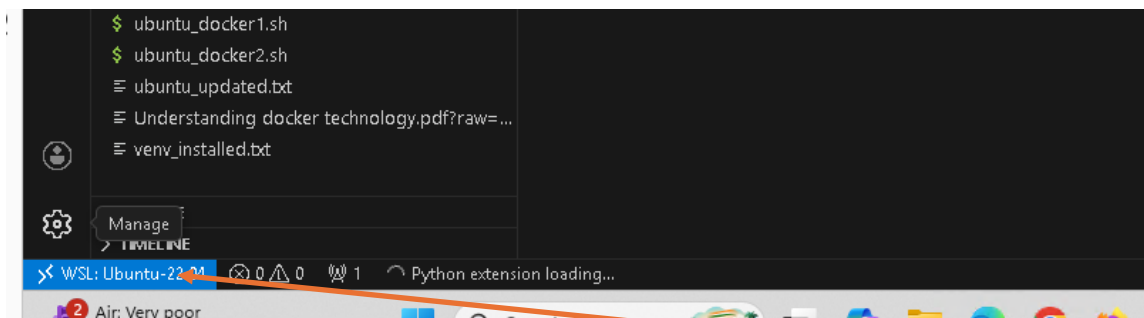


Figure 2: Visual Studio Code started in WSL. Note the blue label *WSL: Ubuntu*. Click it to connect to WSL Ubuntu-22.04

6. Next install necessary python extensions in this VSCode for WSL.
7. Once done, you can then select a python interpreter, as usual, with ctrl+shift+P. You will see all your python virtual environments that exist in WSL.

Google AI generated reply is as below:


To select a Python interpreter in WSL within VS Code, you **must be running VS Code in a WSL remote window**. The main reasons for this issue are typically running VS Code in Windows mode instead of WSL mode, or problems with the Python extension.

Primary Solution: Ensure VS Code is running in WSL Mode. You cannot select a Linux Python executable (which does not have a .exe extension) from a Windows instance of VS Code.

1. **Install the Remote - WSL extension** in VS Code if you haven't already. You can find it in the Extensions marketplace (Ctrl+Shift+X).
2. **Open your project from within WSL:**
 1. Open your WSL terminal (e.g., Ubuntu) in Windows.
 2. Navigate to your project directory in the Linux file system.
 3. Type `code .` and press Enter. This command launches VS Code and automatically connects to the WSL environment.
3. **Verify the connection:** The lower-left corner of the VS Code status bar should show "WSL: [YourDistroName]".
4. **Select the interpreter:** Once in WSL mode, open the Command Palette (Ctrl+Shift+P) and type "**Python: Select Interpreter**". You should now see the available Linux Python interpreters and virtual environments.

4. WSL: Setting Working folder in terminal window

When you open a terminal window in VSCode, the default terminal path may not be what you want.

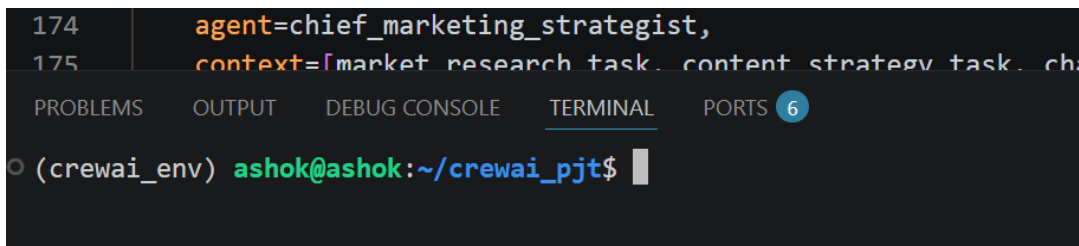

The screenshot shows a VS Code interface with a terminal window. The terminal output displays a Python script snippet: `agent=chief_marketing_strategist,` and `context=[market_research_task, content_strategy_task, ch`. Below the script, the terminal shows the prompt `(crewai_env) ashok@ashok:~/crewai_pjt$` with a cursor. The terminal tabs at the top are labeled PROBLEMS, OUTPUT, DEBUG CONSOLE, TERMINAL, and PORTS 6.

Figure 1: Terminal window in VSCode.

To set the terminal window's path to your working folder, issue the following PowerShell command. This assumes that you have first installed VSCode in Windows. It also assumes that configuration file of VSCode, *settings.json*, is in folder: `C:\Users\ashok\AppData\Roaming\Code\User\settings.json`

```
# 1. Target the correct Windows folder path
$dirPath = "$env:C:\Users\ashok\AppData\Roaming\Code\User"
$settingsPath = "$dirPath\settings.json"

# 2. Force create the folder path if it does not exist yet
if (!(Test-Path $dirPath)) {
    New-Item -ItemType Directory -Path $dirPath -Force
}

# 3. Read existing settings or build a clean object if it is a brand new file
if (Test-Path $settingsPath) {
    $settings = Get-Content $settingsPath -Raw | ConvertFrom-Json
} else {
    $settings = [PSCustomObject]@{ }
}
```

```
# 4. Inject the directory execution properties
$settings | Add-Member -NotePropertyName "python.terminal.executeInFileDir" -NotePropertyValue $true -Force
$settings | Add-Member -NotePropertyName "terminal.integrated.cwd" -NotePropertyValue '${fileDirname}' -Force

# 5. Convert back to JSON format and save
$settings | ConvertTo-Json -Depth 100 | Set-Content $settingsPath
```

Here is how to do it through VSCode interface:

If you run your code via the built-in VS Code play button or debugger, you must tell the debugger to execute from the file's location rather than the root workspace folder. [Stack Overflow +3](#)

- **For Python:**
 - Open VS Code Settings (`Ctrl + ,` on Windows/Linux or `Cmd + ,` on Mac).
 - Search for `executeInFileDir` .
 - Check the box for **Python > Terminal: Execute In File Dir.** [Stack Overflow](#)
- **For C++, Java, Node.js, and others (`launch.json`):**
 - Go to the Run and Debug tab on the left sidebar.
 - Click the gear icon to open your `launch.json` file.
 - Inside your configuration block, add or change the `cwd` attribute:

```
json

"cwd": "${fileDirname}"
```

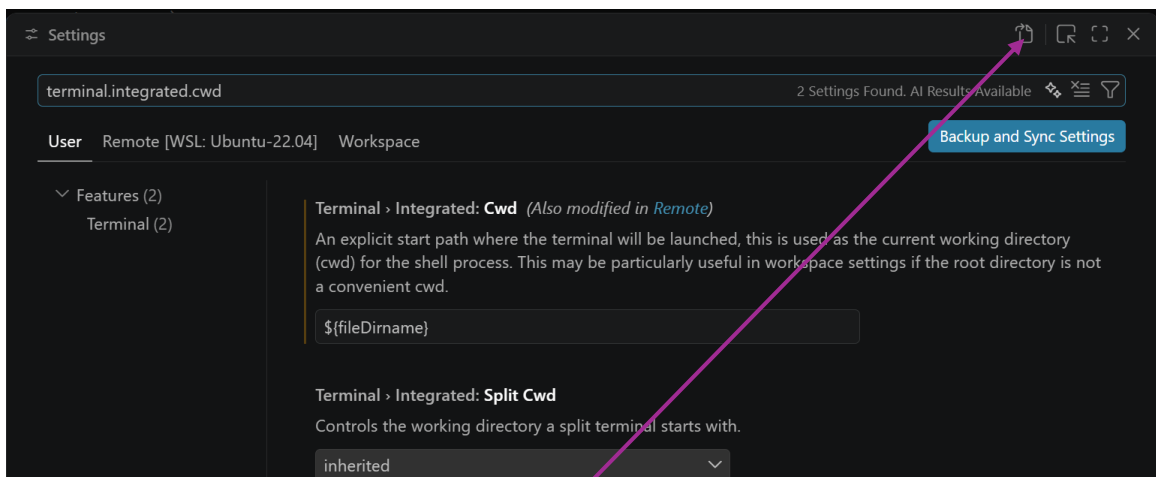


Figure 2: Click this icon to open json settings

#####