Configure VSCode to use local ollama coder

GitHub co-pilot is not needed. Use '*Continue*' extension, instead

Last amended: 3rd May, 2026
My folder: C:\Users\ashok\OneDrive\Documents\visualstudiocode

Contents

First Screen shots when VSCode is started: 2
Install Extensions 5
Configuring Continue first time 9
Clearing chat: 12
Reconfiguring Model in Continue 16
Introduction 21

'*Continue*' brings a chat-box and uses ollama. The extension is easy to install and configure. Install extensions in this order:

a. First python and Jupyter notebook extensions. (Python icon appears on the left panel)
b. Then, Ollama related extensions
c. Finally, *Continue* extension. (*Continue* icon appears on the left panel.)

Any code developed by *Continue* chat box can be Inserted in the current cell of the Jupyter Notebook by clicking Insert icon on the chat box (the first icon).

Follow screen shots:

First Screen shots when VSCode is started:

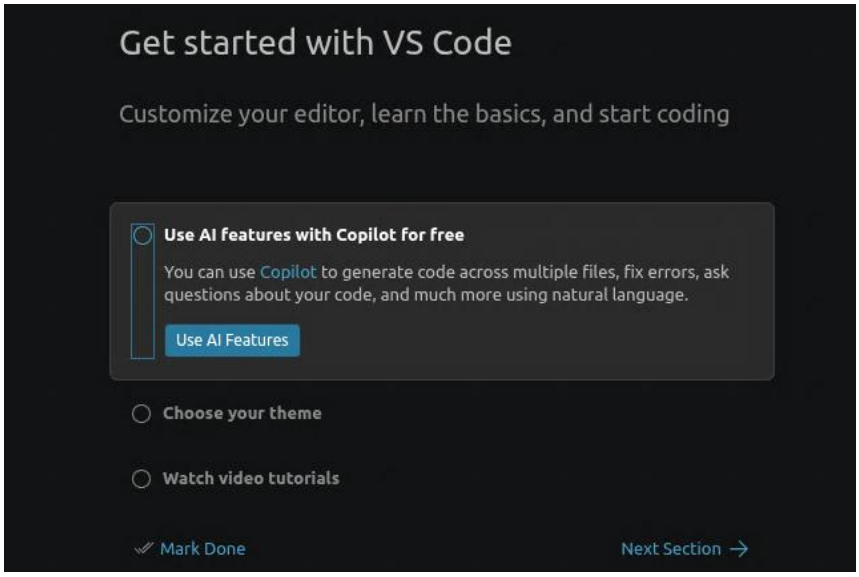

Figure 1: Nothing to do. Click Next Section

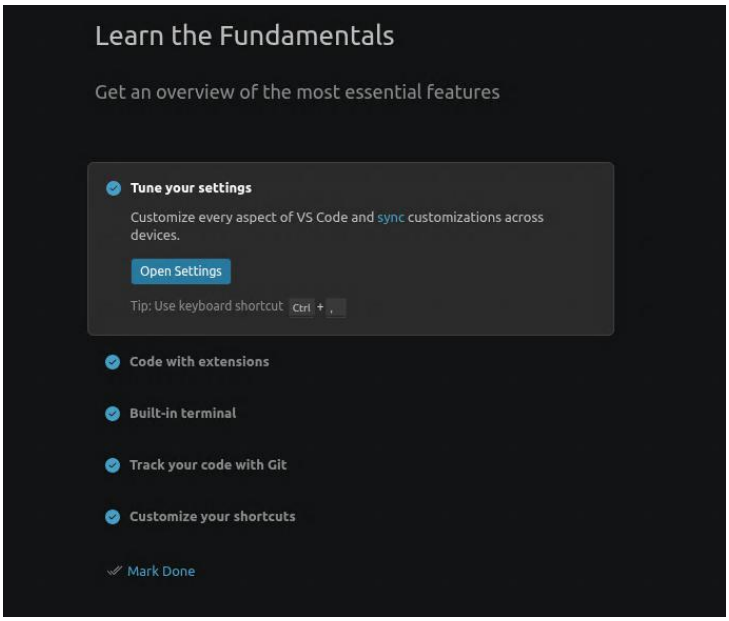

Figure 2: Just close the Walkthrough tab at the top.

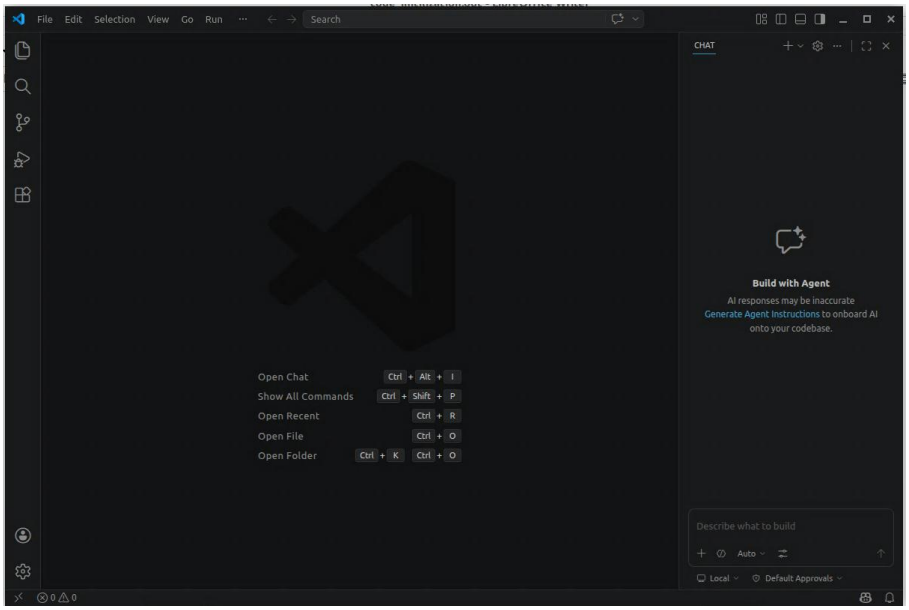

Figure 3: No tab open.

Install Extensions

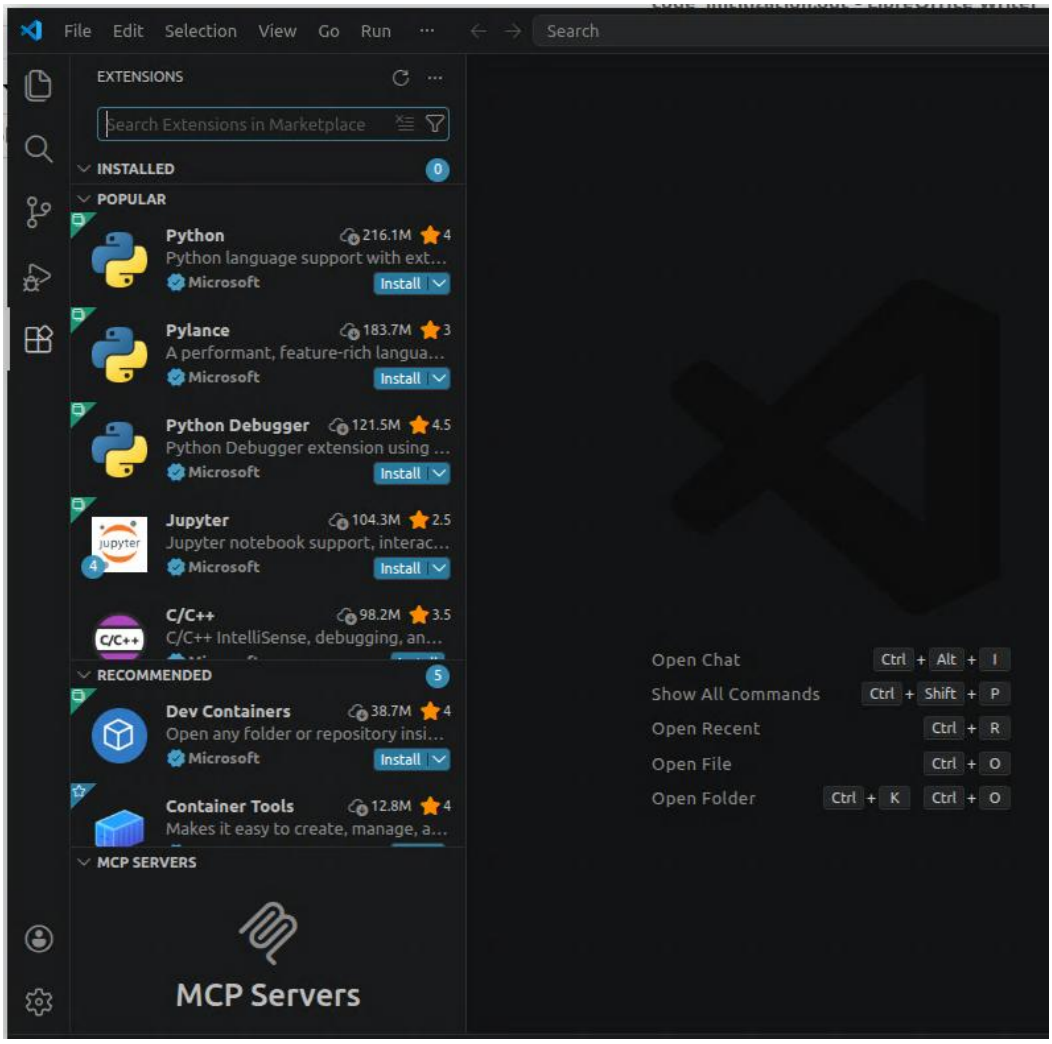

Figure 4: Click Extensions and install the first four python related extensions, including 'Jupyter' extension

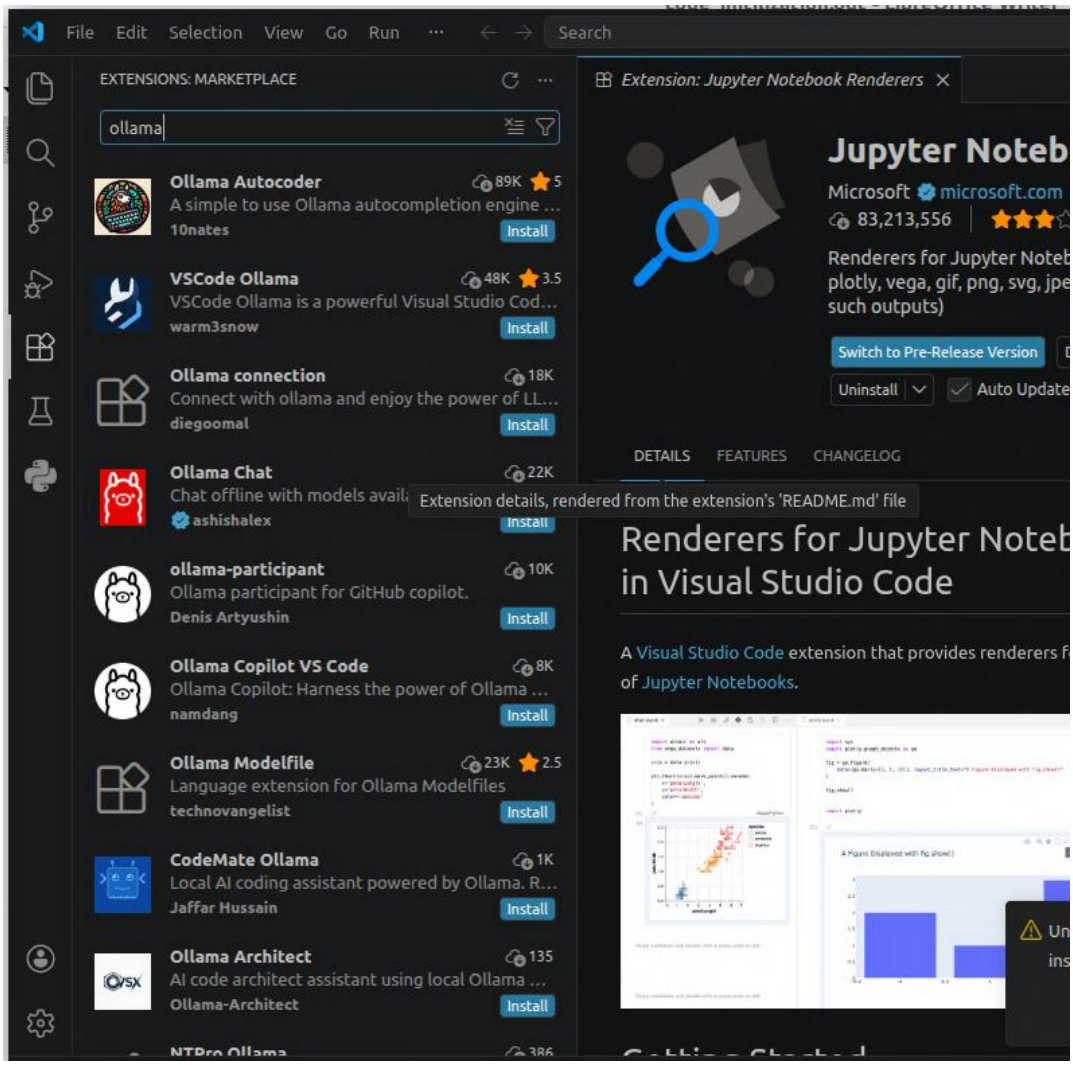

Figure 5: Search for ollama. Install Ollama Autocoder, VSCode Ollama, Ollama connection, Ollama commit, Easy-Ollama, Ollama Local Chat

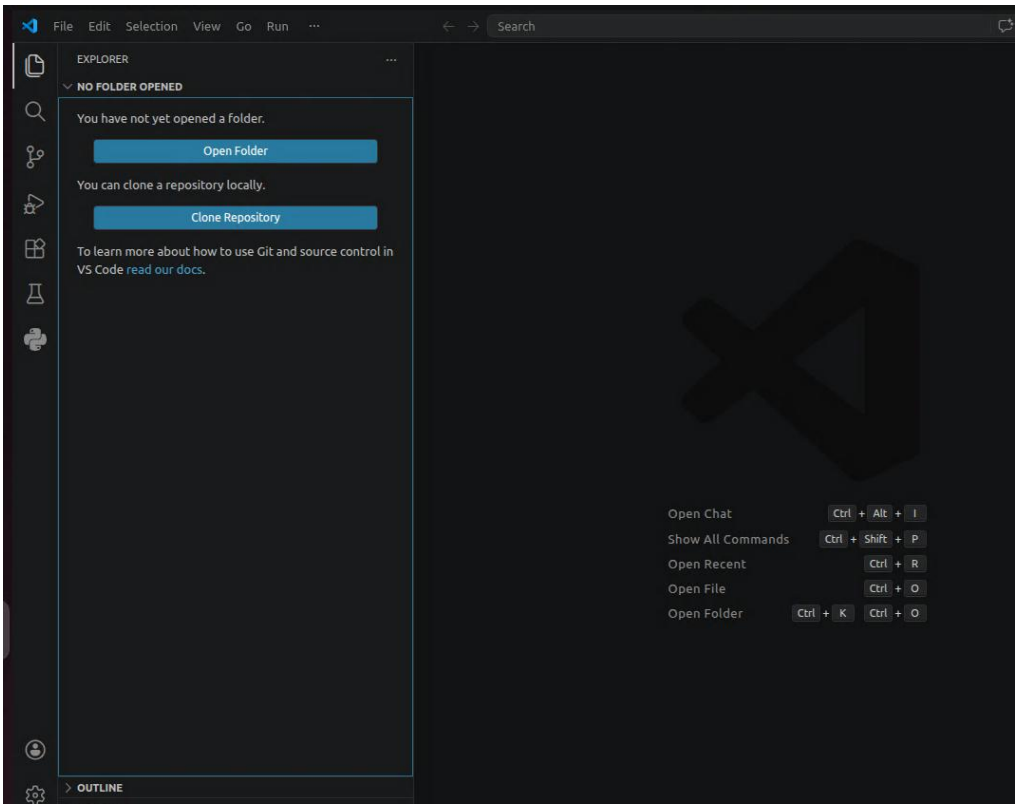

Figure 6: Close Extension and click File icon on the left panel

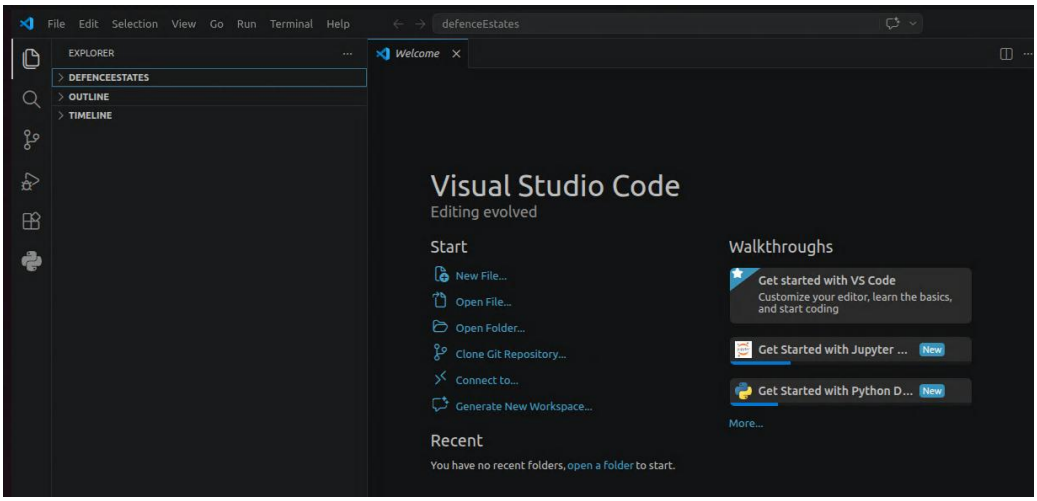

Figure 7: Select ***Documents/defenceEstates*** *folder*

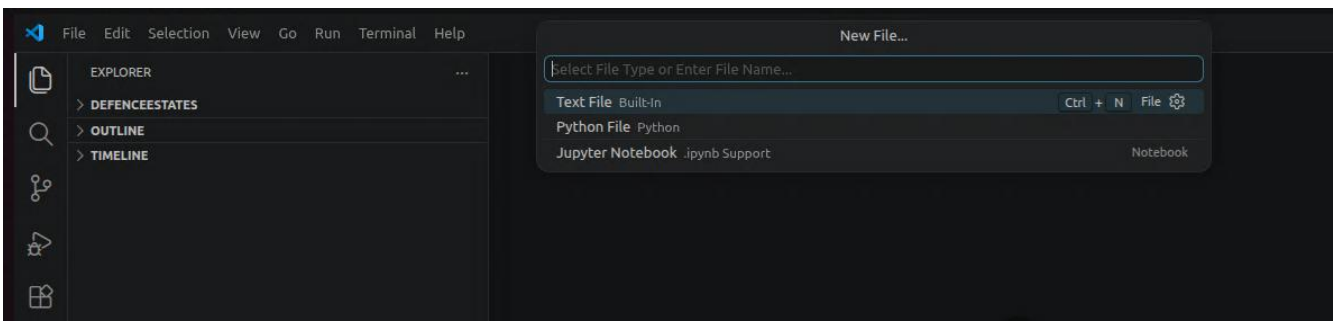

Figure 8: Click File-->Open File-->Select Jupyter notebook

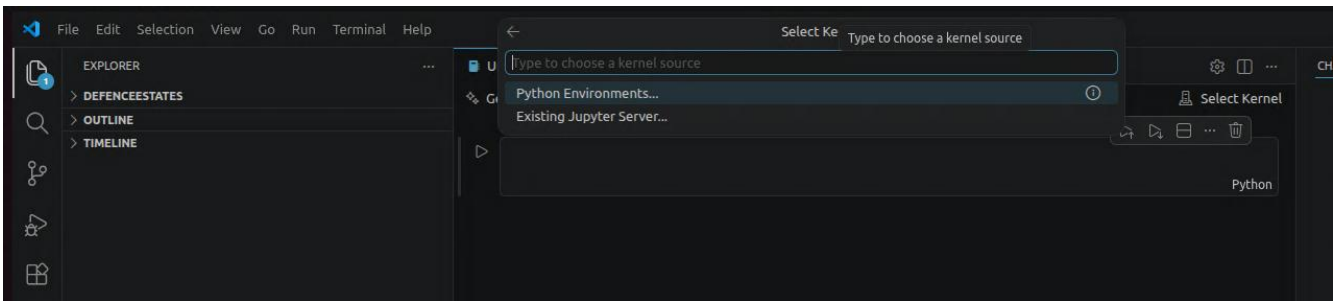

Figure 9: At top-right click ***Select Kernel****. Select* ***base*** *Conda environment*

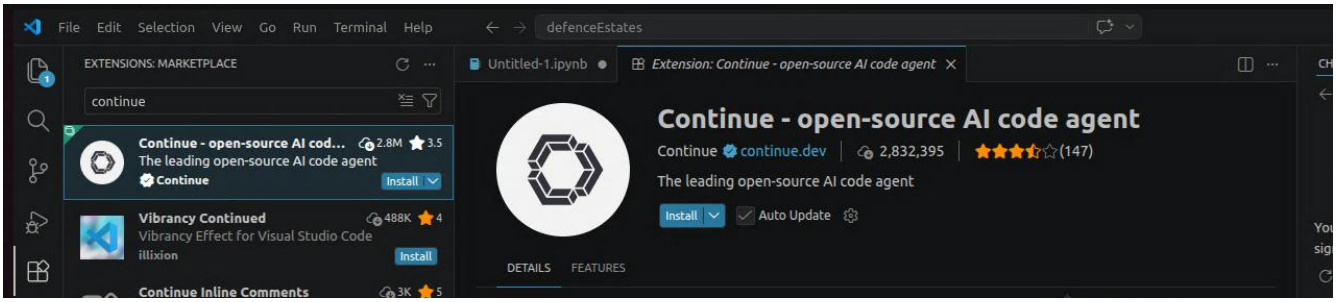

*Figure 10: Install **Continue** as mentioned*

Configuring Continue first time

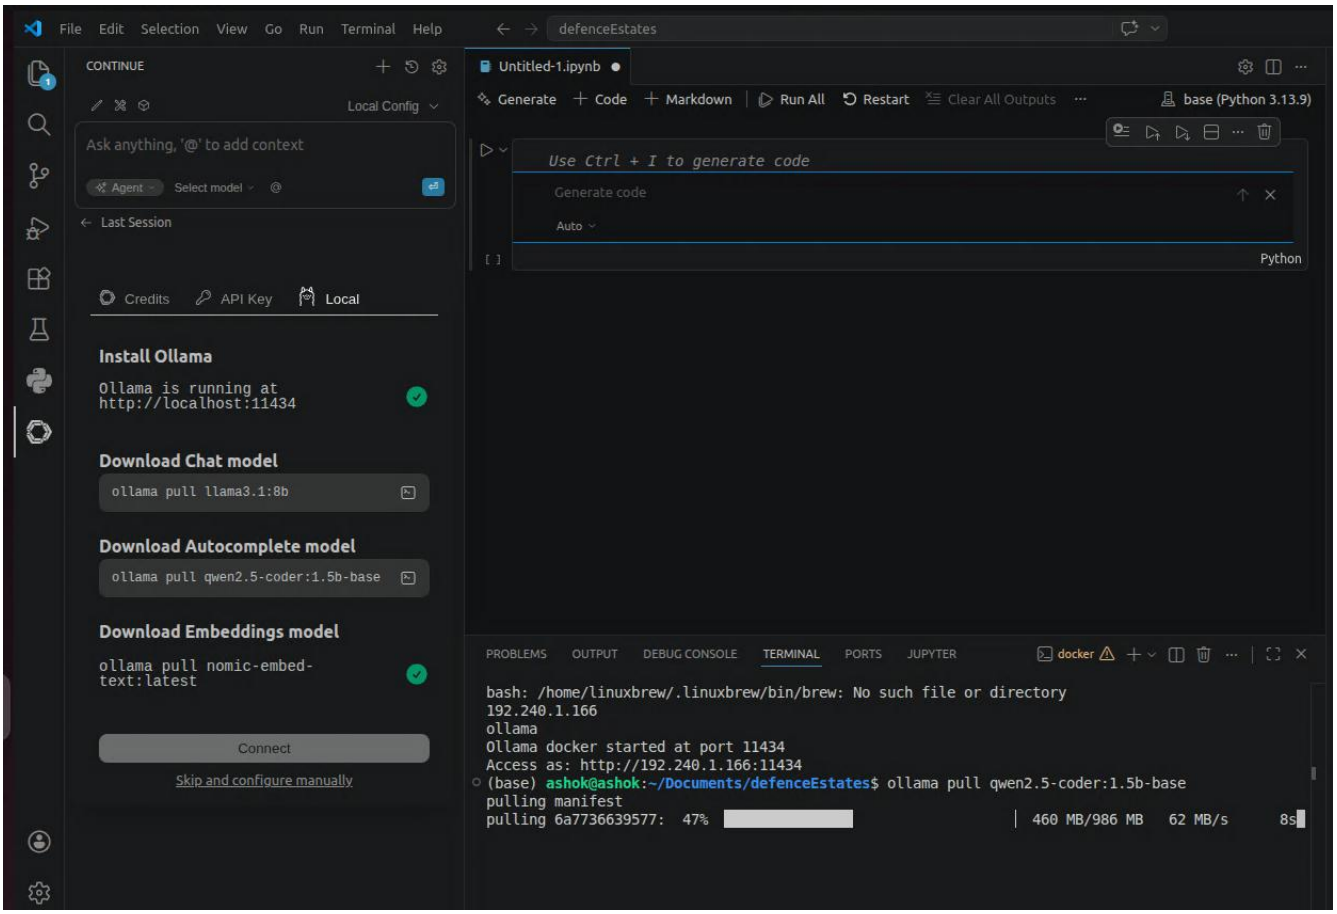

*Figure 11: Open **Continue** configuration through the last icon on the left panel*

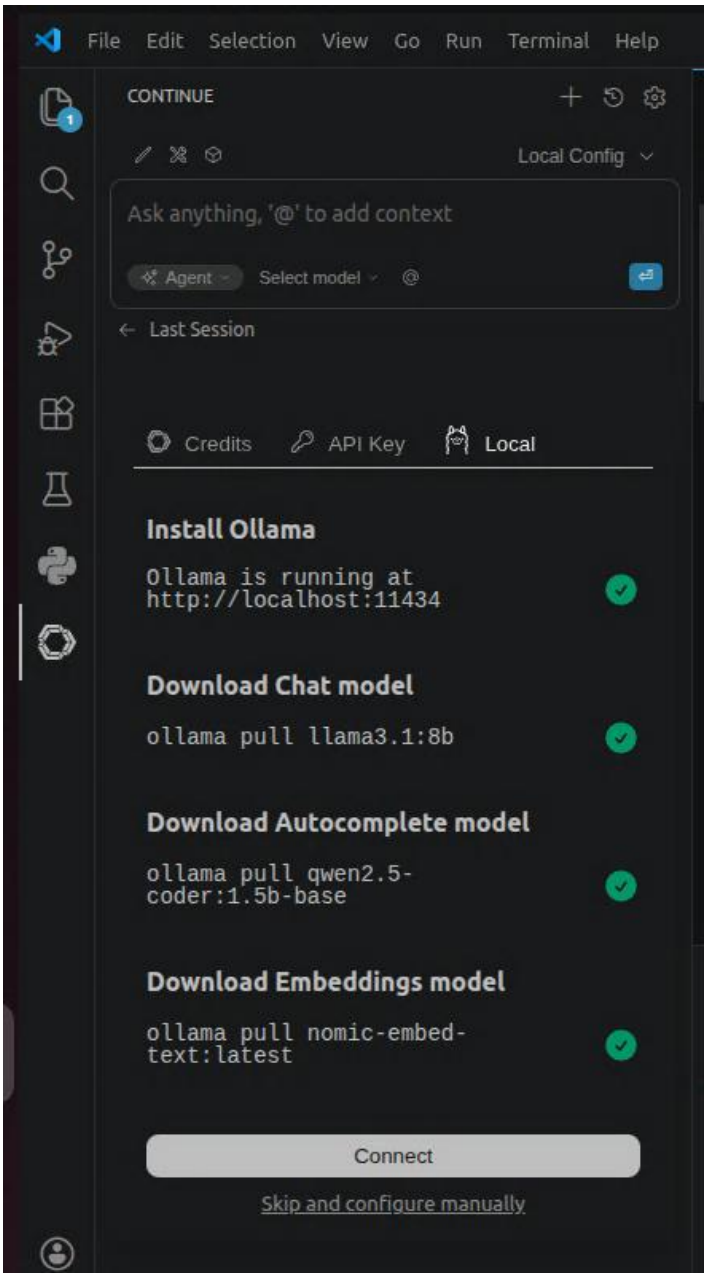

Figure 12: Click on Local and configure

Clearing chat:

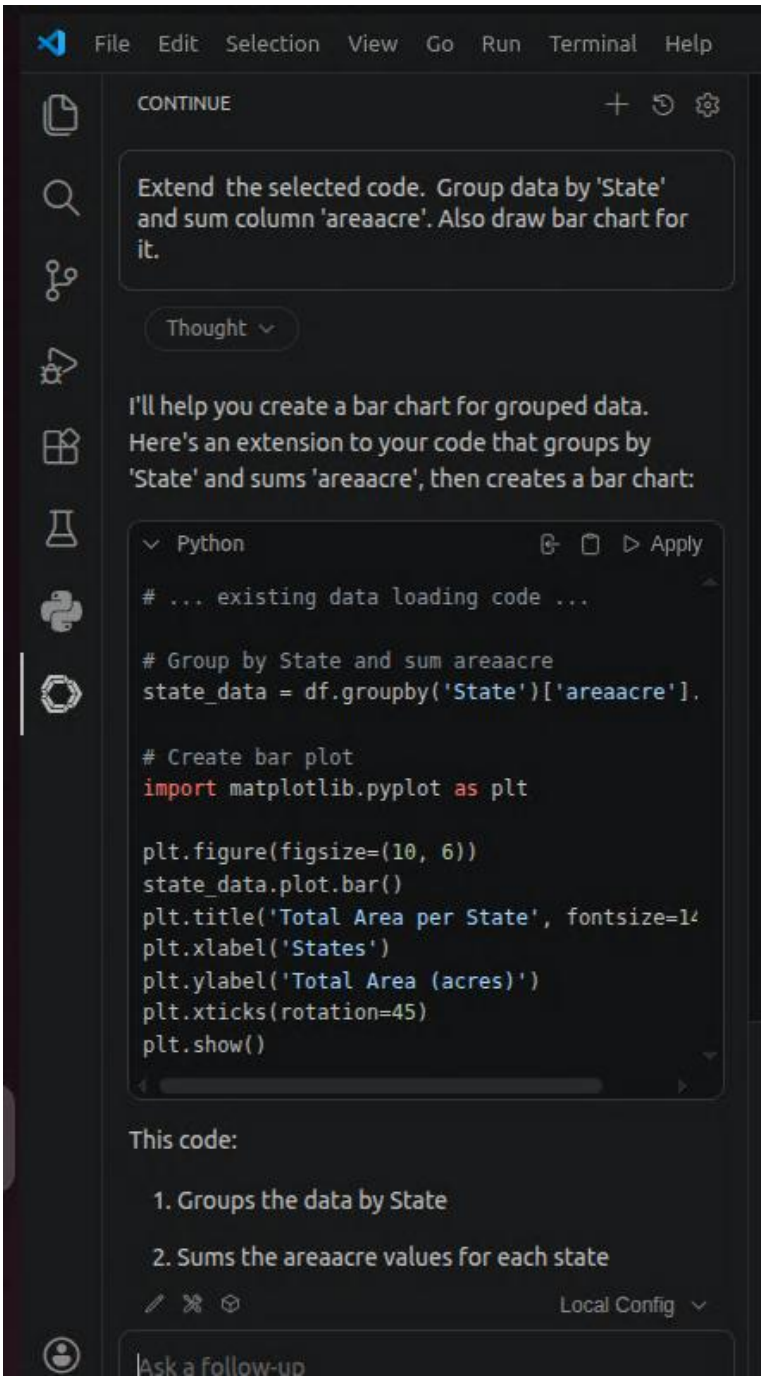

Figure 13: Click here (on redo icon)

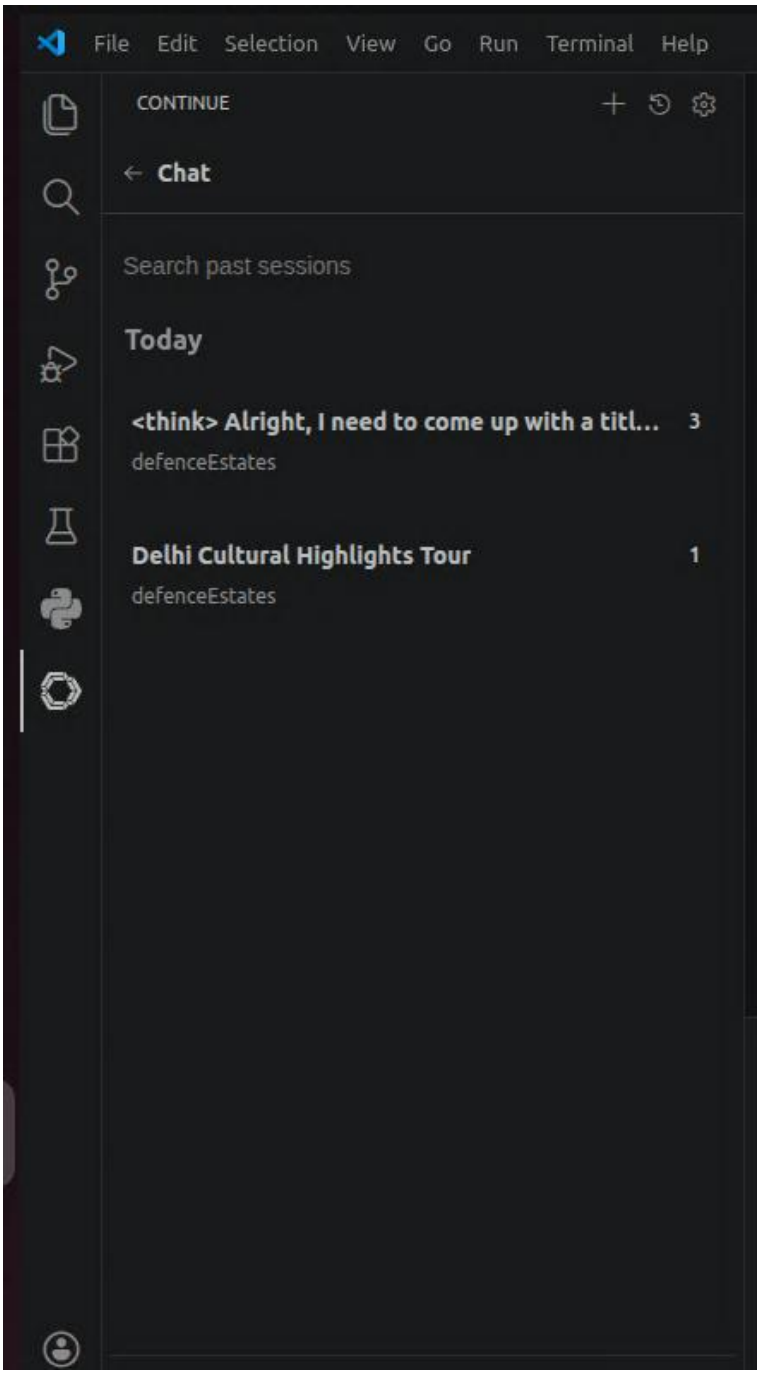

Figure 14: Existing chat messages appear. Delete them

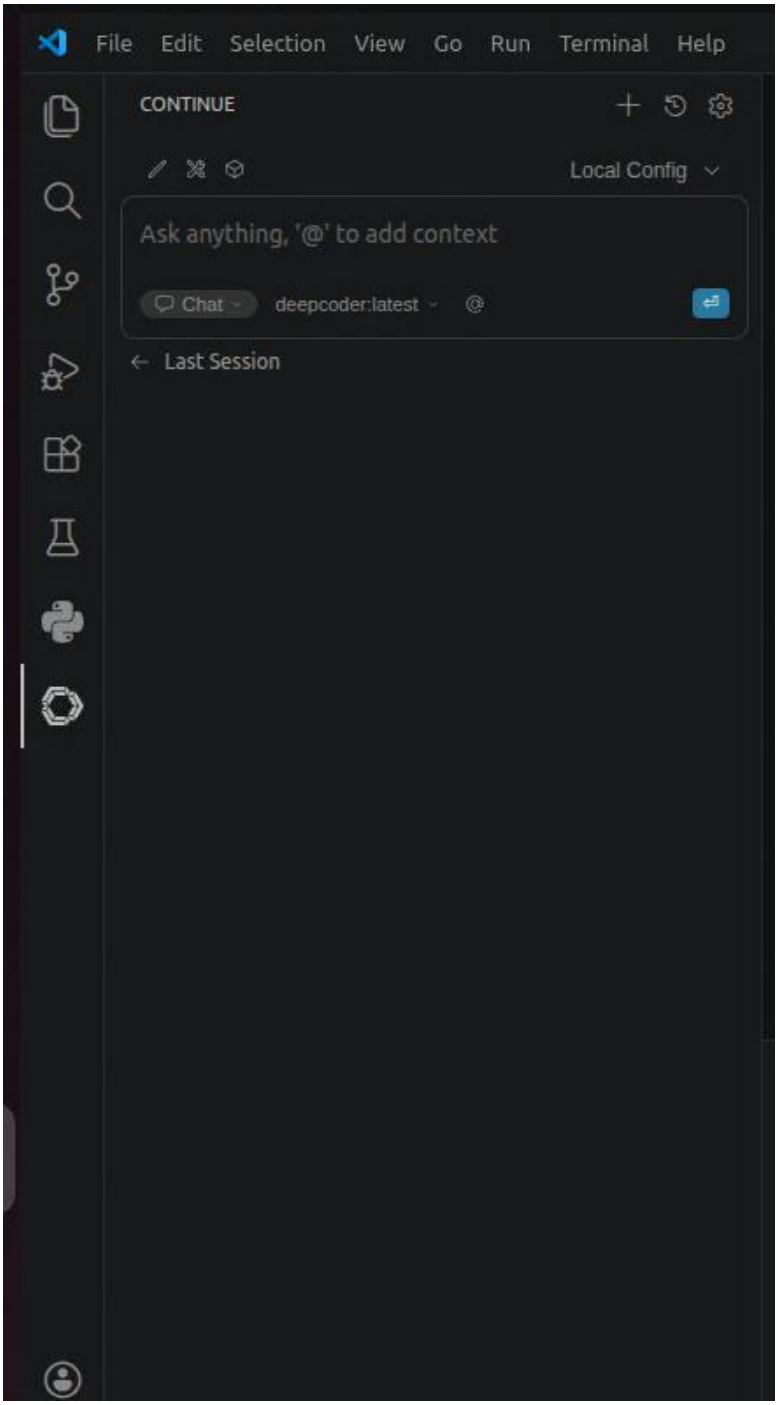

Figure 15: Everything is clean

Reconfiguring Model in Continue

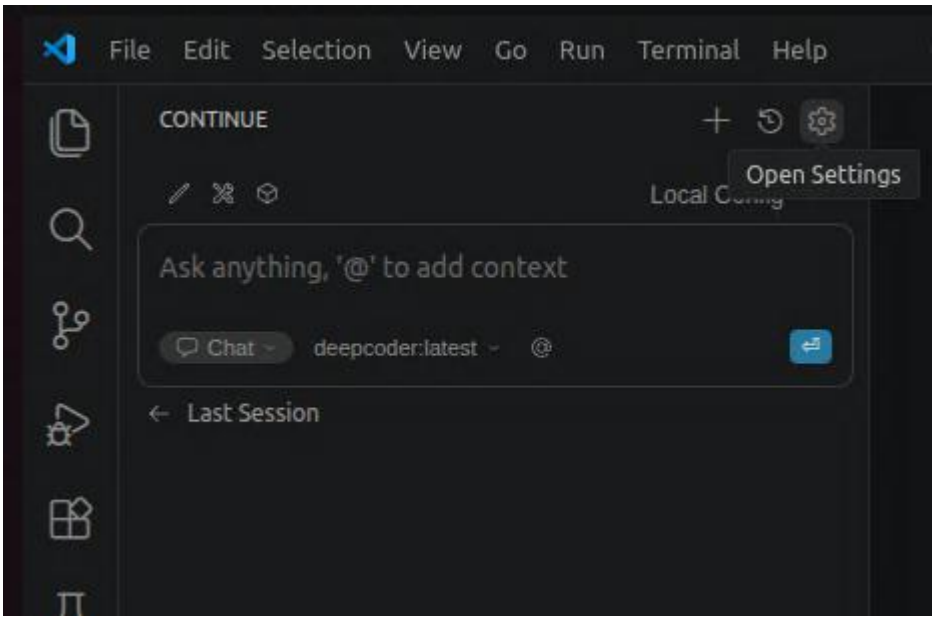

Figure 16: Click on gear icon on the right of chat box

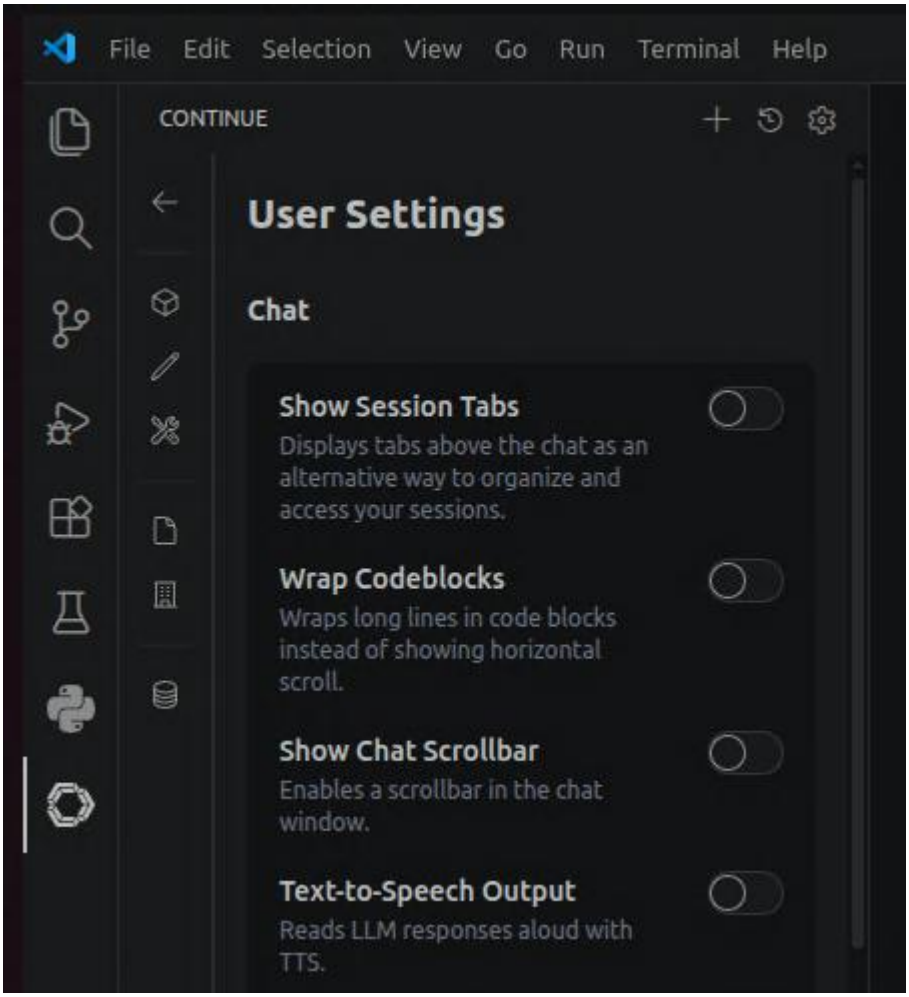

Figure 17: Left panel to change Continue Settings. Click on the fourth icon from the top

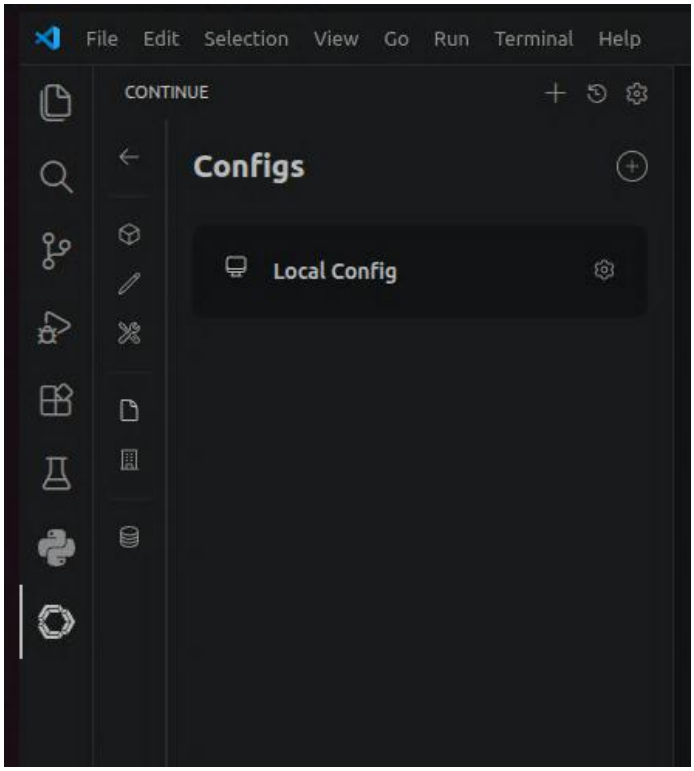

Figure 18: Click on the gear icon to look at the configuration file

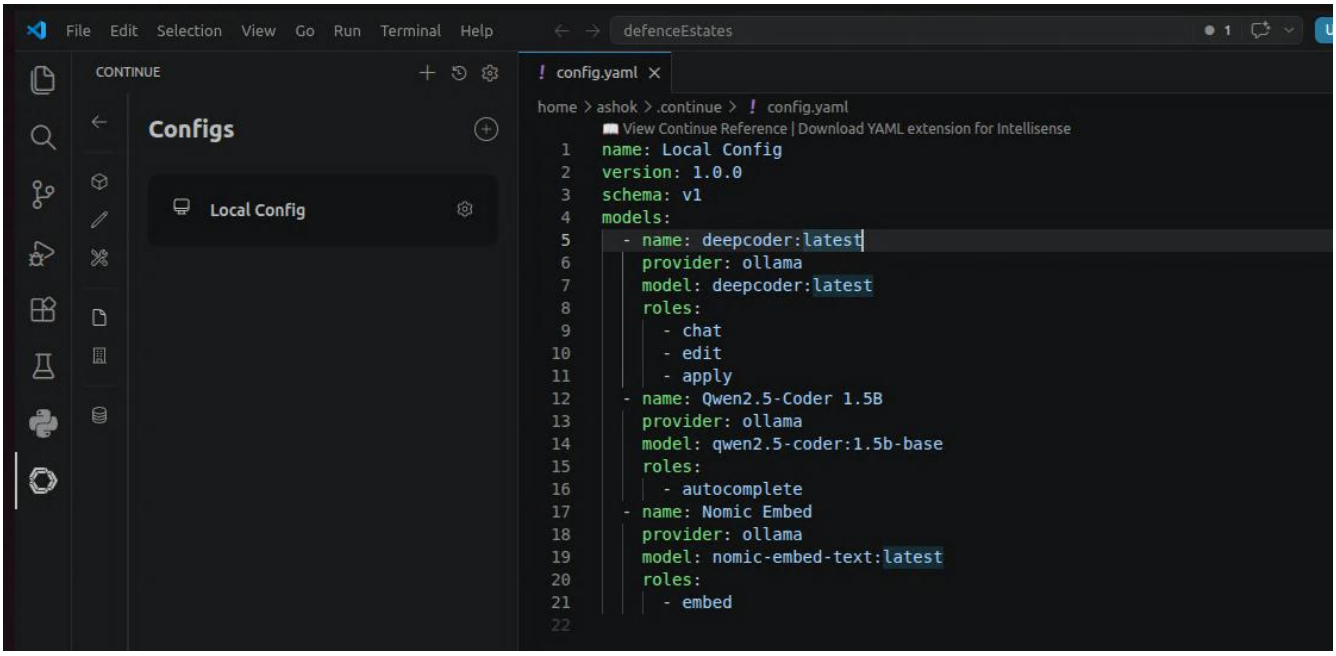

Figure 19: Click on the gear icon to open the configuration file.

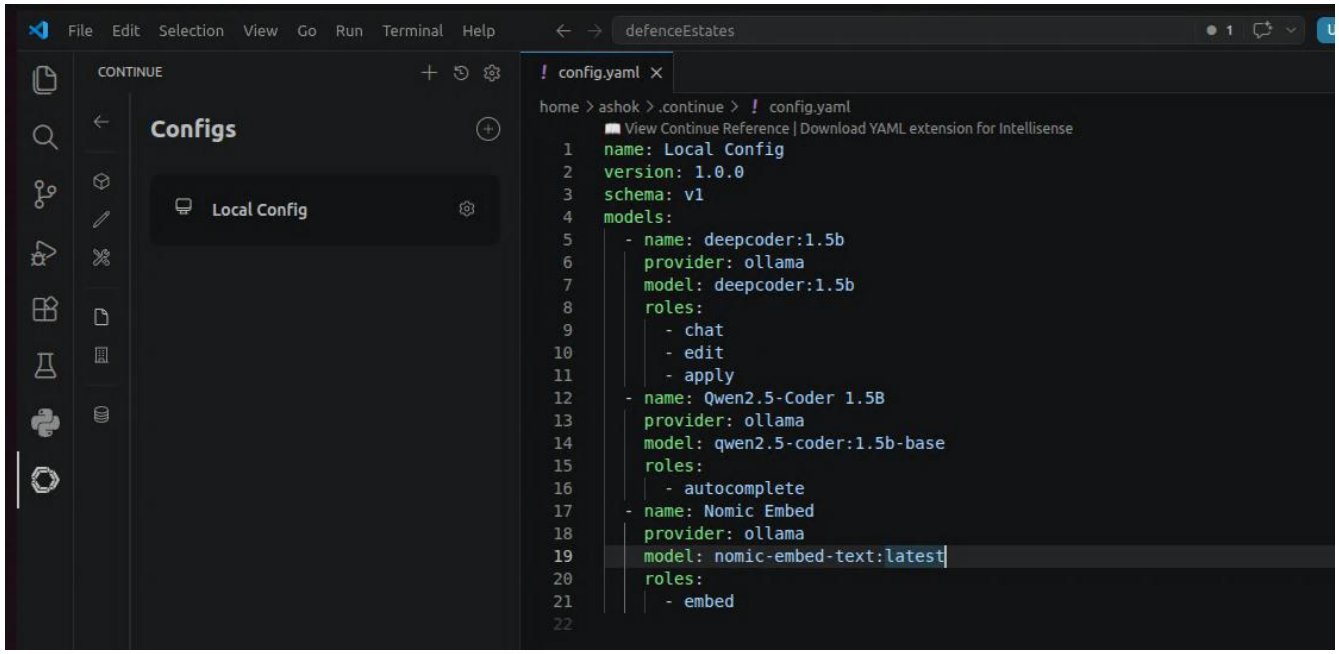

Figure 20: Change model names. deepcoder:latest changed to deepcoder:1.5b

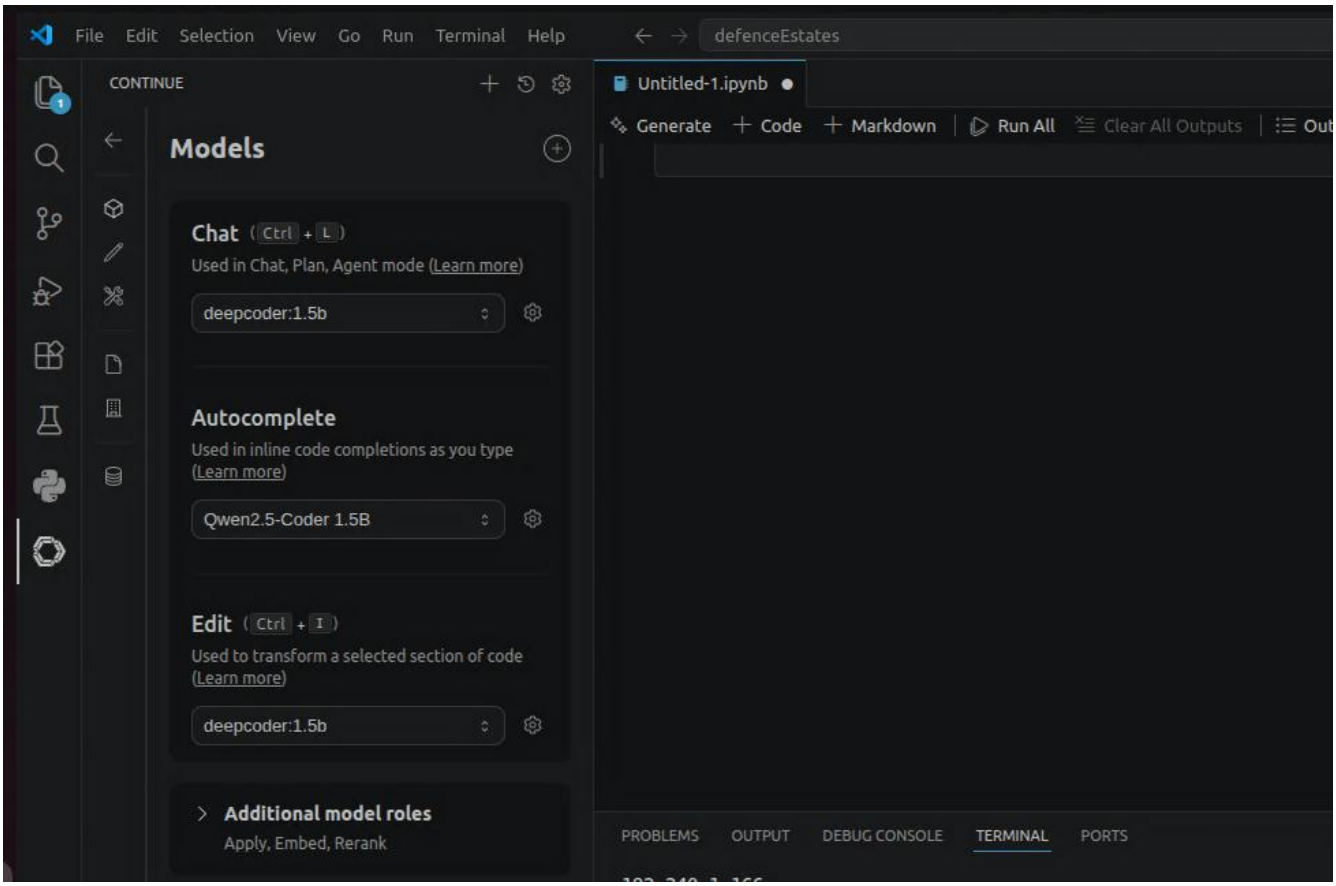

Figure 21: Click here (box) to see the models

Close VSCode and then restart for changed settings to take effect.

###############

Structured Notes

Introduction

These are notes.