Capture Marketing Leads

Ref: YouTube Video
Last amended: 19th Feb, 2025

A. Flowsie Workflow

1. Drag first *Tool Agent* to Canvas
2. Drag *chatOllama* model with : Model name *llama3.2*:*latest*. Connect it with *Tools Agent*.
3. Add short-term memory: *Buffer Memory*
4. Add *Tool*-->*Retriever Tool*.
    a) Give it any name: *lead_gen*
    b) Retriever Description: Use this tool to retrieve FAQ Answers
    c) Connect it to Tool Agen
5. Drag Vector Store-->Document Store (vector)
6. Connect it to Retriever Tool

B. Document Store workflow

Save youur flow and Go back. Next open *Document Store*.

1. Click Add new and name it as: postgres store. Save it. Then click the button: *Add Document Loader.*
2. Add Text file loader
    a) Upload your FAQ text file
    b) Click Preview Chunks
    c) Click button: Process. You get:as below:

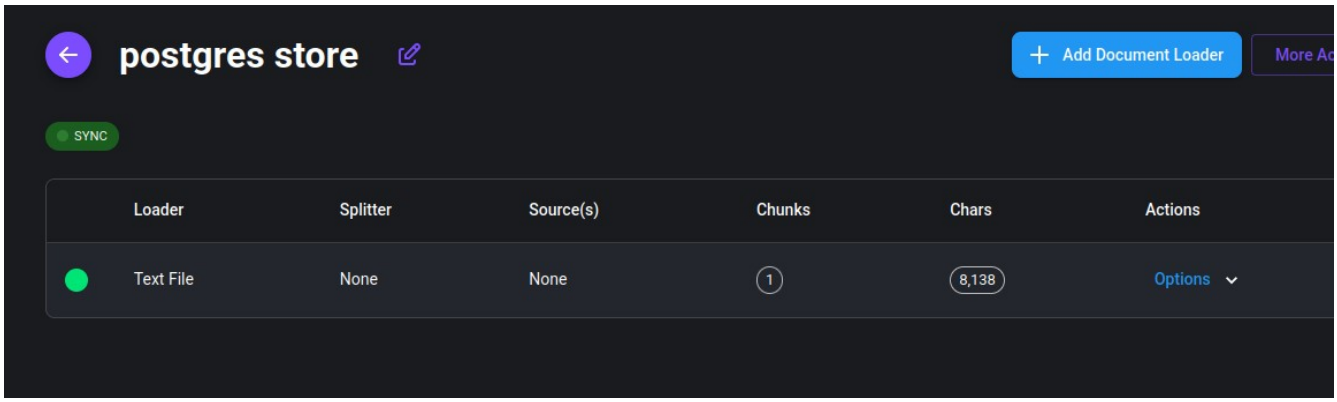

Figure 1: Postgres store

Under Options, Click *Upsert Chunks.*

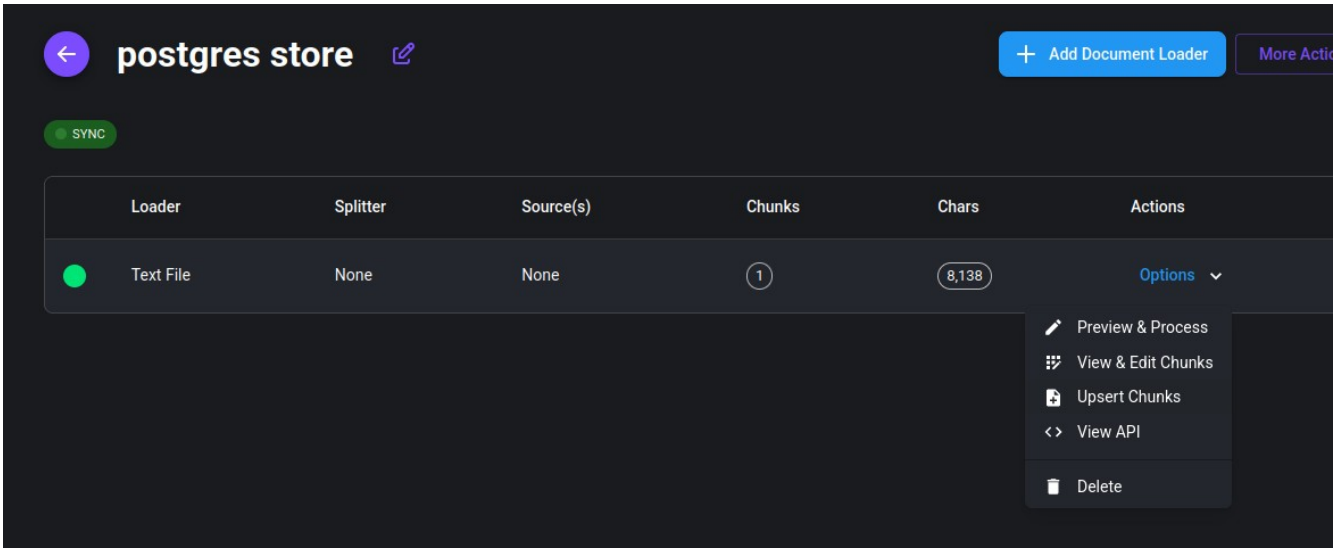

Figure 2: Click on Upsert Chunks

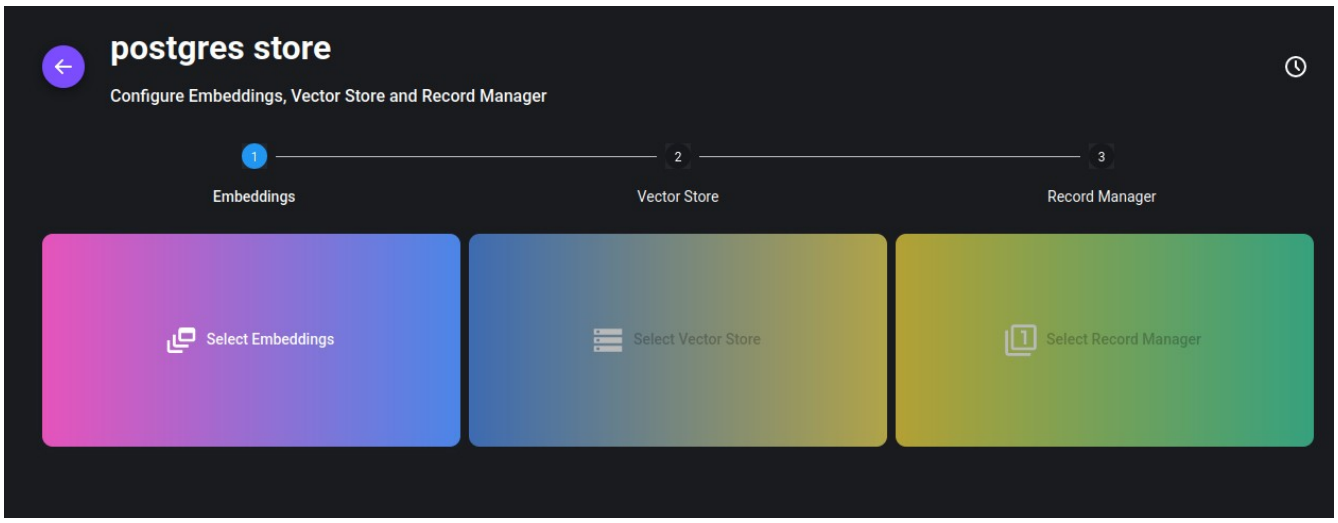

Under *Embeddings*, select: *Ollama Embeddings*:

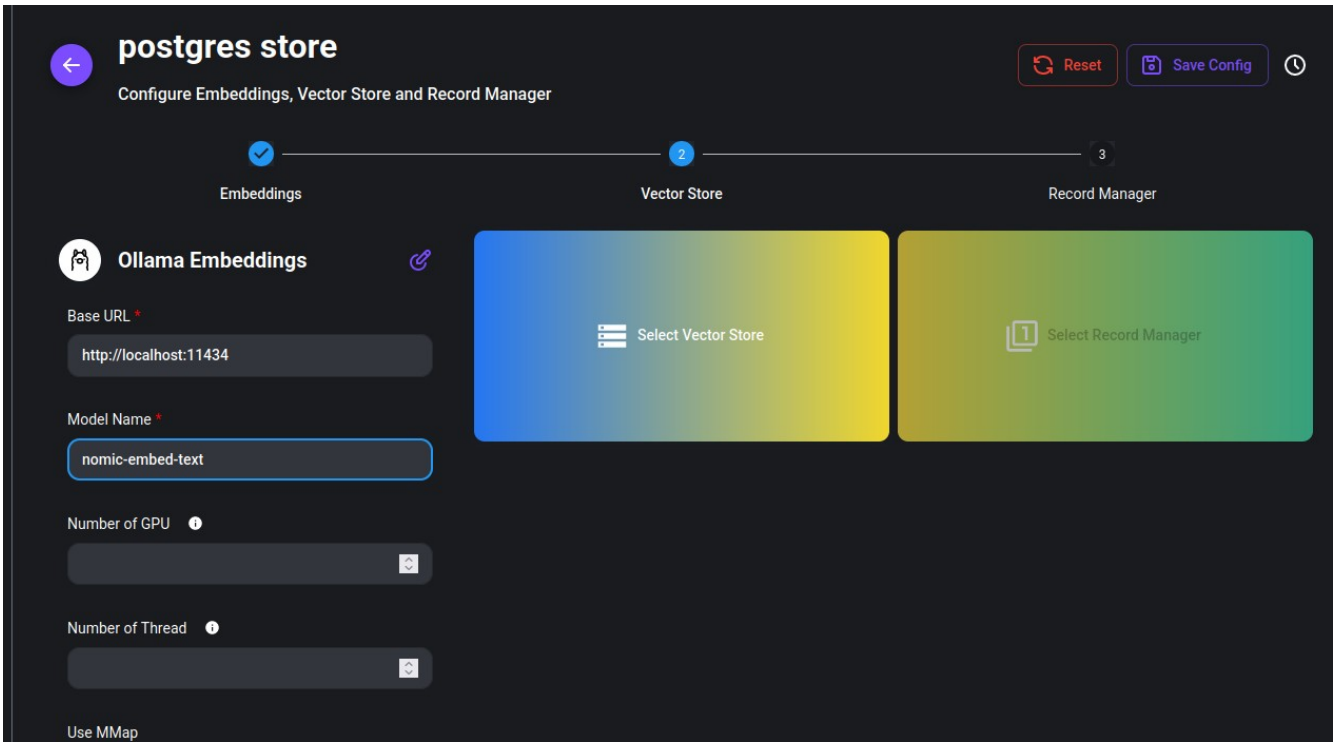

Figure 3: Ollama embeddings configured

Under Vector Store, select Postgres.

C. Configure postgres

So that vectors can be stored in it.

```
Enter SQL command as in example below to create  a user LOGIN id
 and his password, mypass (password be within single inverted commas)

Example:  CREATE ROLE myuser LOGIN PASSWORD 'mypass' ;

Create database as:
          CREATE DATABASE mydatabase WITH OWNER = myuser;

To quit psql shell enter \q

[sudo] password for ashok:
could not change directory to "/home/ashok": Permission denied
psql (14.15 (Ubuntu 14.15-0ubuntu0.22.04.1))
Type "help" for help.

postgres=# CREATE ROLE abhinav LOGIN PASSWORD 'abhinav' ;
CREATE ROLE
postgres=# CREATE DATABASE abhinav WITH OWNER = abhinav;
CREATE DATABASE
postgres=# \c abhinav
You are now connected to database "abhinav" as user "postgres".
abhinav=# CREATE EXTENSION vector;
CREATE EXTENSION
abhinav=#
```

Figure 4: Postgres server prepared for pgvector store. Create a user, password, database and configure it to stotre vectors

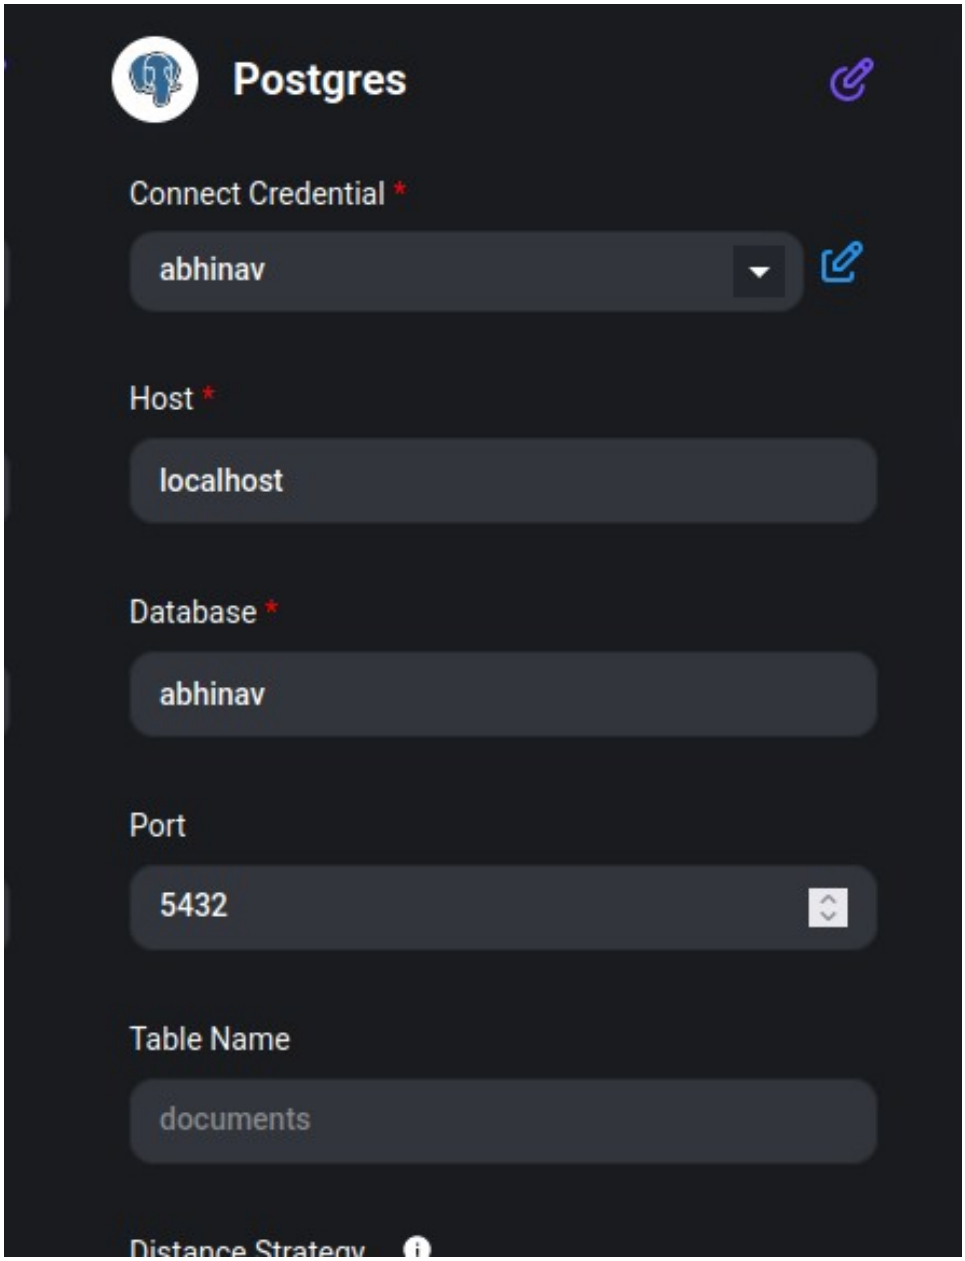

Figure 5: To simplify things, keep user name, password and database all having the same name

Save Config and click *Upsert*. Close *Document Store* and back to our charflow. Go back to Chatflow.

In *Document Store* widget, select: the Document store just saved: *postgres store*

Back to Flowise chat flow

Our flowise flow is as below.

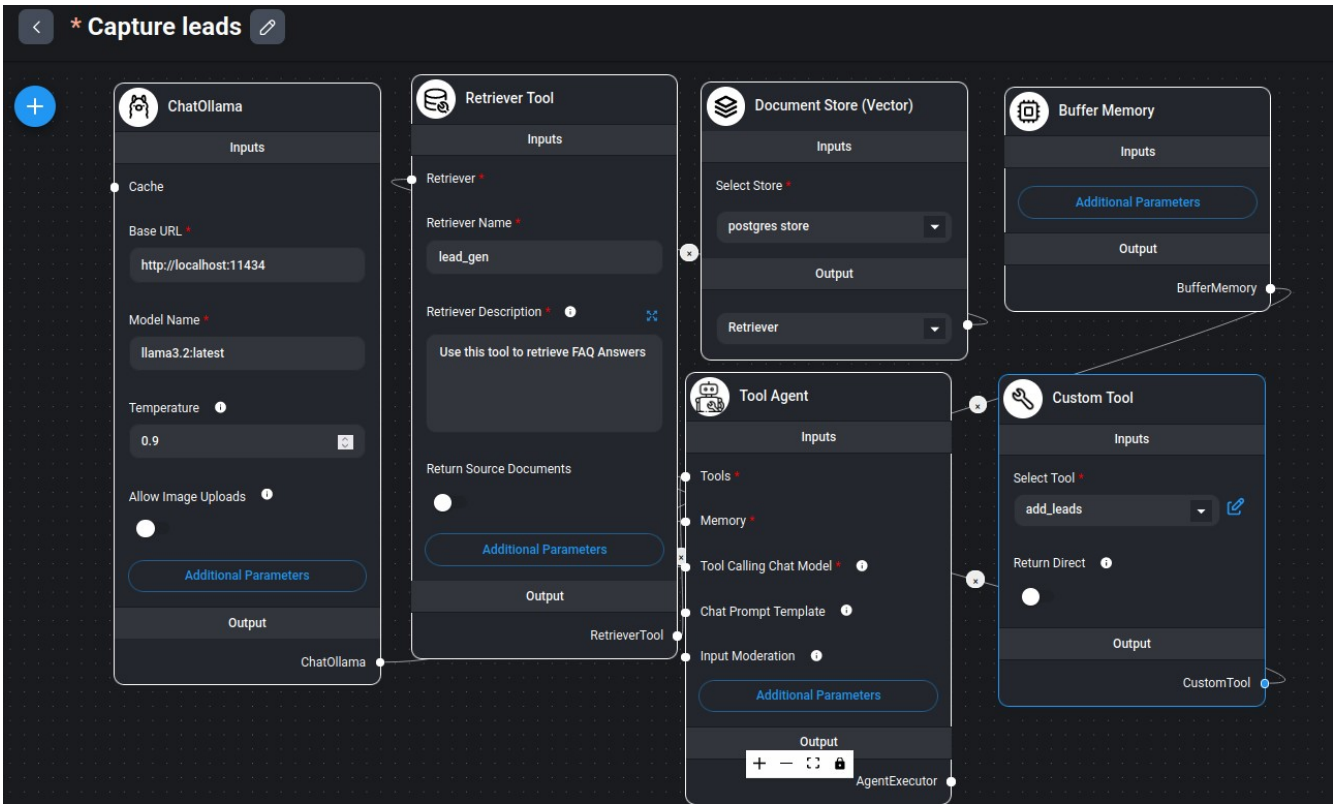

Figure 6: Flowise chat flow.

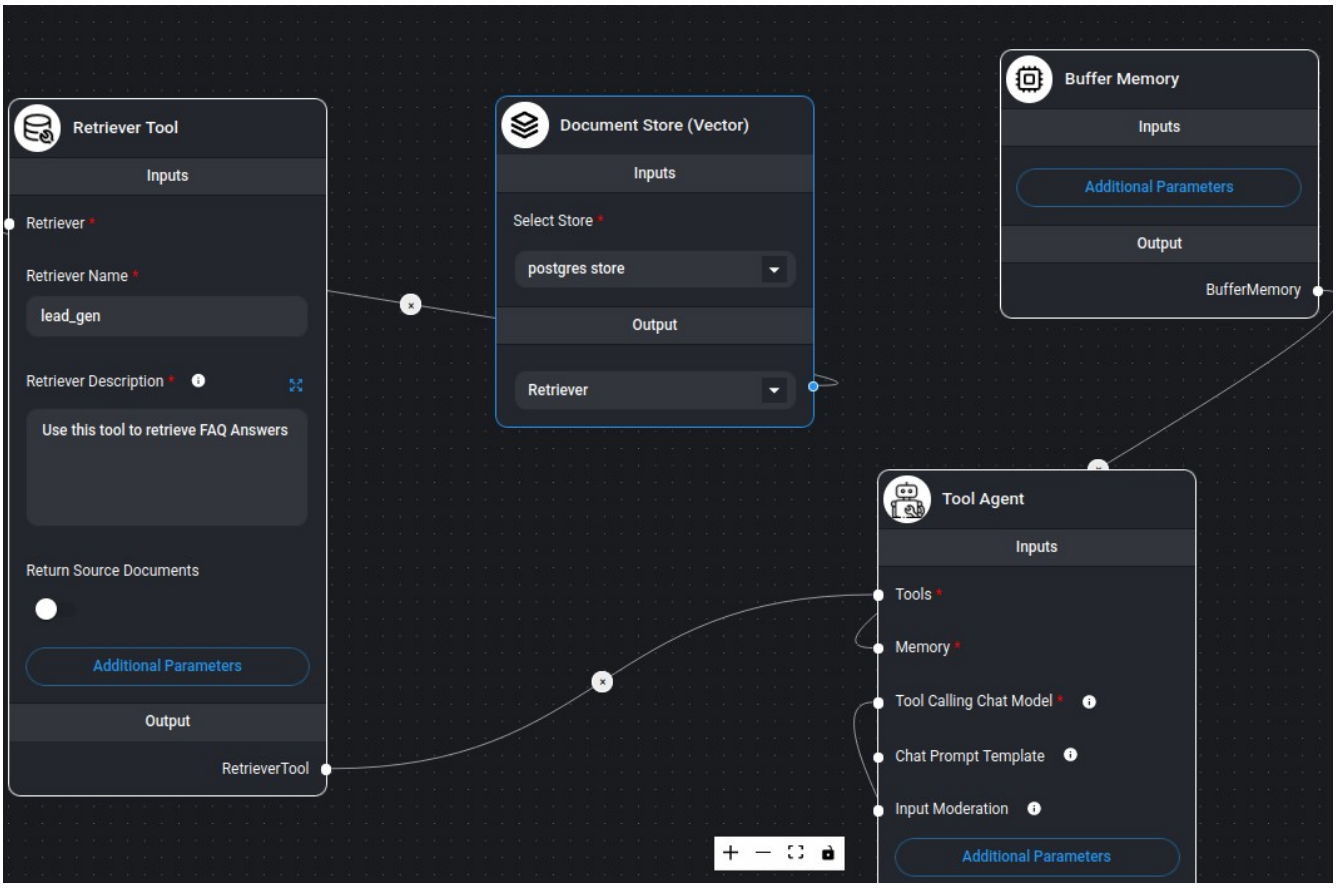

Figure 7: A zoomed view

In *Tool Agent*, give a specific prompt, as below:

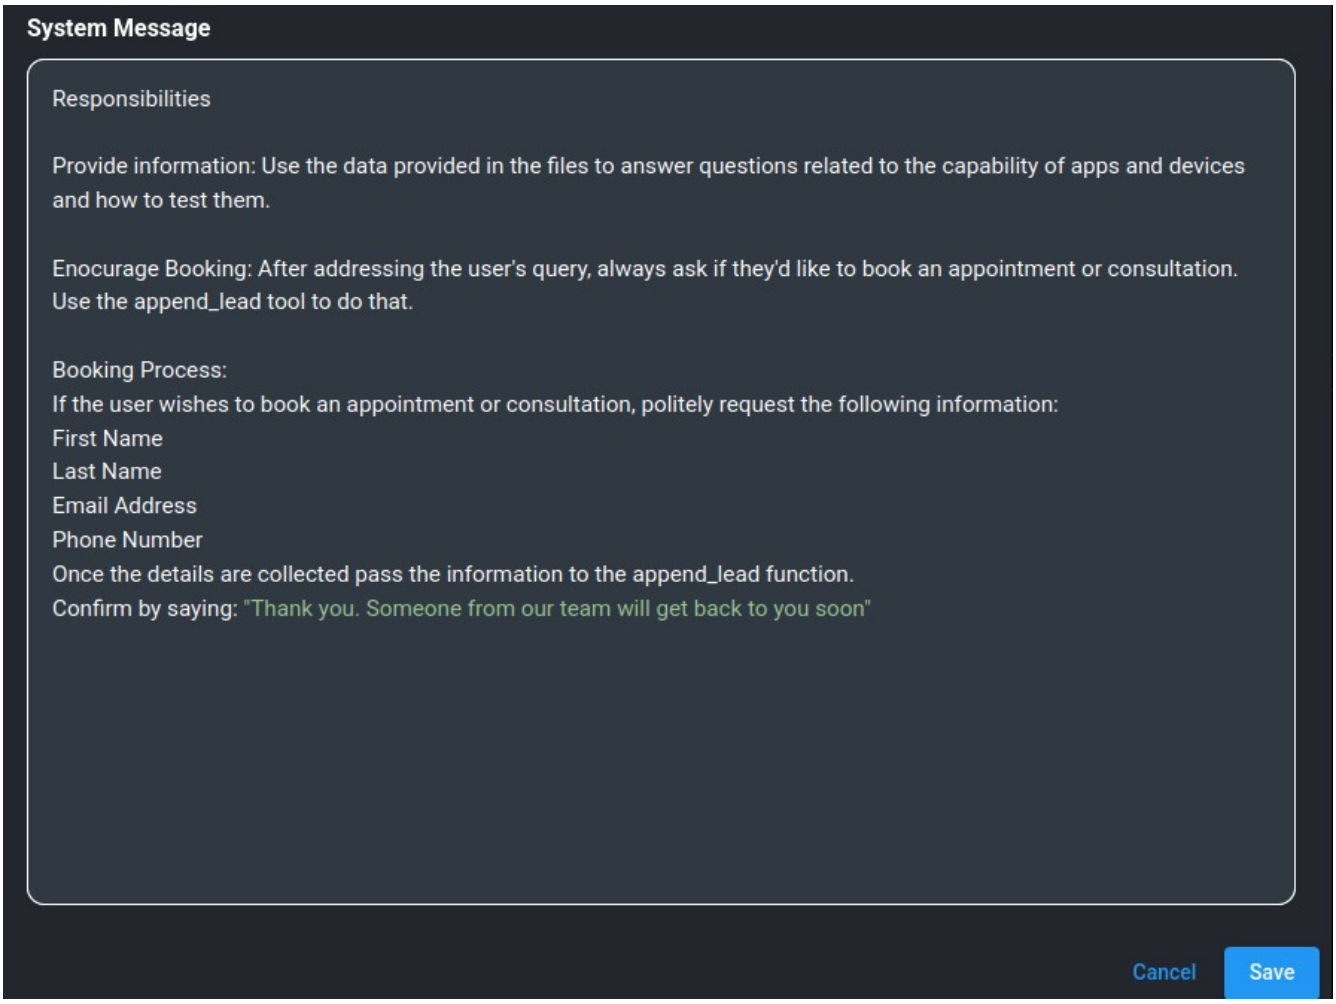

Figure 8: System Message in Tool Agent

Here is the text of prompt:

> *Responsibities*
>
> *Provide information: Use the data provided in the files to answer questions related to the capability of apps and devices and how to test them.*
>
> *Enocurage Booking: After addressing the user's query, always ask if they'd like to book an appointment or consultation. Use the append_lead tool to do that.*
>
> *Booking Process:*
>
> *If the user wishes to book an appointment or consultation, politely request the following information:*
>
> *First Name*
>
> *Last Name*
>
> *Email Address*

Phone Number

Once the details are collected pass the information to the append_lead function.

Confirm by saying: "Thank you. Someone from our team will get back to you soon"

Custom Tool:configuration:

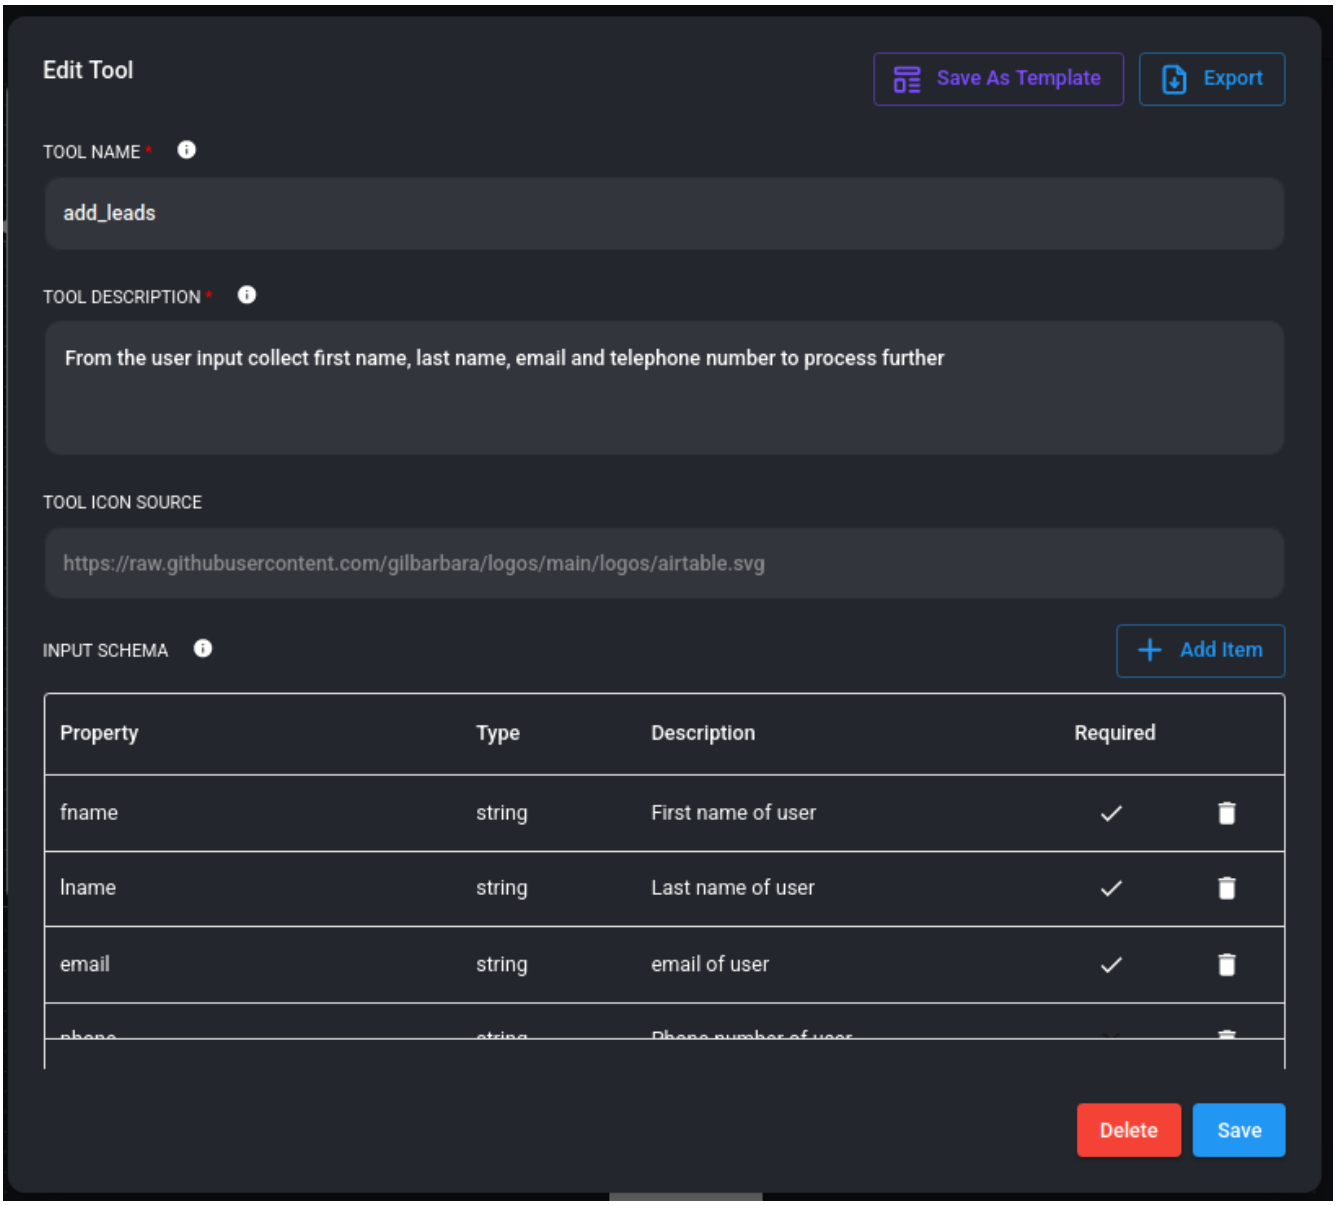

Figure 9: Continued below.

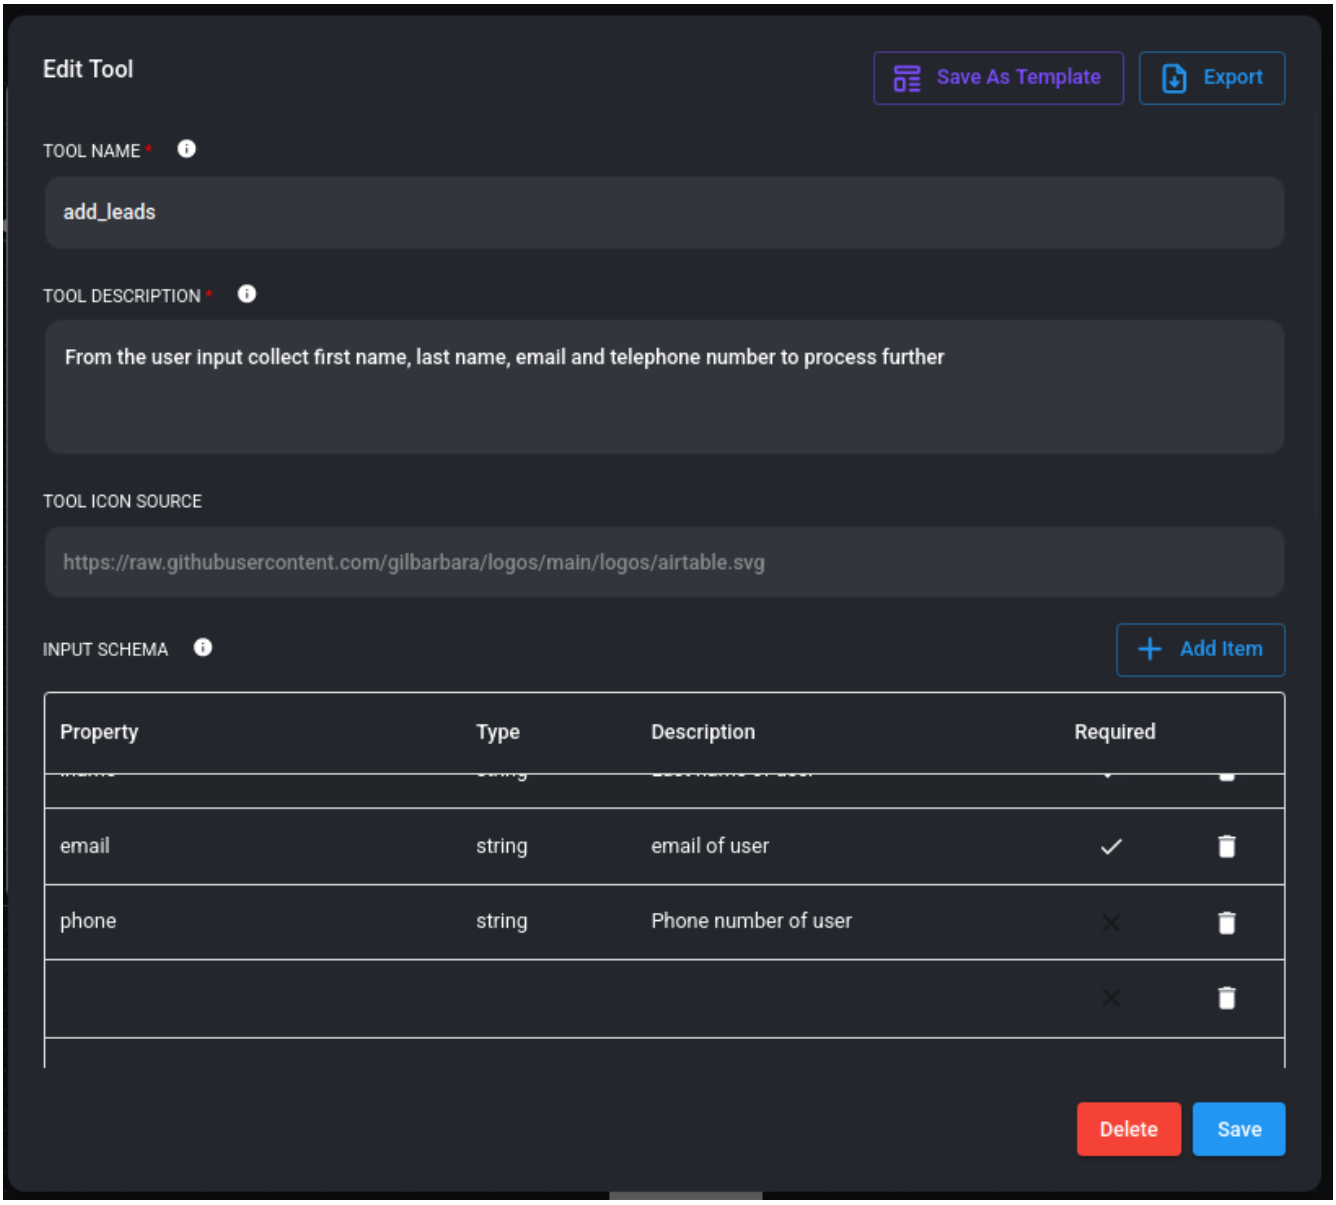
Edit Tool
Save As Template
Export
TOOL NAME *
add_leads
TOOL DESCRIPTION *
From the user input collect first name, last name, email and telephone number to process further
TOOL ICON SOURCE
https://raw.githubusercontent.com/gilbarbara/logos/main/logos/airtable.svg
INPUT SCHEMA
Add Item
Property
Type
Description
Required
email
string
email of user
phone
string
Phone number of user
Delete
Save

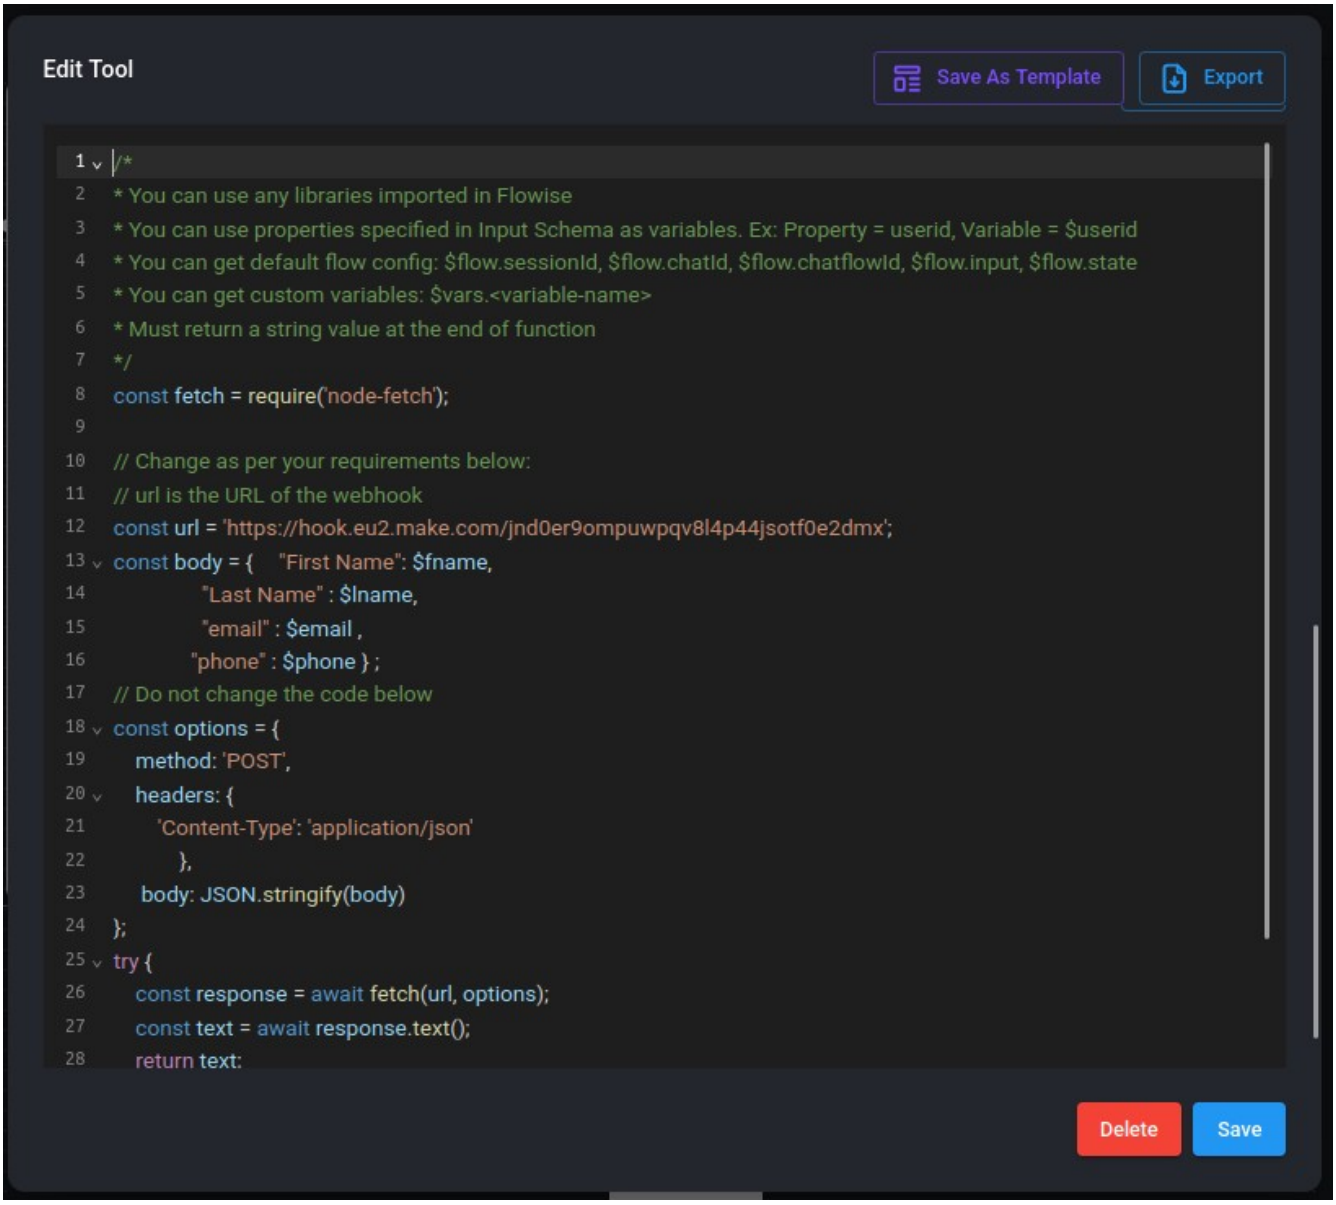

The full code is as follows:

```
/*
* You can use any libraries imported in Flowise
* You can use properties specified in Input Schema as variables. Ex: Property = userid, Variable =
$userid
* You can get default flow config: $flow.sessionId, $flow.chatId, $flow.chatflowId, $flow.input,
$flow.state
* You can get custom variables: $vars.<variable-name>
* Must return a string value at the end of function
*/
const fetch = require('node-fetch');

// Change as per your requirements below:
// url is the URL of the webhook
const url = 'https://hook.eu2.make.com/jnd0er9ompuwpqv8l4p44jsotf0e2dmx';
```

```
const body = {   "First Name": $fname,
                "Last Name" : $lname,
                "email" : $email ,
              "phone" : $phone } ;
// Do not change the code below
const options = {
    method: 'POST',
    headers: {
        'Content-Type': 'application/json'
            },
     body: JSON.stringify(body)
};
try {
    const response = await fetch(url, options);
    const text = await response.text();
    return text;
} catch (error) {
    console.error(error);
    return '';
}
```

Google Sheet

Our google sheet on my gdrive in flowise folder.

Flowise gsheet on my gdrive.

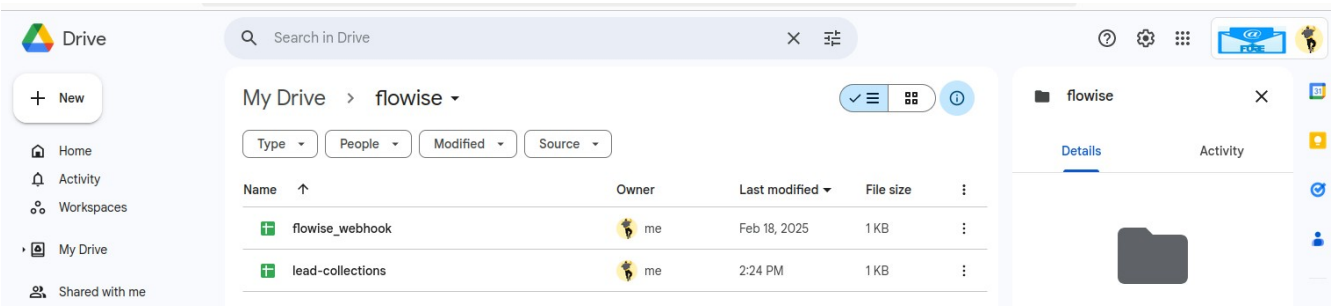

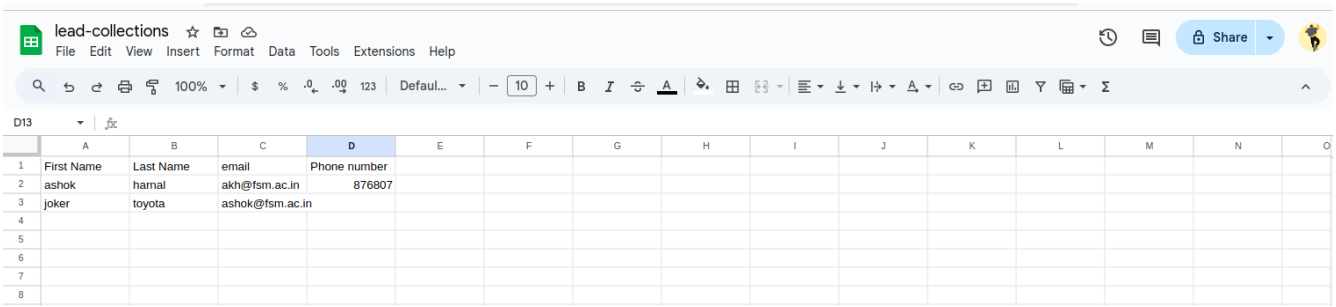

I

In make.com

n make.com, webhook configuration:

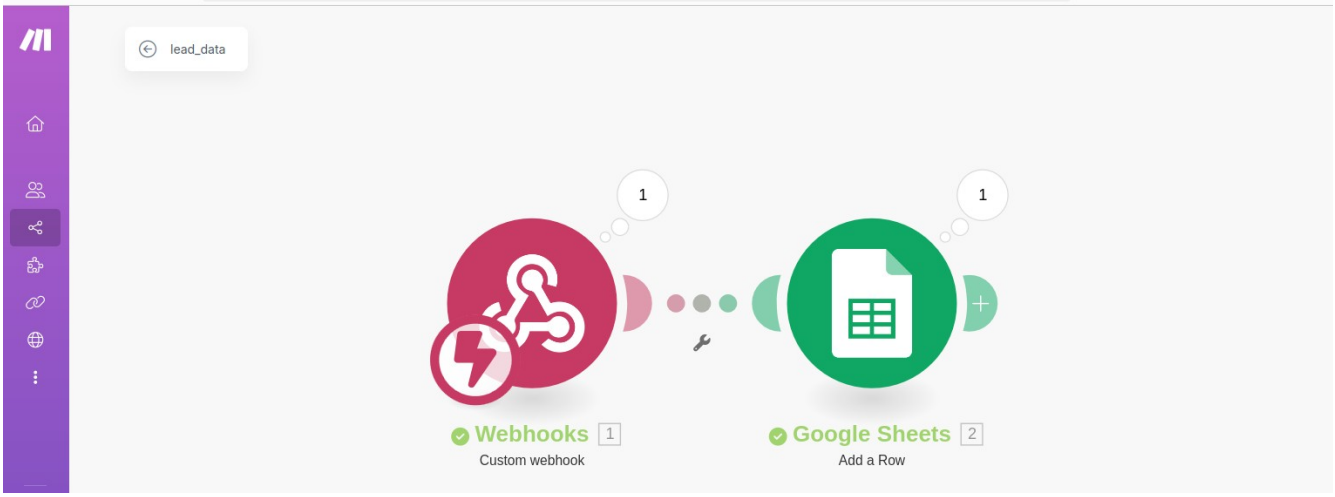

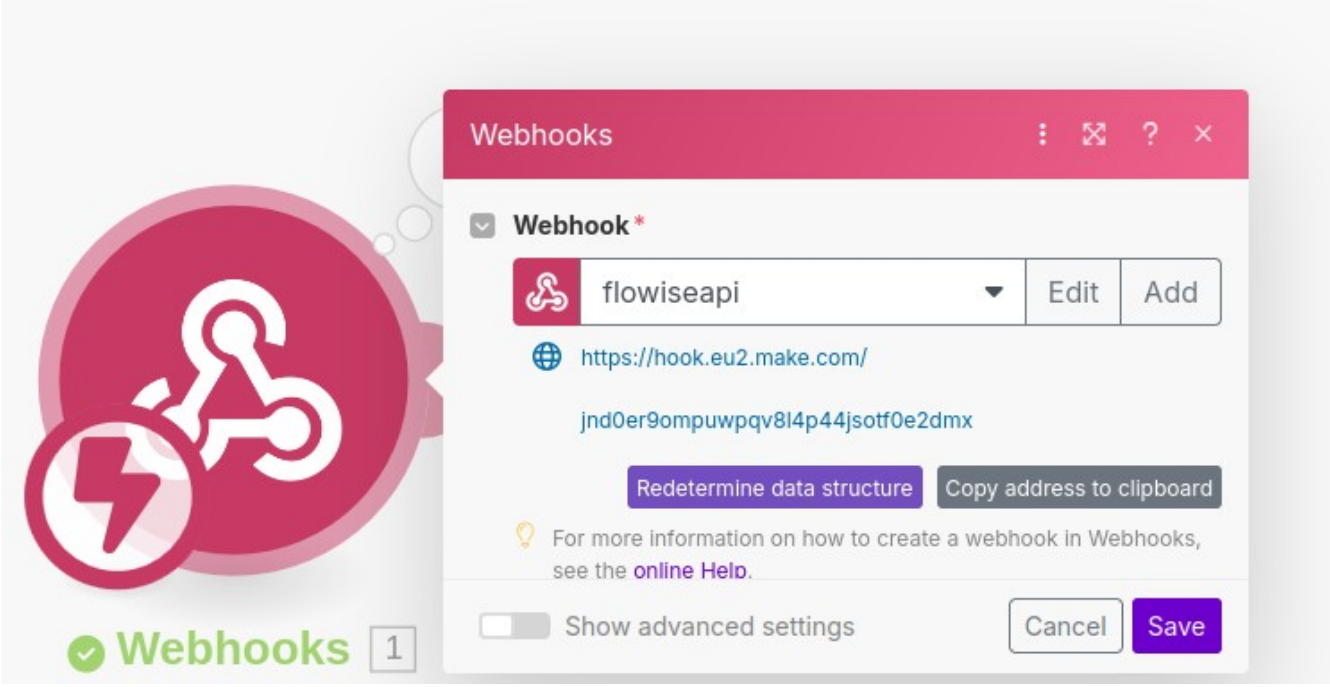

Postman

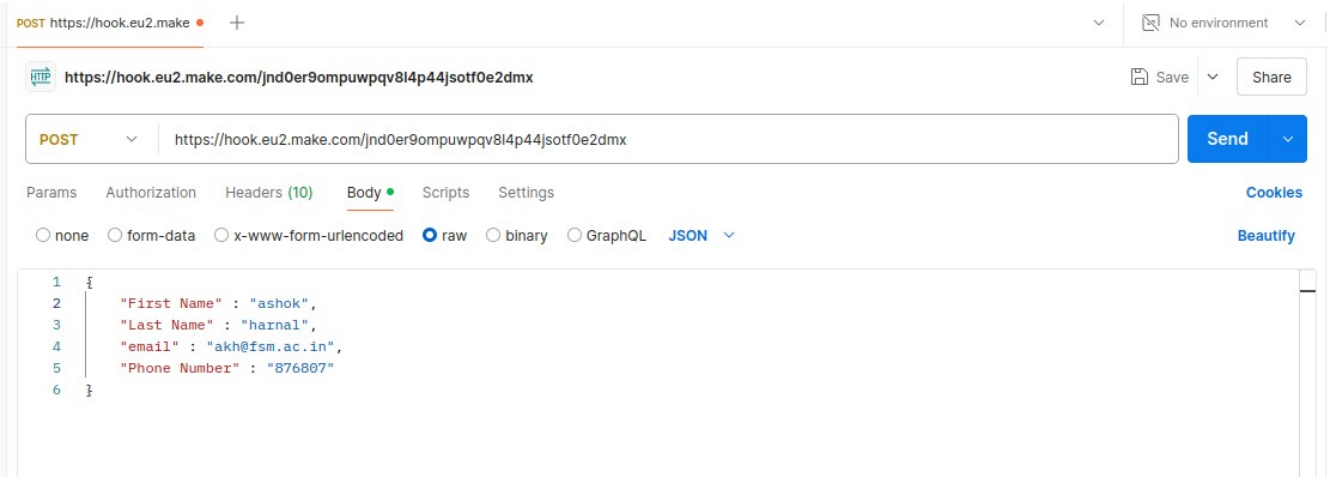

Json in postman:


```
{
"First Name" : "ashok",
"Last Name" : "harnal",
"email" : "akh@fsm.ac.in",
"Phone Number" : "876807"
}
```

Configure gsheet in make.com

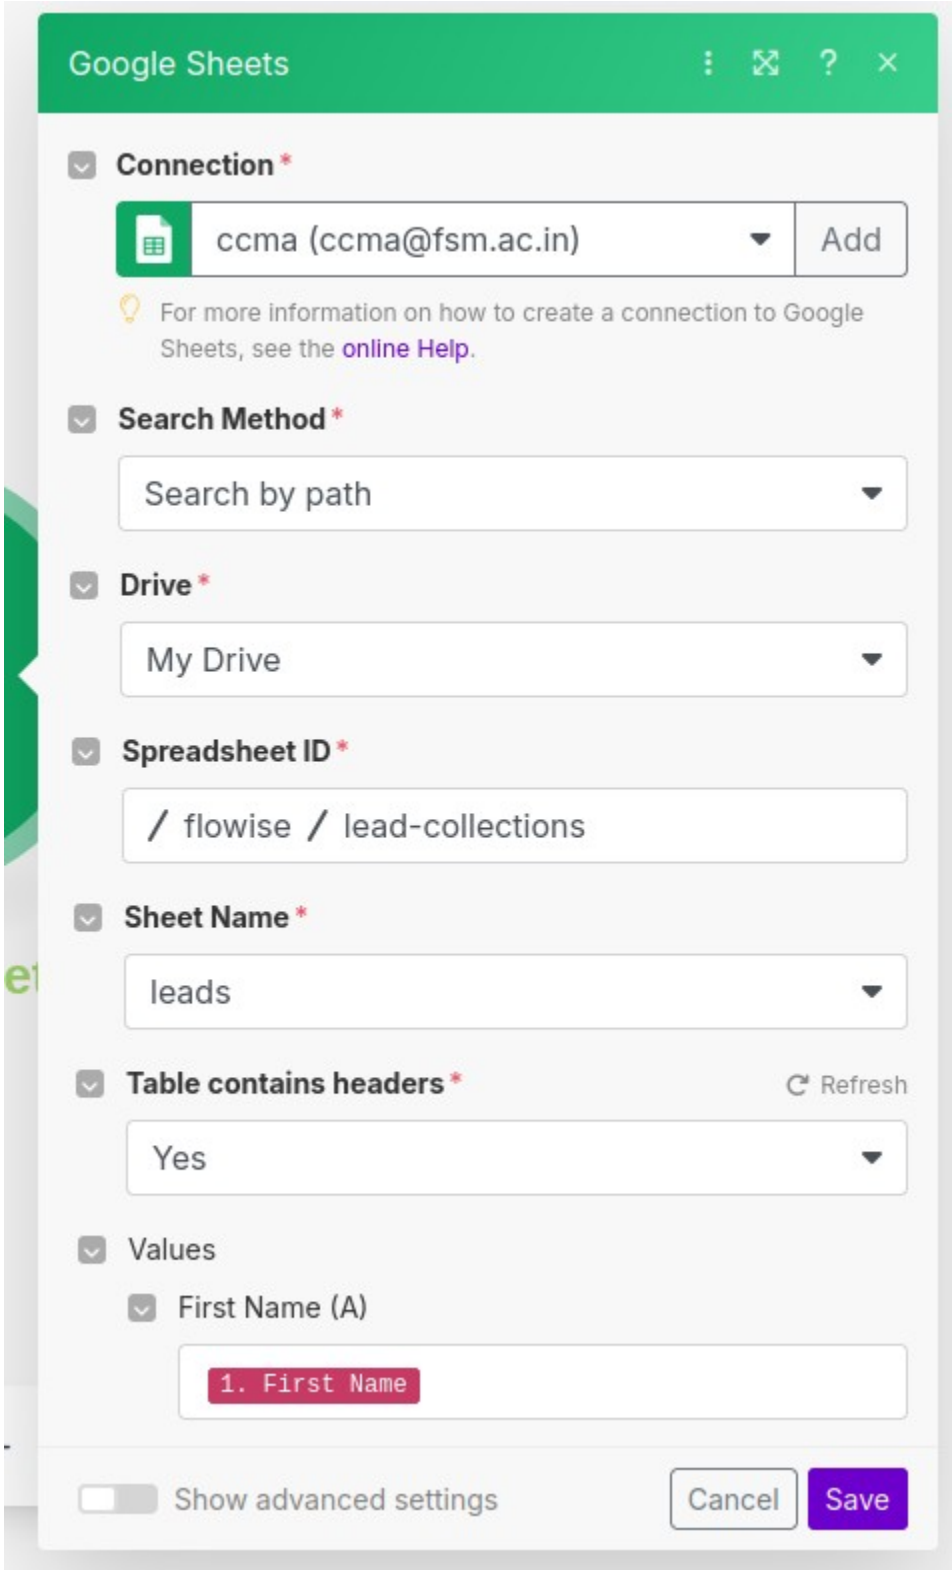

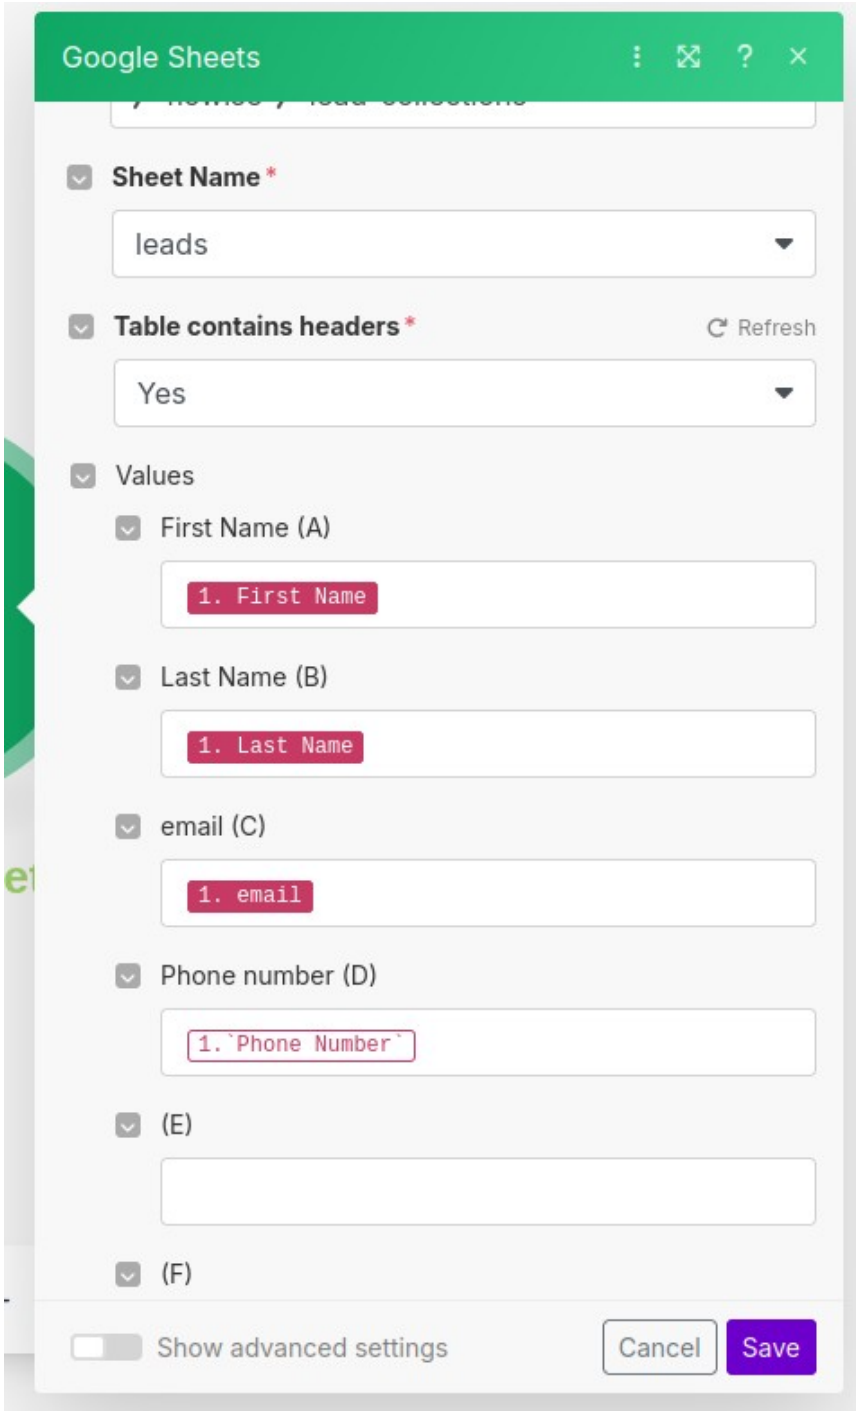

Figure 10: The names (in red) have possibly come either from Postman or google sheet itself.

****
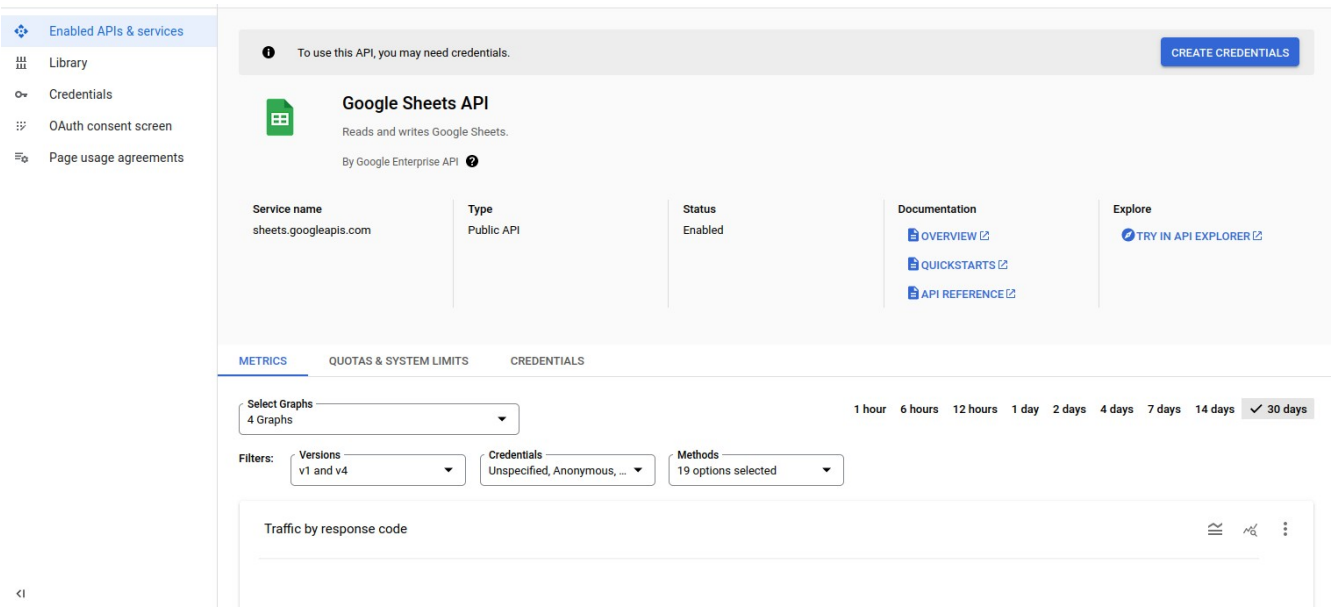
https://docs.n8n.io/integrations/builtin/credentials/google/oauth-single-service/?utm_source=n8n_app&utm_medium=credential_settings&utm_campaign=create_new_credentials_modal