Configure VSCode to use local ollama coder

GitHub co-pilot is not needed. Use '*Continue*' extension, instead

Last amended: 4th May, 2026
My folder: C:\Users\ashok\OneDrive\Documents\visualstudiocode
GitHub: https://github.com/harnalashok/LLMs/tree/main/install_ai_tools/misc/

Contents

First Screen shots when VSCode is started: 2

Install Extensions 5

Configuring Continue first time 9

Clearing chat: 11

Reconfiguring Model in Continue 14

'*Continue*' brings a chat-box and uses ollama. The extension is easy to install and configure. Install extensions in this order:

a. First python and Jupyter notebook extensions. (Python icon appears on the left panel)
b. Then, Ollama related extensions
c. Finally, *Continue* extension. (*Continue* icon appears on the left panel.)

Any code developed by *Continue* chat box can be Inserted in the current cell of the Jupyter Notebook by clicking Insert icon on the chat box (the first icon).

Follow screen shots:

First Screen shots when VSCode is started:

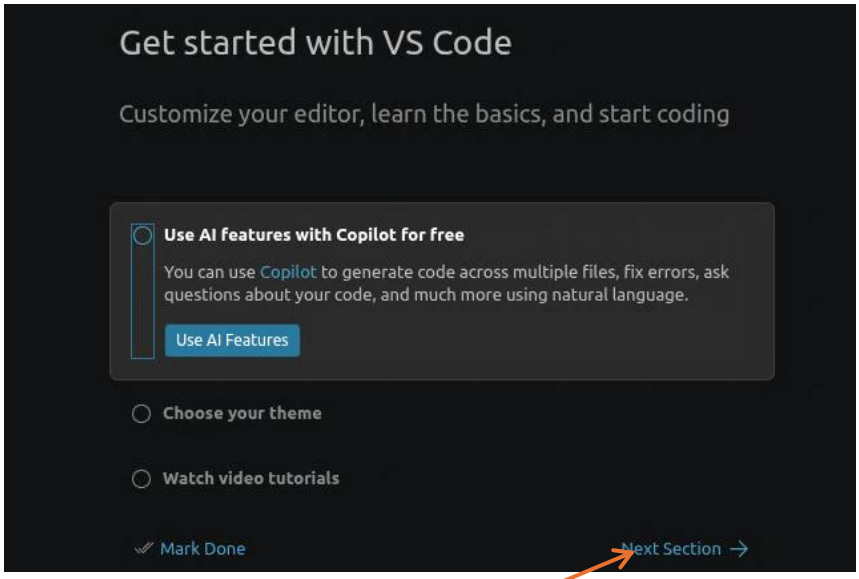

Figure 1: Nothing to do. Click Next Section

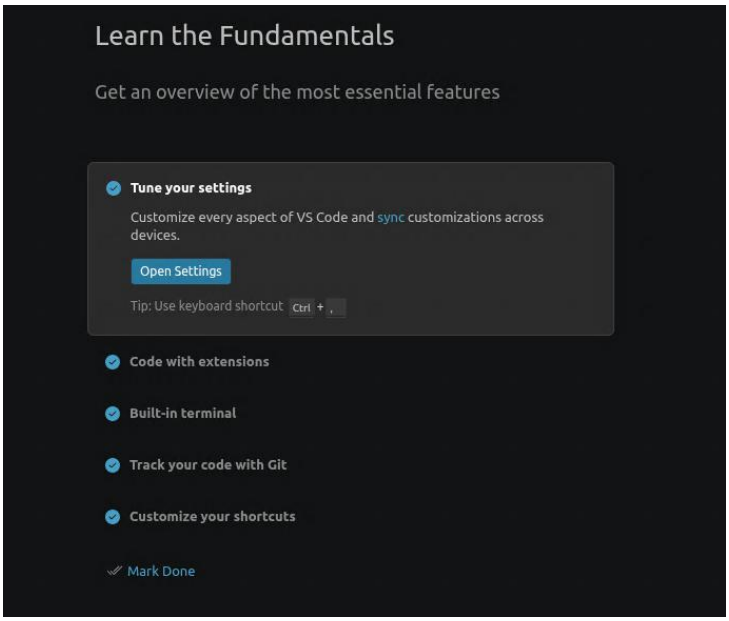

Figure 2: Just close the Walkthrough tab at the very top.

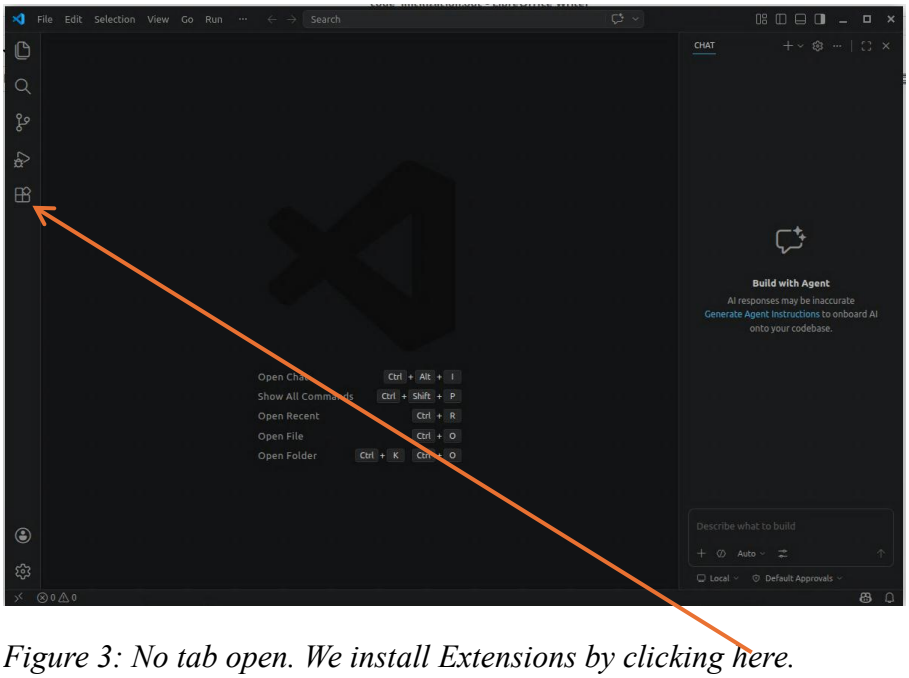

Figure 3: No tab open. We install Extensions by clicking here.

Install Extensions

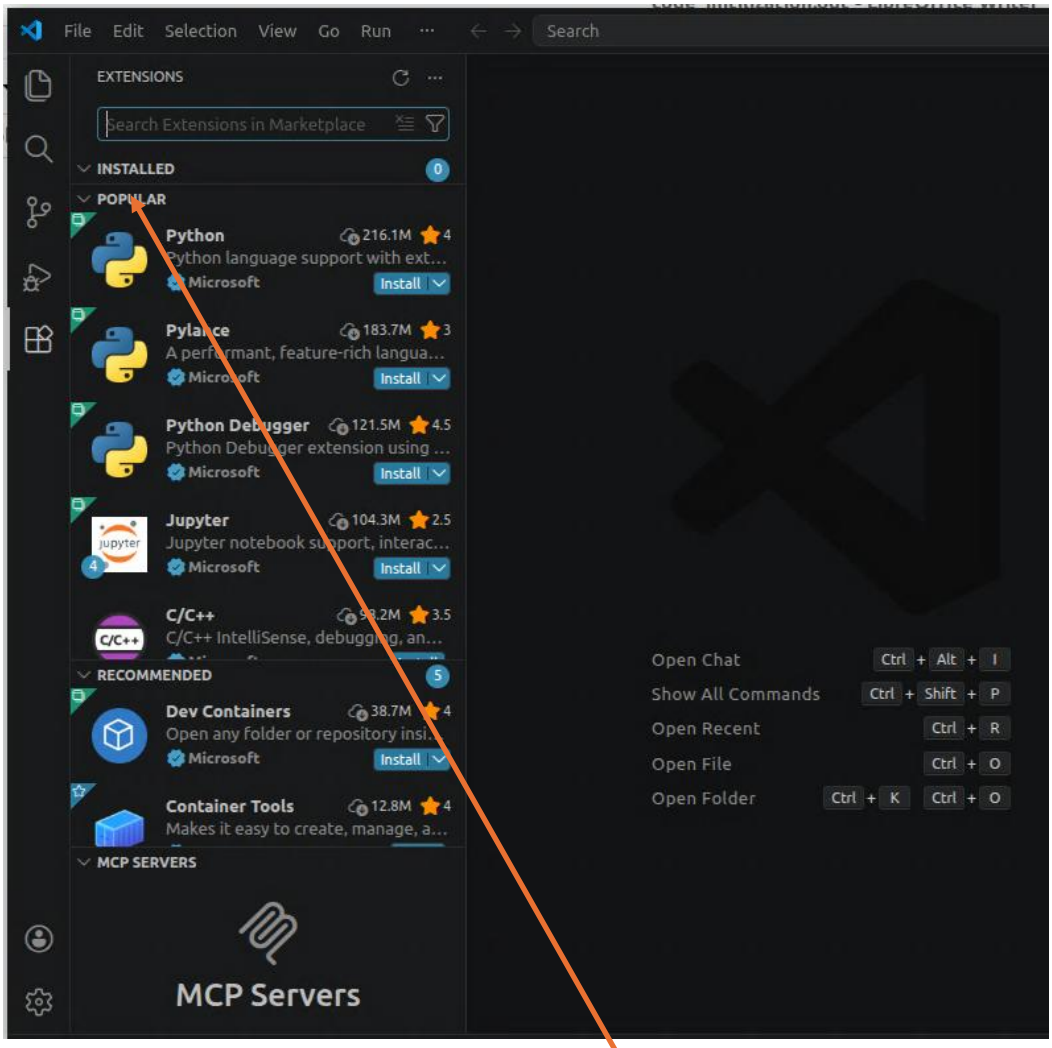

Figure 4: Click Extensions and install the first four python related extensions, if not already installed, including 'Jupyter' extension. These are from 'Popular' category.

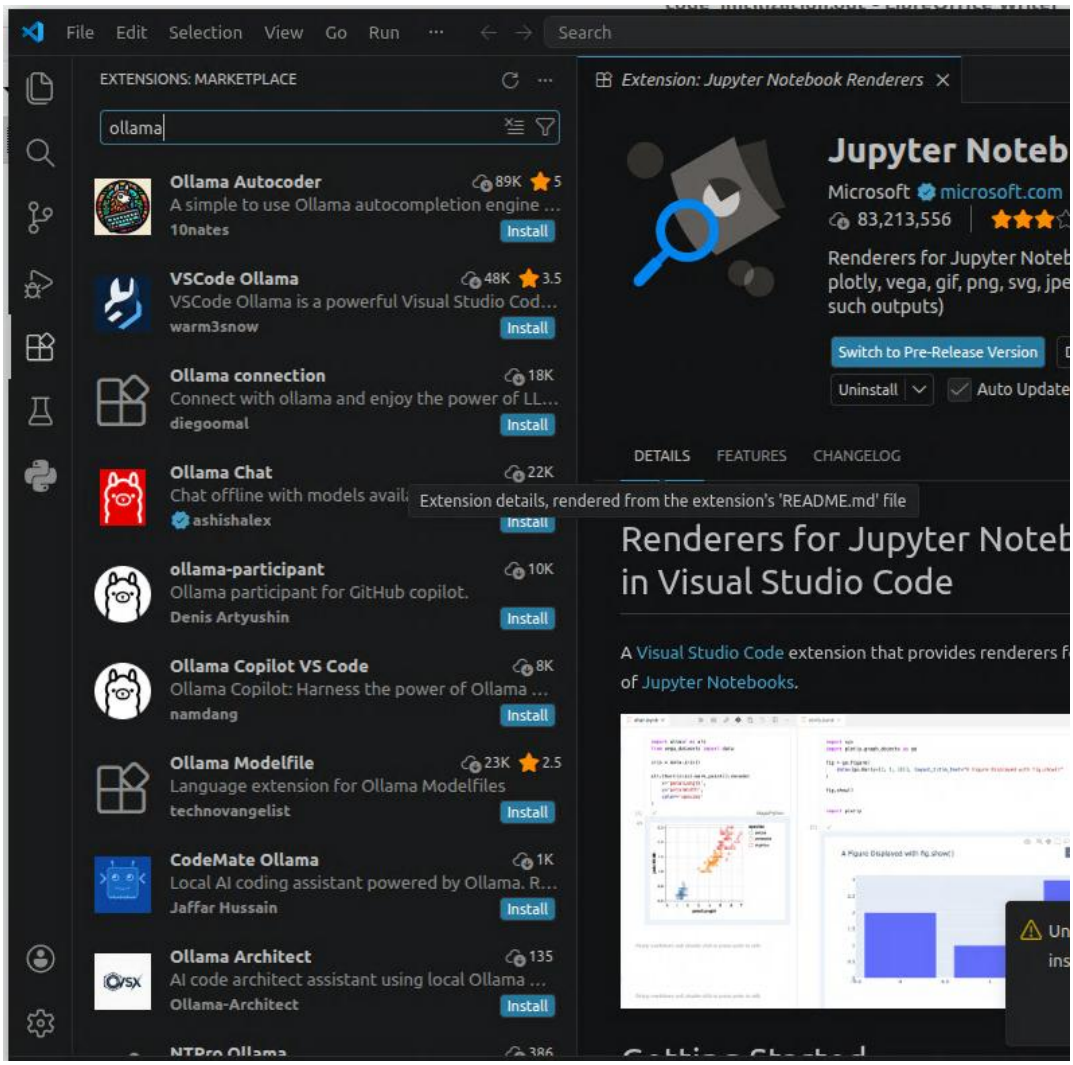

Figure 5: Search for ollama. Install Ollama Autocoder, VSCode Ollama, Ollama connection, Ollama commit, Easy-Ollama, Ollama Local Chat

Next, we create a *defenceEstates* folder within Documents folder. Issue the following command from the terminal:

```
mkdir  /home/ashok/Documents/defenceEstates
```

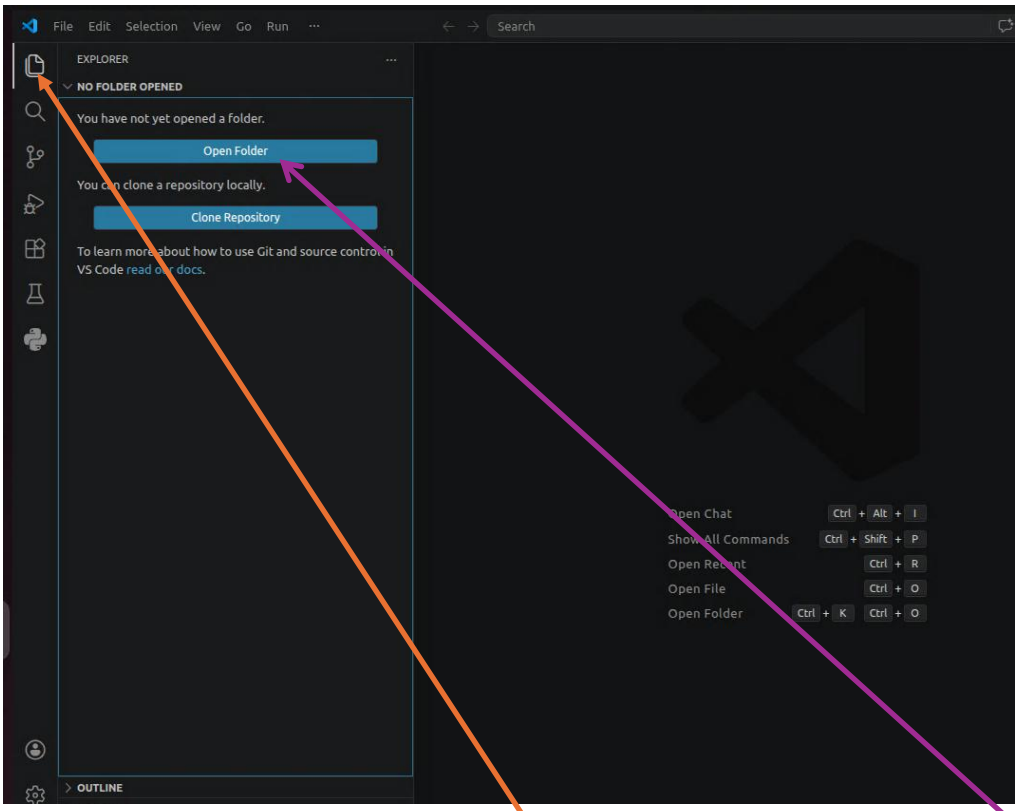

Figure 6: Close Extension and click File icon on the left panel. Then click Open Folder button. And select defenceEstates folder (See below)

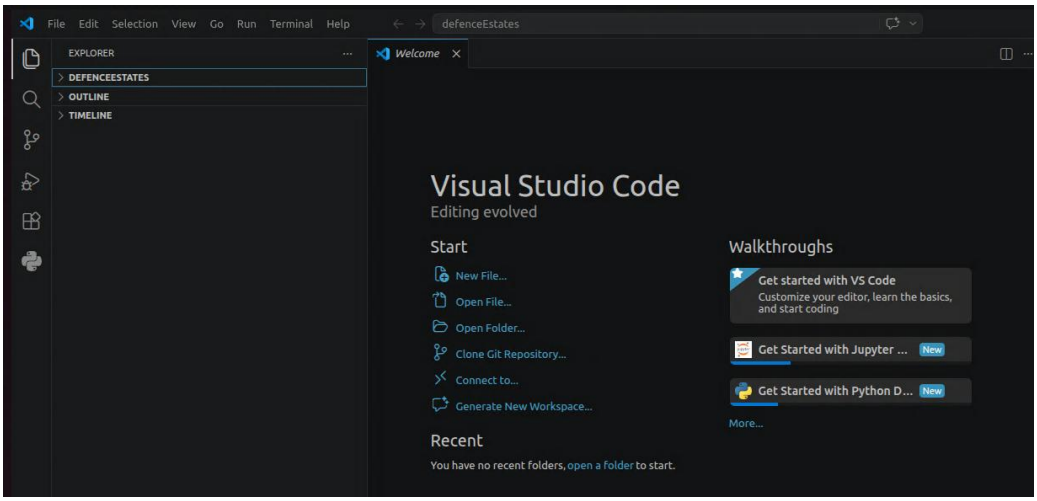

*Figure 7: Select **Documents/defenceEstates** folder*

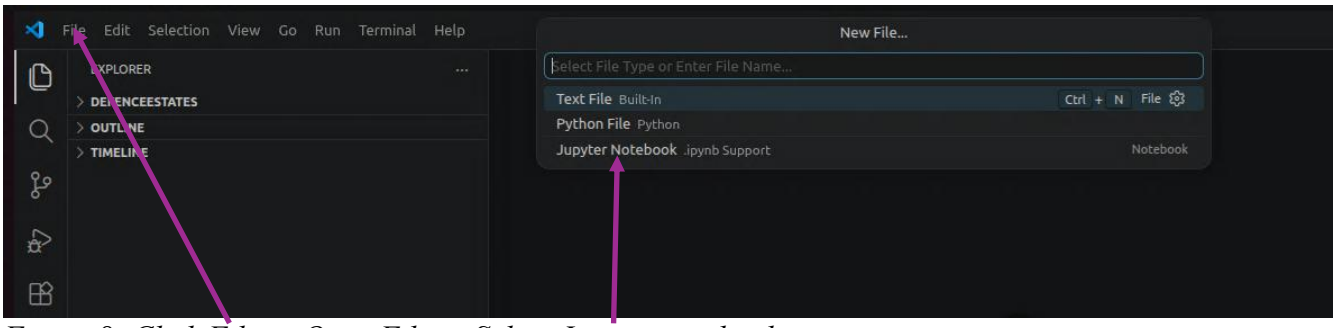

Figure 8: Click File-->Open File-->Select Jupyter notebook

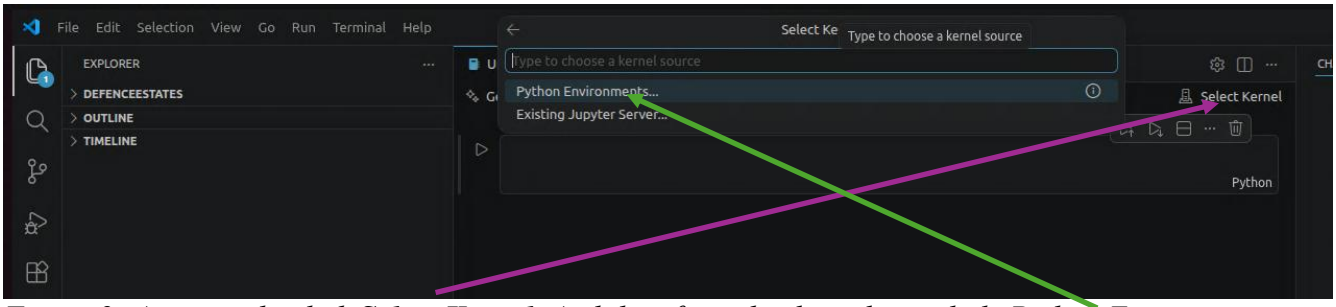

*Figure 9: At top-right click **Select Kernel**. And then from the drop-down click, Python Environments and from there, Select **base** Conda environment*

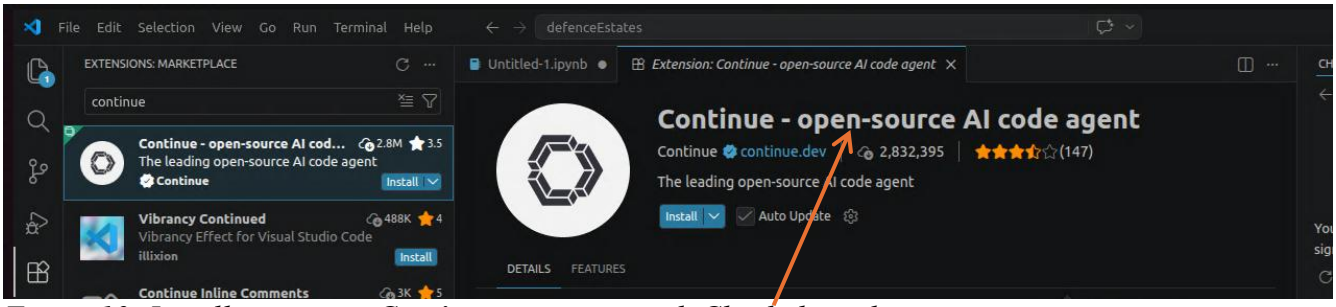

*Figure 10: Install extension, **Continue,** as mentioned. Check this title.*

Configuring Continue first time

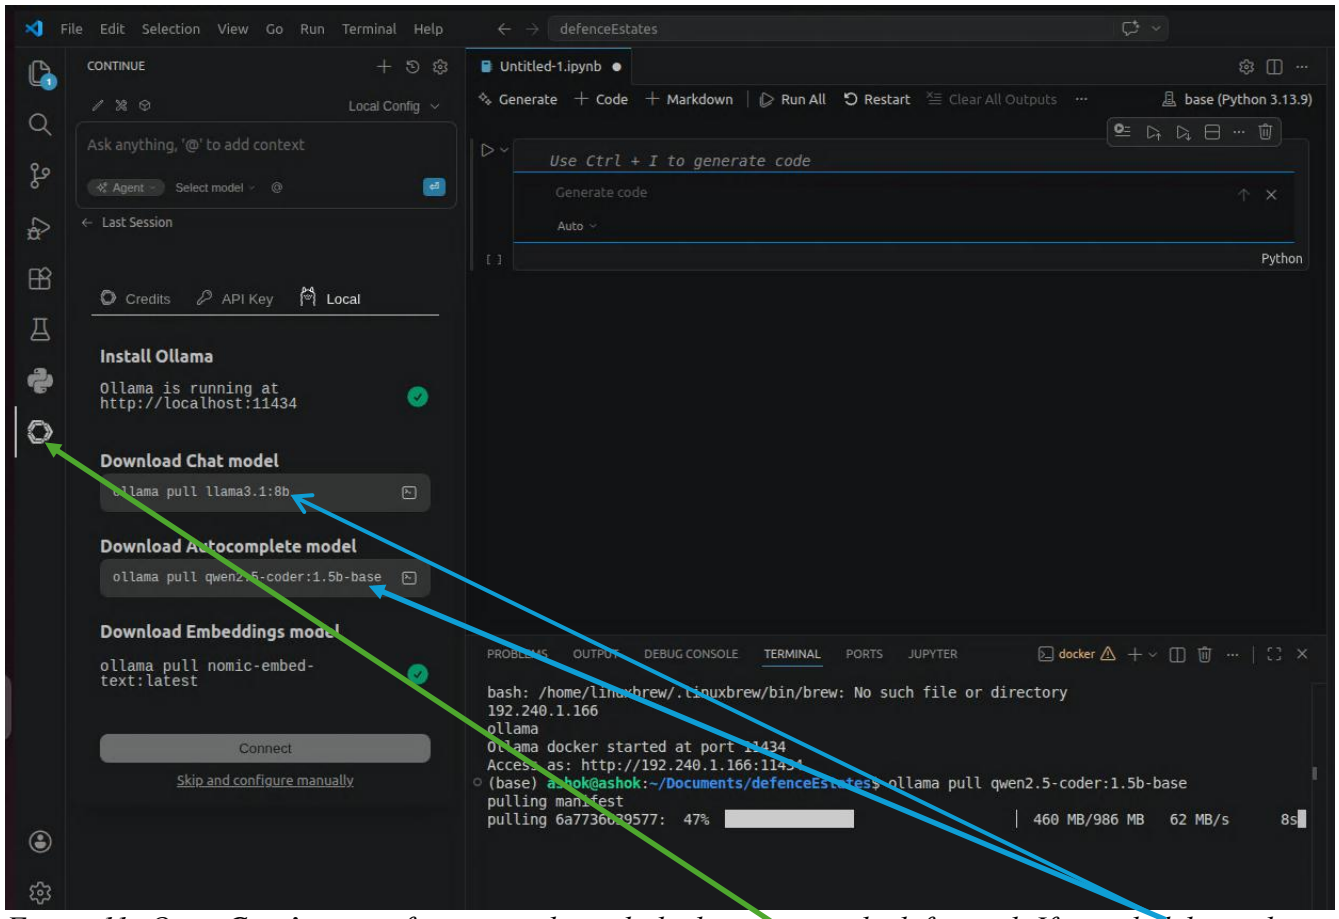

*Figure 11: Open **Continue** configuration through the last icon on the left panel. If you click here, these models will be pulled, if not already existing.*

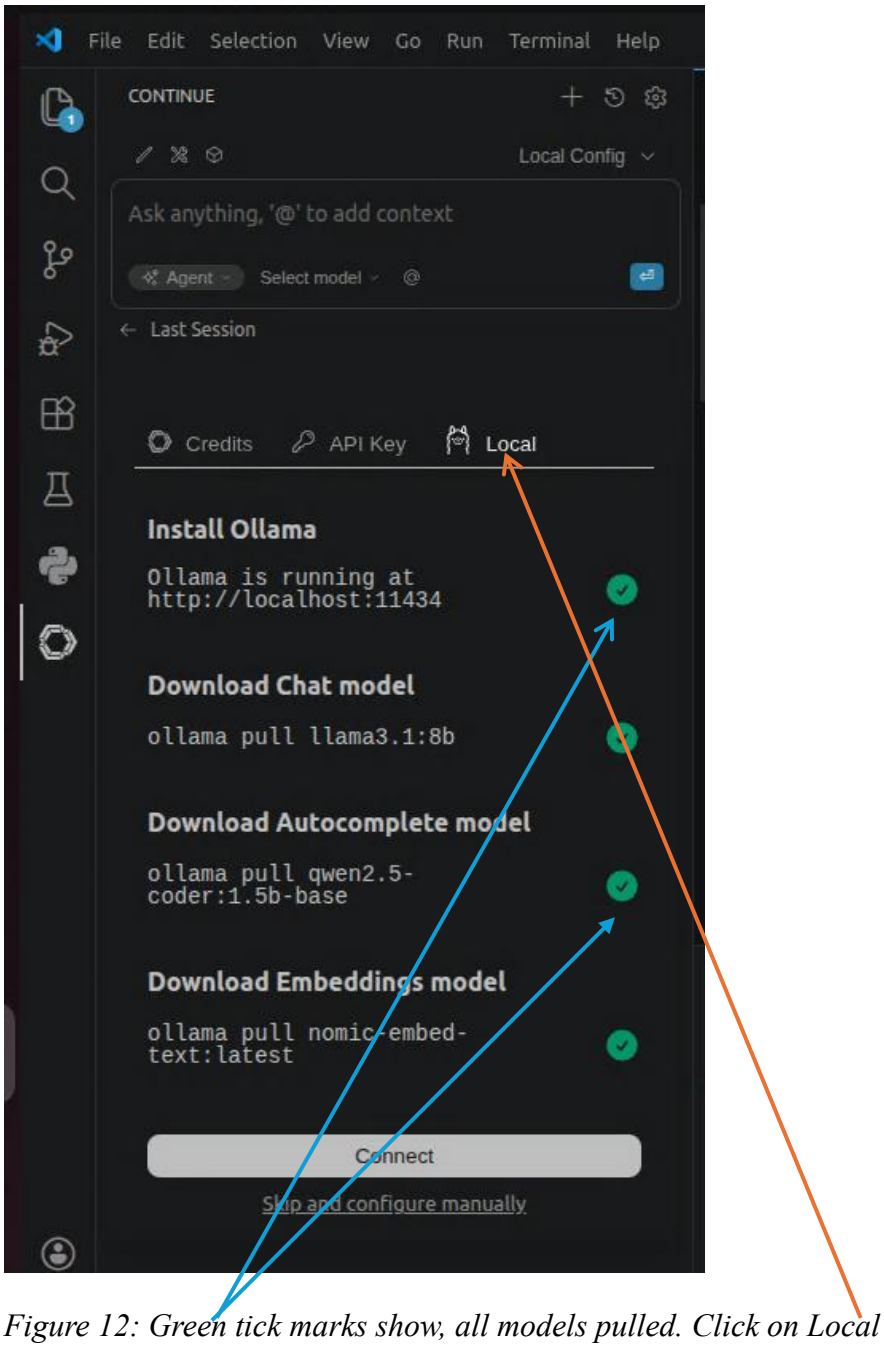

Figure 12: Green tick marks show, all models pulled. Click on Local to begin configuring from code, if needed.

Clearing chat:

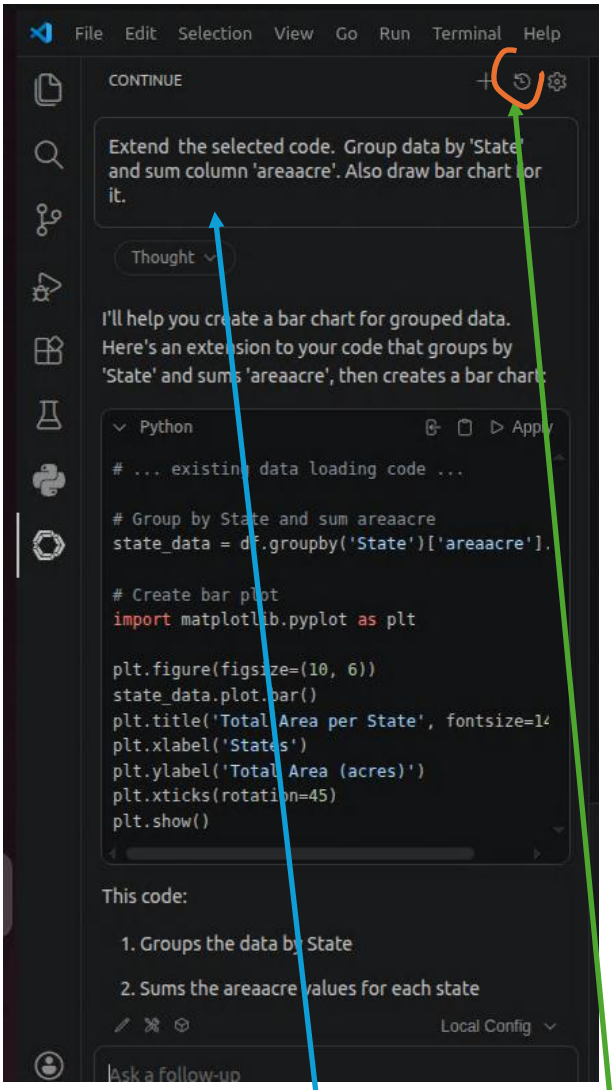

Figure 13: Continue chat box. Click here (on redo icon) to clear chat.

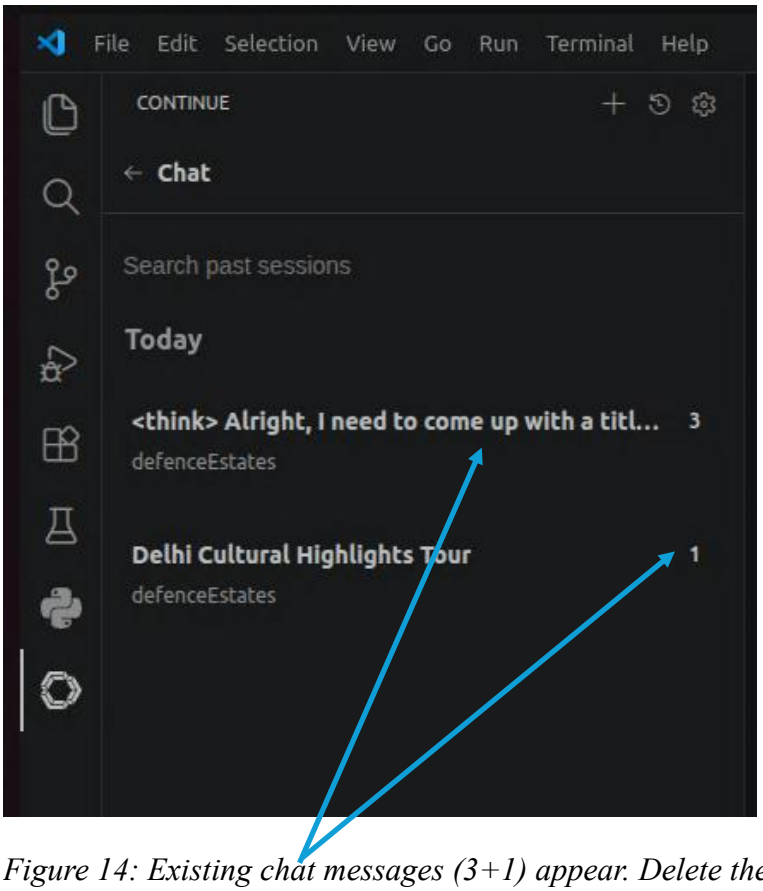

Figure 14: Existing chat messages (3+1) appear. Delete them

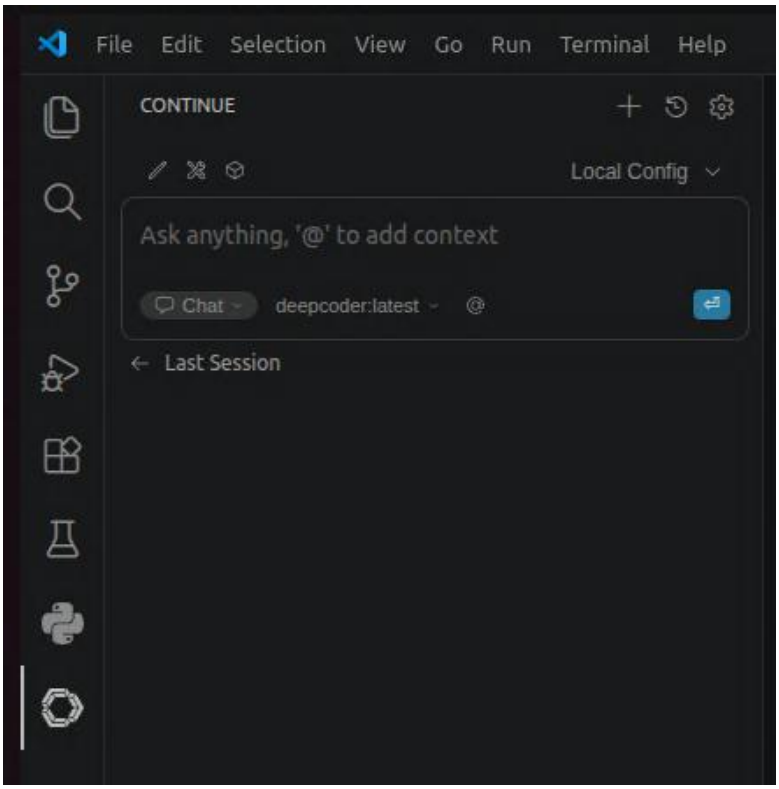

Figure 15: Everything is clean

Reconfiguring Model in Continue

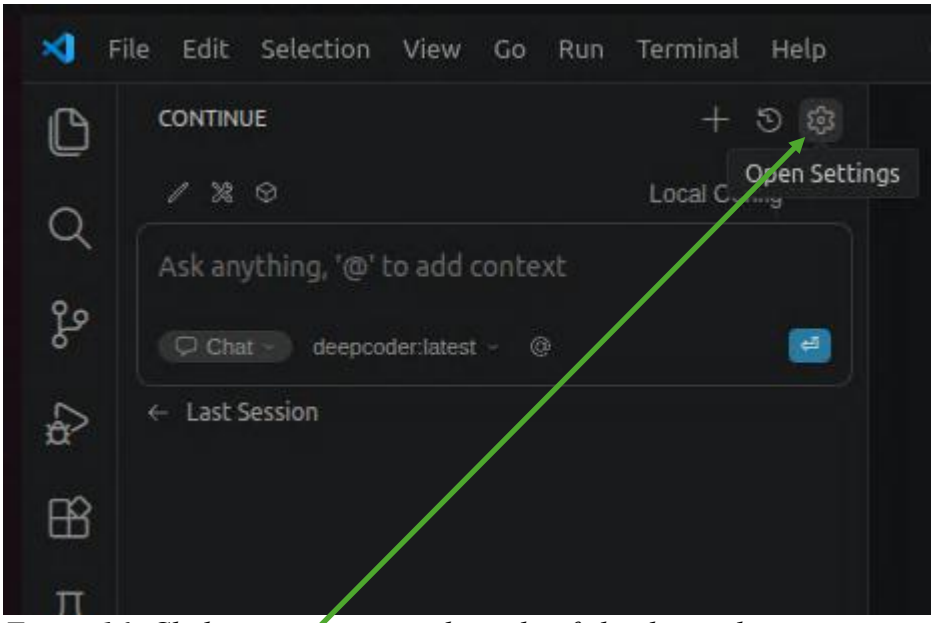

Figure 16: Click on gear icon on the right of chat box to begin reconfiguring

Continue config icons appear on the inner left panel.

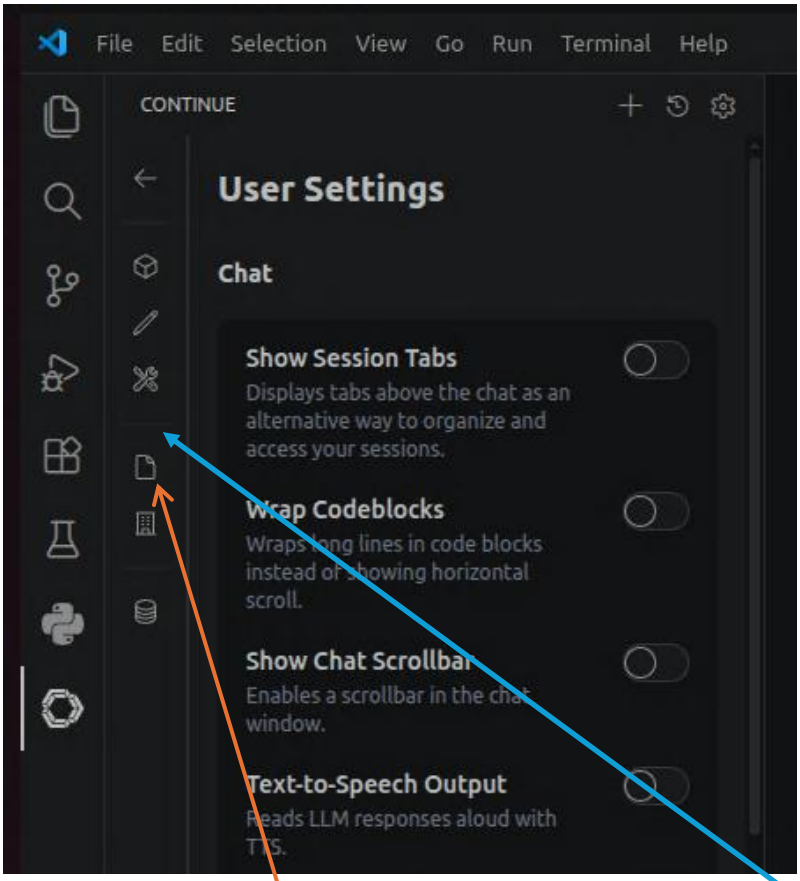

Figure 17: Continue configure icons (six in all) appear on the inner left panel. Use inner Left panel icons to change Continue Settings. Click on the fourth icon from the top.

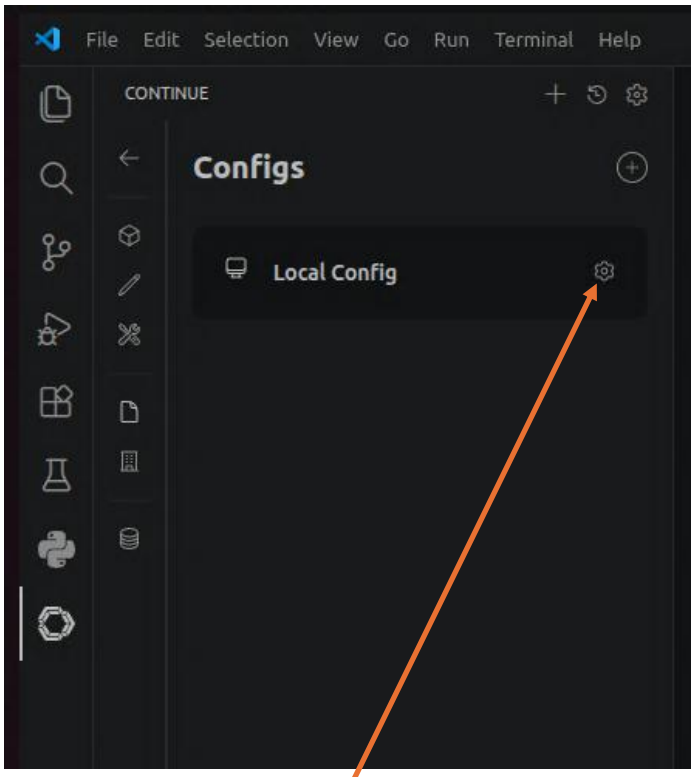

Figure 18: Click on the gear icon to look and amend the configuration file

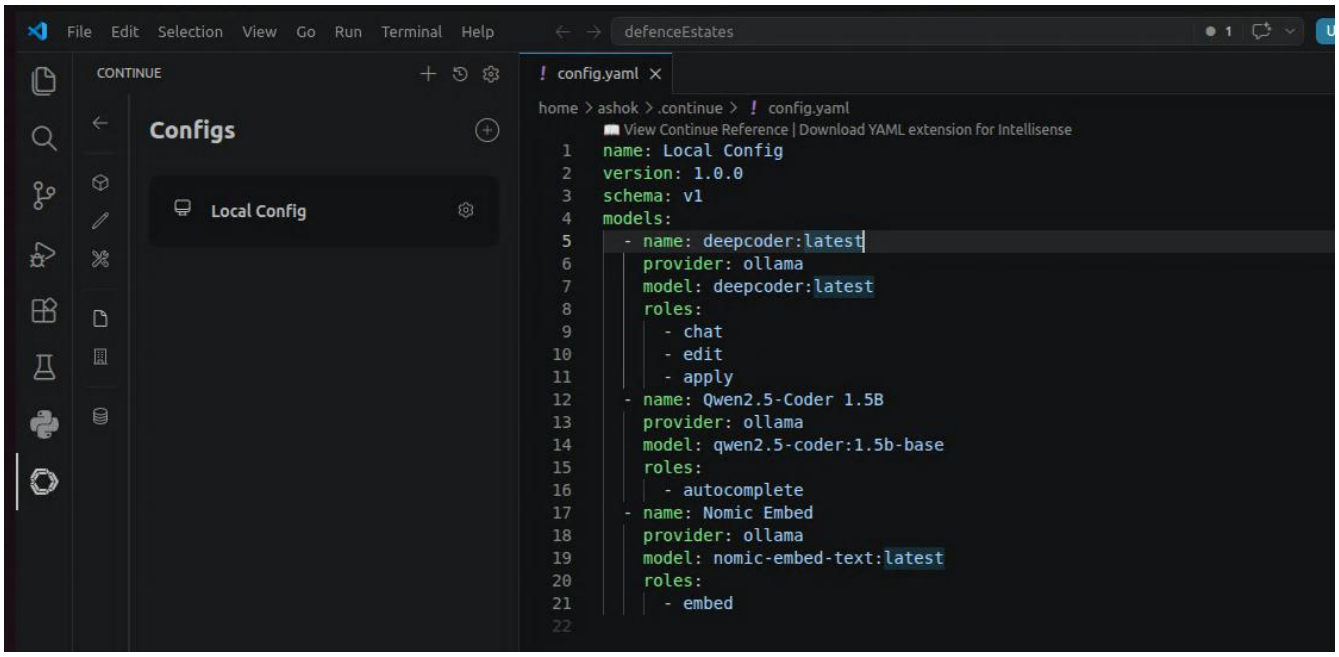

Figure 19: Configuration file. Change it very carefully.

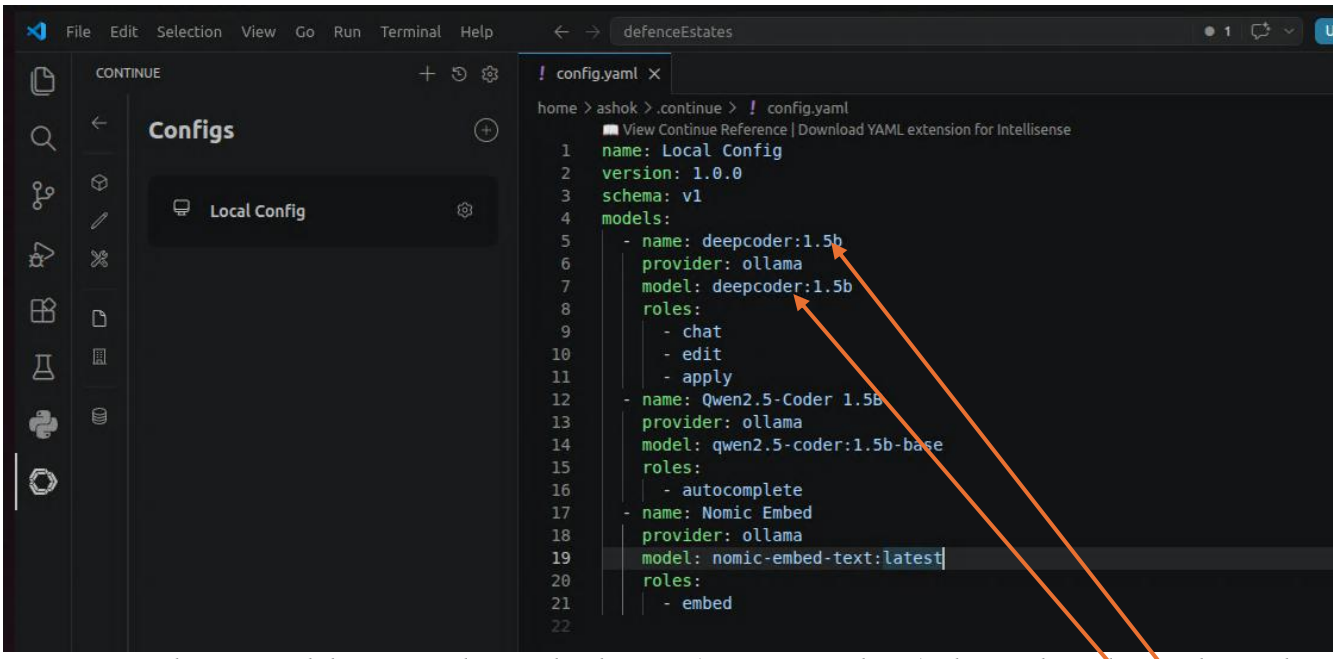

Figure 20: Change model names. 'deepcoder:latest' (see Figure above) changed to 'deepcoder:1.5b'

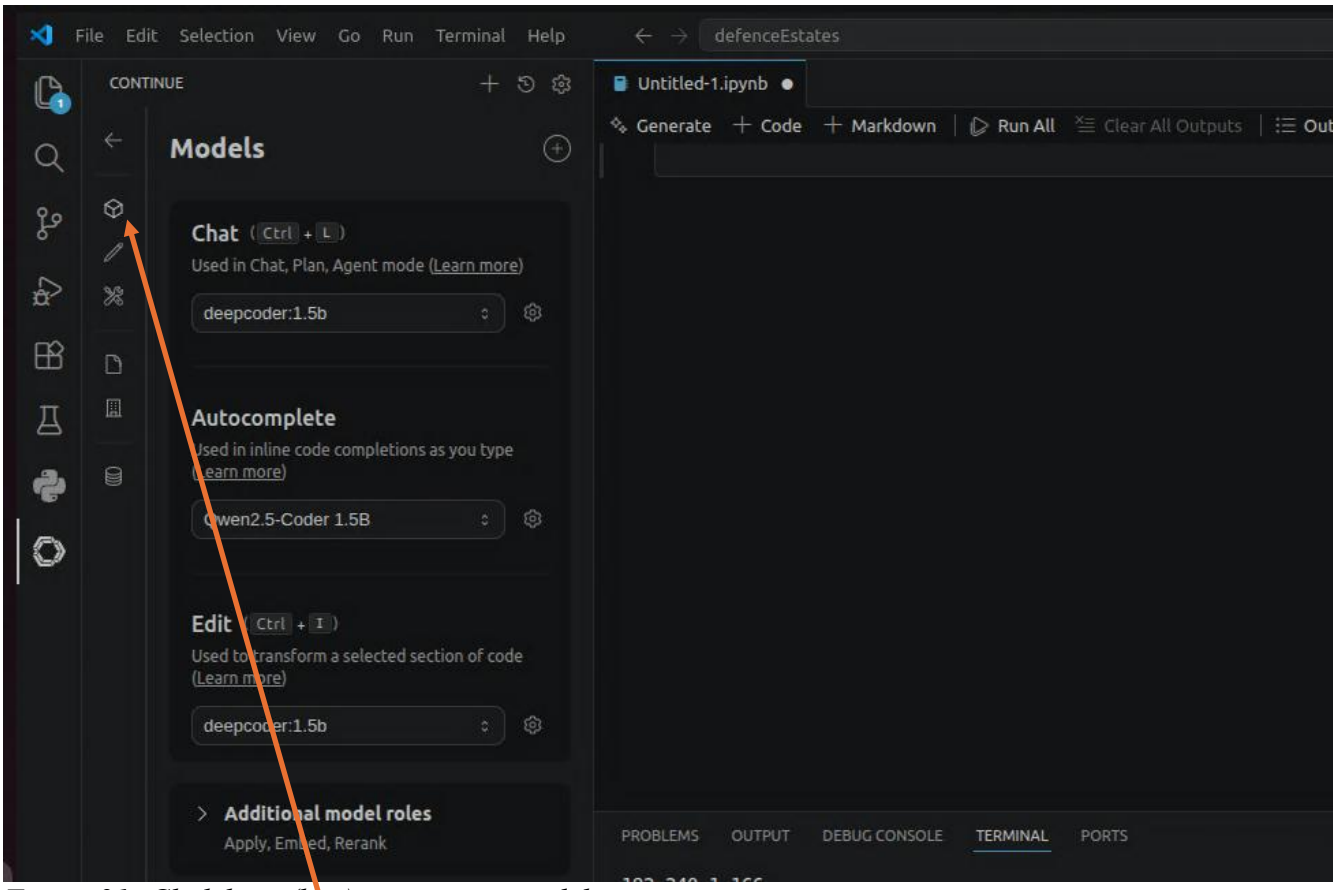

Figure 21: Click here (box) to see your models

Close VSCode and restart for changed settings to take effect.

##############