



## CAPTURAS POSTMAN

**categorias(id, descripcion)**


**GET**

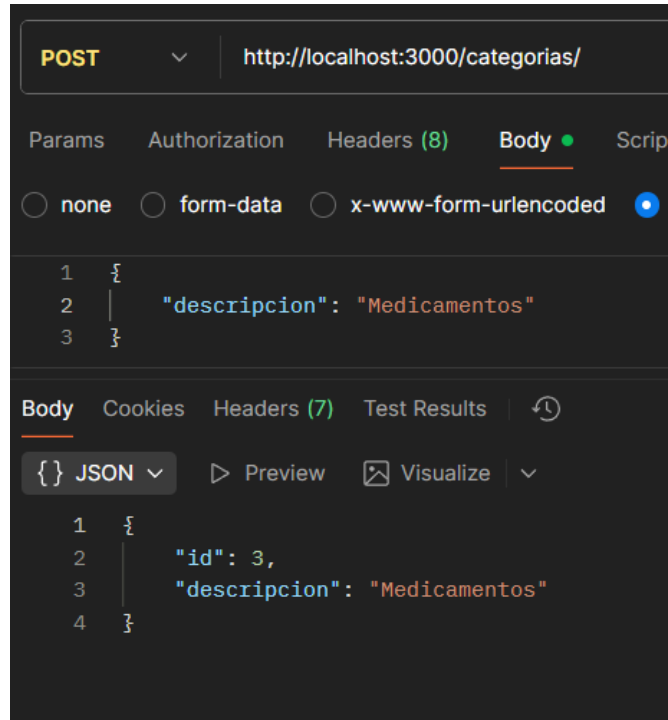


**POST**

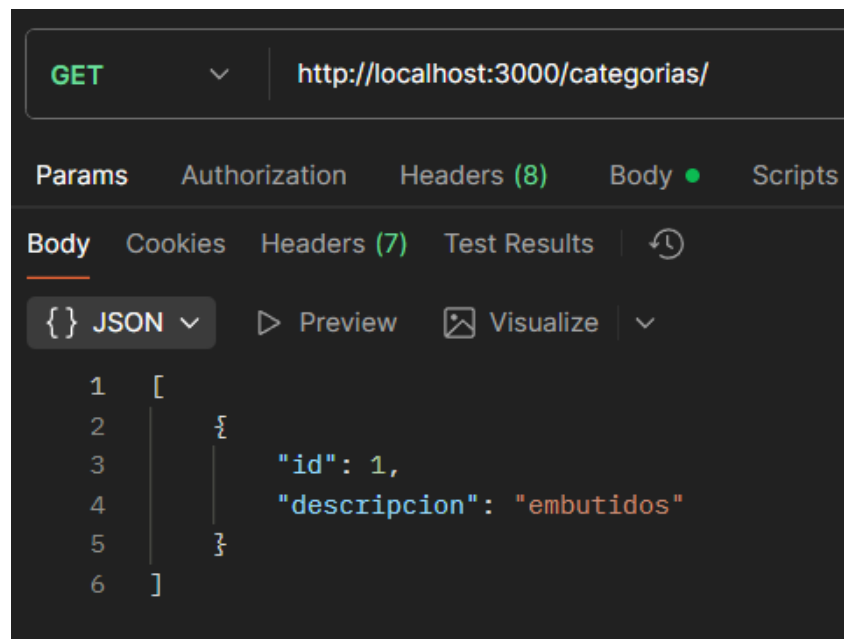

PATCH

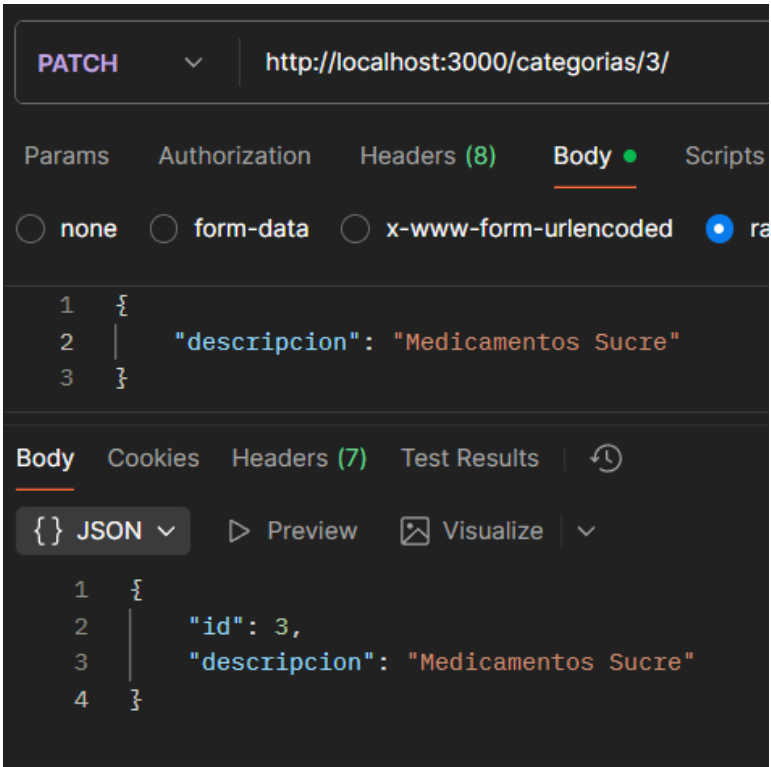


DELETE

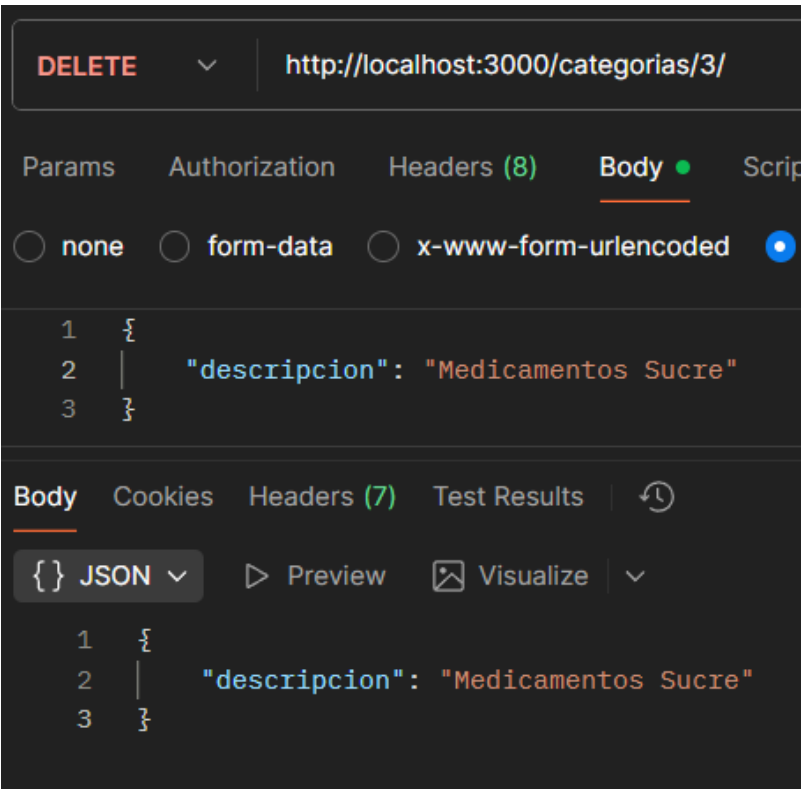


productos(id, id\_categoria, codigo, descripcion, fecha\_vencimiento).

GET

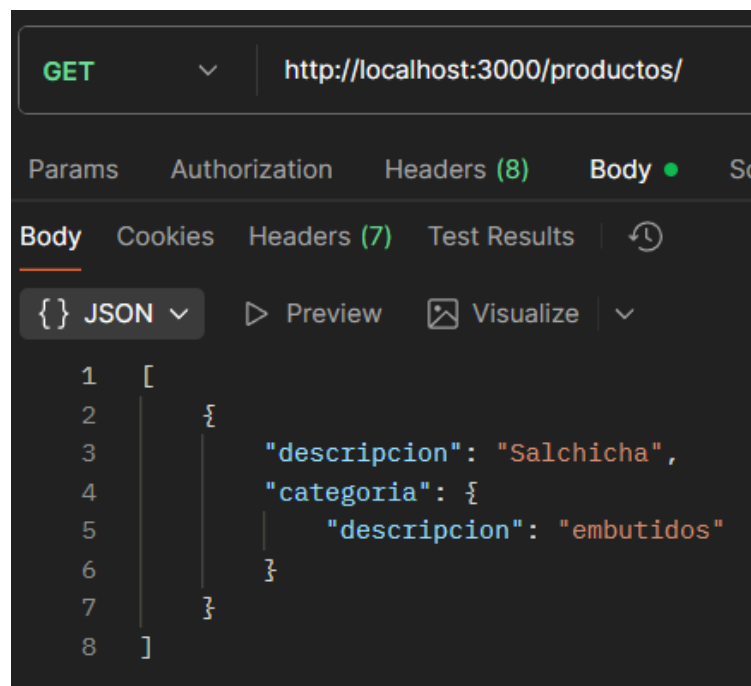

POST

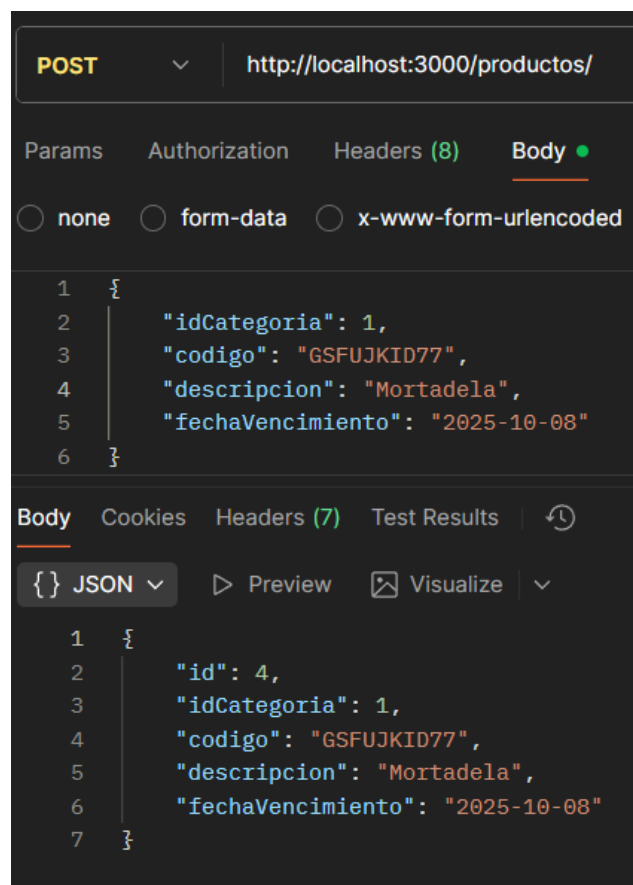

## PATCH

**PATCH**  **http://localhost:3000/productos/3/**

Params

Authorization

Headers (8)

**Body** 

S

☐ none

☐ form-data

☐ x-www-form-urlencoded

```
1  {
2    "idCategoria": 1,
3    "codigo": "GSFFNDSJDNF",
4    "descripcion": "Mortadela",
5    "fechaVencimiento": "2025-11-24"
6  }
```

**Body**

Cookies

Headers (7)

Test Results



 **JSON** 

 Preview

 Visualize



```
1  {
2    "id": 3,
3    "idCategoria": 1,
4    "codigo": "GSFFNDSJDNF",
5    "descripcion": "Mortadela",
6    "fechaVencimiento": "2025-11-24",
7    "categoria": {
8      "id": 1,
9      "descripcion": "embutidos"
10   }
11 }
```

## DELETE

The screenshot displays a REST client interface with a DELETE request to `http://localhost:3000/productos/3/`. The 'Body' tab is selected, showing a JSON payload. Below the main editor, a secondary 'Body' section shows the same JSON with an expanded 'categoria' object.

**DELETE** `http://localhost:3000/productos/3/`

Params Authorization Headers (8) **Body** Scripts

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw

```
1 {
2   "idCategoria": 1,
3   "codigo": "GSFFNDSJDNF",
4   "descripcion": "Mortadela",
5   "fechaVencimiento": "2025-11-24"
6 }
```

**Body** Cookies Headers (7) Test Results

`{}` JSON Preview Visualize

```
1 {
2   "idCategoria": 1,
3   "codigo": "GSFFNDSJDNF",
4   "descripcion": "Mortadela",
5   "fechaVencimiento": "2025-11-24",
6   "categoria": {
7     "id": 1,
8     "descripcion": "embutidos"
9   }
10 }
```