UNIVERSITY OF JAMMU

BHADERWAH CAMPUS

BACHELORS IN COMPUTER APPLICATIONS

(BCA-2ND SEMESTER 2025-28)

PRACTICAL FILE

WEB PROGRAMMING USING PHP

SUBMITTED BY:

Haroon Nisar

113040016

SUBMITTED TO:

Mr. Chanderdeer deep Sir

(Course coordinator)

Dept. Of CS and IT

ACKNOWLEDGEMENT

I would like to express my gratitude to all those people who helped me to complete this practical file. I want to thank **Department of computer science and IT** for providing me all the tools and resources for the completion of my practical file.

I have further more to thank our respected teacher **Mr. Chanderdeep** who encouraged me to move ahead and complete my work in time.

At last, I want to thank my classmates and friends for their help, support, interest and valuable hints. I want to thank once again all the above mentioned persons for their time and help.

Thank you.

HAROON NISAR
BCA 2nd semester
113040016

CERTIFICATE

This is to certify that haroon nisar student of **BCA 2nd semester** bearing university **Roll no. 113040016** has completed that required number of practical of **Web programming using PHP** under the guidance of class teacher **Mr. Chanderdeep** from the Department of Computer science and IT, Bhaderwah campus, University of Jammu.

Signature. **Signature.**

(I/C course coordinate) (Practical I/C)

INDEX

S no.	Programs	Page no.
1	WAP using text formatting tags in html.	05
2	WAP using Inserting image tag in html.	06
3	WAP using link tag in html & external css.	07
4	WAP using list tag (ordered list) in html.	08
5	WAP using list tag (unordered list) in html.	09
6	WAP using Tables tag in html.	10
7	WAP using forms tag in html.	11-13
8	WAP using Anchors tag in html.	14
9	WAP using Iframes tag in html.	15
10	WAP using internal css in html.	16 -17
11	WAP to show different object creating methods(By Creating the Instance of an Object Ditectly).	18
12	WAP to show different object methods in Javascript(create).	19
13	WAP to show different object methods in Javascript(define property).	20
13	WAP to show different object methods in Javascript(enteries).	20

14	WAP to show different object methods in Javascript(freeze).	21
15	WAP to show different object methods in Javascript(keys).	21

****

#Program 1:- WAP using text formatting tags in html.

```
<!DOCTYPE html>
    <html lang="en">
        <head>
            <meta charset="UTF-8">
            <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
        <title>All text formatting tag</title>
</head>
    <body>
        <h1>heading first</h1>
        <h2>heading second</h2>
        <h3>heading third</h3>
        <h4>heading fourth</h4>
        <h5>heading fifth</h5>
        <h6>heading sixth</h6>
        <i>heading italic</i><br>
        <b>heading bold</b><br>
        <small> small text</small><br>
      <big> big text</big>

</body>
</html>
```

heading first
heading second
heading third
heading fourth
heading fifth
heading sixth
heading italic
heading bold
small text
big text

OUTPUT

Program 2:- WAP using Inserting image tag in html.

```
<!DOCTYPE html>
        <html lang="en">
    <head>
            <meta charset="UTF-8">
            <meta name="viewport" content="width=device-width, initial-scale=1.0">
        <title>inserting images</title>
    </head>
<body>
            <img src="https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcT05-r0hbY79J0g_buNOe-bOXpIY3wVinWDSg&s">
</body>
</html>
```

OUTPUT

http://127.0.0.1:3000/.vscode/my project/Abdul Majeed/image.html

Program 3:- WAP using link tag in html & external css.

```
<!DOCTYPE html>
        <html lang="en">
    <head>
            <meta charset="UTF-8">
            <meta name="viewport" content="width=device-width, initial-scale=1.0">
      <title>external css </title>
      <link rel="stylesheet" href="external.css">
</head>
      <body>
          <img src="https://encrypted-tbn0.gstatic.com/images?  q=tbn:ANd9GcT5iMFieWI9pn8QAMfV3xd00NwBxUXOyklvfg&s">
<p>
Lorem ipsum dolor sit amet, consectetur adipisicing elit. Error officia culpa dolorem deleniti omnis rerum odio ex eaque quia maiores alias quae placeat id eveniet, nisi dolore? Eius harum
```

WAP using internal css in html.

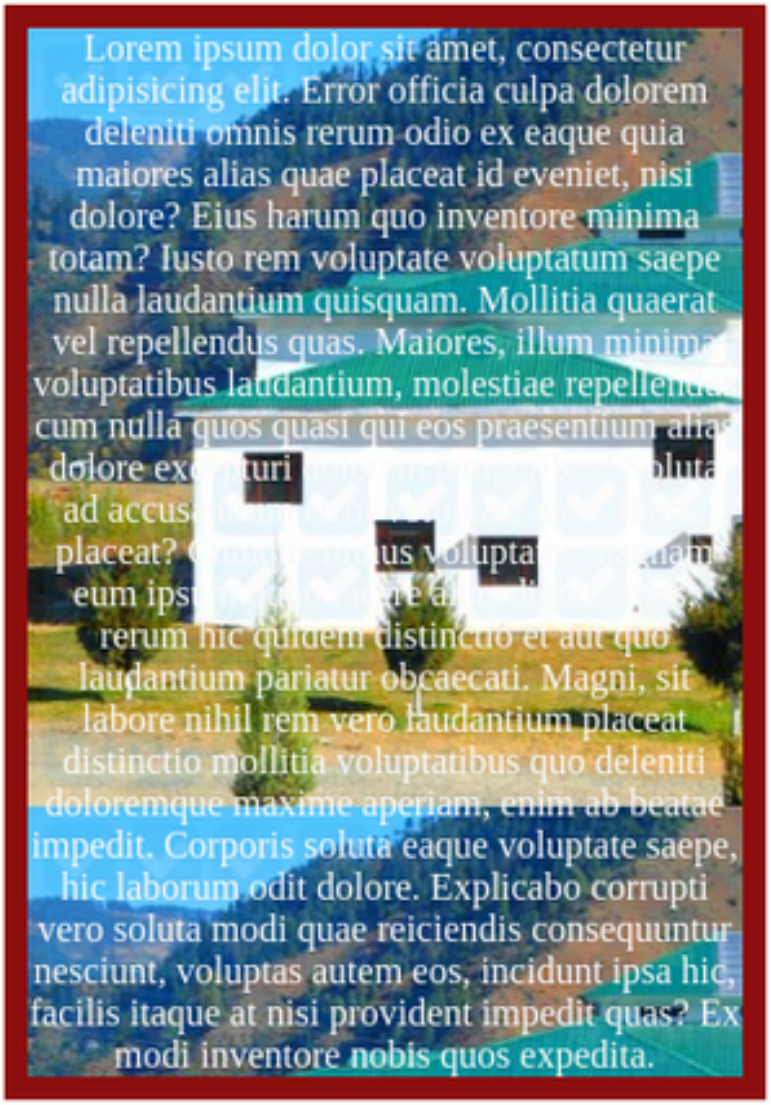

quo inventore minima totam? Iusto rem voluptate voluptatum saepe nulla laudantium quisquam. Mollitia quaerat vel repellendus quas. Maiores, illum minima voluptatibus laudantium, molestiae repellendus cum nulla quos quasi qui eos praesentium alias dolore excepturi dolorem temporibus! Soluta ad accusantium error voluptate nam. Illum, placeat? Cumque minus voluptates magnam eum ipsum quod facere alias dignissimos, rerum hic quidem distinctio et aut quo laudantium pariatur obcaecati. Magni, sit labore nihil rem vero laudantium placeat distinctio mollitia voluptatibus quo deleniti doloremque maxime aperiam, enim ab beatae impedit. Corporis soluta eaque voluptate saepe, hic laborum odit dolore. Explicabo corrupti vero soluta modi quae reiciendis consequuntur nesciunt, voluptas autem eos, incidunt ipsa hic, facilis itaque at nisi provident impedit quas? Ex modi inventore nobis quos expedita.

</p>

```
</body>

</html>
```

OUTPUT

Program 4:- WAP using list tag (ordered list) in html.

```
<!DOCTYPE html>

    <html lang="en">

<head>

      <meta charset="UTF-8">

       <meta name="viewport" content="width=device-width, initial-scale=1.0">

       <title>ordered list in html</title>

</head>
```

OUTPUT

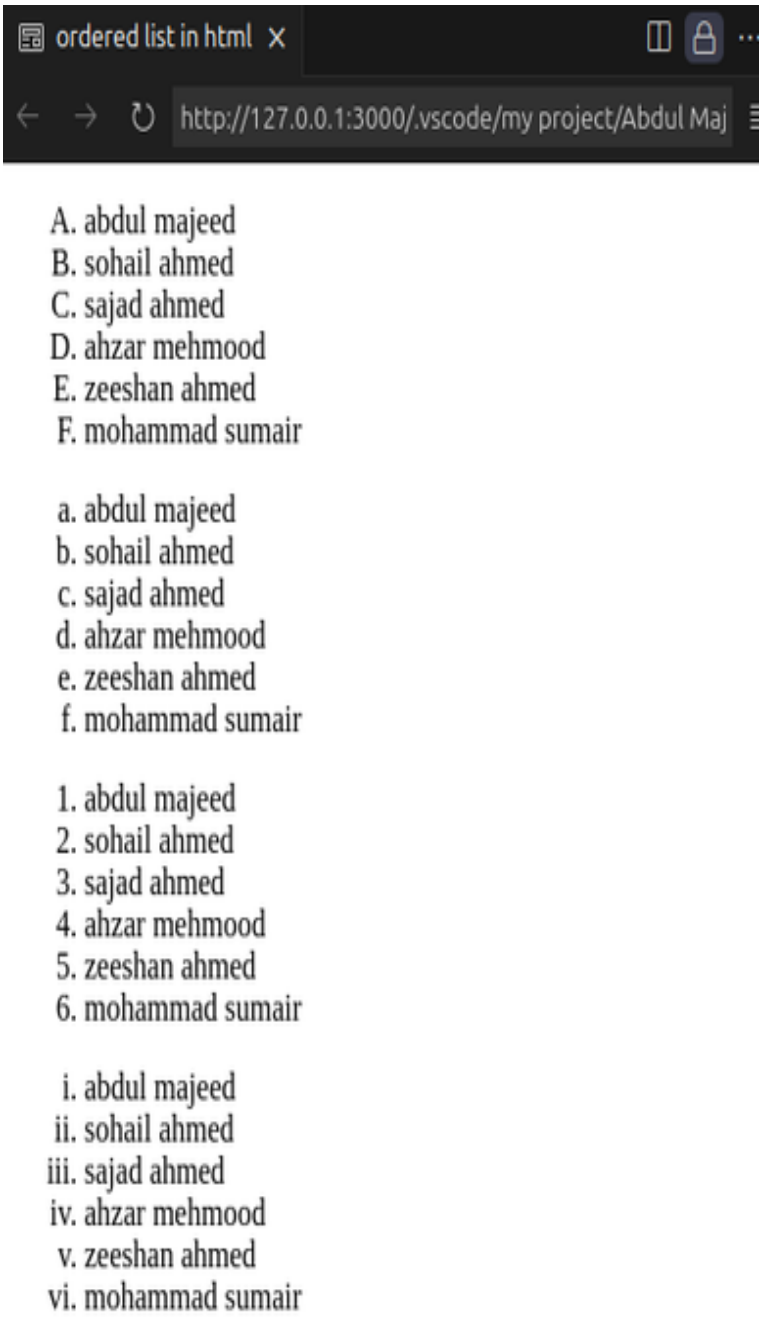


```
<body>

<ol ty pe="A">

        <li>abdul majeed</li>

        <li>sohail ahmed</li>

        <li>sajad ahmed</li>

        <li>ahzar mehmood</li>

        <li>zeeshan ahmed</li>

        <li>mohammad sumair</li>

</ol>
```

```
<ol type="a">
        <li>abdul majeed</li>
        <li>sohail ahmed</li>
        <li>sajad ahmed</li>
        <li>ahzar mehmood</li>
        <li>zeeshan ahmed</li>
        <li>mohammad sumair</li>
</ol>
<ol type="1">
        <li>abdul majeed</li>
        <li>sohail ahmed</li>
        <li>sajad ahmed</li>
        <li>ahzar mehmood</li>
        <li>zeeshan ahmed</li>
        <li>mohammad sumair</li>
</ol>
<ol type="i">
        <li>abdul majeed</li>
        <li>sohail ahmed</li>
        <li>sajad ahmed</li>
        <li>ahzar mehmood</li>
        <li>zeeshan ahmed</li>
        <li>mohammad sumair</li>
</ol>
        </body>
</html>
```

Program 5:- WAP using list tag (unordered list) in html.

```
<!DOCTYPE html>

<html lang="en">

    <head>

        <meta charset="UTF-8">

        <meta name="viewport" content="width=device-width, initial-scale=1.0">

            <title>unordered list in html</title>

    </head>

            <body>

<ul>

<li>abdul majeed</li>

<li>sohail ahmed</li>

<li>sajad ahmed</li>

<li>ahzar mehmood</li>

<li>zeeshan ahmed</li>

<li>mohammad sumair</li>

</ul>

            </body>

</html>
```

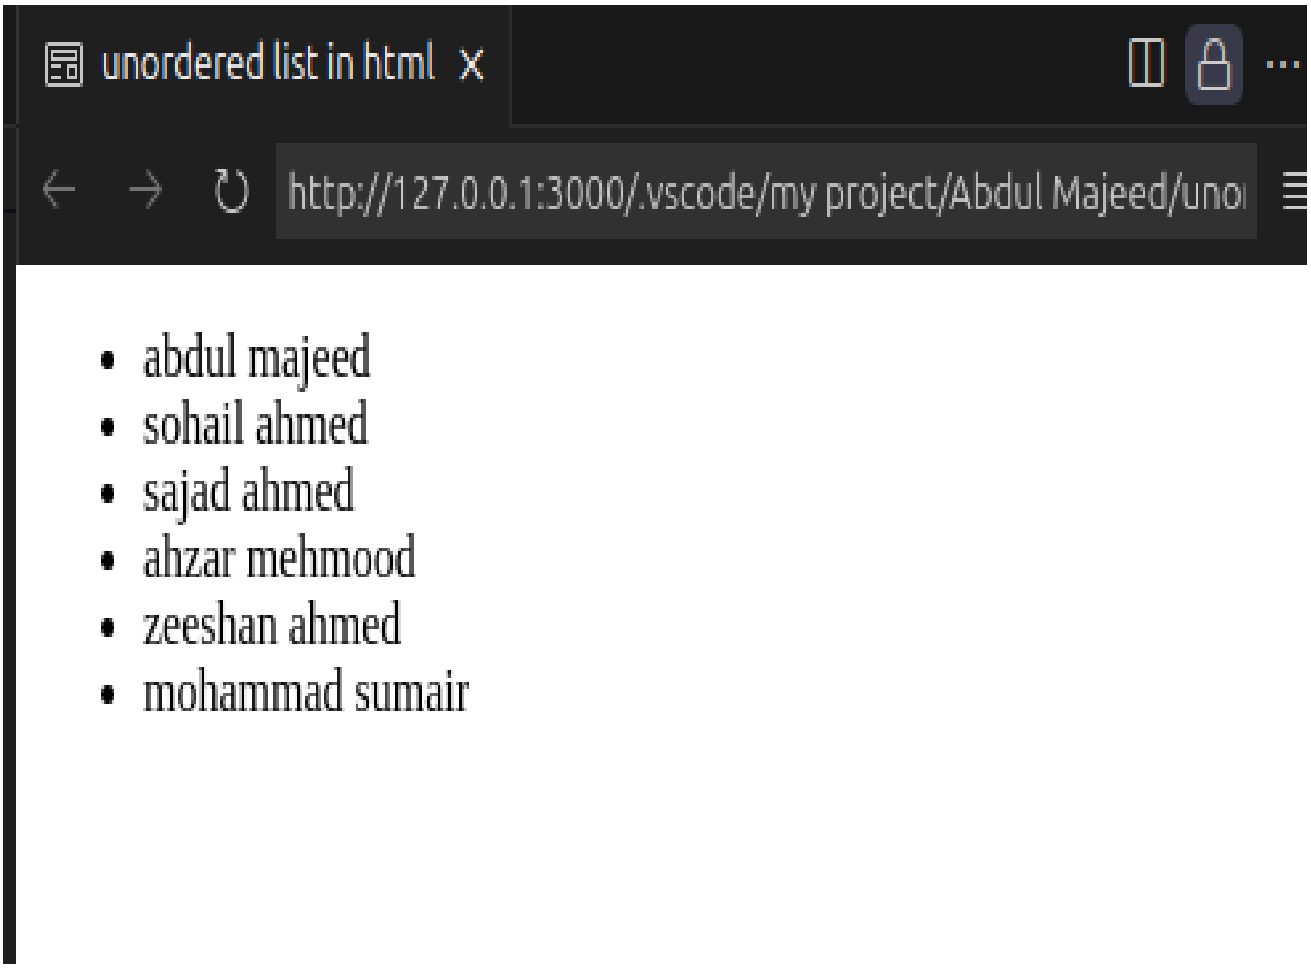
unordered list in html
http://127.0.0.1:3000/.vscode/my project/Abdul Majeed/uno
abdul majeed
sohail ahmed
sajad ahmed
ahzar mehmood
zeeshan ahmed
mohammad sumair

OUTPUT

Program 6:- WAP using Tables tag in html.

```
<!DOCTYPE html>
        <html lang="en">
<head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>table in html</title>
</head>
    <body>
        <caption>Student data </caption>
<table border="1">
        <tr>
<th>Name</th>
<th>Roll. no</th>
        </tr>
<tr>
<td>abdul majeed</td>
<td>1</td>
</tr>
<tr>
      <td>sajad ahmed</td>
      <td>2</td>
</tr>
<tr>
      <td>mohammad sumair</td>
      <td>3</td>
```

```
</tr>

<tr>

    <td>hilal ahmed</td>

    <td>4</td>

</tr>
```

OUTPUT

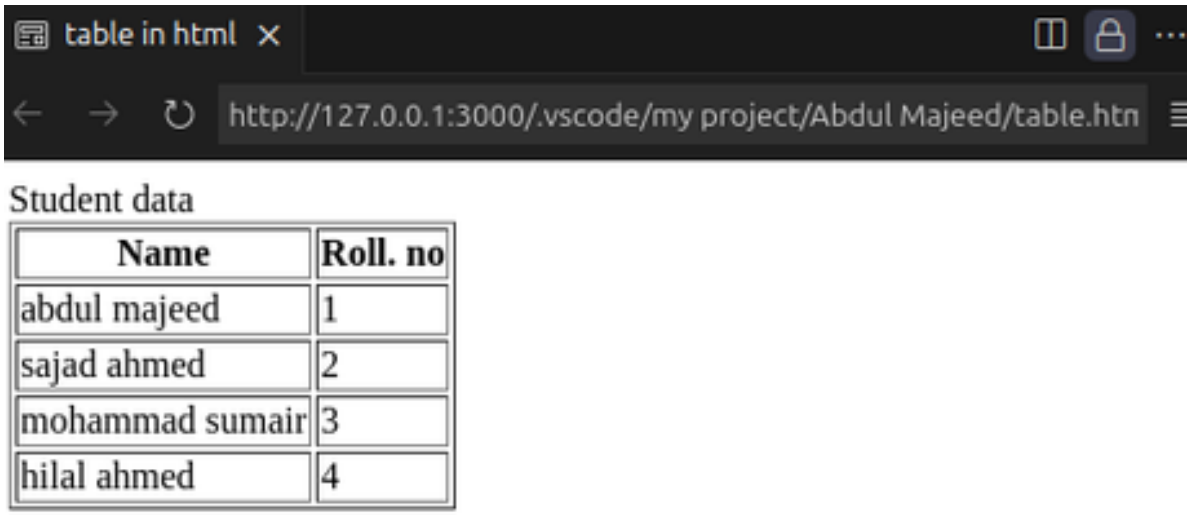


```
</table>

</body>

</html>
```

Program 7:- WAP using forms tag in html.

```
<!DOCTYPE html>

<html lang="en">


        <head>

                <meta charset="UTF-8">

                <meta name="viewport" content="width=device-width, initial-scale=1.0">

                        <title>regitration form </title>

<style>

#submit {

background-color: rgb(223, 139, 30);

}

</style>

        </head>


<body style="text-align: justify;">

         <h2>Registration Form</h2>

                <form action="/contact.php">

   <!--for enter the name -->

            <label for="name"> Name:</label><br>

            <input type="text" id="name" placeholder="Enter your Name"><br>

<!--for enter father name -->

             <label for="father_name"> Father name: </label><br>

             <input type="text" id="father_name" placeholder="Enter father name"><br>

<!--for enter adhar number-->

             <label for="adhar ">Adhar number:</label><br>

             <input type="mix" id="adhar" length="12" placeholder="enter adhar number"><br>
```

```
<!--for enter date of birth-->
            <label for="date">DOB:</label><br>
            <input type="date" id="date" placeholder="enter date of birth"><br>
<!--this code for put ph number-->
            <label for="tel">Phone number:</label><br>
            <input type="tel" id="tel" placeholder="9596328541"><br>


<!--this code for address input from user-->
            <label for="address ">Address:</label><br>
            <input type="address" id="address" placeholder="enter your address"><br>
<!--this code for input gender-->
            <label for="gender">Gander:</label><br>
     male:<input type="radio" name="gender" id="male" ><br>
   female:<input type="radio" name="gender" id="others"><br>
   others:<input type="radio" name="gender" id="female"><br>


<!--This code for enter state-->
                <label for="state">State:</label><br>
                    <select id="state" name="state" >
                            <option value="ap">andhra pradesh</option>
                            <option value="AP">aranachul pradesh</option>
                            <option value="as">assam</option>
                            <option value="bhr">bihar</option>
                            <option value="CG">chatisgarh</option>
                           <option value="GA">goa</option>
                           <option value="HR">harayana </option>
                           <option value="HP">himachal pradesh</option>
                           <option value="JK">jammu and kashmir</option>
```

```
                    <option value="GO">gujjrat</option>

                    <option value="JRK">jharkhand</option>

                    <option value="KR">kerala</option>

                    <option value="LW">lakshadweep</option>

                    <option value="MZ">mizoram</option>

                    <option value="MG">magaleya</option>

                    <option value="NG">nagaland</option>

                    <option value="OS">odisa</option>

                    <option value="PC">pudichari </option>

                    <option value="RJ"> rajasthan</option>

                    <option value="TN">tamil nadu</option>

                    <option value="TG"> talingana</option>

                    <option value="UK">uthra khand</option>

                    <option value="WB">west bengal</option>

                    <option value="DL">delhi</option>

                    <option value="PJ">panjab</option>

                    <option value="KR">karnataka</option>

                    <option value="UP">utter pradesh</option>

                </select><br>

<!--for upload adhar file-->

                <label for="file">Upload adhar:</label><br>

                <input type="file" id="file"><br>

<!--for enter email-->

                <label for="email ">Email:</label><br>

                <input type="text" id="email " placeholder="abnc123@gmail.com"><br>

<!--for enter password -->

                <label for="Password">Password:</label><br>

                <input type="password" id="Password" placeholder="enter strong password"><br>
```

```
<!--for submit button-->

        <label for="submit"></label>

        <input type="submit" id="submit"> <br>

</form>

</body>

</html>
```

O

Registration Form

Name:
Enter your Name
Father name:
Enter father name
Adhar number:
enter adhar number
DOB:
mm/dd/yyyy
Phone number:
9596328541
Address:
enter your address
Gander:
male:
female:
others:
State:
andhra pradesh
Upload adhar:
Choose File No file chosen
Email:
abnc123@gmail.com
Password:
enter strong password
Submit

UTPUT

Program 8:- WAP using Anchors tag in html.

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
            <title>USING anchor TAG</title>
    </head>
<body>
        <a href="https://www.bhaderwahcampus.in/">bhaderwahcampus website</a>
</body>
</html>
```

OUTPUT

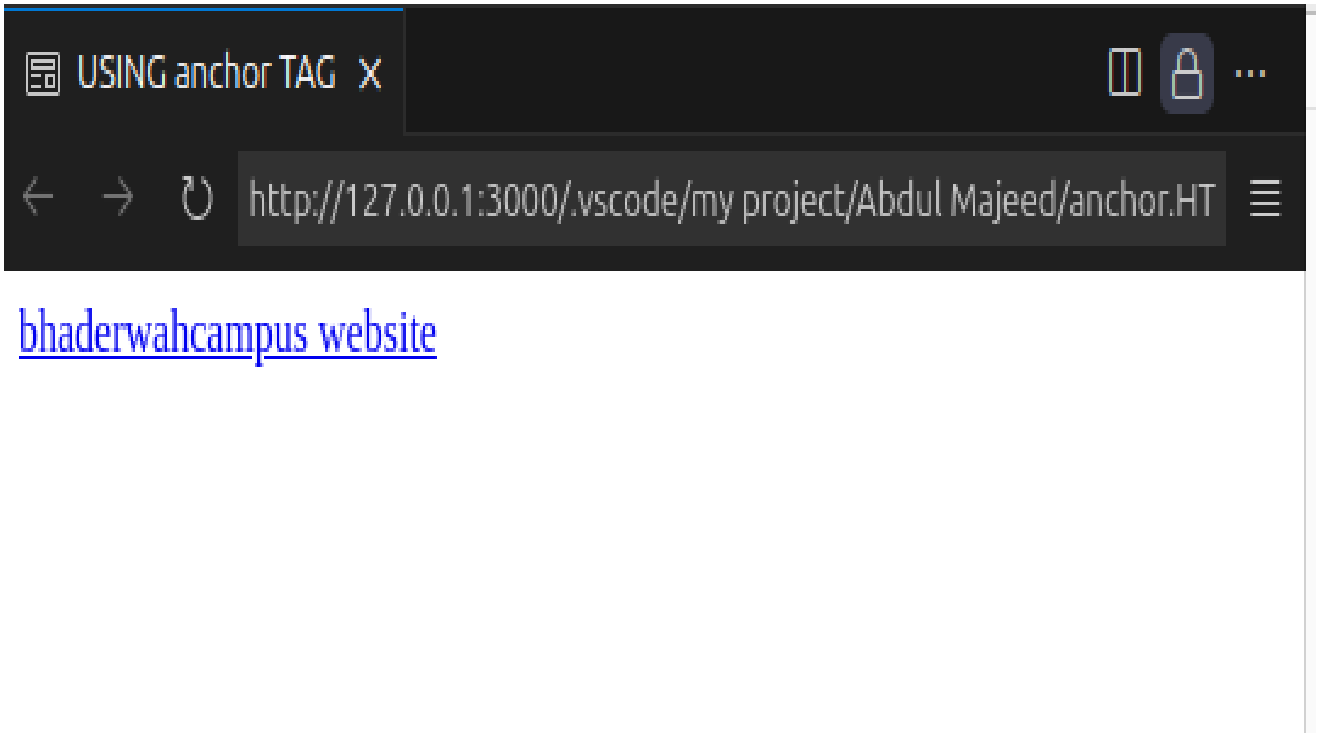

Program 9:- WAP using Iframes tag in html.

```
<!DOCTYPE html>

<html lang="en">

  <head>

        <meta charset="UTF-8">

        <meta name="viewport" content="width=device-width, initial-scale=1.0">

            <title>Iframes in html</title>

  </head>

<body>

      <iframe src="https://www.wikipedia.org/" width="612x612" height="600px"></iframe>

</body>

</ht
```

Iframes in html
http://127.0.0.1:3000/.vscode/my project/Abdul Majeed/iframes.html
WIKIPEDIA
The Free Encyclopedia
English
6,974,000+ articles
日本語
1,457,000+ 記事
Русский
2 036 000+ статей
Deutsch
3.001.000+ Artikel
Español
2.021.000+ artículos
Français
2 674 000+ articles
中文
1,470,000+ 条目 / 條目
Italiano
1.910.000+ voci
Português
1.146.000+ artigos
Polski
1 652 000+ haseł
EN
Read Wikipedia in your language

ml>

OUTPUT

Program 10:- WAP using internal css in html.

```
<!DOCTYPE html>

<html lang="en">

    <head>

            <meta charset="UTF-8">

            <meta name="viewport" content="width=device-width, initial-scale=1.0">

                    <title>style tag in html </title>

<style>

          *{border-radius: 50px;

            text-align: center;

            margin: 10px;

}

#box1{

background-color: brown;

}

#box2{

background-color: rgba(54, 42, 165,0.5);

}

#box3{

background-color: rgb(199, 174, 31);

}

#box4{

background-color: rgb(168, 190, 172);

}

#box5{

background-color: rgb(24, 170, 90);

}
```

```
.selectors{
font-style: italic;
font-size: xx-large;
}
h1, h2, h3, h4{
background-color: rgb(160, 114, 15);
text-transform: uppercase;
text-decoration: underline;
}
h5{
background-color: aquamarine;
border:20px dotted red;
padding: 10px
}
</style>
</head>
<body >
<div id="box1" class="selectors">box 1</div>
<div id="box2" class="selectors">box 2</div>
<div id="box3" class="selectors">box 3</div>
<div id="box4" class="selectors">box 4</div>
<div id="box5" class="selectors">box 5</div>
<h1>heading first</h1>
<h2>heading second</h2>
<h3>heading third</h3>
<h4>heading fourth</h4>
<h5>heading fifth</h5>
<h6>heading sixth</h6>
```

```
</body>

</html>
```

OUTPUT

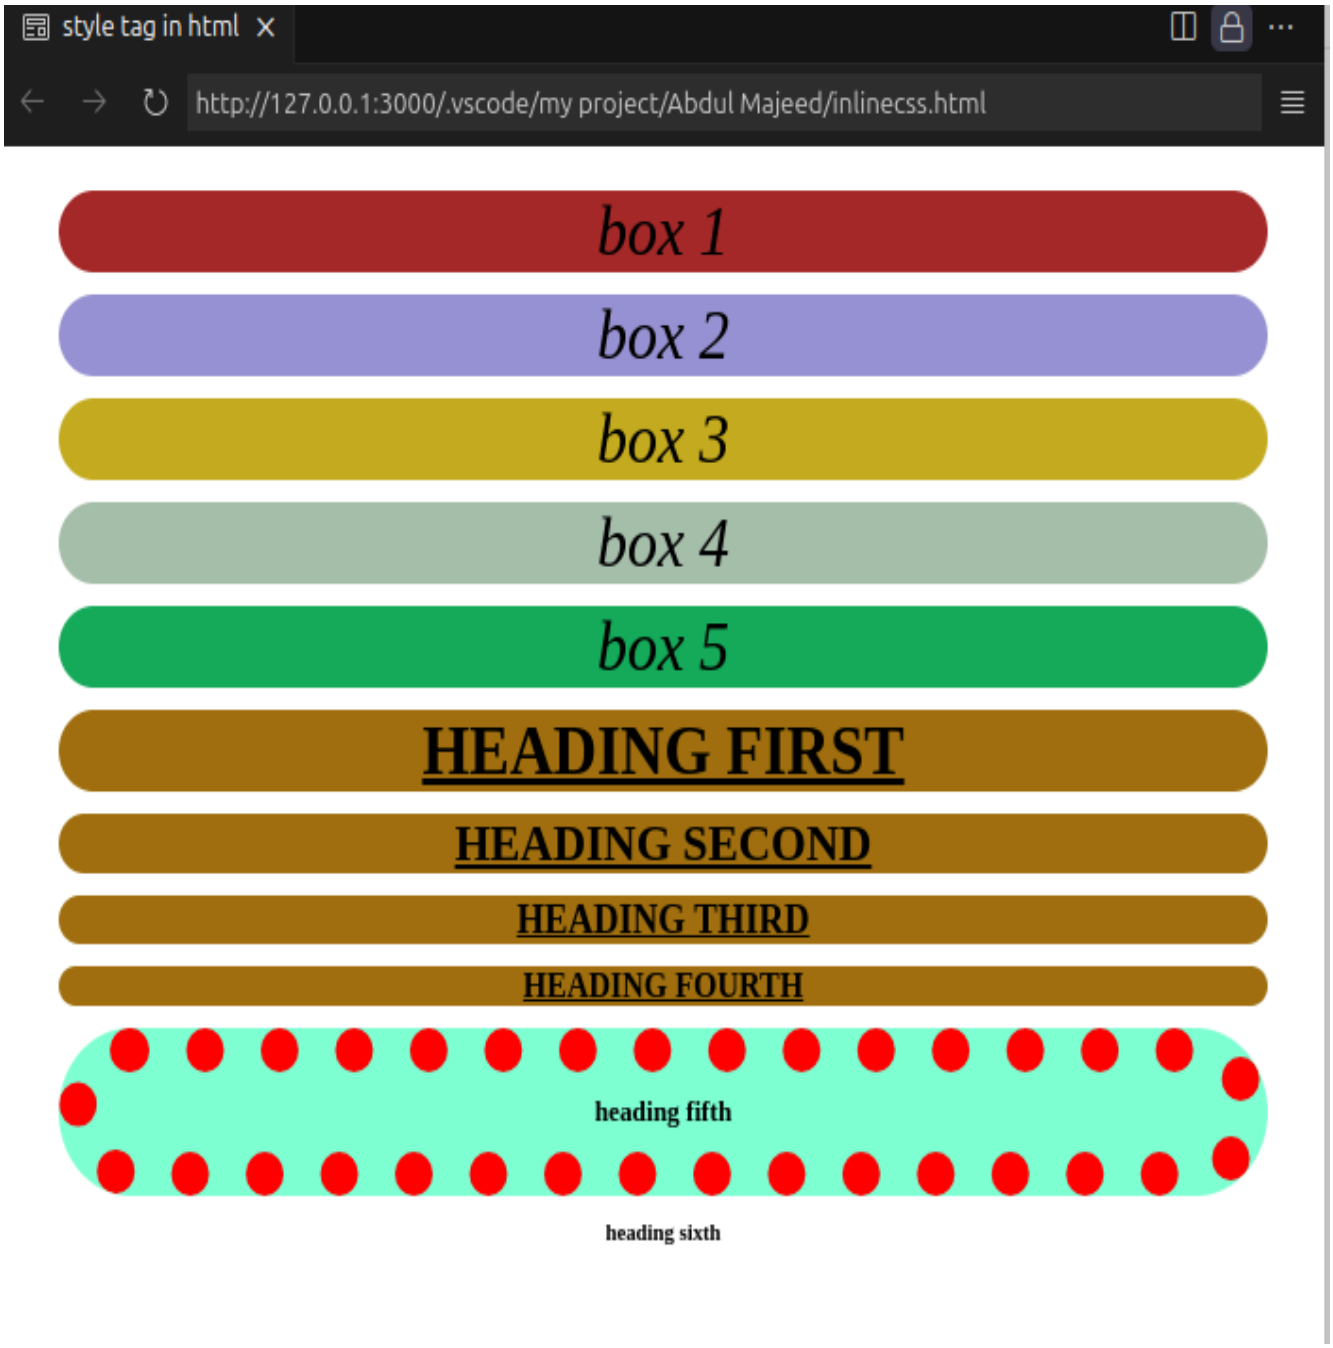

Program 11:- WAP to show different object creating methods(By Creating the Instance of an Object Ditectly).

```
html>
   <head><br> By Creating Instance of the Object Directly </br></head>
   <body>
      <script>
         var std=new Object();
         std={rollno:01,name:"Abdul majeed",course:"BCA"}
         std.course=("MCA");
         document.write(std.rollno + std.name + std.course);
      </script>
   </body>
</html>
```

OUTPUT

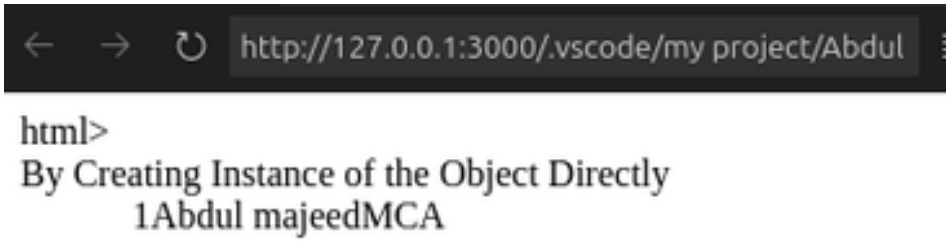

-

Program 15:- WAP to show Javascript method.

```
<html>
```

```
<head><br> Method of java script</br></head>
<body>
  <script>
    function std(rollno,name,course)
      {
        this.rollno=rollno;
        this.name=name;
        this.course=course;
        this.changecourse=changecourse;
      function changecourse(othercourse){
        this.course=othercourse;}
      }
    e=new std(01,"Abdul majeed","BCA");
    document.write(e.rollno+e.name+e.course);
    e.changecourse("MCA");
    document.write(e.rollno+e.name+e.course);
  </script>
</body>
</html>
```

OUTPUT

Program 12:- WAP to show different object methods in Javascript(create).

OUTPUT

```
<html>
<body>
<h1>Objects.create method</h1>
<p id="yo"></p>
<script>
const person = {
  firstName: "Abdul ",
  lastName: "majeed",
  language: "English"
};
const man = Object.create(person);
man.firstName = "abdul";
document.getElementById("yo").innerHTML = person.firstName + " and " + man.firstName;
</script>
</body>
</html>
```

Program 13:- WAP to show different object methods in Javascript(define property).

```
<html>

<body>

<h1>Objects.define property method</h1>

<p id="yo"></p>

<script>

const person = {

  firstName: "Abdul",

  lastName: "Majeed",

  language: "English"

};

Object.defineProperty(person, "language", {value:"NO"})

document.getElementById("yo").innerHTML = person.language;

</script>

</body>

</html>
```

OUTPUT

Program 14:- WAP to show different object methods in Javascript(enteries).

```
<html>

<body>

<h1>Objects.enteries method</h1>

<p id="yo"></p>

<script>

const fruits = {Bananas:300, Oranges:200, Apples:500};

let text = "";

for (let [fruit, amount] of Object.entries(fruits)) {

  text += fruit + ": " + amount + "<br>";

}

document.getElementById("yo").innerHTML = text;
```

OUTPUT

```
</script>

</body>

</html>
```

Program 14:- WAP to show different object methods in Javascript(freeze).

```
<html>

<body>

<h1>Objects.freeze method</h1>

<p id="yo"></p>

<script>

"use strict"

const person = {

  firstName: "Abdul",

  lastName: "Majeed",

  age: 18,

  eyeColor: "brown"
```

OUTPUT

```
};

Object.freeze(person)

let text;

try {

  person.age = 19;

  text = Object.values(person);

}

catch (err) {

  text = err;

}

document.getElementById("yo").innerHTML = text;

</script>

</body>

</html>
```

Program 21:- WAP to show different object methods in Javascript(keys). OUTPUT

```
<html>
```

```
<body>
<h1>Objects.keys method</h1>
<p id="yo"></p>
<script>
const person = {
  firstName: "Sarthak",
  lastName: "Gupta",
  age: 18,
  eyeColor: "brown"
};
const keys = Object.keys(person);
document.getElementById("yo").innerHTML = keys;
</script>
</body>
</html>
```

****