Role lens

The product seen through each role. **46 screens.**

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as GuardianNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What guardian sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Opening view

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8

Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as StudentNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What student sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Student64

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as ApplicantNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What applicant sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Applicant13

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as AlumniNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What alumni sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	◖	—	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Alumni13

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as FacultyNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What faculty sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Faculty14

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Teaching assistantNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What teaching assistant sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	◖	—	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Teaching assistant10

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as AdvisorNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What advisor sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Advisor11

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as RegistrarNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What registrar sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Registrar9

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as FinanceNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What finance sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Finance4

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Student affairsNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What student affairs sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	◖	—	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Student affairs7

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as IT / securityNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What it / security sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	◖	—	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

IT / security4

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Support / opsNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What support / ops sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Support / ops3

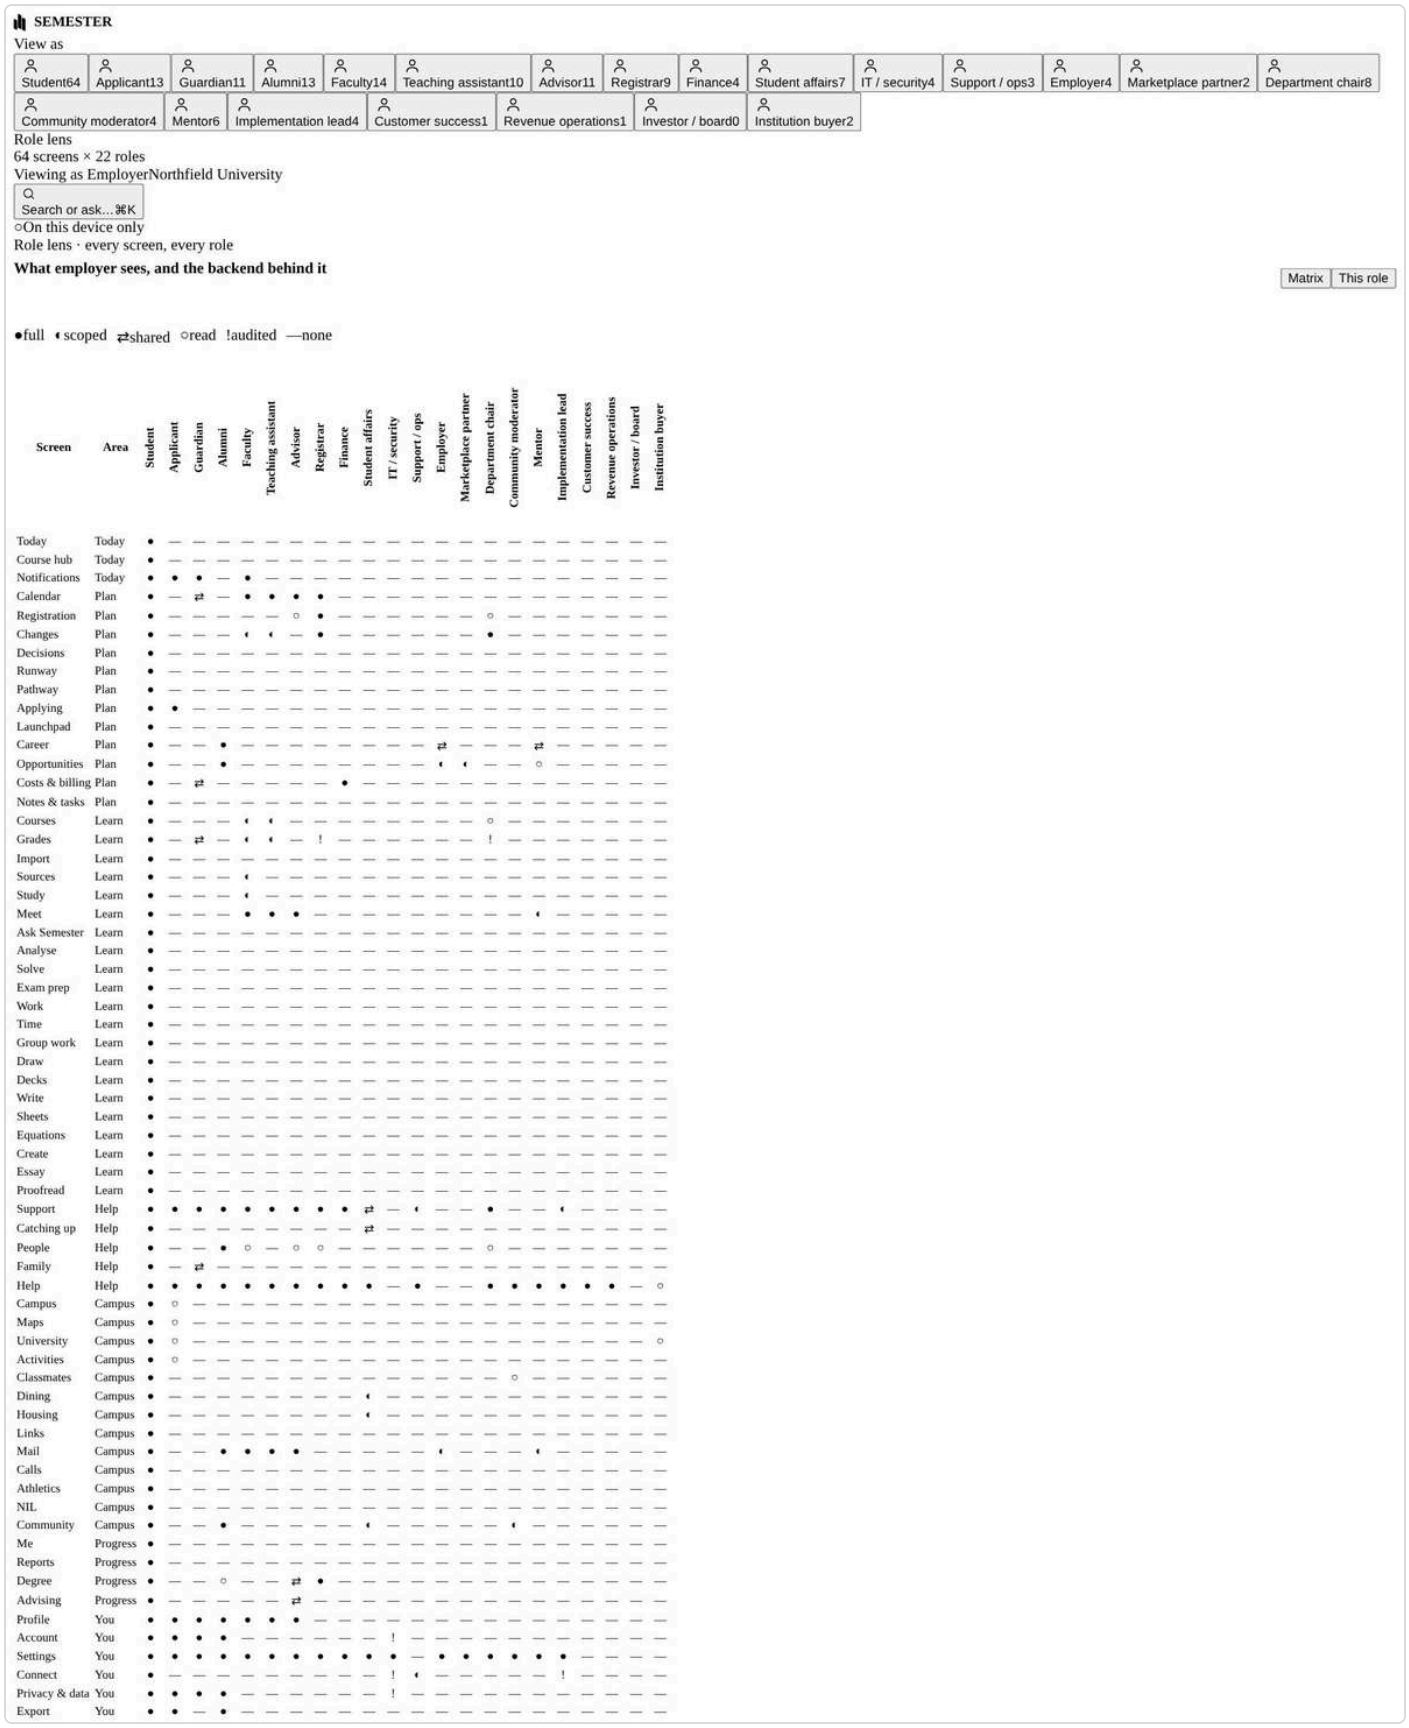

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Employer4

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Marketplace partnerNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What marketplace partner sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Marketplace partner2

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Department chairNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What department chair sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Department chair8

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Community moderatorNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What community moderator sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Community moderator4

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as MentorNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What mentor sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Mentor6

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Implementation leadNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What implementation lead sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Implementation lead4

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Customer successNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What customer success sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Customer success1

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Revenue operationsNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What revenue operations sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Revenue operations1

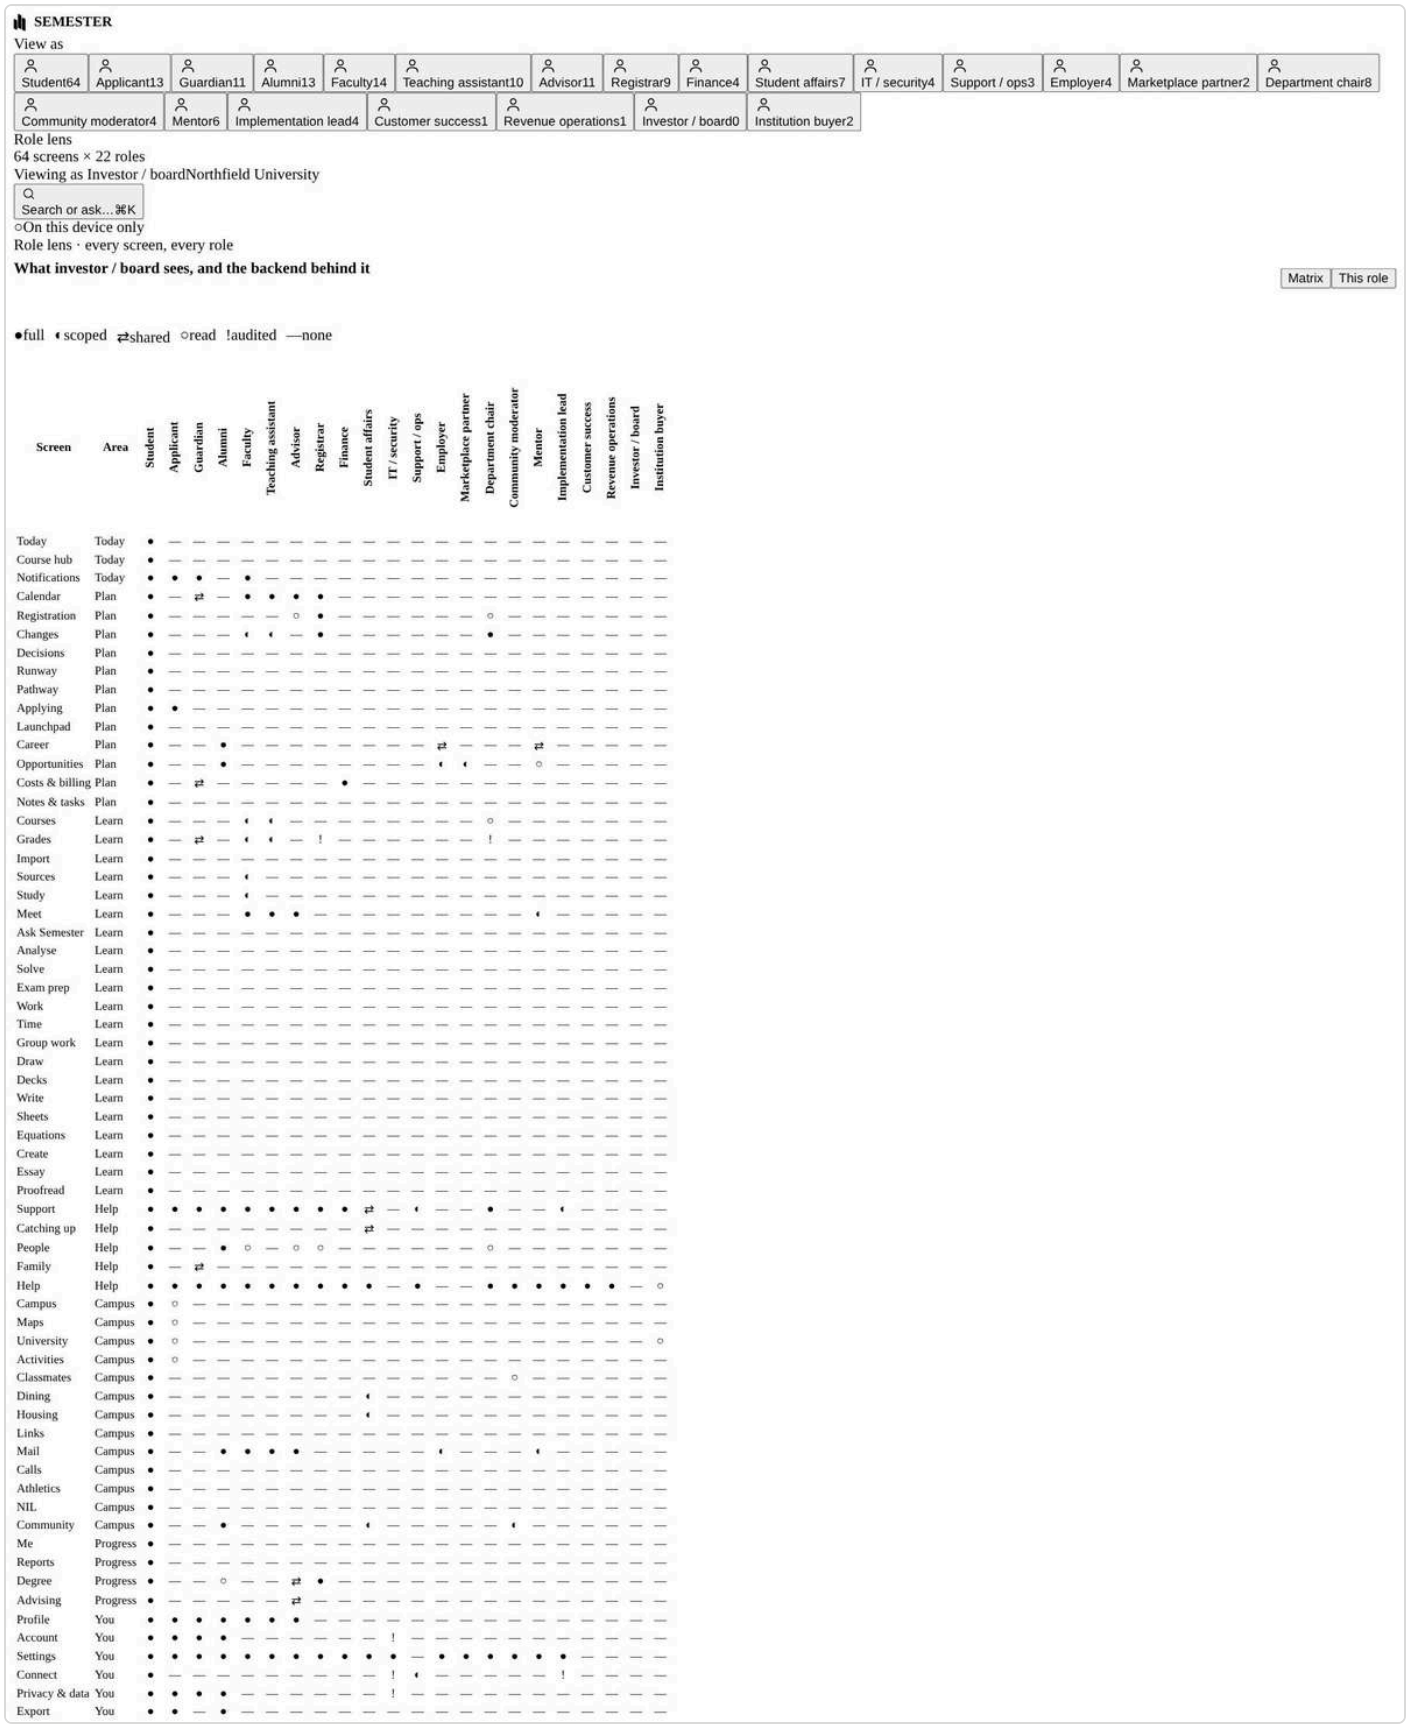

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	—	◖	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Investor / board0

SEMESTER

View as

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Role lens

64 screens × 22 roles

Viewing as Institution buyerNorthfield University

Search or ask… ⌘K

○On this device only

Role lens · every screen, every role

What institution buyer sees, and the backend behind it

Matrix | This role

●full ◖scoped ⇄shared ○read !audited —none

Screen	Area	Student	Applicant	Guardian	Alumni	Faculty	Teaching assistant	Advisor	Registrar	Finance	Student affairs	IT / security	Support / ops	Employer	Marketplace partner	Department chair	Community moderator	Mentor	Implementation lead	Customer success	Revenue operations	Investor / board	Institution buyer
Today	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Course hub	Today	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notifications	Today	●	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Calendar	Plan	●	—	⇄	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Registration	Plan	●	—	—	—	—	—	○	●	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Changes	Plan	●	—	—	—	◖	◖	—	●	—	—	—	—	—	—	●	—	—	—	—	—	—	—
Decisions	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Runway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pathway	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Applying	Plan	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Launchpad	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Career	Plan	●	—	—	●	—	—	—	—	—	—	—	—	⇄	—	—	—	⇄	—	—	—	—	—
Opportunities	Plan	●	—	—	●	—	—	—	—	—	—	—	—	◖	◖	—	—	○	—	—	—	—	—
Costs & billing	Plan	●	—	⇄	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Notes & tasks	Plan	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Courses	Learn	●	—	—	—	◖	◖	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Grades	Learn	●	—	⇄	—	◖	◖	—	!	—	—	—	—	—	—	!	—	—	—	—	—	—	—
Import	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sources	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Study	Learn	●	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Meet	Learn	●	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	◖	—	—	—	—	—
Ask Semester	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Analyse	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Solve	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exam prep	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Time	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Group work	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Draw	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Decks	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Write	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sheets	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Equations	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Create	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Essay	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Proofread	Learn	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Support	Help	●	●	●	●	●	●	●	●	●	⇄	—	◖	—	—	●	—	—	◖	—	—	—	—
Catching up	Help	●	—	—	—	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—
People	Help	●	—	—	●	○	—	○	○	—	—	—	—	—	—	○	—	—	—	—	—	—	—
Family	Help	●	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Help	Help	●	●	●	●	●	●	●	●	●	●	—	●	—	—	●	●	●	●	●	●	—	○
Campus	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Maps	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
University	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○
Activities	Campus	●	○	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Classmates	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	○	—	—	—	—	—	—
Dining	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Housing	Campus	●	—	—	—	—	—	—	—	—	◖	—	—	—	—	—	—	—	—	—	—	—	—
Links	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mail	Campus	●	—	—	●	●	●	●	—	—	—	—	◖	—	—	—	—	◖	—	—	—	—	—
Calls	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Athletics	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
NIL	Campus	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Community	Campus	●	—	—	●	—	—	—	—	—	◖	—	—	—	—	—	—	◖	—	—	—	—	—
Me	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Reports	Progress	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Degree	Progress	●	—	—	○	—	—	⇄	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Advising	Progress	●	—	—	—	—	—	⇄	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Profile	You	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Account	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Settings	You	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●	●	●	—	—	—	—
Connect	You	●	—	—	—	—	—	—	—	—	—	!	◖	—	—	—	—	—	!	—	—	—	—	—
Privacy & data	You	●	●	●	●	—	—	—	—	—	—	!	—	—	—	—	—	—	—	—	—	—	—
Export	You	●	●	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Institution buyer2

SEMESTER
View as
Student64
Applicant13
Guardian11
Alumni13
Faculty14
Teaching assistant10
Advisor11
Registrar9
Finance4
Student affairs7
IT / security4
Support / ops3
Employer4
Marketplace partner2
Department chair8
Community moderator4
Mentor6
Implementation lead4
Customer success1
Revenue operations1
Investor / board0
Institution buyer2
Role lens
64 screens × 22 roles
Viewing as Institution buyerNorthfield University
Search or ask… ⌘K
○On this device only
Role lens · every screen, every role
What institution buyer sees, and the backend behind it
Matrix
This role
●full ◖scoped ⇄shared ○read !audited —none
Today
0 of 3
Today— none
Course hub— none
Notifications— none
Plan
0 of 12
Calendar— none
Registration— none
Changes— none
Decisions— none
Runway— none
Pathway— none
Applying— none
Launchpad— none
Career— none
Opportunities— none
Costs & billing— none
Notes & tasks— none
Learn
0 of 21
Courses— none
Grades— none
Import— none
Sources— none
Study— none
Meet— none
Ask Semester— none
Analyse— none
Solve— none
Exam prep— none
Work— none
Time— none
Group work— none
Draw— none
Decks— none
Write— none
Sheets— none
Equations— none
Create— none
Essay— none
Proofread— none
Help
1 of 5
Support— none
Catching up— none
People— none
Family— none
Help○ read
Campus
1 of 13
Campus— none
Maps— none
University○ read
Activities— none
Classmates— none
Dining— none
Housing— none
Links— none
Mail— none
Calls— none
Athletics— none
NIL— none
Community— none
Progress
0 of 4
Me— none
Reports— none
Degree— none
Advising— none
You
0 of 6
Profile— none
Account— none
Settings— none
Connect— none
Privacy & data— none
Export— none
Progress · Degree
How it renders for this role
✕Not available — the screen does not render for this role. Company roles (investor, customer success, revenue ops) work in the company consoles — investor portal, business workspace, /ops — with aggregate data only, never student records
Degree doesn’t render
The route is hidden from navigation and the server returns no rows for this role. Deep links show a permission notice.
Backend
Sources
SIS degree audit · Semester
Tables
degree_audit, scenarios, metrics
Row-level security
owner; advisor via active share
API
RPC: degree_progress()
Role filter
no policy grants select
ModelDesign-level map from the navigation areas and role kits — not read from every migration. Verify against supabase/migrations before relying on it.

This role

This role › Course hub— none

This role › Notifications— none

This role › Registration— none

This role › Changes— none

This role › Decisions— none

This role › Runway— none

This role › Pathway— none

This role › Applying— none

This role › Launchpad— none

This role › Career— none

This role › Opportunities— none

This role › Costs & billing— none

This role › Notes & tasks— none

This role › Grades— none

This role › Import— none

This role › Sources— none

This role › Study— none

This role › Meet— none

This role › Ask Semester— none

This role › Analyse— none

This role › Solve— none

This role › Exam prep— none

This role › Work— none

ATLAS

16 screens.

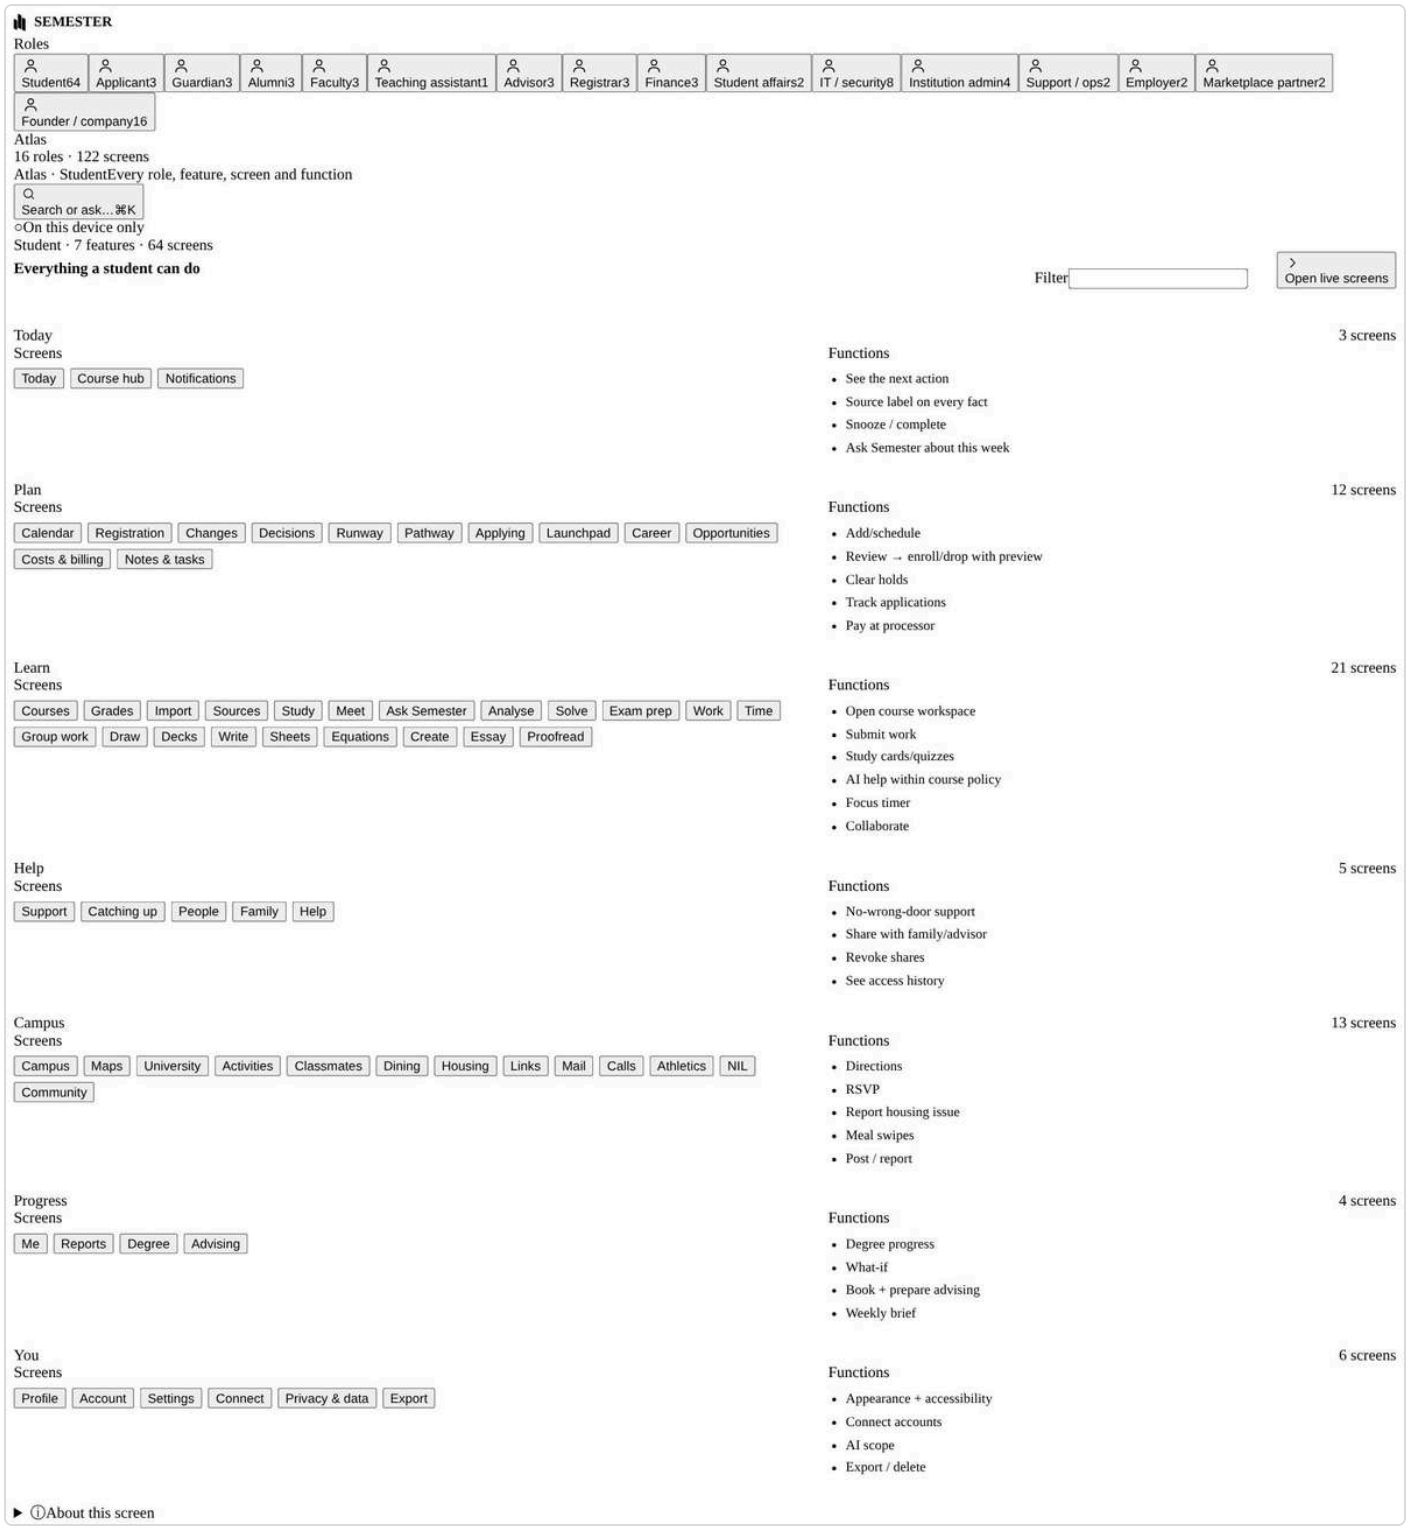

Opening view

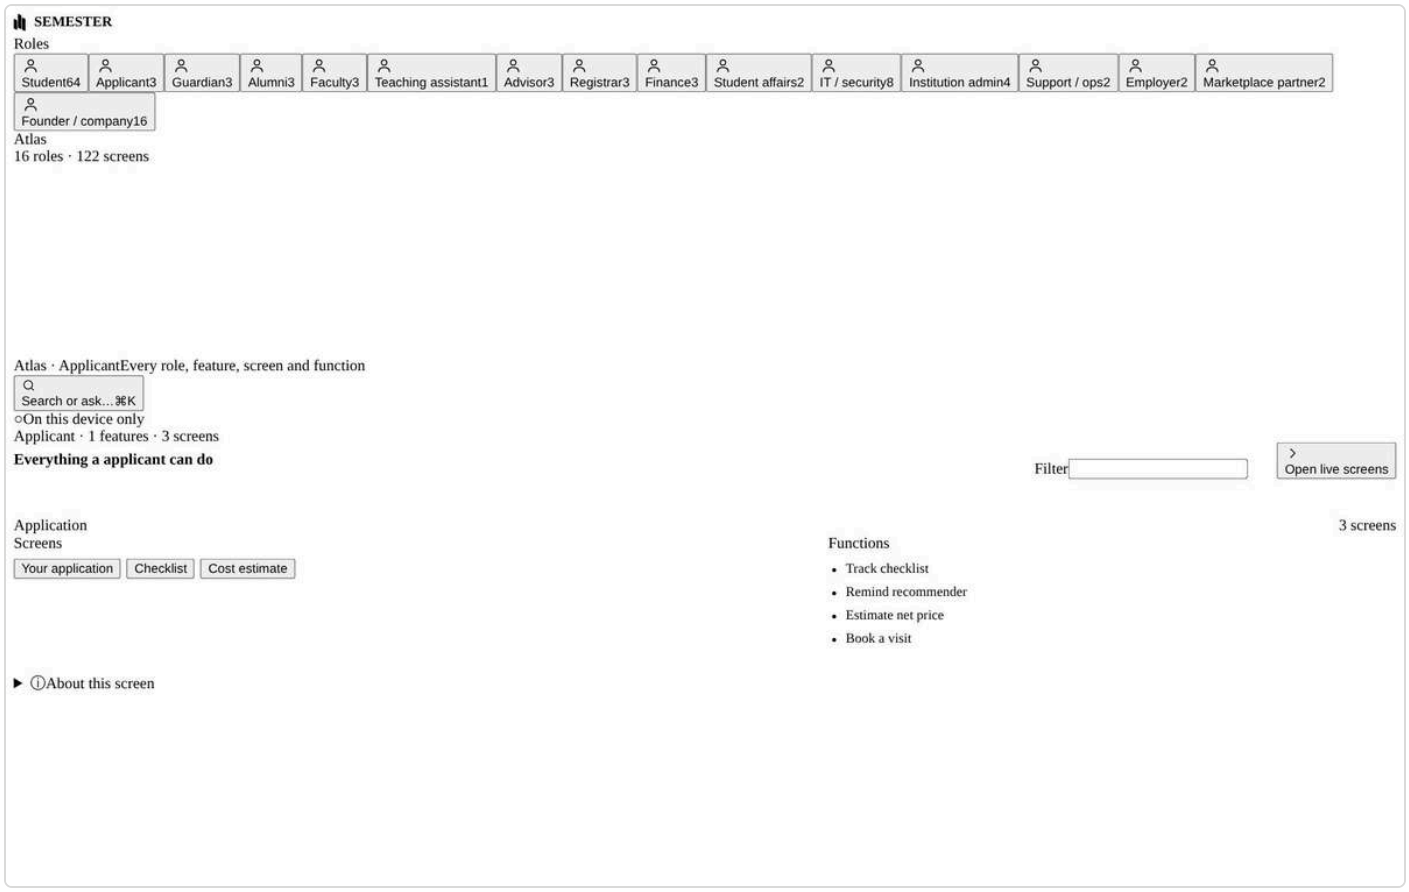
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · ApplicantEvery role, feature, screen and function
Search or ask…⌘K
On this device only
Applicant · 1 features · 3 screens
Everything a applicant can do
Filter
Open live screens
Application
3 screens
Screens
Your application
Checklist
Cost estimate
Functions
Track checklist
Remind recommender
Estimate net price
Book a visit
About this screen

Applicant3

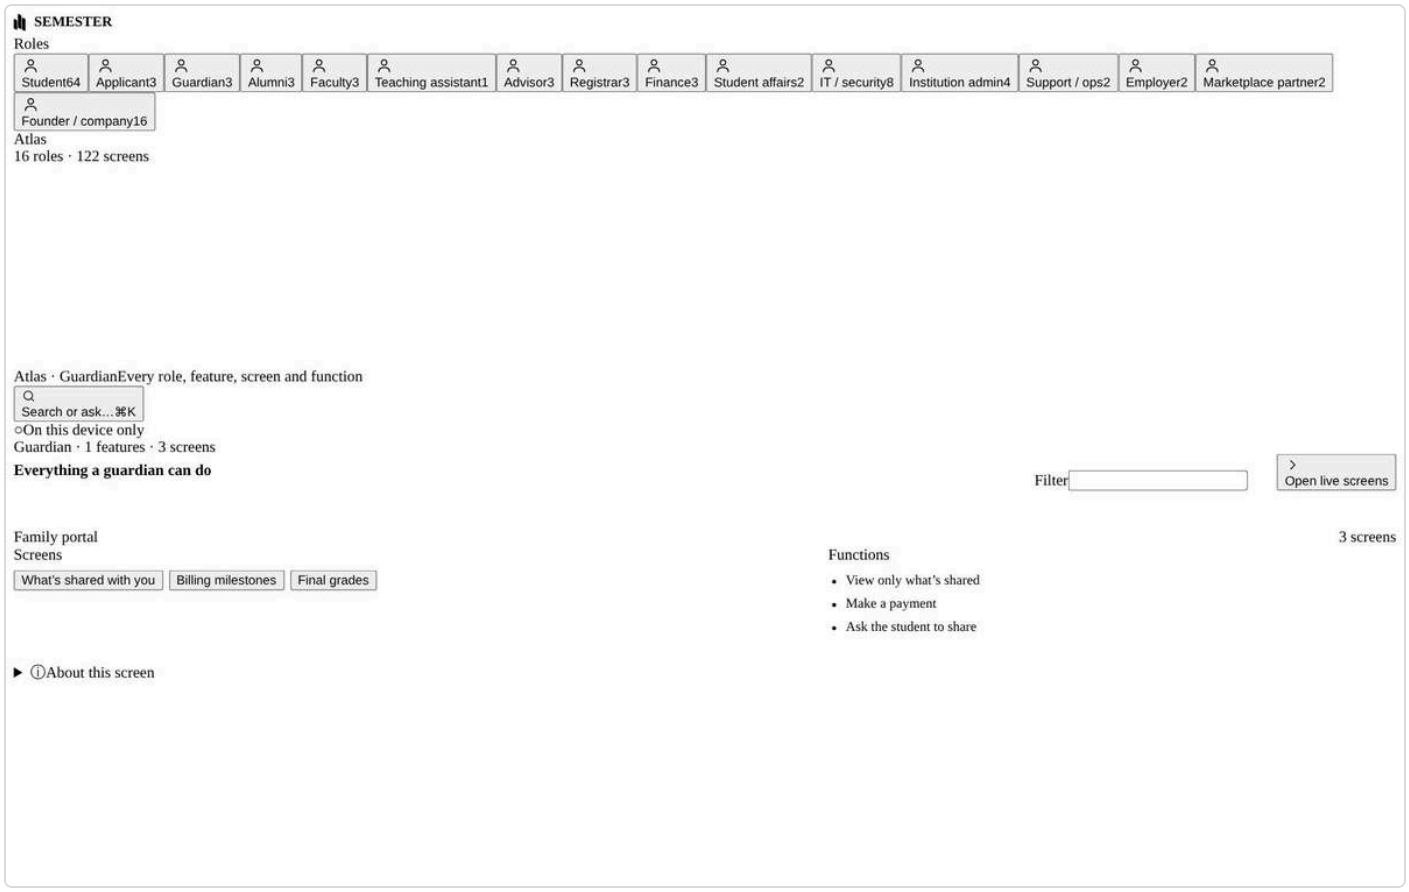
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · GuardianEvery role, feature, screen and function
Search or ask… ⌘K
On this device only
Guardian · 1 features · 3 screens
Everything a guardian can do
Filter
Open live screens
Family portal
3 screens
Screens
What's shared with you
Billing milestones
Final grades
Functions
View only what's shared
Make a payment
Ask the student to share
About this screen

Guardian3

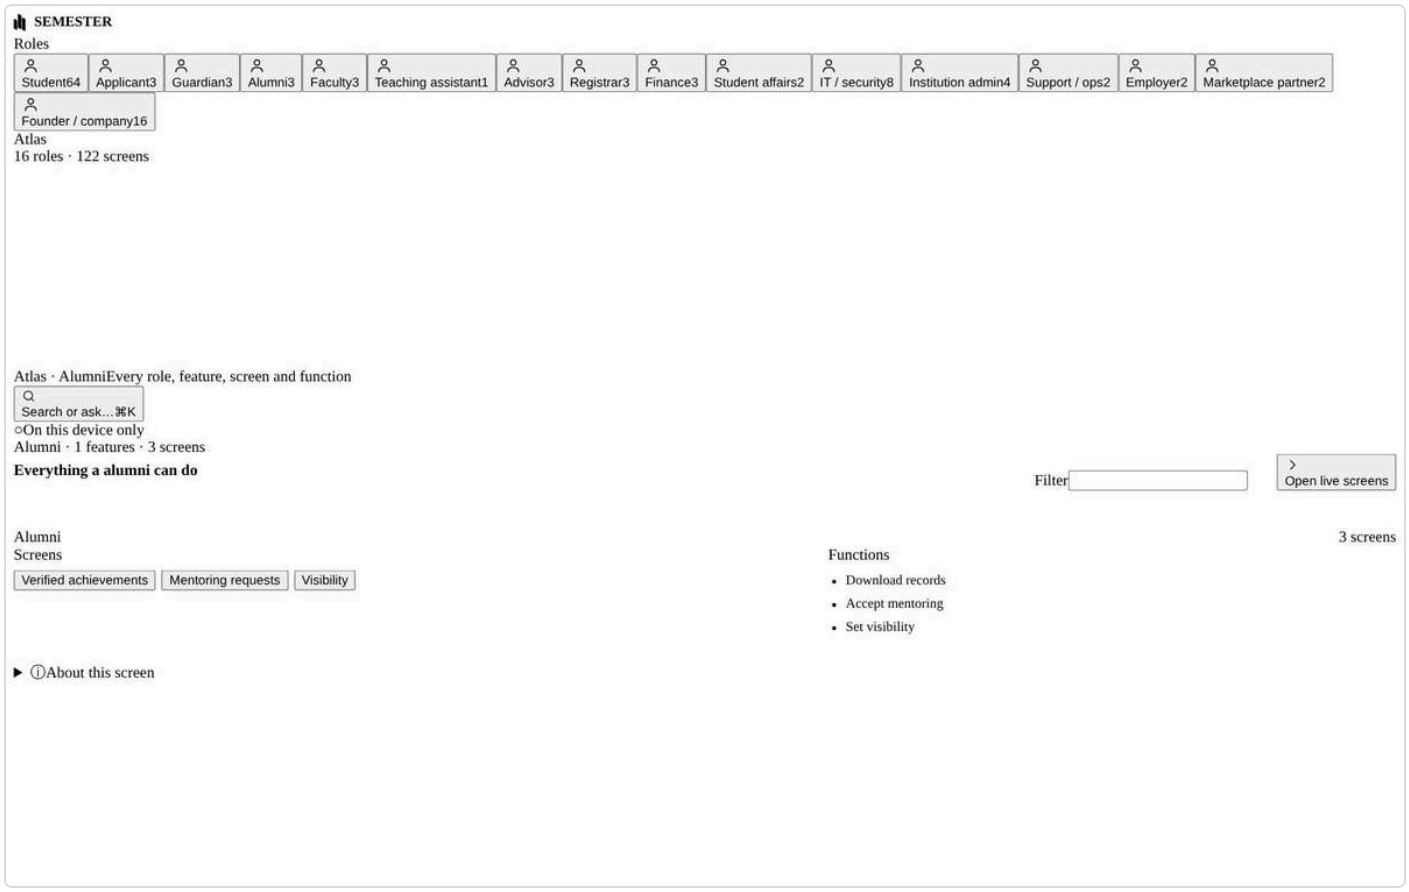
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · AlumniEvery role, feature, screen and function
Search or ask… ⌘K
On this device only
Alumni · 1 features · 3 screens
Everything a alumni can do
Filter
Open live screens
Alumni
3 screens
Screens
Verified achievements
Mentoring requests
Visibility
Functions
Download records
Accept mentoring
Set visibility
About this screen

Alumni3

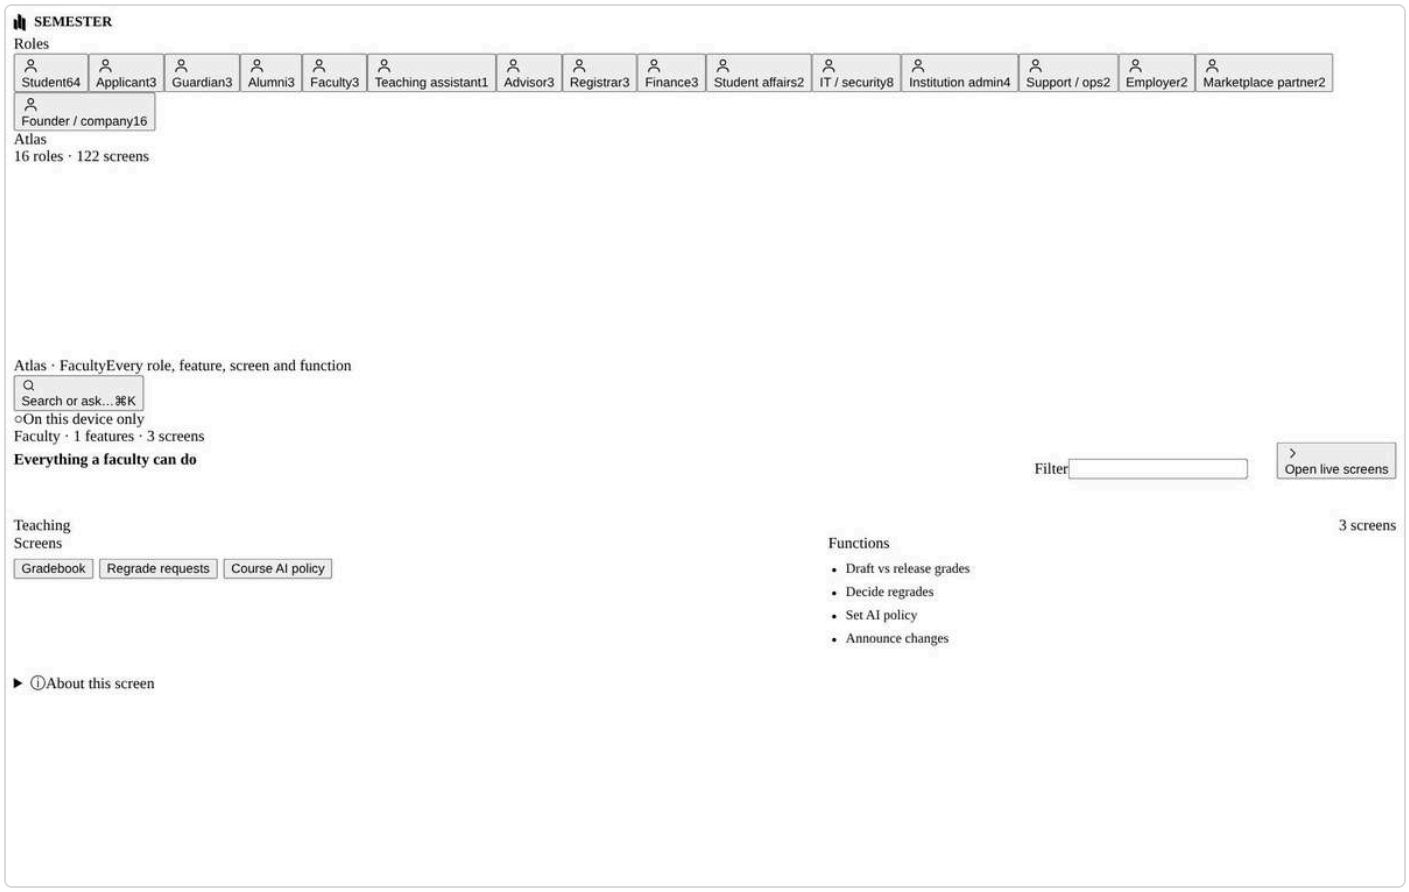
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · FacultyEvery role, feature, screen and function
Search or ask...⌘K
○On this device only
Faculty · 1 features · 3 screens
Everything a faculty can do
Filter
Open live screens
Teaching
3 screens
Screens
Gradebook
Regrade requests
Course AI policy
Functions
Draft vs release grades
Decide regrades
Set AI policy
Announce changes
▶ ⓘAbout this screen

Faculty3

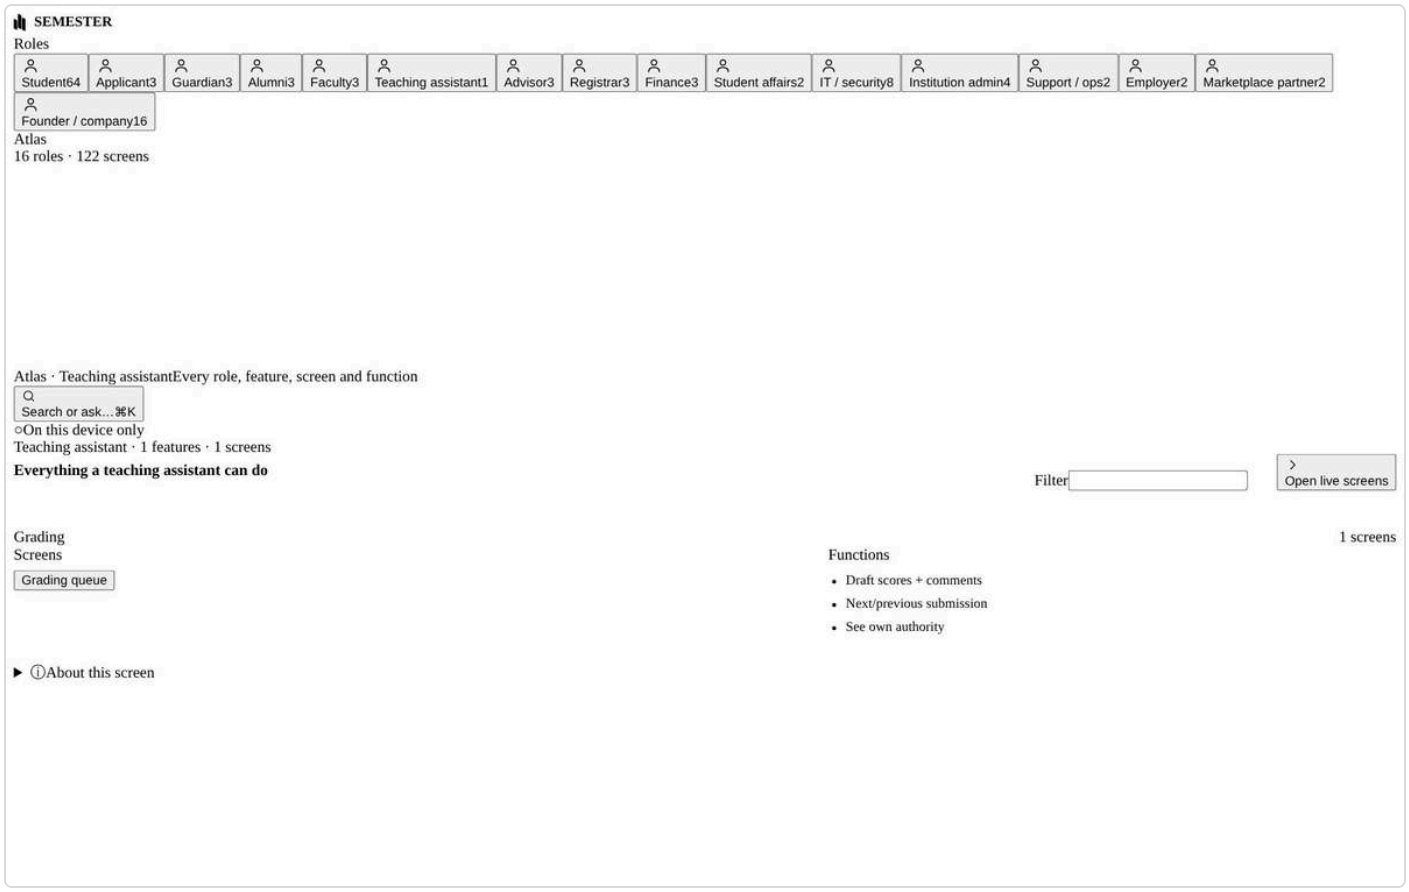

Teaching assistant1

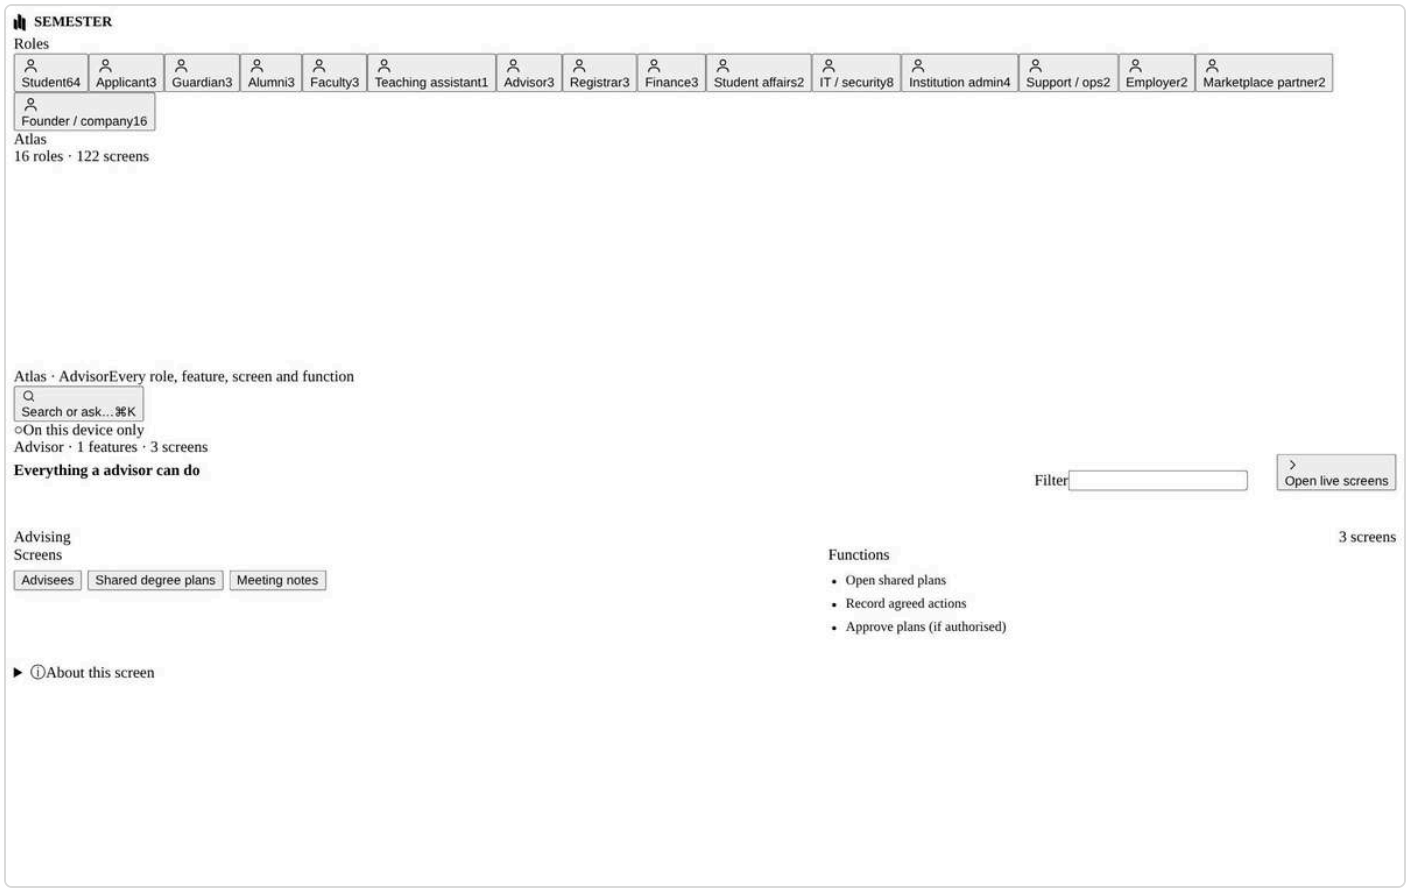
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · AdvisorEvery role, feature, screen and function
Search or ask… ⌘K
On this device only
Advisor · 1 features · 3 screens
Everything a advisor can do
Filter
Open live screens
Advising
3 screens
Screens
Advisees
Shared degree plans
Meeting notes
Functions
Open shared plans
Record agreed actions
Approve plans (if authorised)
About this screen

Advisor3

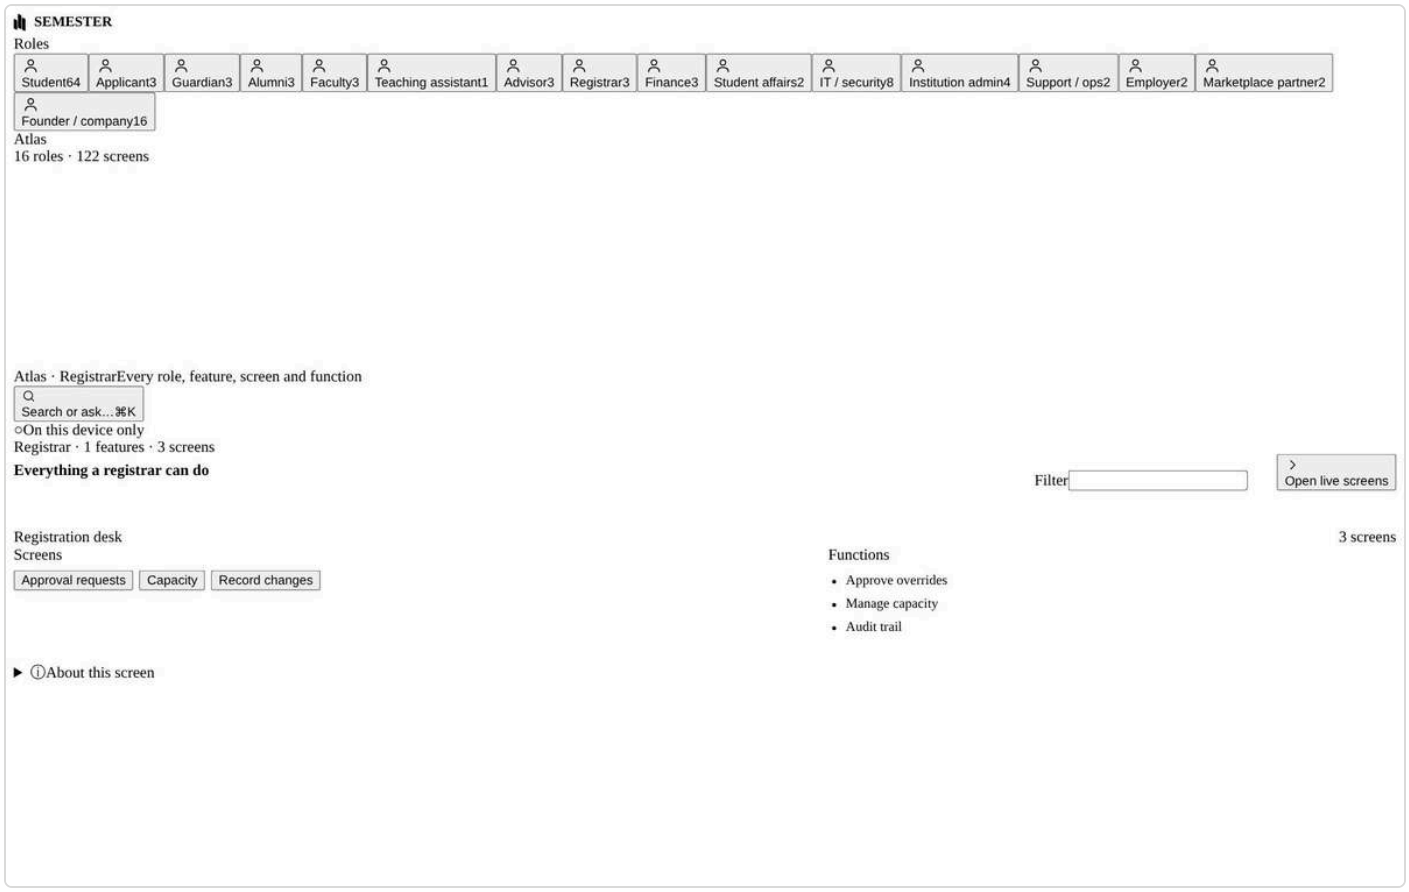
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · RegistrarEvery role, feature, screen and function
Search or ask… ⌘K
On this device only
Registrar · 1 features · 3 screens
Everything a registrar can do
Filter
Open live screens
Registration desk
3 screens
Screens
Approval requests
Capacity
Record changes
Functions
Approve overrides
Manage capacity
Audit trail
About this screen

Registrar3

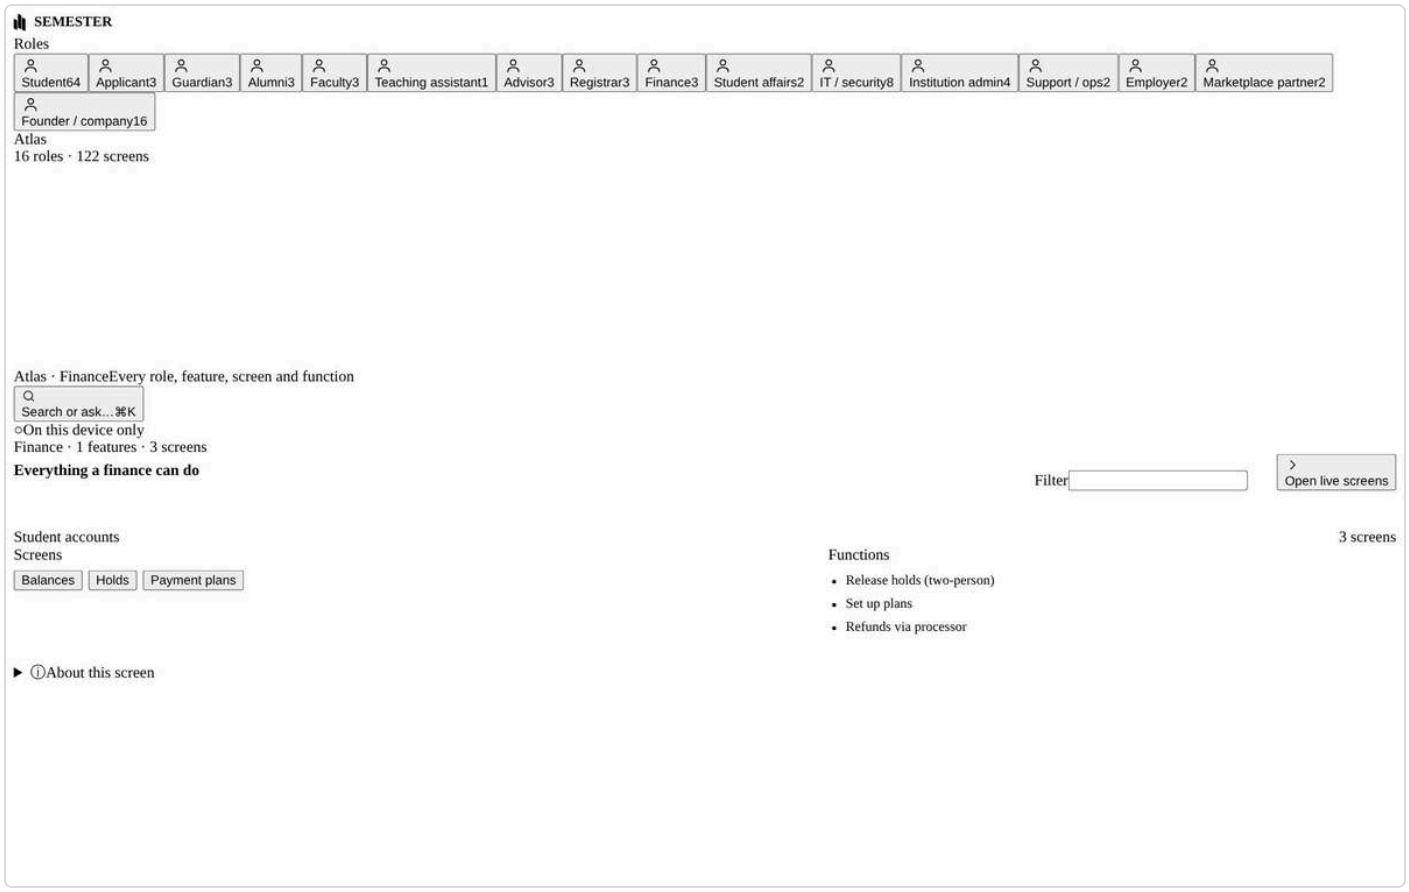
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · FinanceEvery role, feature, screen and function
Search or ask… ⌘K
On this device only
Finance · 1 features · 3 screens
Everything a finance can do
Filter
Open live screens
Student accounts
3 screens
Screens
Balances
Holds
Payment plans
Functions
Release holds (two-person)
Set up plans
Refunds via processor
About this screen

Finance3

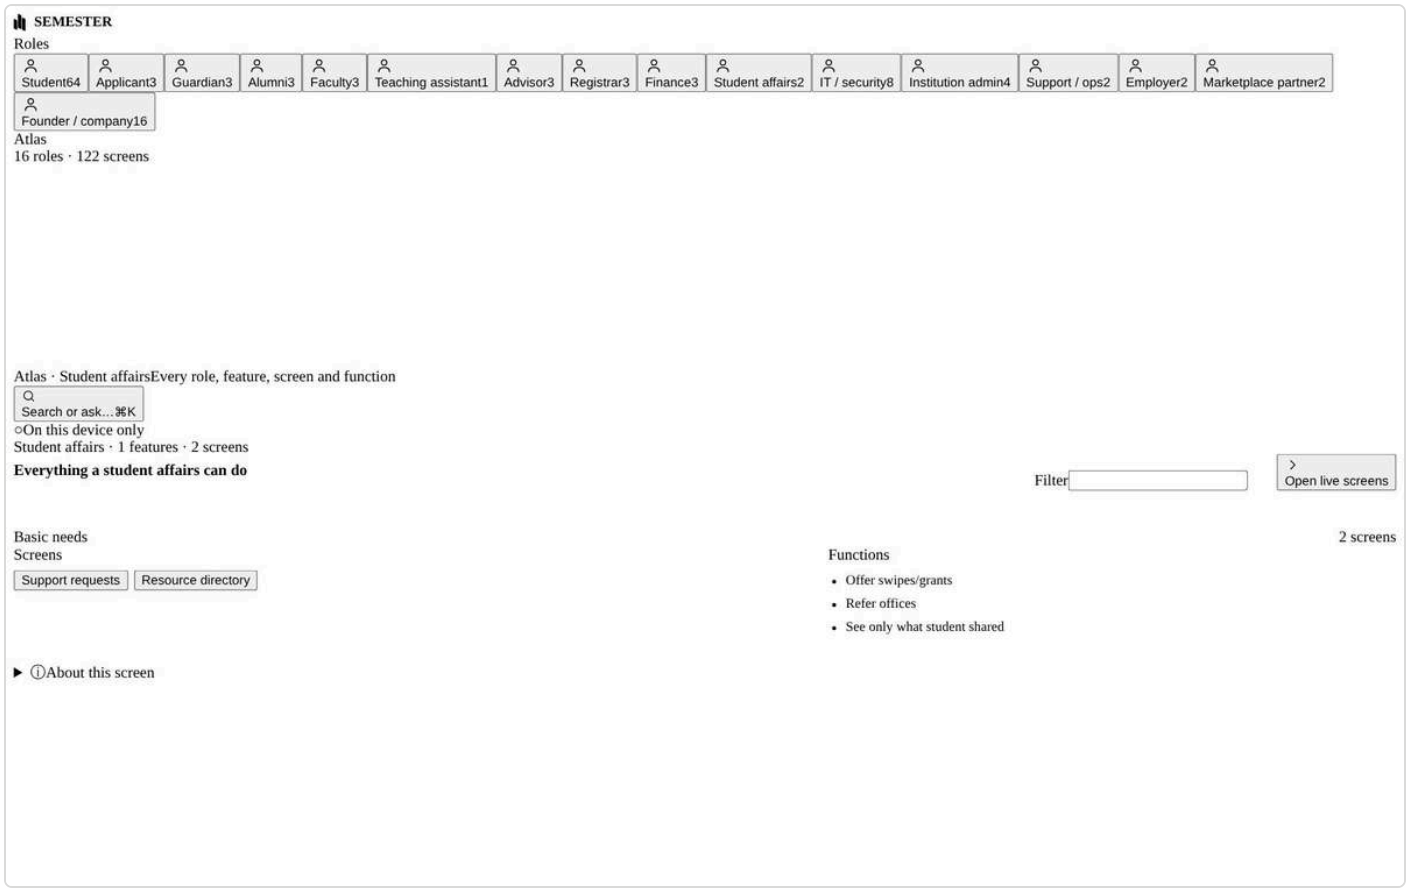

Student affairs2

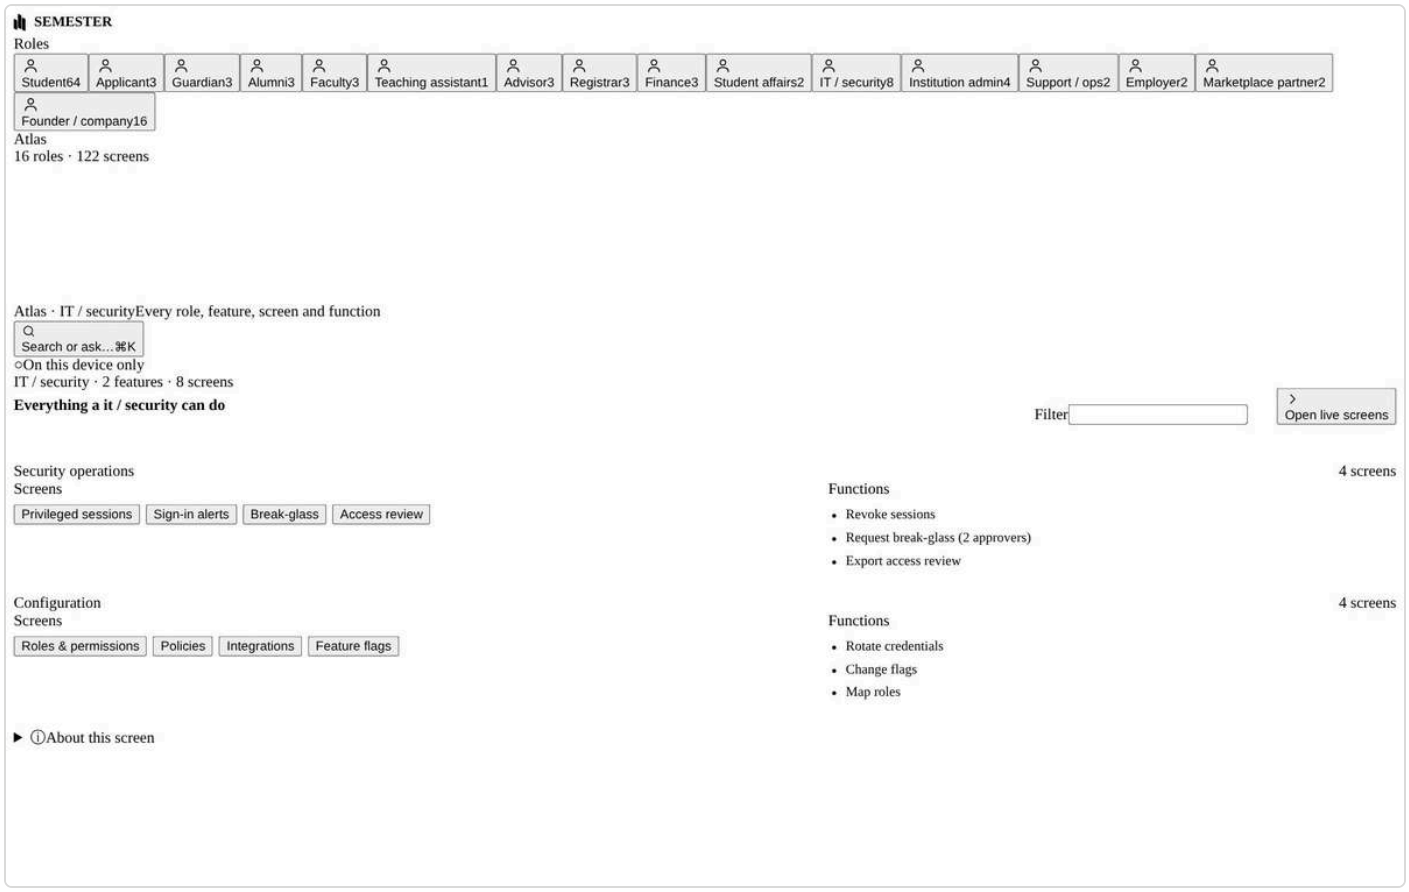

IT / security8

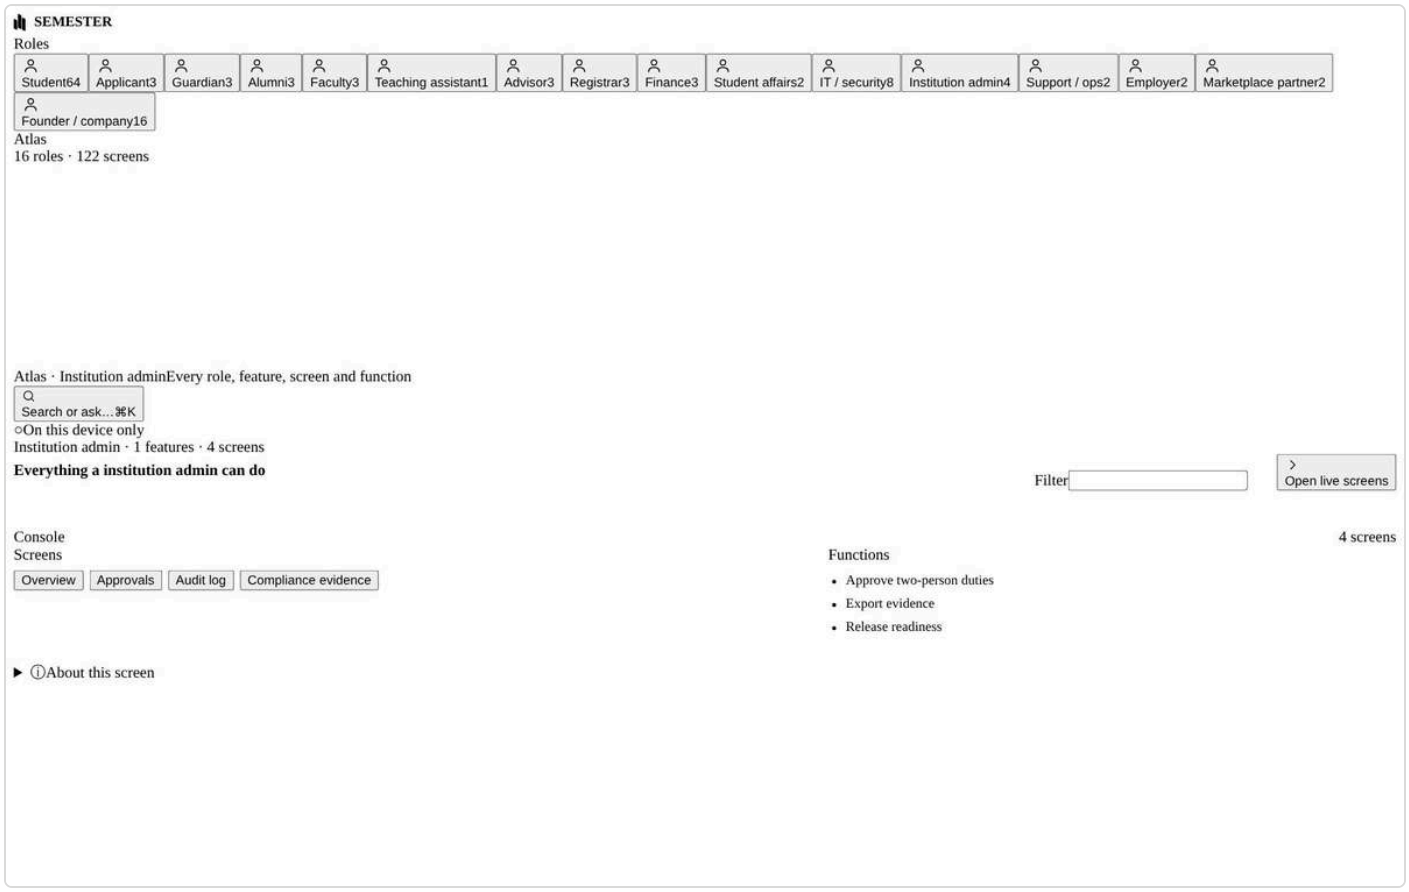

Institution admin4

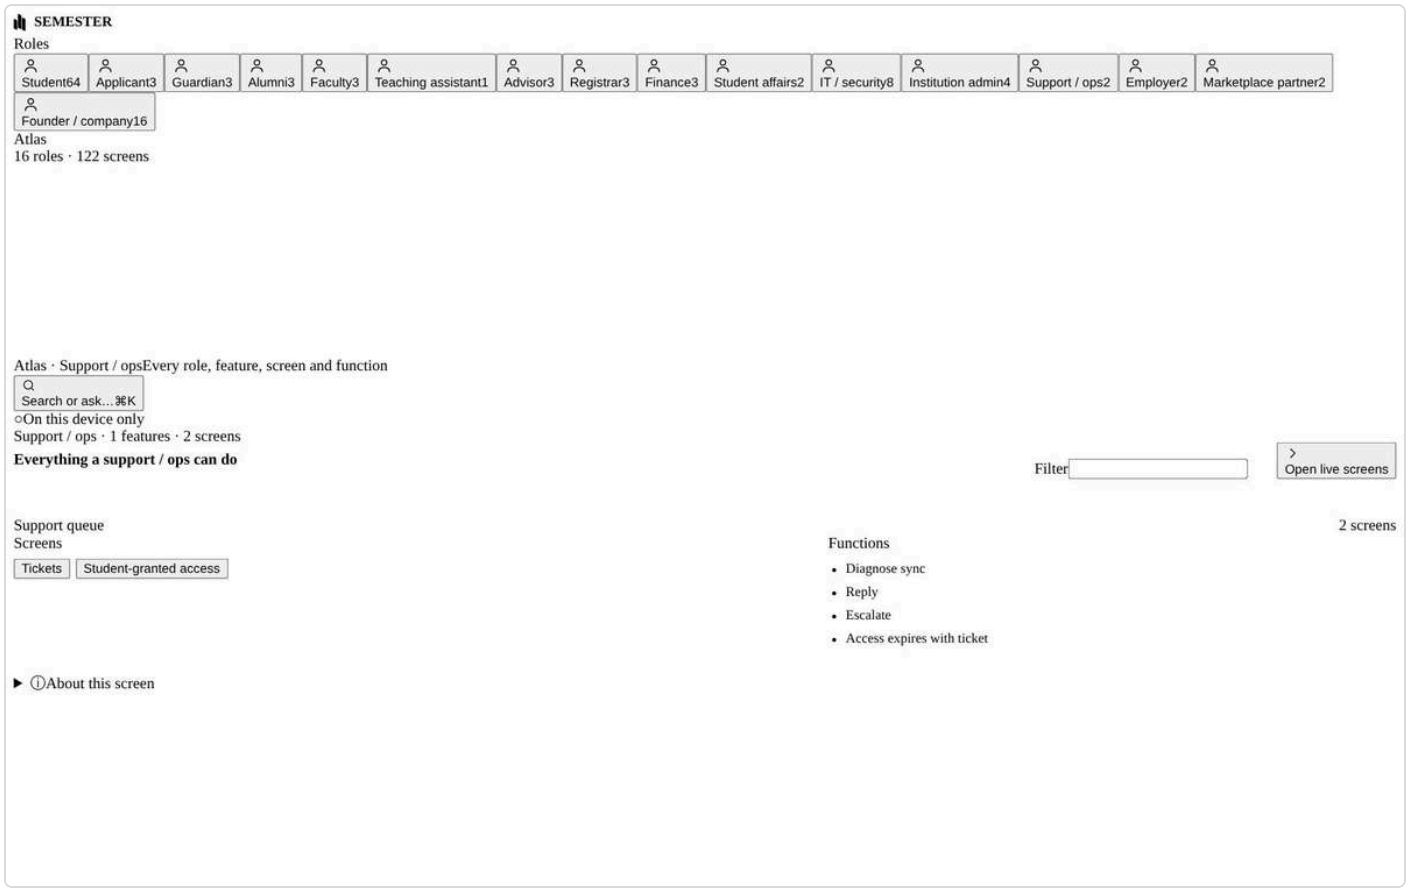

Support / ops2

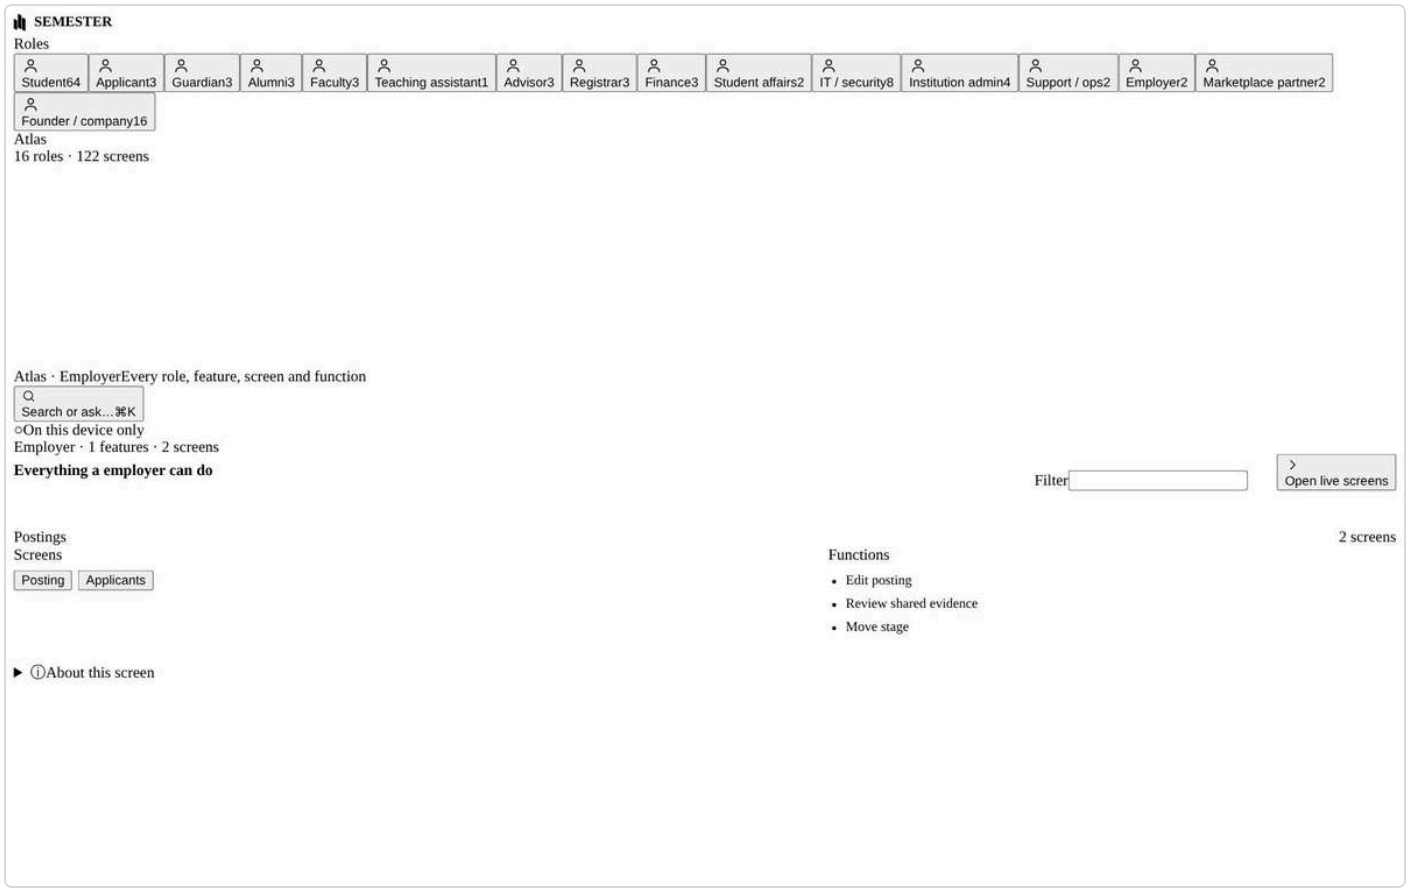
SEMESTER
Roles
Student64
Applicant3
Guardian3
Alumni3
Faculty3
Teaching assistant1
Advisor3
Registrar3
Finance3
Student affairs2
IT / security8
Institution admin4
Support / ops2
Employer2
Marketplace partner2
Founder / company16
Atlas
16 roles · 122 screens
Atlas · EmployerEvery role, feature, screen and function
Search or ask… ⌘K
○On this device only
Employer · 1 features · 2 screens
Everything a employer can do
Filter
Open live screens
Postings
2 screens
Screens
Posting
Applicants
Functions
Edit posting
Review shared evidence
Move stage
▶ ⓘAbout this screen

Employer2

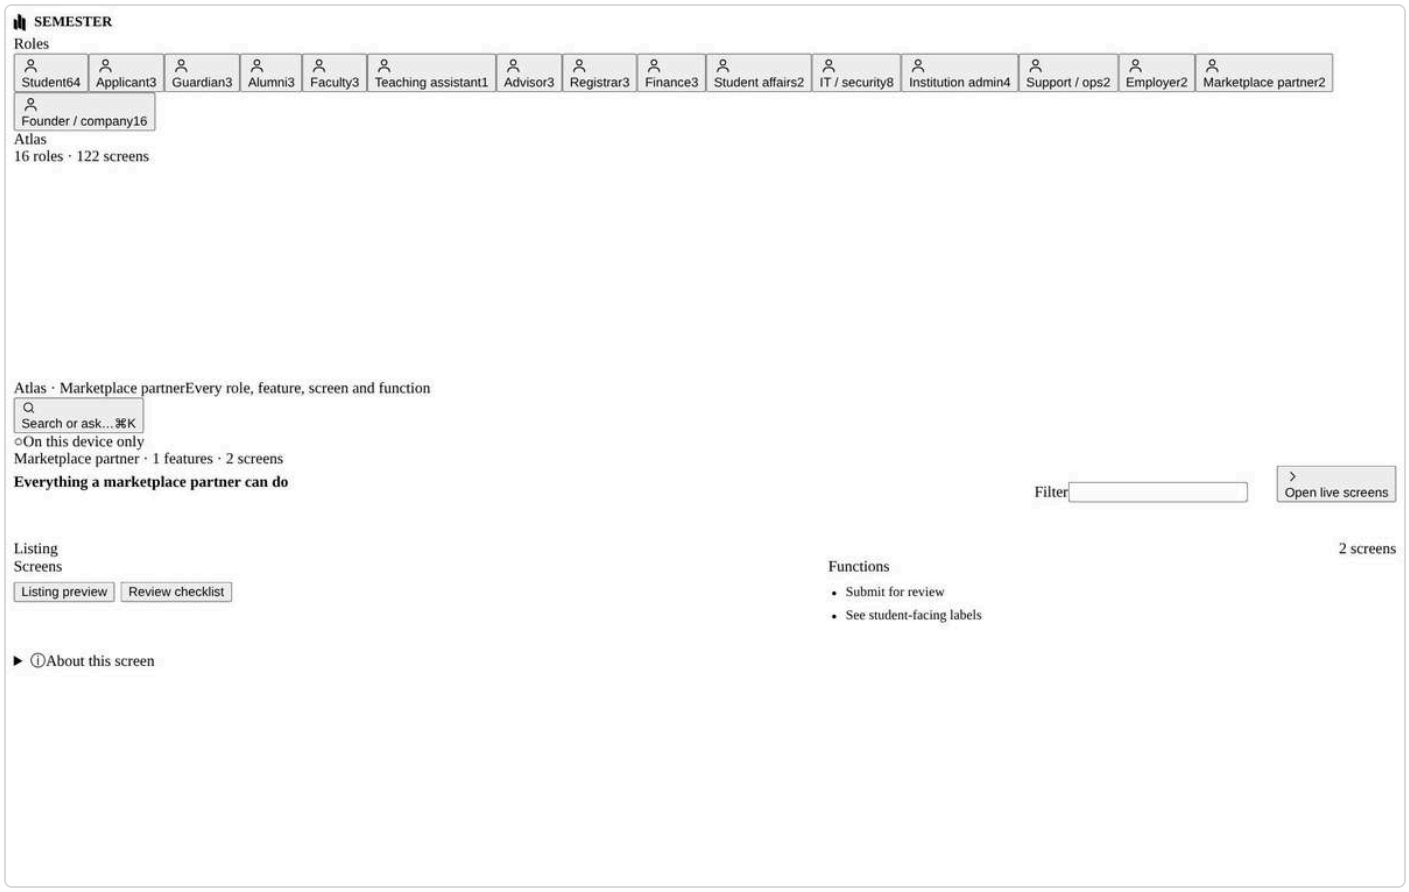

Marketplace partner2

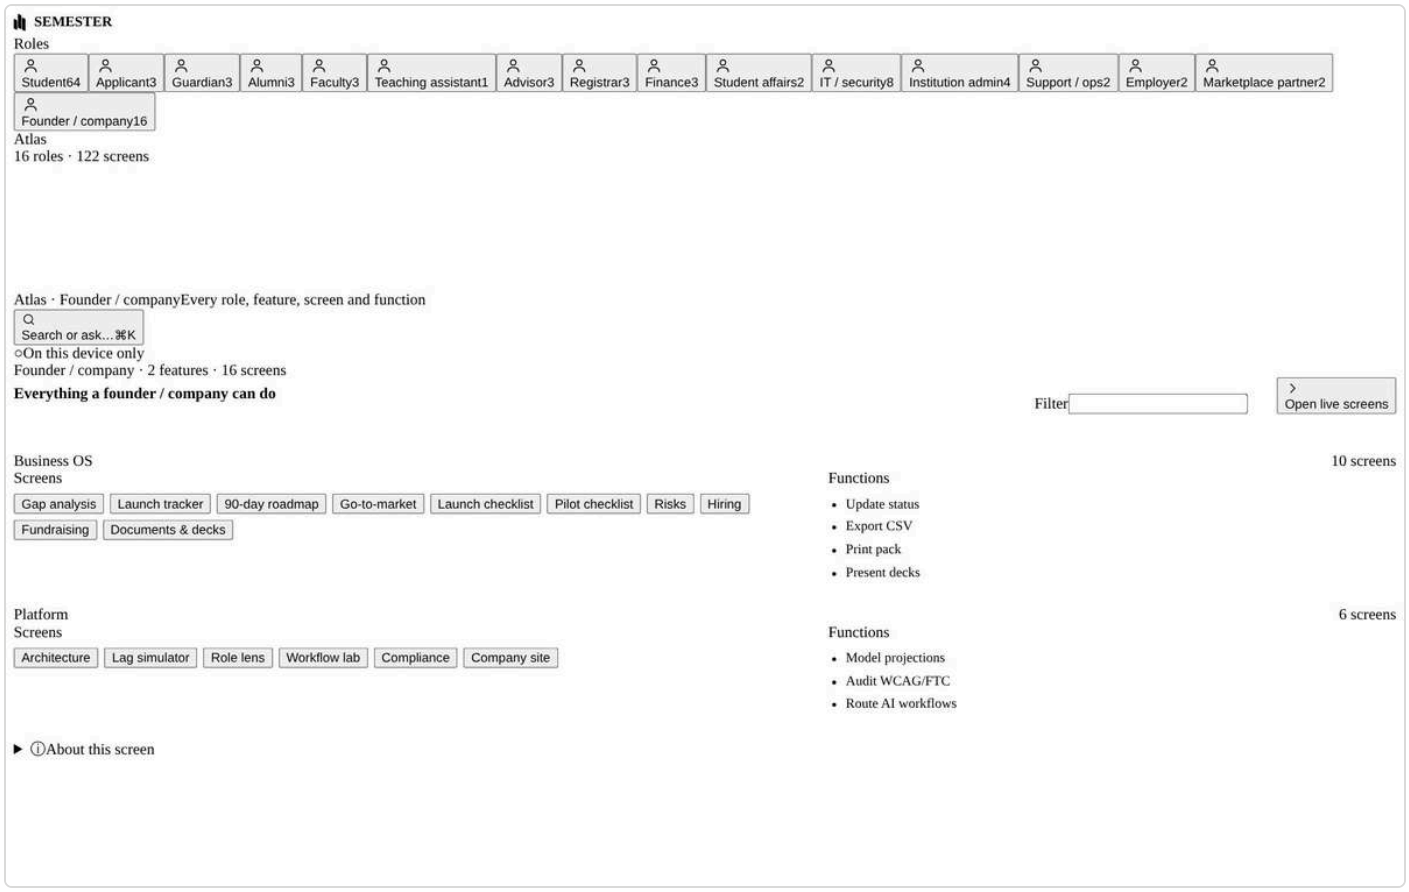

Founder / company16

Master catalog

Searchable catalog of systems, screens and workflows. **9 screens.**

Opening view

SEMESTER

Overview | Roles · 51 | Screens · 673 | Workflows · 319 | Systems · 88 | Education graph | Documents · 82 | Gap register | Claude Code prompt

Master catalog
Evidence-based status
Master catalog · Roles · 51Semester — everything

Search or ask… ⌘K

○On this device only
Master catalog

Roles

Search

Export full catalog (CSV)

Roles

Role	Side	What they need from Semester
Prospective student	Learner	Discover programs, understand fit, explore value, apply or sign up
Applicant	Learner	Track admissions tasks, documents, decisions, aid and onboarding
Student	Learner	Daily workspace, learning, planning, actions, support, campus life, career
Transfer student	Learner	Credit evaluation, articulation, path comparison, onboarding
Online student	Learner	Remote learning, time-zone-aware schedule, support, community, career
Adult learner	Learner	Flexible plans, credential tracking, employer links, financial planning
Graduate student	Learner	Research, milestones, advisor collaboration, funding, career
International student	Learner	Visa/immigration handoffs, orientation, support, compliance notifications
Student athlete	Learner	Academic plan, permitted support sharing, travel and eligibility-aware workflows
Student worker	Learner	Schedule, payroll/employment handoffs, workload planning
Student parent/caregiver	Learner	Flexible planning, childcare/resource handoffs, support coordination
Alumni	Learner	Credentials, lifelong learning, mentoring, opportunities, network
Family/guardian	Partner / community	Student-consented support, payment/support handoffs, approved summaries
Faculty/instructor	Institution	Course Studio, course policy, learning content, assessment, gradebook
Teaching assistant	Institution	Scoped course support, grading/feedback, office hours, course content
Department chair	Institution	Curriculum, faculty/course operations, outcomes, demand, approvals
Program director	Institution	Program path, requirements, outcomes, advising, retention, curriculum
Academic advisor	Institution	Student path, action completion, check-ins, referrals, planning
Student success staff	Institution	Caseload, interventions, campaigns, referrals, outcomes
Registrar staff	Institution	Terms, catalog, sections, registration, holds, overrides, records
Financial aid staff	Institution	Aid handoffs, required actions, policy-guided communication
Student accounts staff	Institution	Balances, payment plans, reconciliation, holds, controlled account actions
Admissions staff	Institution	Prospects, applicants, campaigns, recruitment conversion
Housing staff	Institution	Assignments, requests, service handoffs, housing policy workflows
Dining/campus-card staff	Institution	Locations, plans, orders, balances, service operations
Library staff	Institution	Resources, research guidance, discovery, course reserves
Accessibility/disability services	Institution	Accommodation workflows, consented access, service plans
Counseling/wellbeing staff	Institution	Safe referral and resource handoffs; no unnecessary broad access
Career staff	Institution	Opportunities, employer relations, appointments, skills, outcomes
Employer	Partner / community	Approved talent discovery, postings, internships, verified evidence
Mentor	Partner / community	Mentoring offers, requests, schedule, scoped student interaction
Peer mentor	Partner / community	Consent-based peer support, program workflows, supervision
Campus safety staff	Institution	Institution-authorized emergency/safety handoffs only
Community moderator	Partner / community	Content reports, moderation queue, appeals, safety escalation
Student organization leader	Learner	Organization setup, membership, events, communications, finance handoffs
Institutional IT	Institution	SSO, SCIM, integrations, security, tenant configuration
Institutional security/privacy	Institution	Security review, data flows, access, policy, evidence, incidents
Institutional executive	Institution	Outcomes, adoption, risk, operational health, strategic decisions
Institutional auditor	Institution	Scoped evidence, audit history, compliance proof
Semester support operator	Company	Ticket queue, time-limited support access, incident escalation
Semester implementation lead	Company	Tenant setup, integrations, training, rollout, launch readiness
Semester customer-success manager	Company	Health, QBRs, renewals, expansion, pilot conversion
Semester revenue operations	Company	Accounts, quotes, contracts, plans, pricing exceptions, forecast
Semester finance operator	Company	Invoices, collections, dunning, financial reporting, approved adjustments
Semester security operator	Company	Access reviews, security evidence, incidents, vulnerabilities
Semester privacy/legal operator	Company	Data requests, legal holds, retention, contracts, claims
Semester product operator	Company	Roadmap, feature flags, beta, feedback, release evidence
Semester executive	Company	Company health, risk, strategy, major approvals, board reporting
Developer/partner	Company	APIs, sandbox, integration, marketplace publishing, support
Investor / board member	Company	Company health, runway, pipeline, risk, board reporting — read-only, aggregate, no student data
Institution buyer (VP / CIO / procurement)	Institution	Pilot scope, trust evidence, pricing, contract and renewal decision

Roles · 51

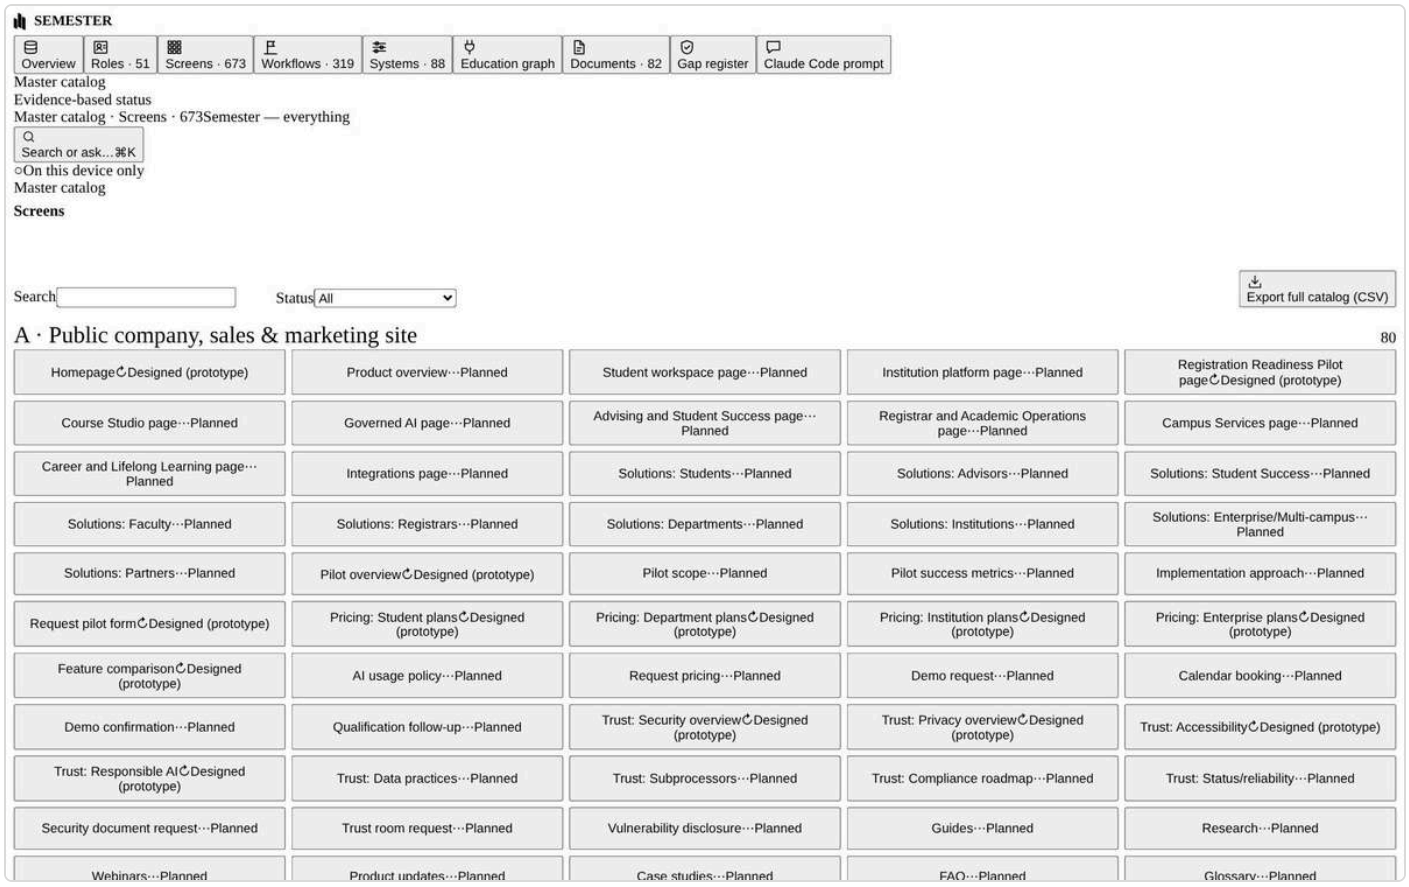
SEMESTER
Overview
Roles · 51
Screens · 673
Workflows · 319
Systems · 88
Education graph
Documents · 82
Gap register
Claude Code prompt
Master catalog
Evidence-based status
Master catalog · Screens · 673Semester — everything
Search or ask… ⌘K
On this device only
Master catalog
Screens
Search
Status All
Export full catalog (CSV)
A · Public company, sales & marketing site
80
Homepage Designed (prototype)
Product overview···Planned
Student workspace page···Planned
Institution platform page···Planned
Registration Readiness Pilot page Designed (prototype)
Course Studio page···Planned
Governed AI page···Planned
Advising and Student Success page··· Planned
Registrar and Academic Operations page···Planned
Campus Services page···Planned
Career and Lifelong Learning page··· Planned
Integrations page···Planned
Solutions: Students···Planned
Solutions: Advisors···Planned
Solutions: Student Success···Planned
Solutions: Faculty···Planned
Solutions: Registrars···Planned
Solutions: Departments···Planned
Solutions: Institutions···Planned
Solutions: Enterprise/Multi-campus··· Planned
Solutions: Partners···Planned
Pilot overview Designed (prototype)
Pilot scope···Planned
Pilot success metrics···Planned
Implementation approach···Planned
Request pilot form Designed (prototype)
Pricing: Student plans Designed (prototype)
Pricing: Department plans Designed (prototype)
Pricing: Institution plans Designed (prototype)
Pricing: Enterprise plans Designed (prototype)
Feature comparison Designed (prototype)
AI usage policy···Planned
Request pricing···Planned
Demo request···Planned
Calendar booking···Planned
Demo confirmation···Planned
Qualification follow-up···Planned
Trust: Security overview Designed (prototype)
Trust: Privacy overview Designed (prototype)
Trust: Accessibility Designed (prototype)
Trust: Responsible AI Designed (prototype)
Trust: Data practices···Planned
Trust: Subprocessors···Planned
Trust: Compliance roadmap···Planned
Trust: Status/reliability···Planned
Security document request···Planned
Trust room request···Planned
Vulnerability disclosure···Planned
Guides···Planned
Research···Planned
Webinars···Planned
Product updates···Planned
Case studies···Planned
FAQ···Planned
Glossary···Planned

Screens · 673

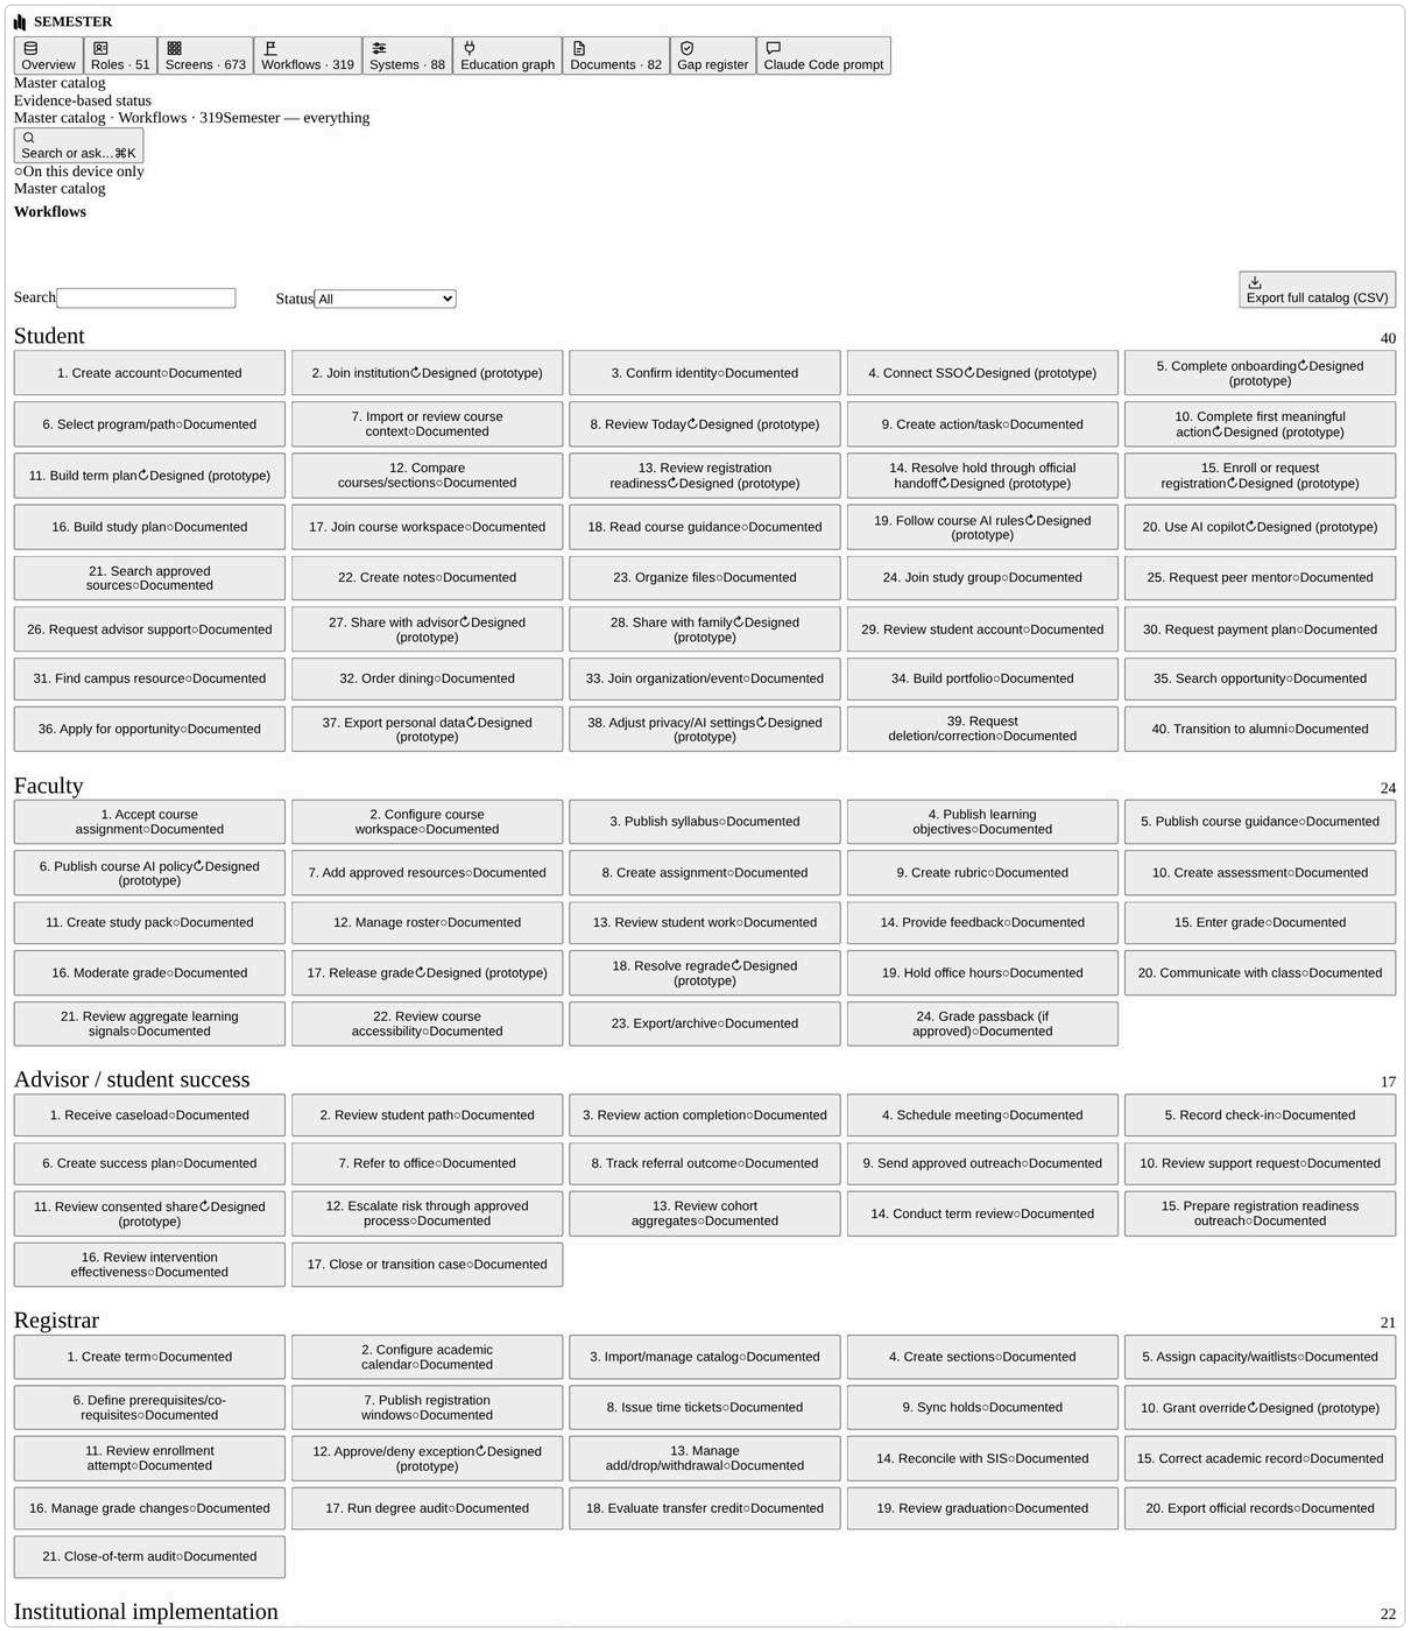

Workflows · 319 (1/3)

1. Contract signed○Documented	2. Tenant created○Documented	3. Executive sponsor named○Documented	4. Operational champion named○Documented	5. Security/privacy scope confirmed○Documented
6. Data/integration inventory○Documented	7. SSO/identity configured○Documented	8. Tenant policy configured○Documented	9. Roles configured○Documented	10. Feature cohorts configured○Documented
11. Data mapping approved○Documented	12. Sandbox sync tested○Documented	13. Reconciliation passed○Documented	14. Admin training○Documented	15. Student communication prepared○Documented
16. Launch readiness gate passed○Documented	17. Controlled launch○Documented	18. Adoption monitored○Documented	19. Support and incident path live○Documented	20. Midpoint review○Documented
21. Pilot outcome review○Documented	22. Annual conversion or offboarding○Documented			

Controlled integration

20

1. Integration request○Documented	2. Business purpose defined○Documented	3. Data classification identified○Documented	4. Security/privacy review○Documented	5. Scope requested○Documented
6. Tenant approval○Documented	7. Credential configured server-side○Documented	8. Sandbox validated○Documented	9. Mapping created○Documented	10. Mapping version approved○Documented
11. Read-only sync enabled○Documented	12. Reconciliation passed○Documented	13. Monitoring enabled○Documented	14. Write direction requested○Documented	15. Higher approval required○Documented
16. Controlled write pilot○Documented	17. Rollback verified○Documented	18. Production approval○Documented	19. Periodic scope review○Documented	20. Retirement/offboarding○Documented

AI

17

1. User asks↻Designed (prototype)	2. Intent identified○Documented	3. Role/tenant/course scope established○Documented	4. Data classification checked↻Designed (prototype)	5. Consent checked○Documented
6. Course/tenant AI policy checked↻Designed (prototype)	7. Provider/model selected○Documented	8. Allowed sources retrieved○Documented	9. Prompt/tool permission validated○Documented	10. Response generated○Documented
11. Sources and limits shown↻Designed (prototype)	12. Suggested action presented○Documented	13. Official handoff offered○Documented	14. Human escalation offered○Documented	15. Usage/spend logged○Documented
16. Audit/evaluation signal recorded○Documented	17. Feedback/correction captured○Documented			

Support

12

1. User searches help○Documented	2. Opens support request↻Designed (prototype)	3. Minimum safe context captured○Documented	4. Categorized + severity○Documented	5. Routed to team/office○Documented
6. Owner accepts or routes○Documented	7. User receives status○Documented	8. Resolution delivered○Documented	9. Confirm or close○Documented	10. Root cause tagged○Documented
11. Product/KB feedback loop○Documented	12. SLA and satisfaction recorded○Documented			

Incident

17

1. Alert or report○Documented	2. Triage○Documented	3. Severity declared○Documented	4. Incident commander○Documented	5. Technical lead○Documented
6. Communications lead○Documented	7. Impact assessed○Documented	8. Risky releases paused○Documented	9. Mitigation executed○Documented	10. Internal update○Documented
11. Customer update○Documented	12. Recovery monitored○Documented	13. Resolved○Documented	14. Postmortem○Documented	15. Corrective actions to Inbox○Documented
16. SLO/error budget reviewed○Documented	17. Release policy updated○Documented			

Domain migration

17

1. Domain inventory○Documented	2. Source data inventory○Documented	3. Field mapping○Documented	4. Data classification○Documented	5. Import staging○Documented
6. Validation○Documented	7. Duplicate/conflict resolution○Documented	8. Reconciliation○Documented	9. Dual run○Documented	10. User acceptance○Documented
11. Institution approval○Documented	12. Cutover○Documented	13. Enhanced monitoring○Documented	14. Rollback window○Documented	15. Archive/export○Documented
16. Legacy retirement○Documented	17. Post-migration review○Documented			

Student finance

16

1. Review student account○Documented	2. Review charges and credits○Documented	3. See hold blocking registration○Documented	4. Open cost planner○Documented	5. Request payment plan○Documented
6. Review plan terms○Documented	7. Accept payment plan○Documented	8. Payment handoff to processor○Documented	9. Processor confirms payment○Documented	10. Reconcile payment with SIS○Documented
11. Release hold○Documented	12. Notify student of hold release○Documented	13. Request refund status○Documented	14. Financial-aid handoff○Documented	15. Emergency support request○Documented

Workflows · 319 (2/3)

16. Audit ledger reviewed○Documented

Campus services

15

1. Open campus map○Documented	2. Find study space○Documented	3. Check dining hours and menus○Documented	4. Order dining○Documented	5. Pay with meal balance○Documented
6. Pick up order○Documented	7. Donate meal swipes to pool○Documented	8. Submit housing maintenance request○Documented	9. Housing staff accepts request○Documented	10. Request resolved○Documented
11. Find accessibility services○Documented	12. Request accommodation○Documented	13. Accommodation approved○Documented	14. Find safety resources○Documented	15. Wellness handoff○Documented

Community & moderation

20

1. Set profile visibility per field○Documented	2. Choose alias for public posts○Documented	3. Join course community○Documented	4. Join organization space○Documented	5. Create post○Documented
6. AI pre-screen public post○Documented	7. Post published○Documented	8. Ask question in Q&A○Documented	9. Answer endorsed by TA○Documented	10. Create marketplace listing○Documented
11. Integrity filter checks listing○Documented	12. Make offer in chat○Documented	13. Arrange safe meet-up○Documented	14. Report content○Documented	15. Moderator reviews report○Documented
16. Remove content or warn○Documented	17. Student appeals○Documented	18. Appeal decided○Documented	19. Safety escalation○Documented	20. Community health reviewed○Documented

Career & employer

18

1. Build skills profile○Documented	2. Add evidence to portfolio○Documented	3. Request skill verification○Documented	4. Faculty verifies skill○Documented	5. Generate resume from evidence○Documented
6. Search opportunities○Documented	7. Employer posts internship○Documented	8. Career staff approves posting○Documented	9. Apply to internship○Documented	10. Employer reviews approved evidence○Documented
11. Book career appointment○Documented	12. Interview scheduled○Documented	13. Offer recorded○Documented	14. Career outcome captured○Documented	15. Transition to alumni○Documented
16. Alumni offers mentoring○Documented	17. Mentor matched with student○Documented	18. Continuing education enrolment○Documented		

Family consent

13

1. Student opens family sharing○Documented	2. Choose information categories○Documented	3. Set access expiry○Documented	4. Send consent invitation○Documented	5. Guardian confirms relationship○Documented
6. Guardian accepts scope○Documented	7. Guardian views shared items○Documented	8. Billing/support handoff○Documented	9. Access history reviewed○Documented	10. Student narrows scope○Documented
11. Student revokes access○Documented	12. Access expires automatically○Documented	13. Audit retained○Documented		

Developer platform

16

1. Partner applies○Documented	2. Partner agreement signed○Documented	3. Sandbox tenant created○Documented	4. Request data scopes○Documented	5. Security review of app○Documented
6. Scopes approved○Documented	7. Register OAuth client○Documented	8. Configure webhooks○Documented	9. Build against SDK○Documented	10. Integration certification○Documented
11. App review○Documented	12. Listed in marketplace○Documented	13. Institution enables app○Documented	14. Metering and billing○Documented	15. Version deprecation notice○Documented
16. App retired○Documented				

Analytics & outcomes

14

1. Define success measures with sponsor○Documented	2. Measures sheet signed○Documented	3. Instrument events (no PII)○Documented	4. Aggregate with minimum cell size○Documented	5. Weekly metrics review○Documented
6. SLO dashboard reviewed○Documented	7. Error budget checked○Documented	8. Pilot midpoint report○Documented	9. Course analytics shared with faculty○Documented	10. Program outcomes reviewed○Documented
11. Pilot results report○Documented	12. Improvement backlog prioritized○Documented	13. Release evidence recorded○Documented	14. Quarterly operating review○Documented	

Workflows · 319 (3/3)

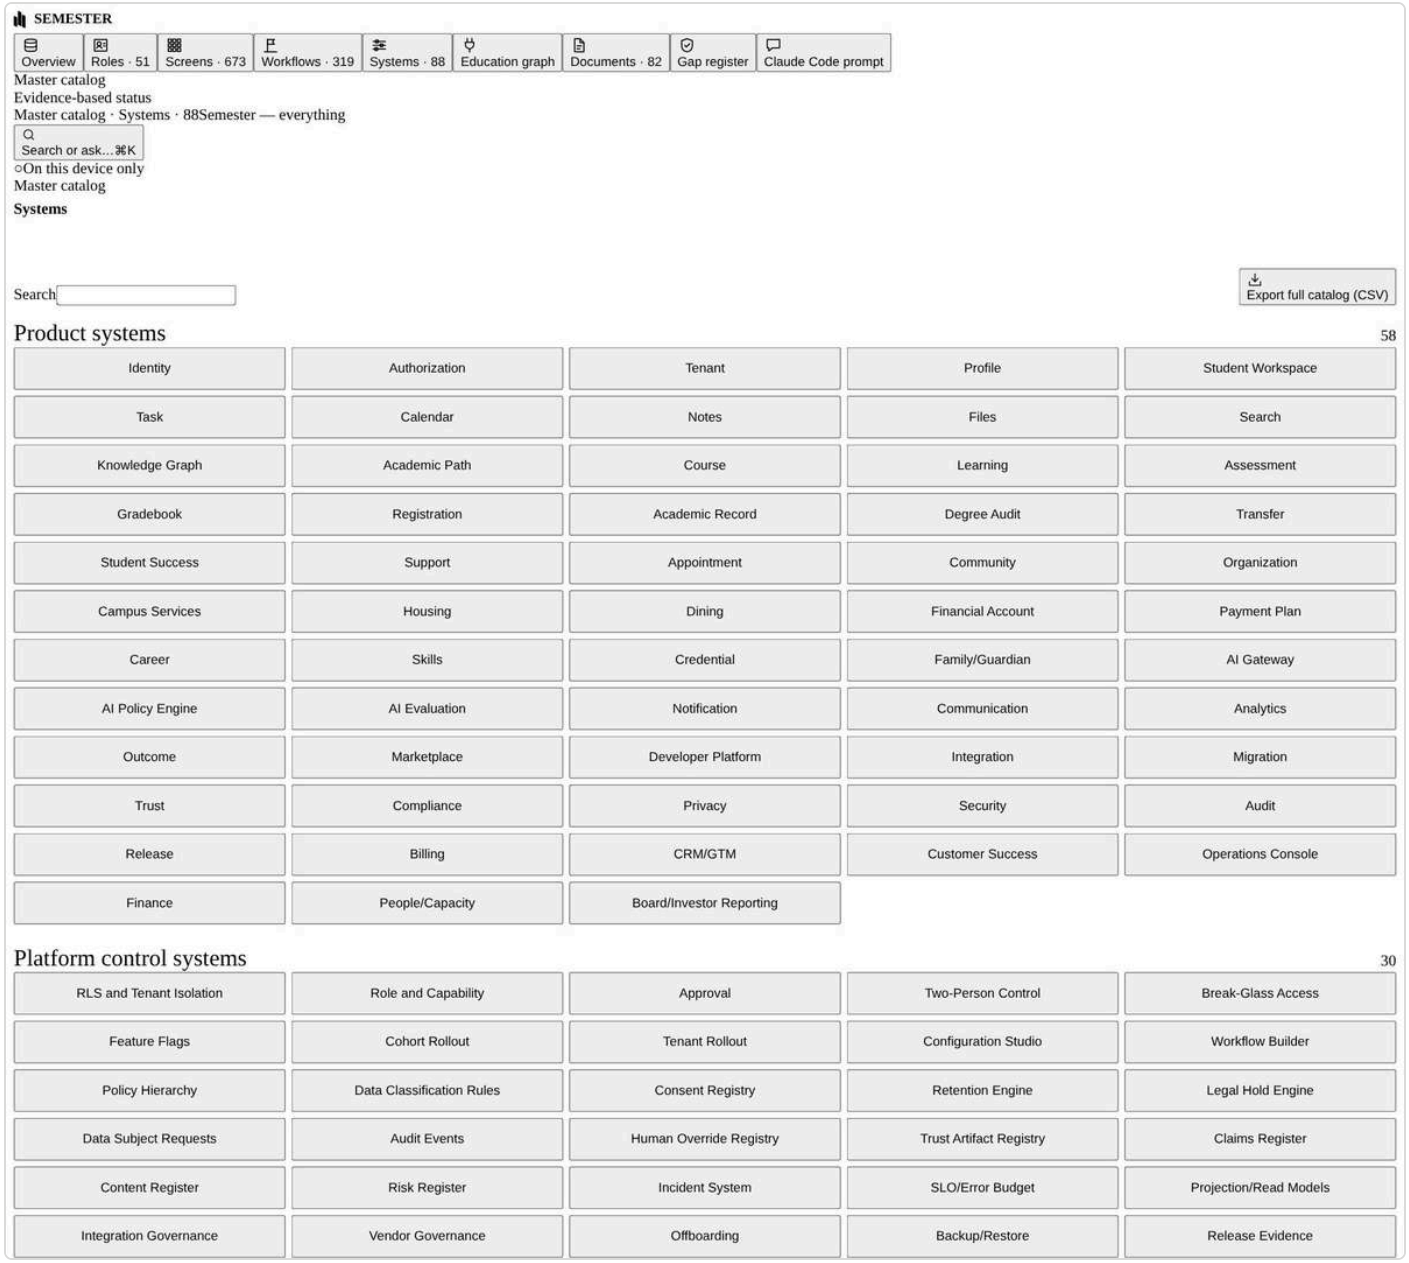
SEMESTER
Overview
Roles · 51
Screens · 673
Workflows · 319
Systems · 88
Education graph
Documents · 82
Gap register
Claude Code prompt
Master catalog
Evidence-based status
Master catalog · Systems · 88Semester — everything
Search or ask… ⌘K
On this device only
Master catalog
Systems
Search
Export full catalog (CSV)
Product systems
58
Identity
Authorization
Tenant
Profile
Student Workspace
Task
Calendar
Notes
Files
Search
Knowledge Graph
Academic Path
Course
Learning
Assessment
Gradebook
Registration
Academic Record
Degree Audit
Transfer
Student Success
Support
Appointment
Community
Organization
Campus Services
Housing
Dining
Financial Account
Payment Plan
Career
Skills
Credential
Family/Guardian
AI Gateway
AI Policy Engine
AI Evaluation
Notification
Communication
Analytics
Outcome
Marketplace
Developer Platform
Integration
Migration
Trust
Compliance
Privacy
Security
Audit
Release
Billing
CRM/GTM
Customer Success
Operations Console
Finance
People/Capacity
Board/Investor Reporting
Platform control systems
30
RLS and Tenant Isolation
Role and Capability
Approval
Two-Person Control
Break-Glass Access
Feature Flags
Cohort Rollout
Tenant Rollout
Configuration Studio
Workflow Builder
Policy Hierarchy
Data Classification Rules
Consent Registry
Retention Engine
Legal Hold Engine
Data Subject Requests
Audit Events
Human Override Registry
Trust Artifact Registry
Claims Register
Content Register
Risk Register
Incident System
SLO/Error Budget
Projection/Read Models
Integration Governance
Vendor Governance
Offboarding
Backup/Restore
Release Evidence

Systems · 88

Education graph

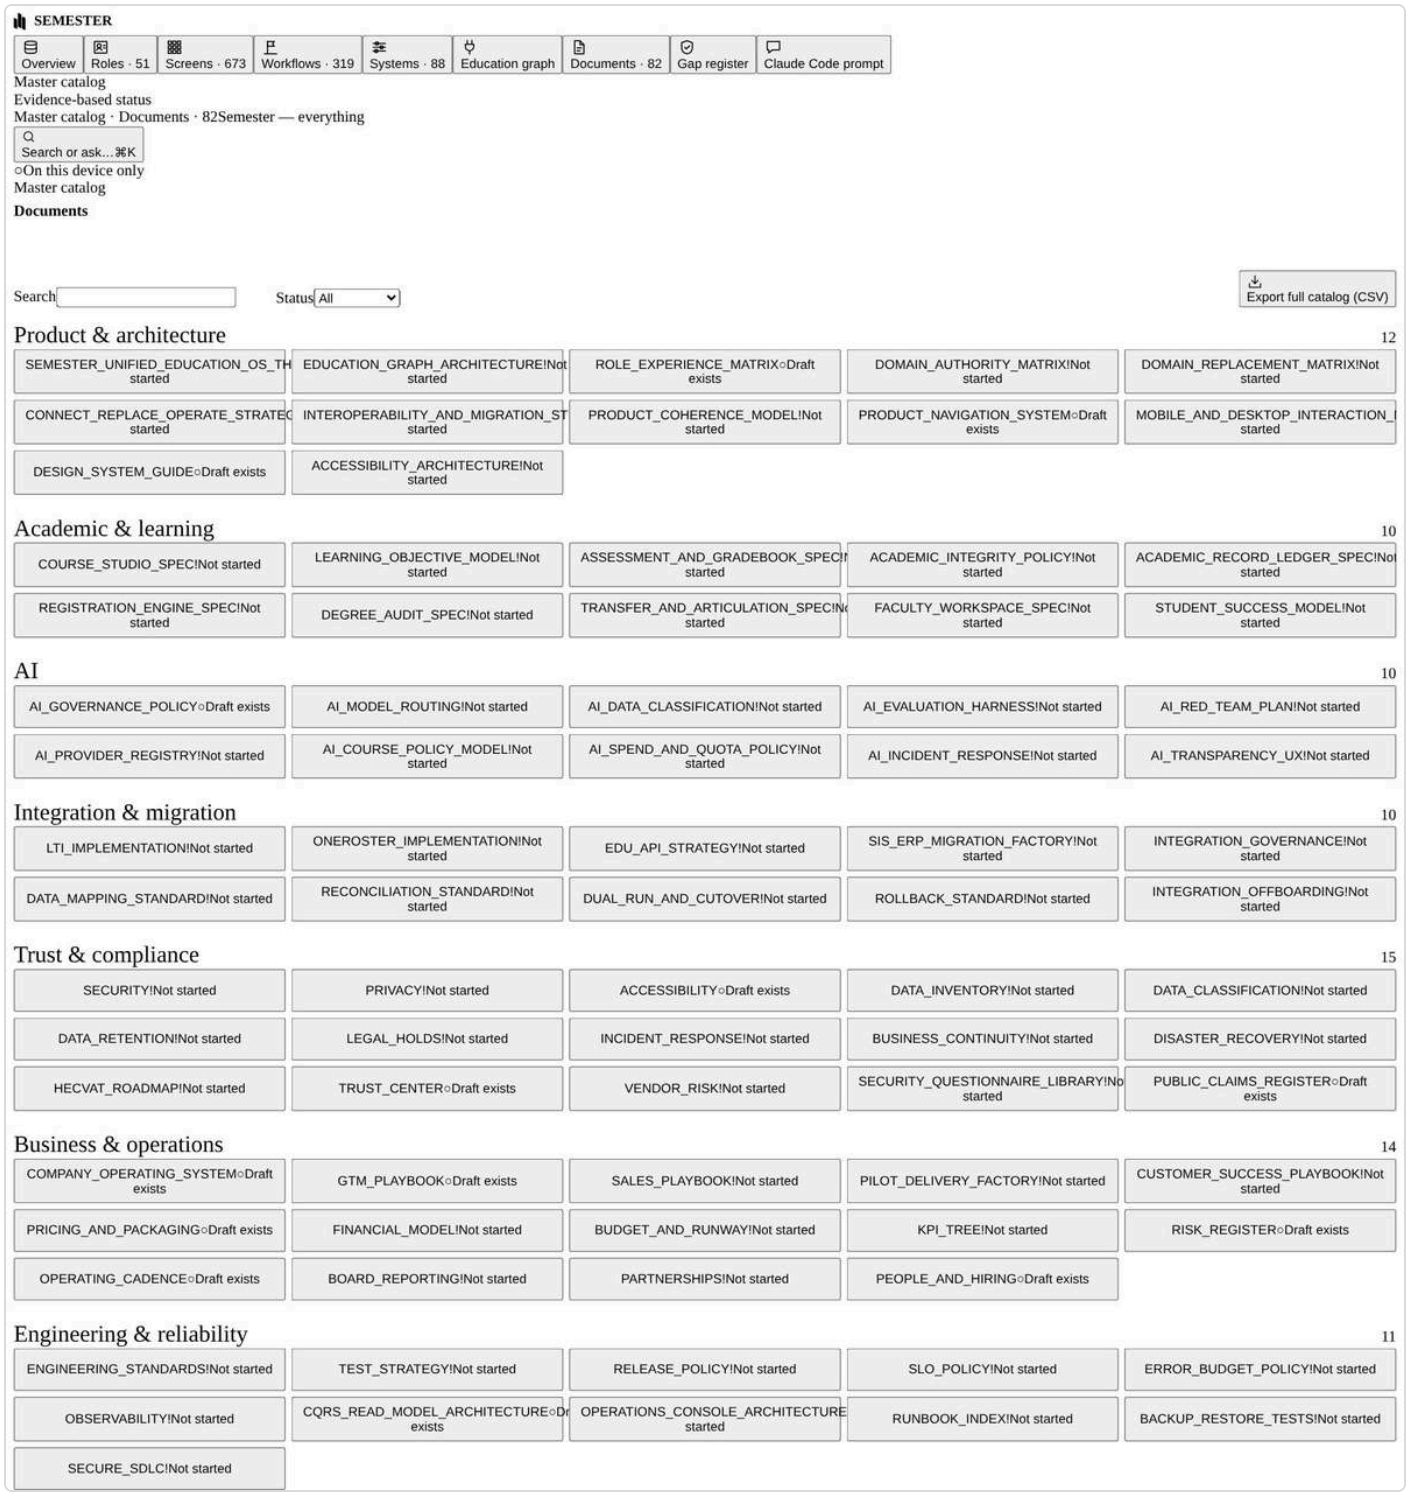

Documents · 82

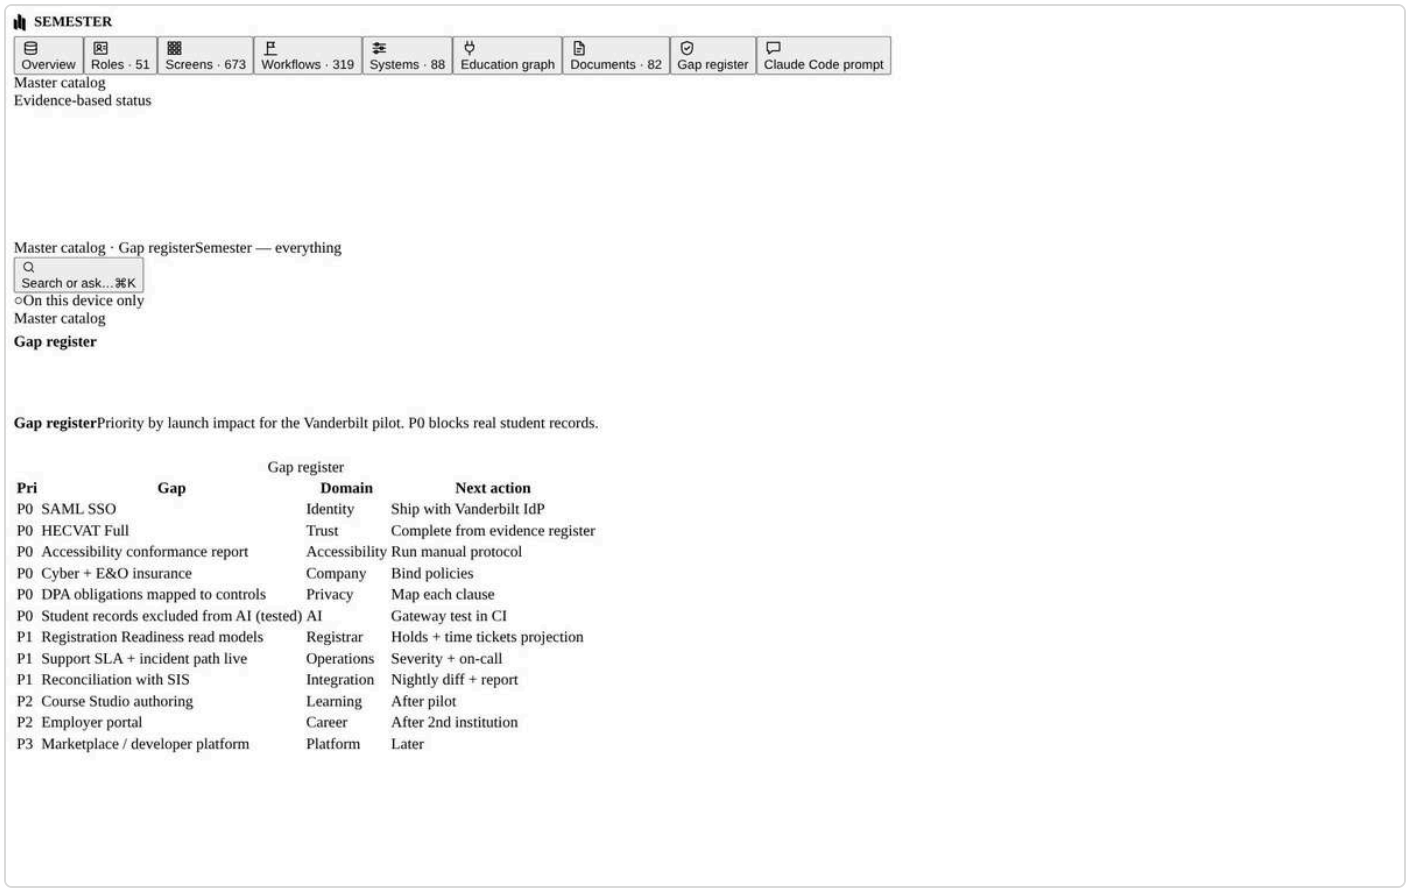

Gap register

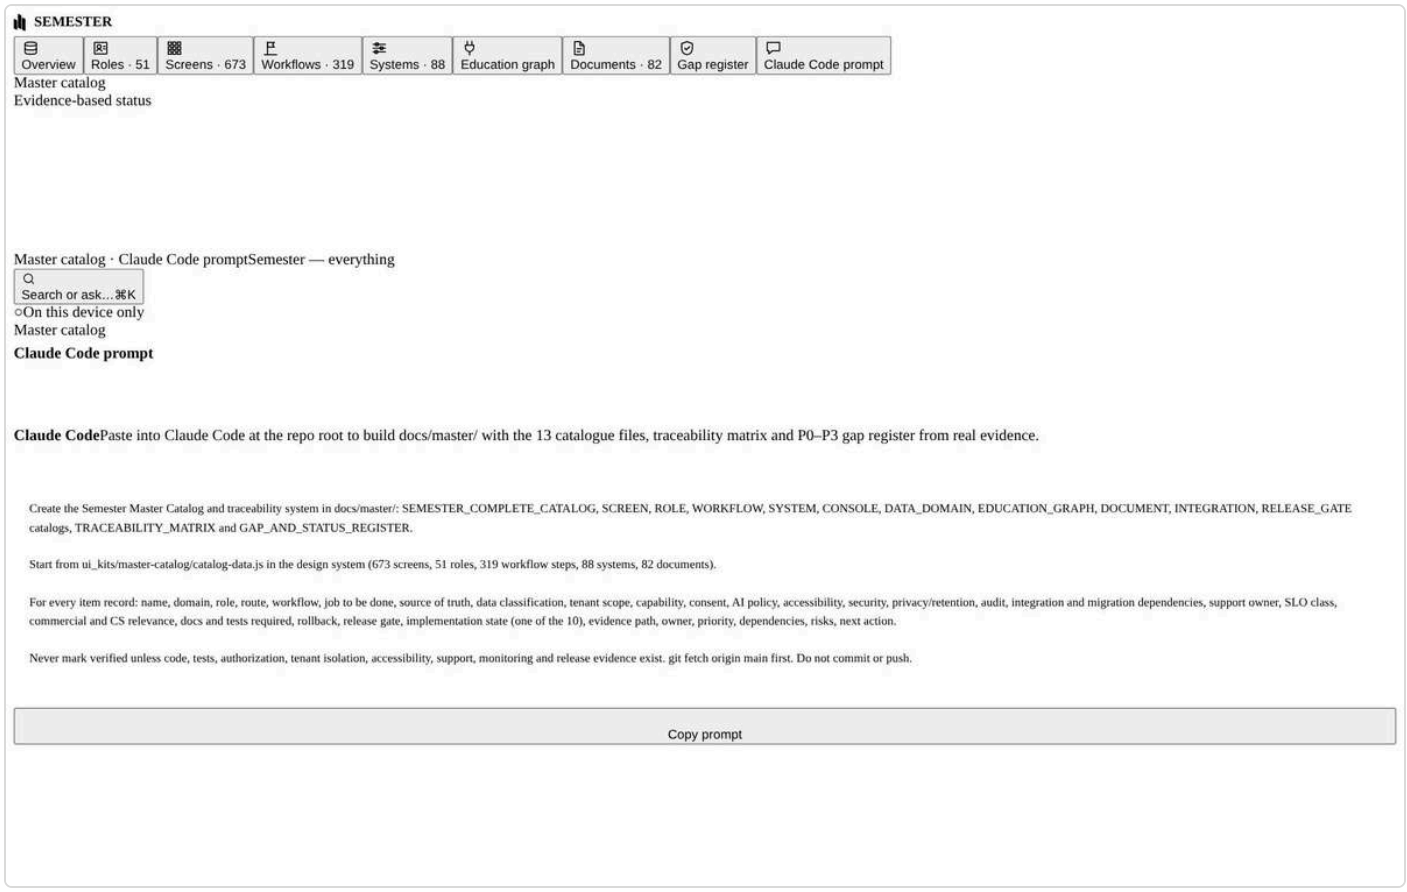

Claude Code prompt

Workflow runner and capability map

Run any workflow step by step; the OS capability map. **32 screens.**

Opening view (1/3)

19	Revenue, GTM, customer success and company operations	16/30 modules · 102 screens · 36 steps
20	Developer platform, marketplace and partner ecosystem	8/19 modules · 0 screens · 16 steps
21	Analytics, outcomes, reliability and continuous improvement	9/10 modules · 102 screens · 14 steps

Solid chips match a catalogued screen; dashed chips are modules with no screen yet.

JOURNEYS

Core student journey

1. Signs in
2. Today
3. Action Center
4. Path
5. Plan
6. Courses
7. Copilot
8. Support
9. Campus
10. Career
11. Lifelong relationship

Student daily loop

1. What changed?
2. What matters?
3. What can I do?
4. What is official?
5. Who can help?
6. What progress did I make?

Learning flow

1. Faculty publishes structure
2. Student gets course context
3. Studies and completes work
4. Tasks, calendar, notes, AI connected
5. Faculty feedback
6. Grade released
7. Evidence and path update

Registration workflow

1. Student selects section
2. Term, hold, prerequisite, capacity, credit, policy checks
3. Enroll / waitlist / deny / route
4. Immutable audit entry
5. Authoritative result

Operations action model

1. Request
2. Attach evidence
3. Required approval
4. Impact preview
5. Execution
6. Audit event
7. Read-model refresh
8. Operator review

Family consent

1. Student chooses scope
2. Family accepts
3. Only permitted info visible
4. Access audited
5. Expires or revoked

Learner lifecycle

1. Prospect
2. Applicant
3. Student
4. Learner
5. Planner
6. Course participant
7. Community member
8. Support recipient
9. Credential holder
10. Job candidate
11. Employee
12. Alumnus
13. Lifelong learner
14. Mentor / partner / employer

Institution lifecycle

1. Configures
2. Provisions
3. Governs
4. Supports
5. Measures
6. Improves
7. Trusts
8. Expands
9. Migrates
10. Operates

REQUIRED SHARED WORKFLOWS — 21 REQUIRED

Shared workflow	Runs as	
Authentication	Student journey · step 4 · Connect SSO	Open
Tenant provisioning	Institution implementation · step 2 · Tenant created	Open
Role/capability grant	Registrar & academic operations · step 10 · Grant override	Open
Consent grant/revocation	Family & guardian consent · step 11 · Student revokes access	Open
Course enrollment	Student journey · step 15 · Enroll or request registration	Open
Task creation/completion	Student journey · step 9 · Create action/task	Open
Academic plan update	Student journey · step 11 · Build term plan	Open
Registration request	Student journey · step 15 · Enroll or request registration	Open
Grade entry/release	Faculty course lifecycle · step 17 · Release grade	Open
Support request	Support request · step 2 · Opens support request	Open
Advisor referral	Advising & student success · step 7 · Refer to office	Open
AI request	Governed AI request · step 1 · User asks	Open
Integration sync	Controlled integration · step 11 · Read-only sync enabled	Open
Data export/erasure	Student journey · step 37 · Export personal data	Open
Feature rollout	Institution implementation · step 10 · Feature cohorts configured	Open
Tenant rollout	Institution implementation · step 17 · Controlled launch	Open
Pilot conversion	Institution implementation · step 22 · Annual conversion or offboarding	Open
Billing/payment	Student finance & payment · step 8 · Payment handoff to processor	Open
Incident response	Incident response · step 1 · Alert or report	Open

Opening view (2/3)

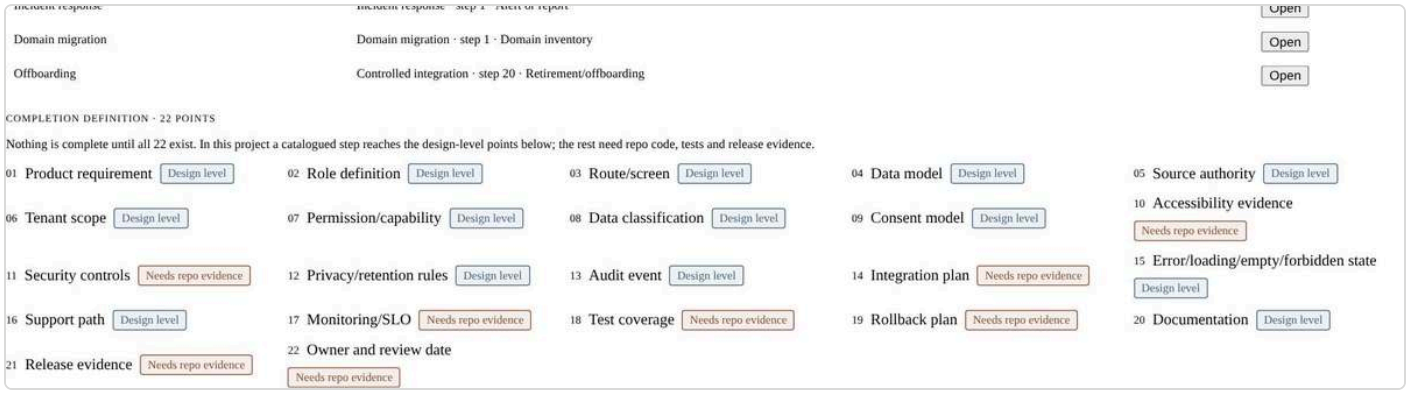

Opening view (3/3)

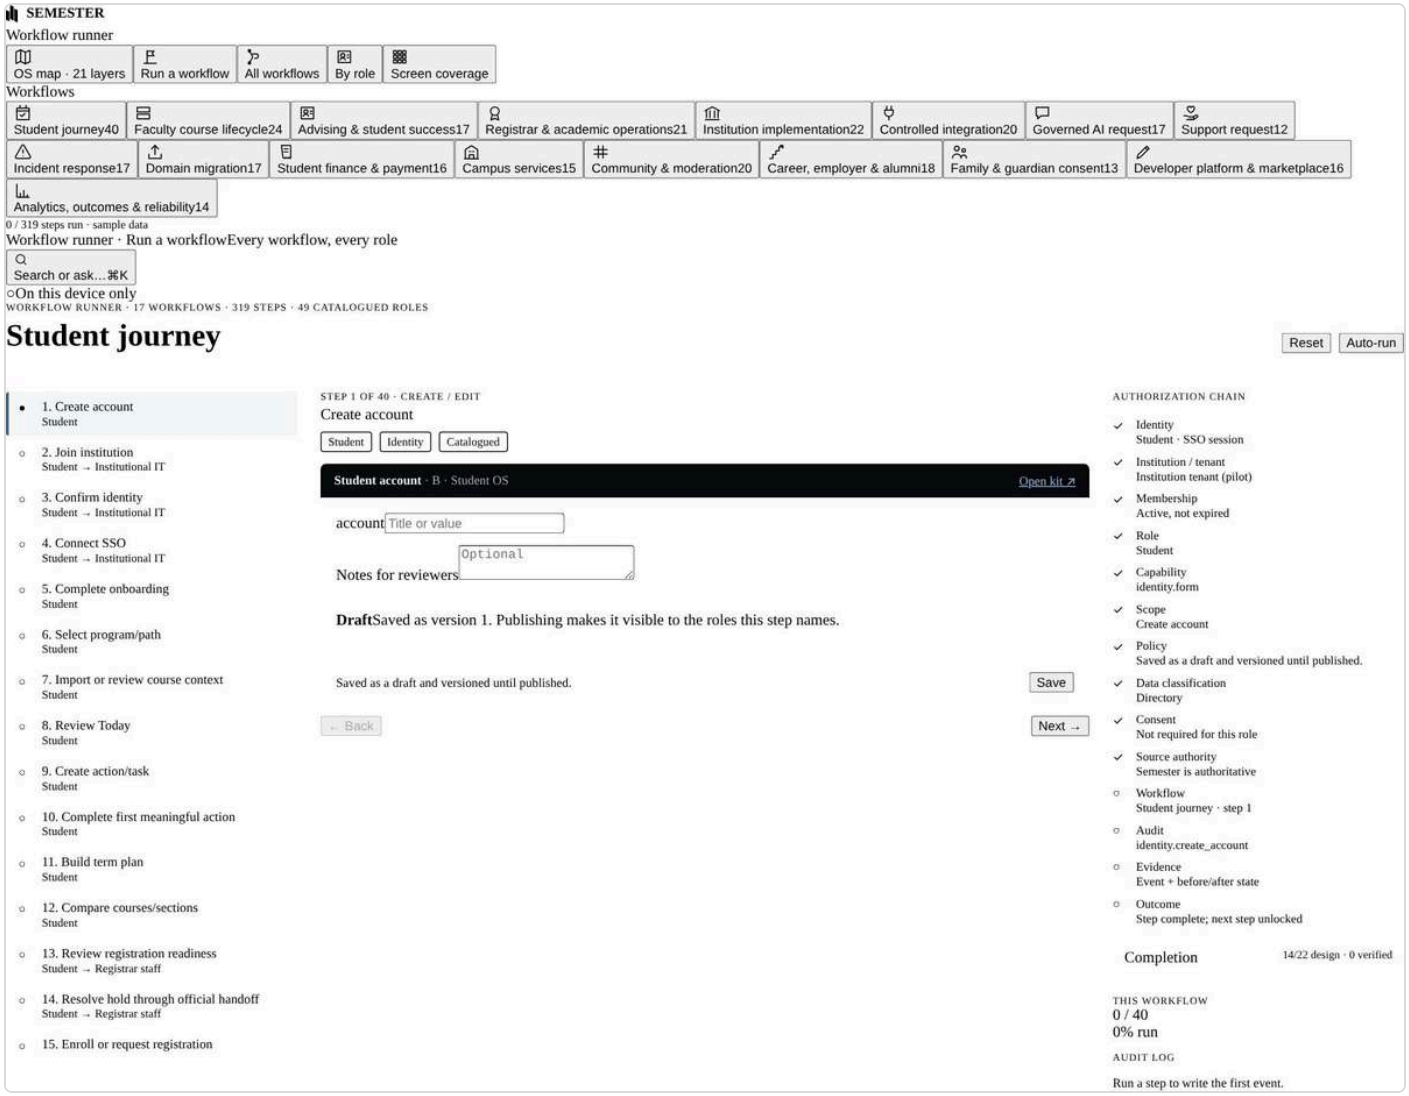

Run a workflow

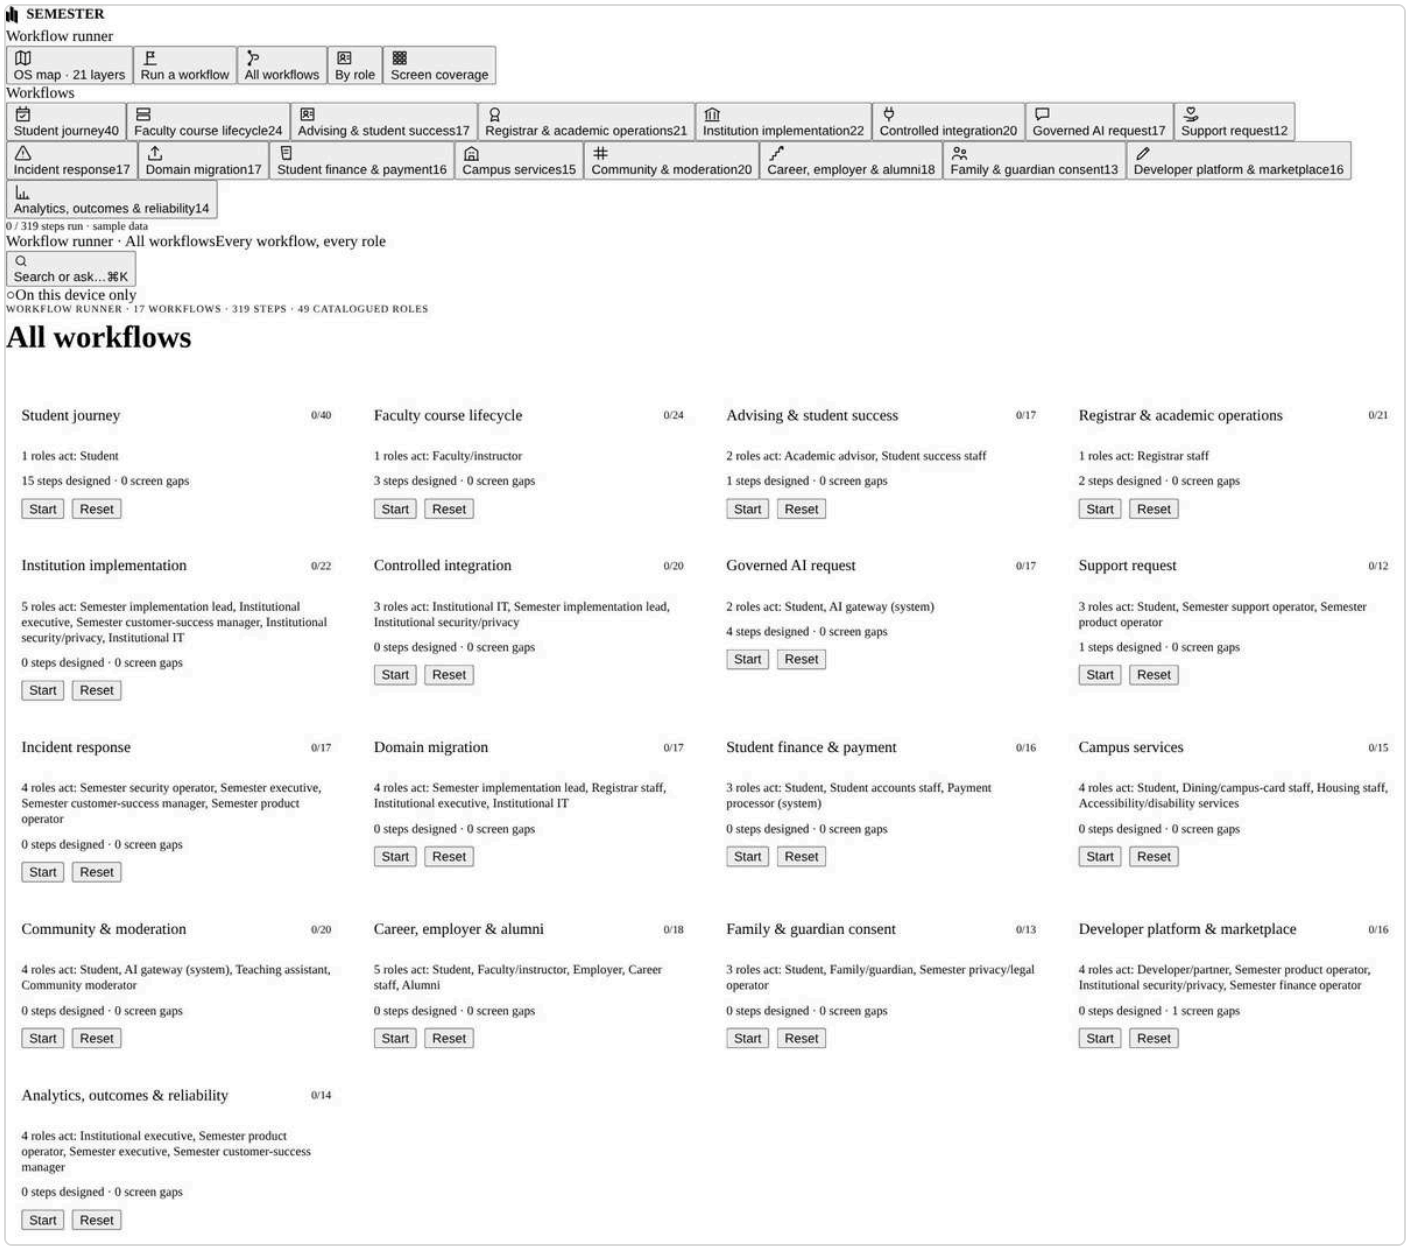

All workflows

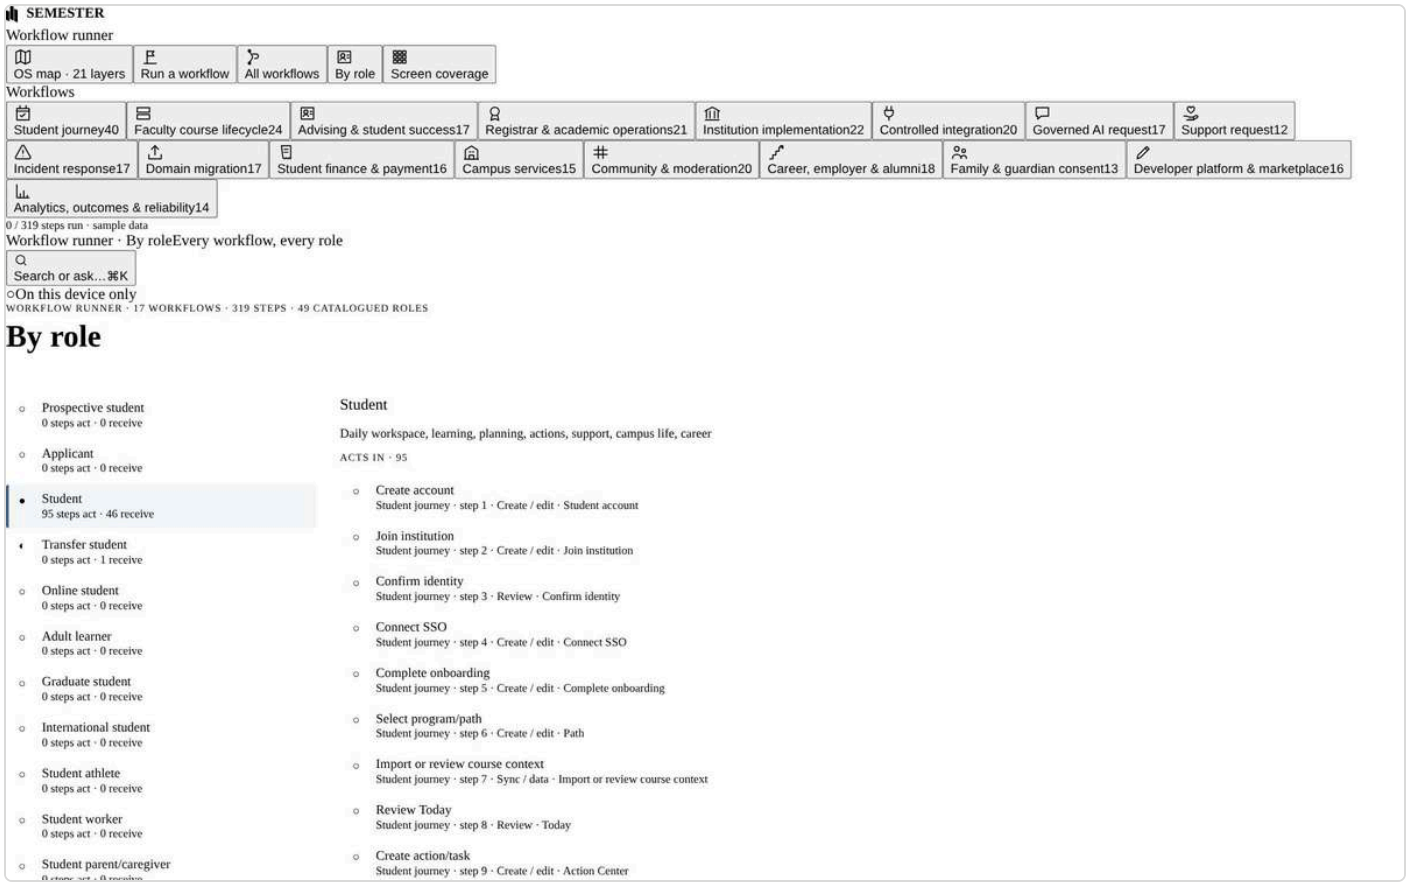
SEMESTER
Workflow runner
OS map · 21 layers
Run a workflow
All workflows
By role
Screen coverage
Workflows
Student journey40
Faculty course lifecycle24
Advising & student success17
Registrar & academic operations21
Institution implementation22
Controlled integration20
Governed AI request17
Support request12
Incident response17
Domain migration17
Student finance & payment16
Campus services15
Community & moderation20
Career, employer & alumni18
Family & guardian consent13
Developer platform & marketplace16
Analytics, outcomes & reliability14
0 / 319 steps run · sample data
Workflow runner · By roleEvery workflow, every role
Search or ask…⌘K
On this device only
WORKFLOW RUNNER · 17 WORKFLOWS · 319 STEPS · 49 CATALOGUED ROLES
By role
Prospective student
0 steps act · 0 receive
Applicant
0 steps act · 0 receive
Student
95 steps act · 46 receive
Transfer student
0 steps act · 1 receive
Online student
0 steps act · 0 receive
Adult learner
0 steps act · 0 receive
Graduate student
0 steps act · 0 receive
International student
0 steps act · 0 receive
Student athlete
0 steps act · 0 receive
Student worker
0 steps act · 0 receive
Student parent/caregiver
Student
Daily workspace, learning, planning, actions, support, campus life, career
ACTS IN · 95
Create account
Student journey · step 1 · Create / edit · Student account
Join institution
Student journey · step 2 · Create / edit · Join institution
Confirm identity
Student journey · step 3 · Review · Confirm identity
Connect SSO
Student journey · step 4 · Create / edit · Connect SSO
Complete onboarding
Student journey · step 5 · Create / edit · Complete onboarding
Select program/path
Student journey · step 6 · Create / edit · Path
Import or review course context
Student journey · step 7 · Sync / data · Import or review course context
Review Today
Student journey · step 8 · Review · Today
Create action/task
Student journey · step 9 · Create / edit · Action Center

By role

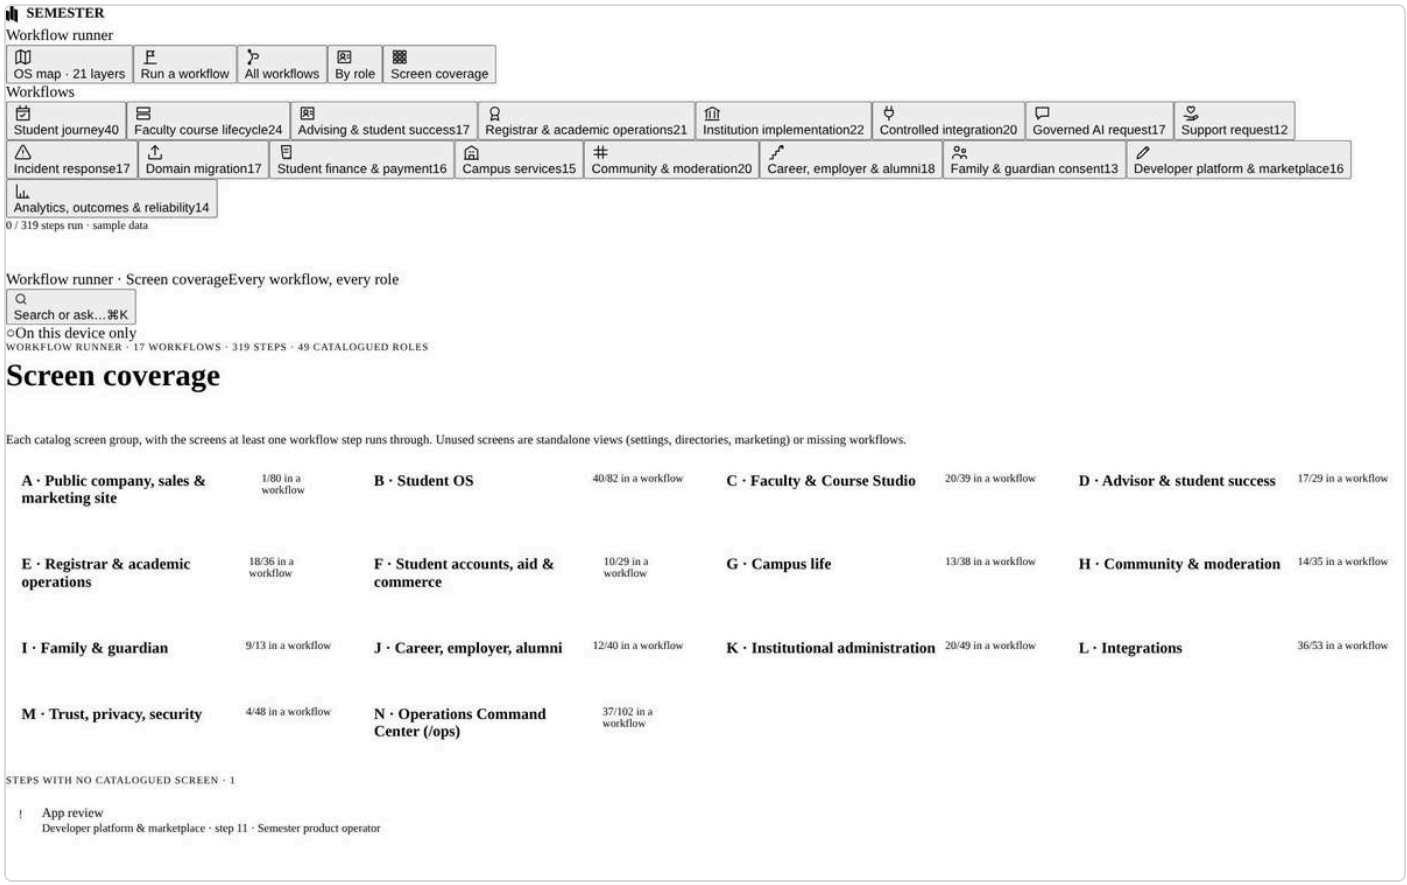

Screen coverage

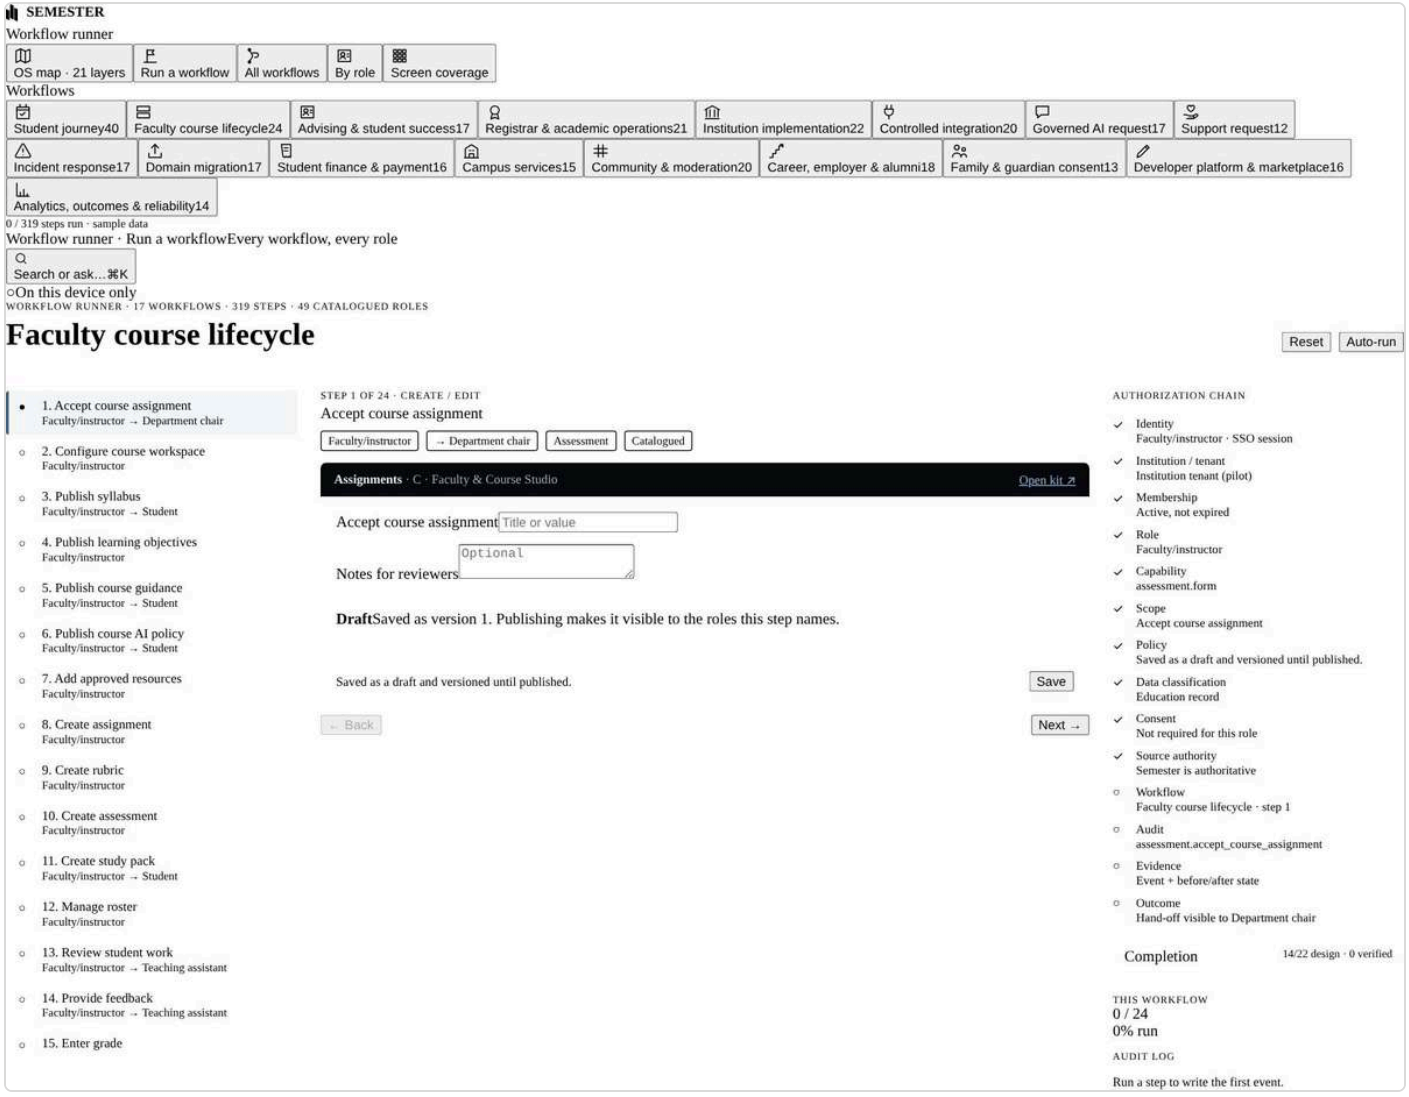

Faculty course lifecycle24

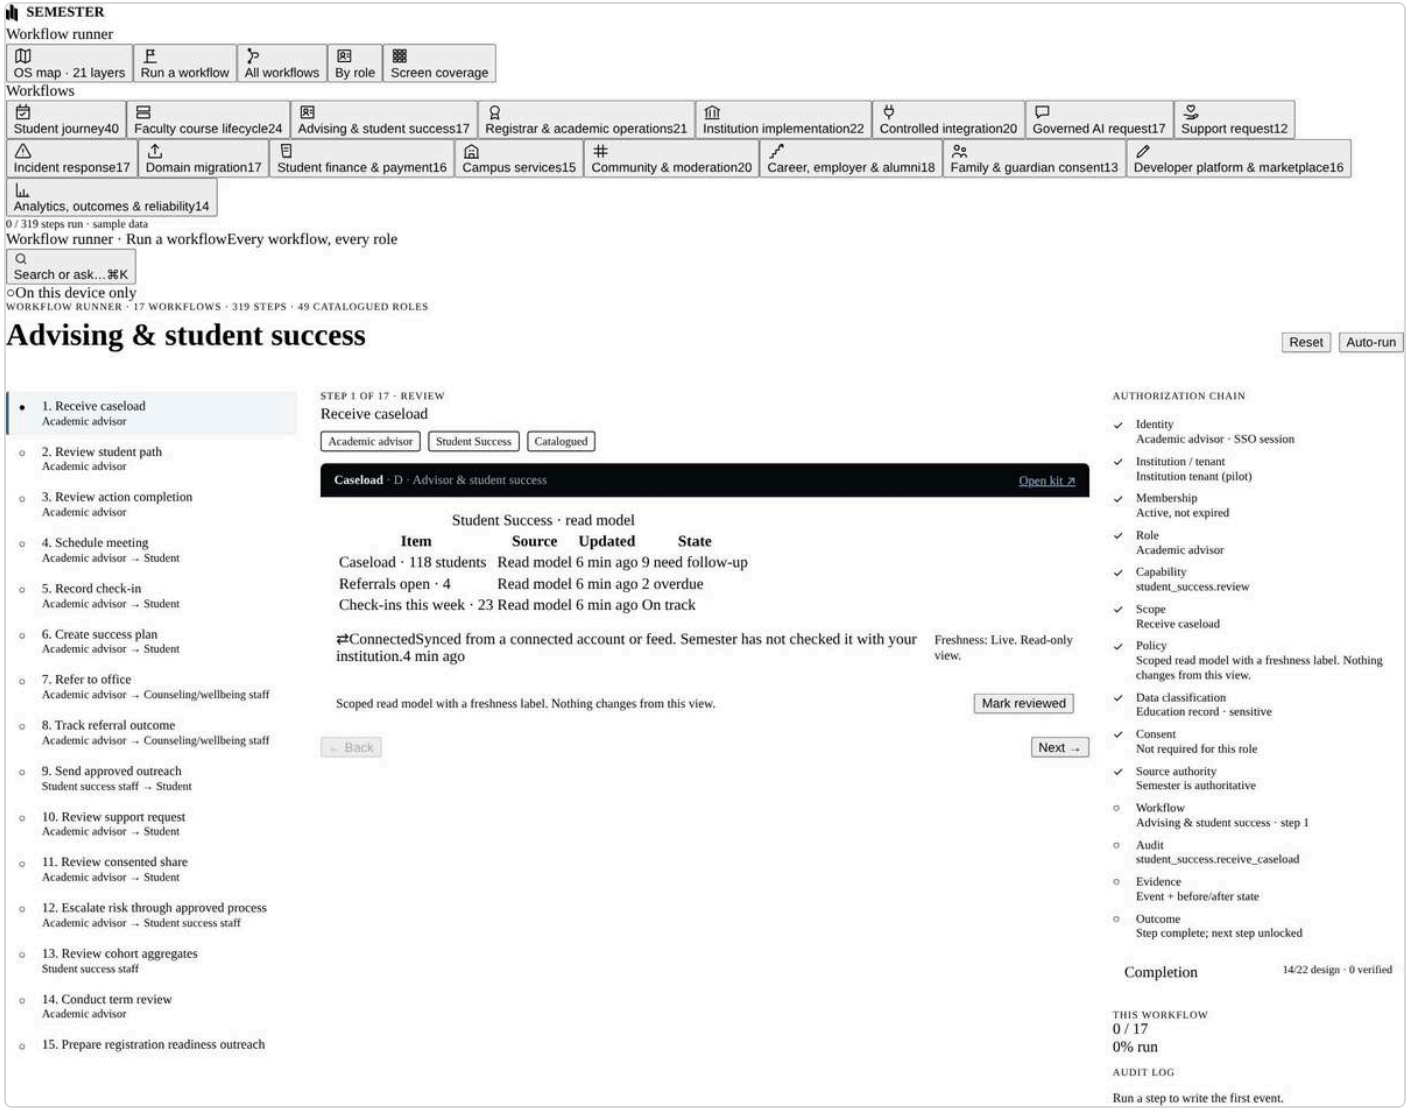

Advising & student success17

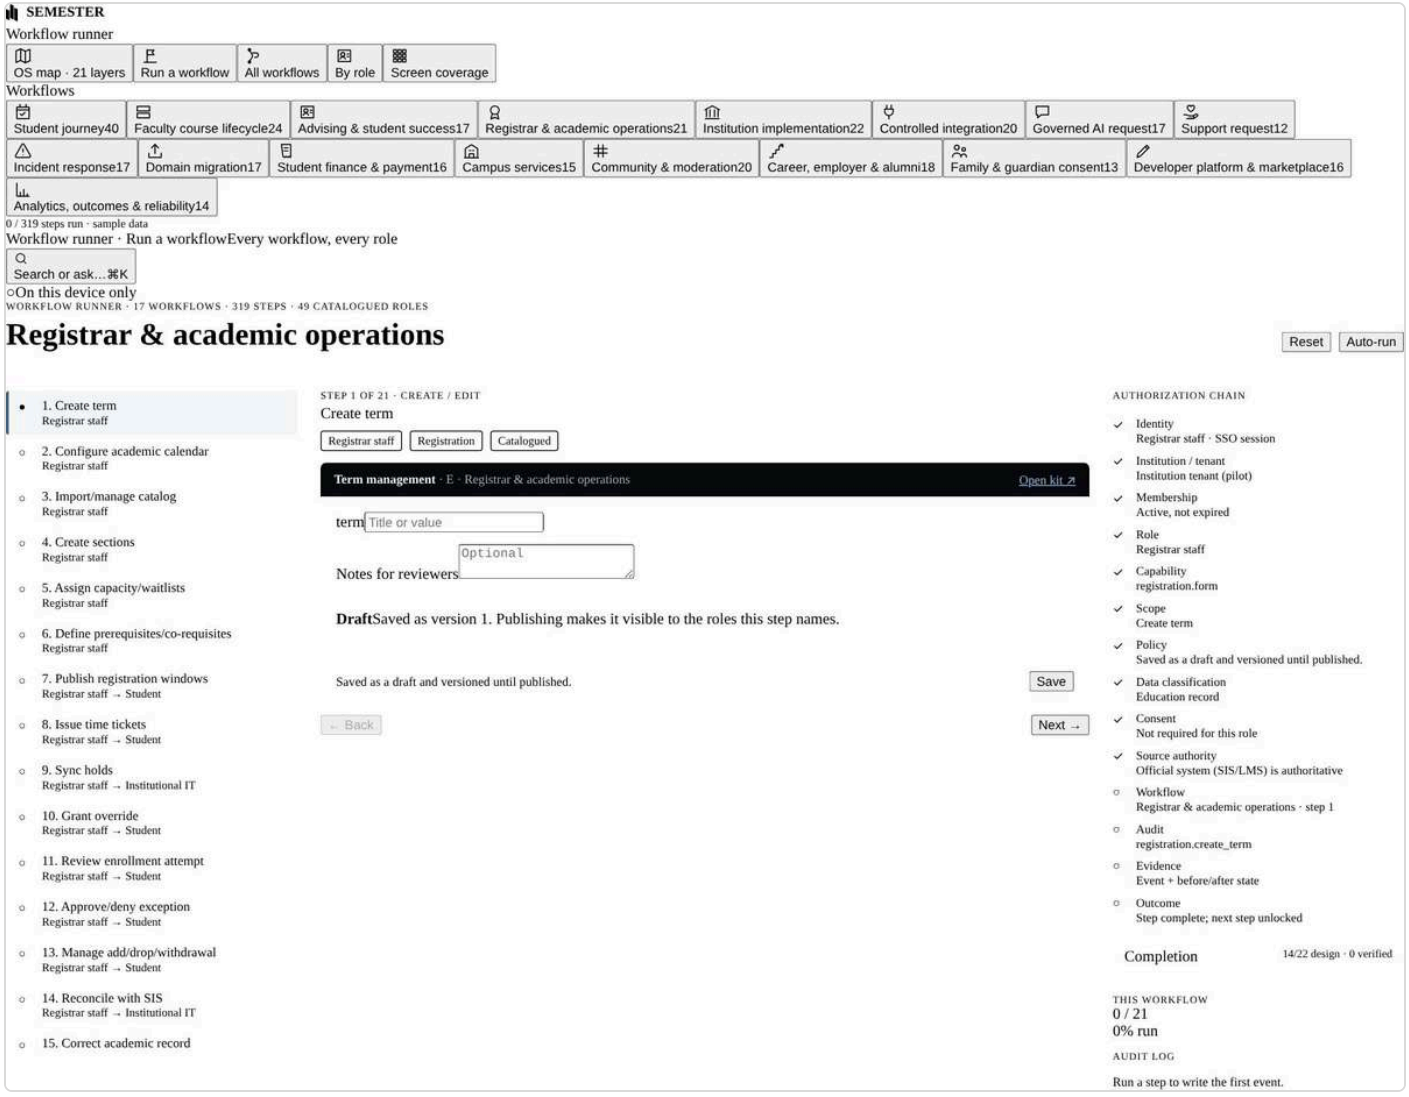

Registrar & academic operations21

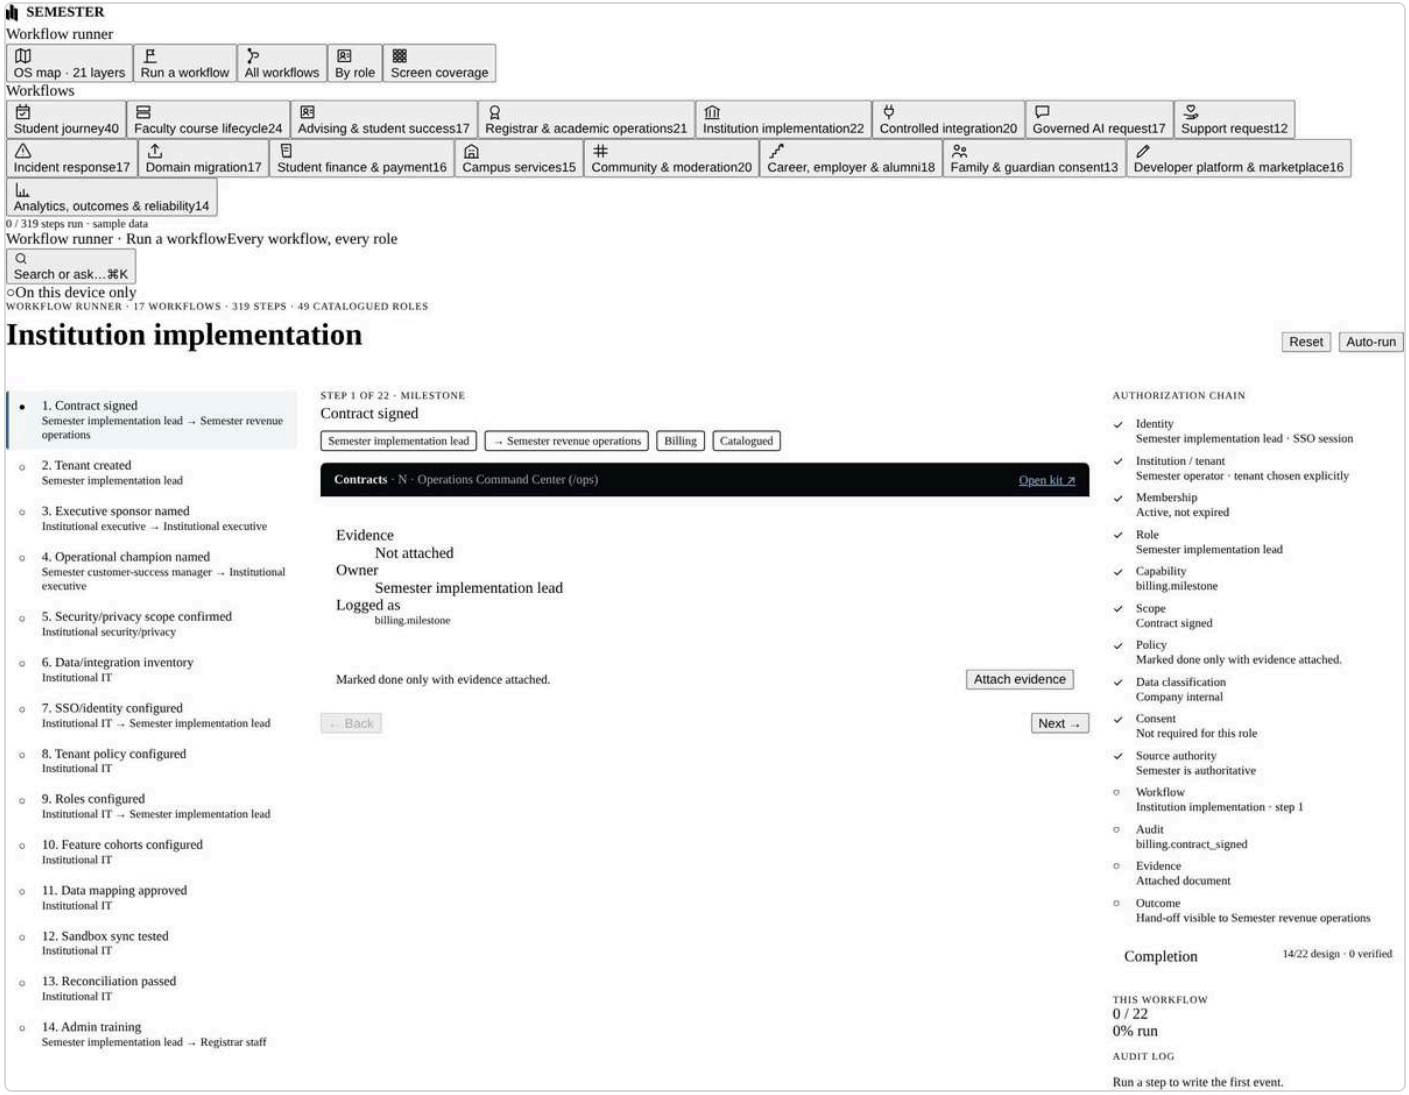

Institution implementation22

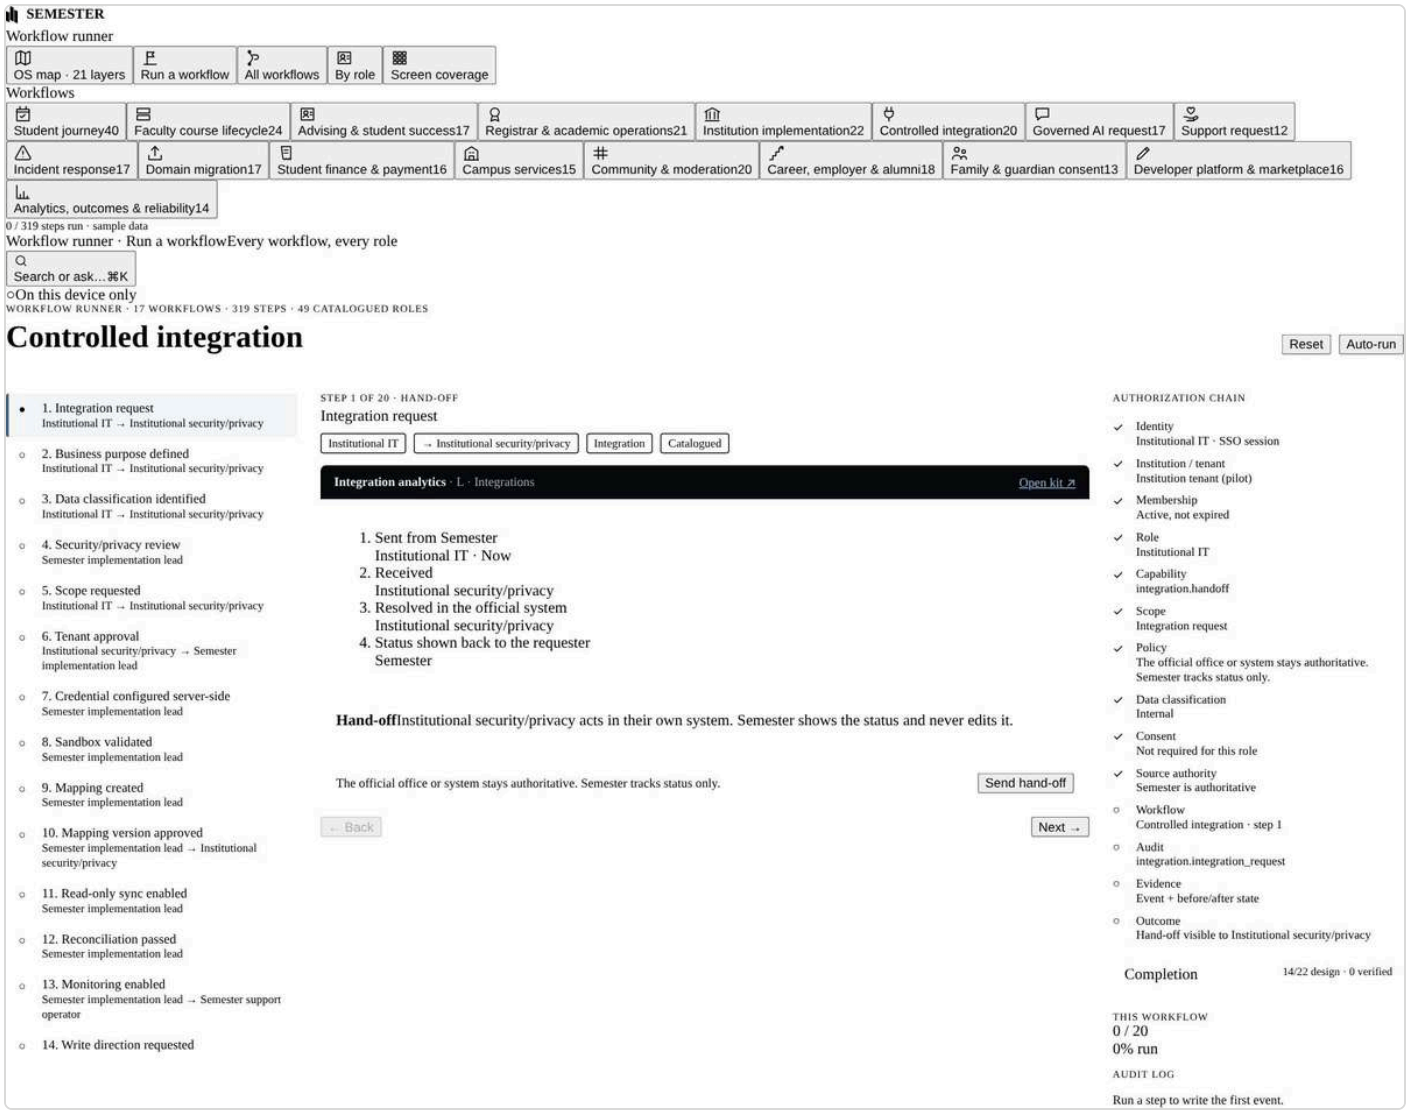

Controlled integration20

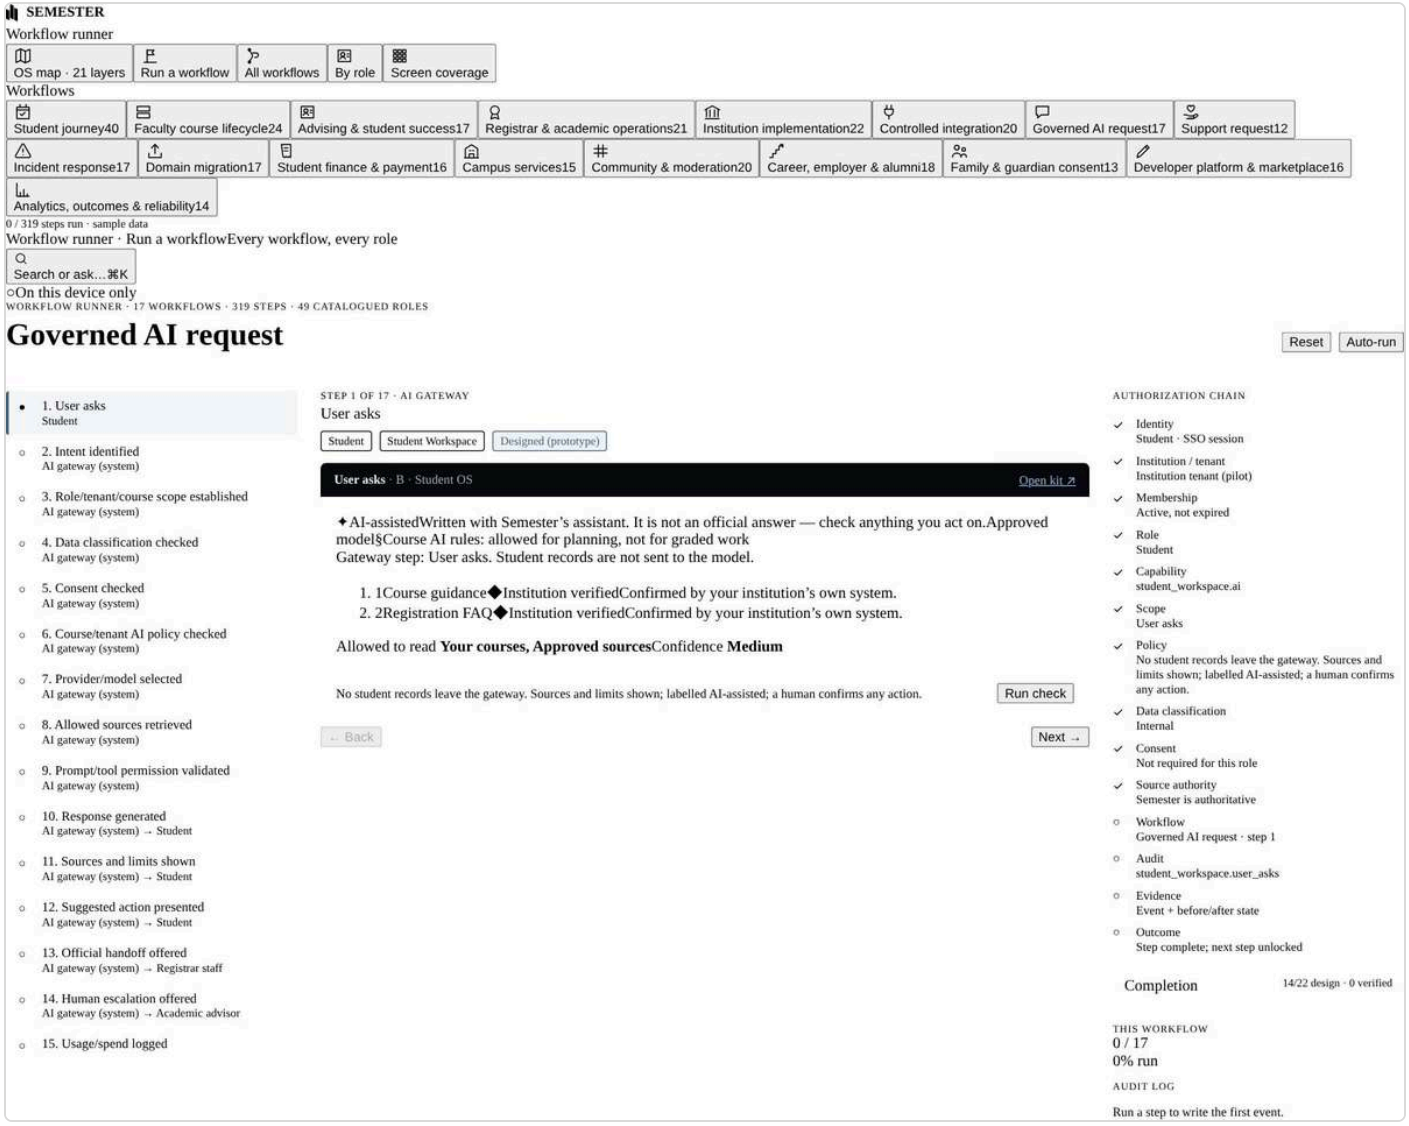

Governed AI request17

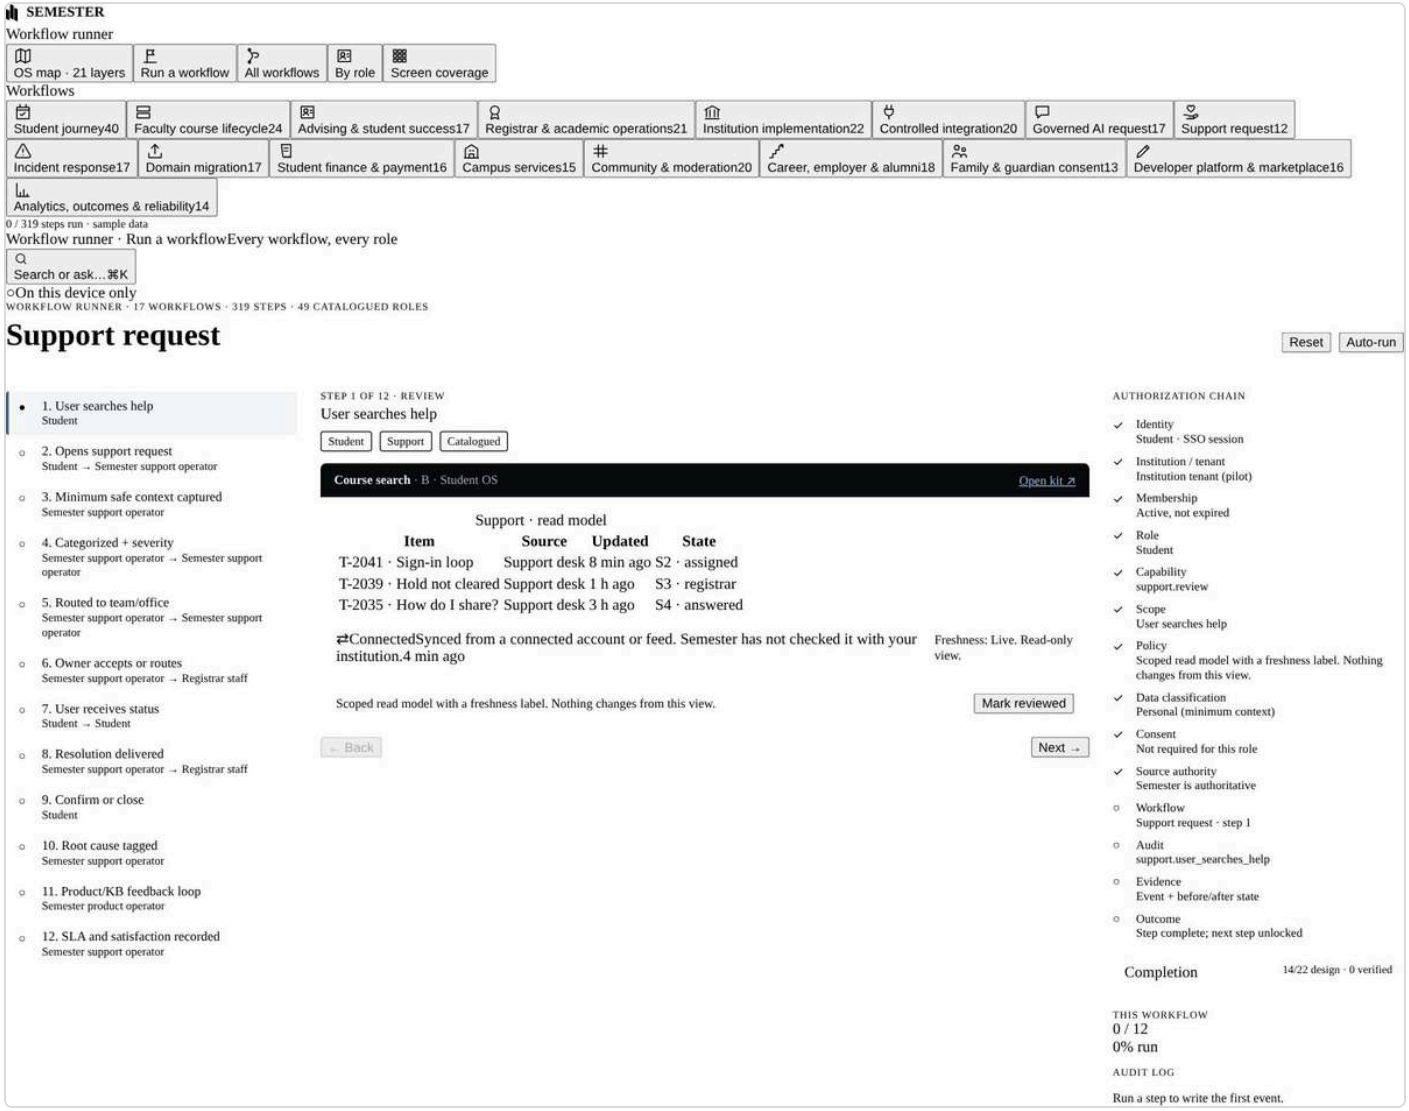

Support request12

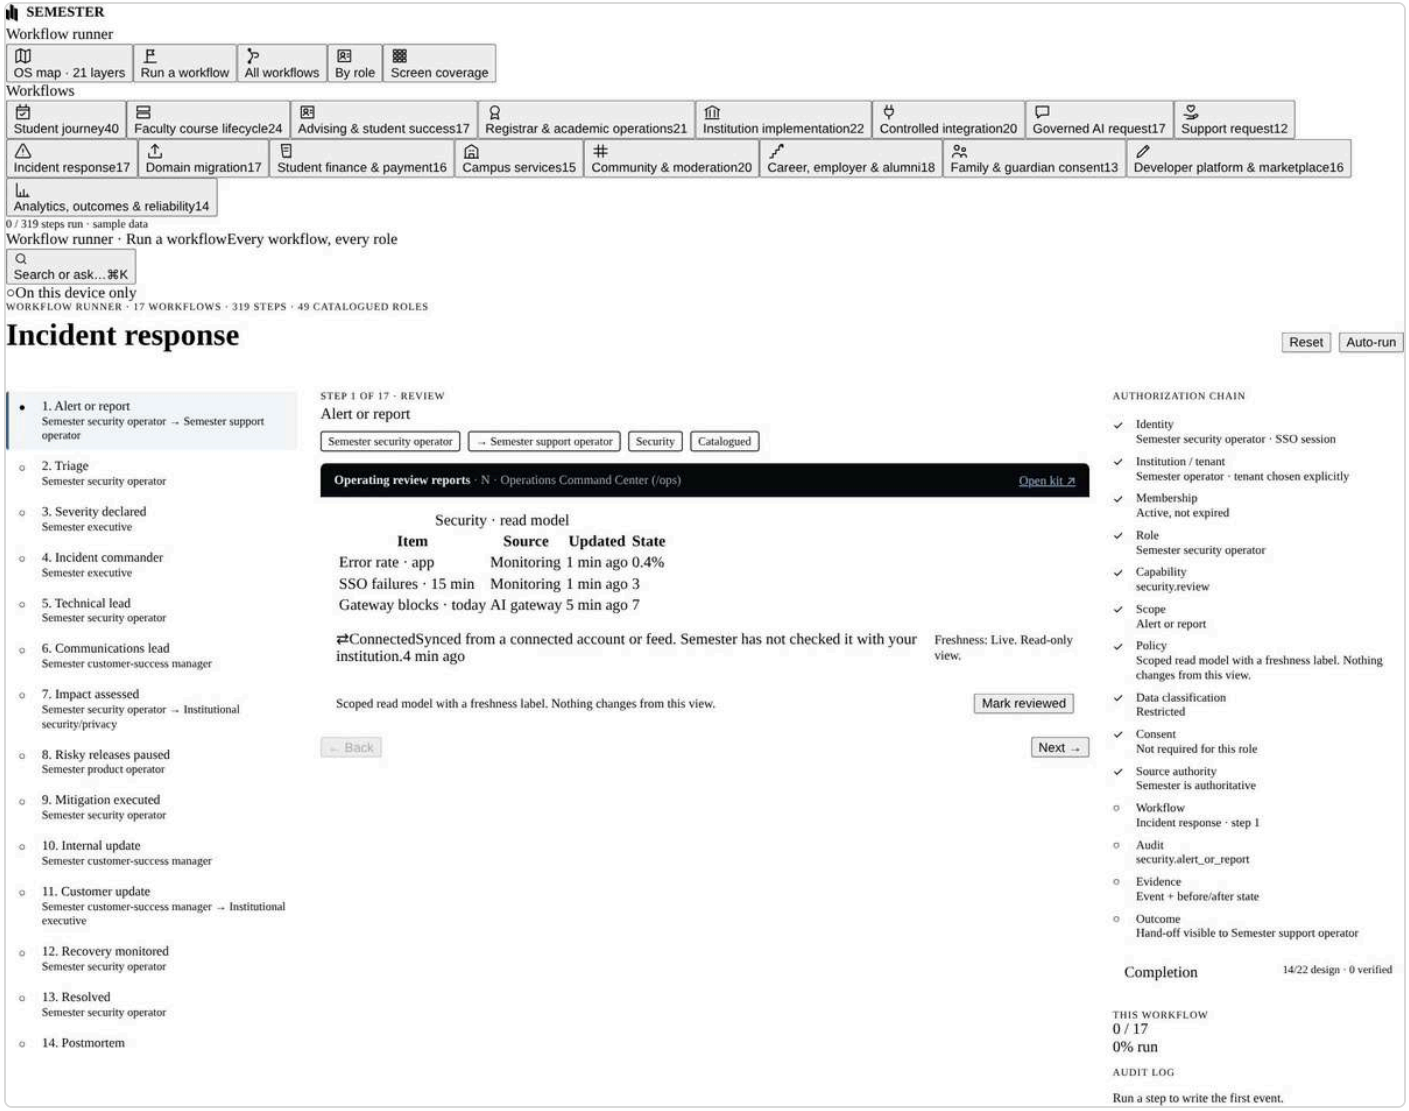

Incident response17

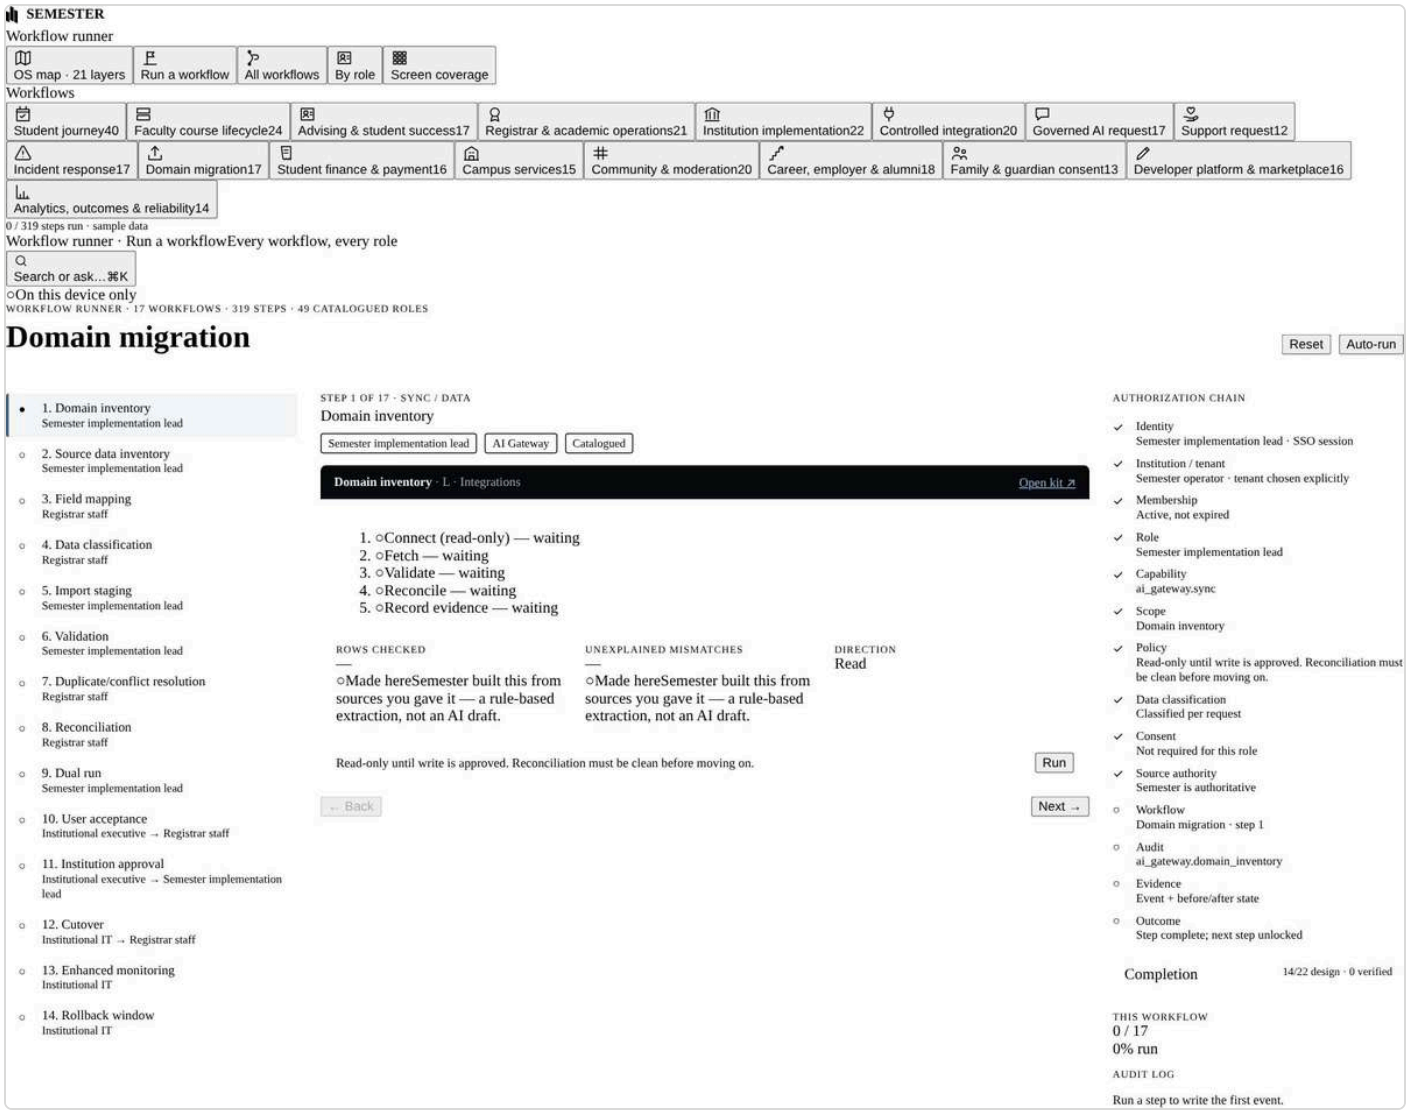

Domain migration17

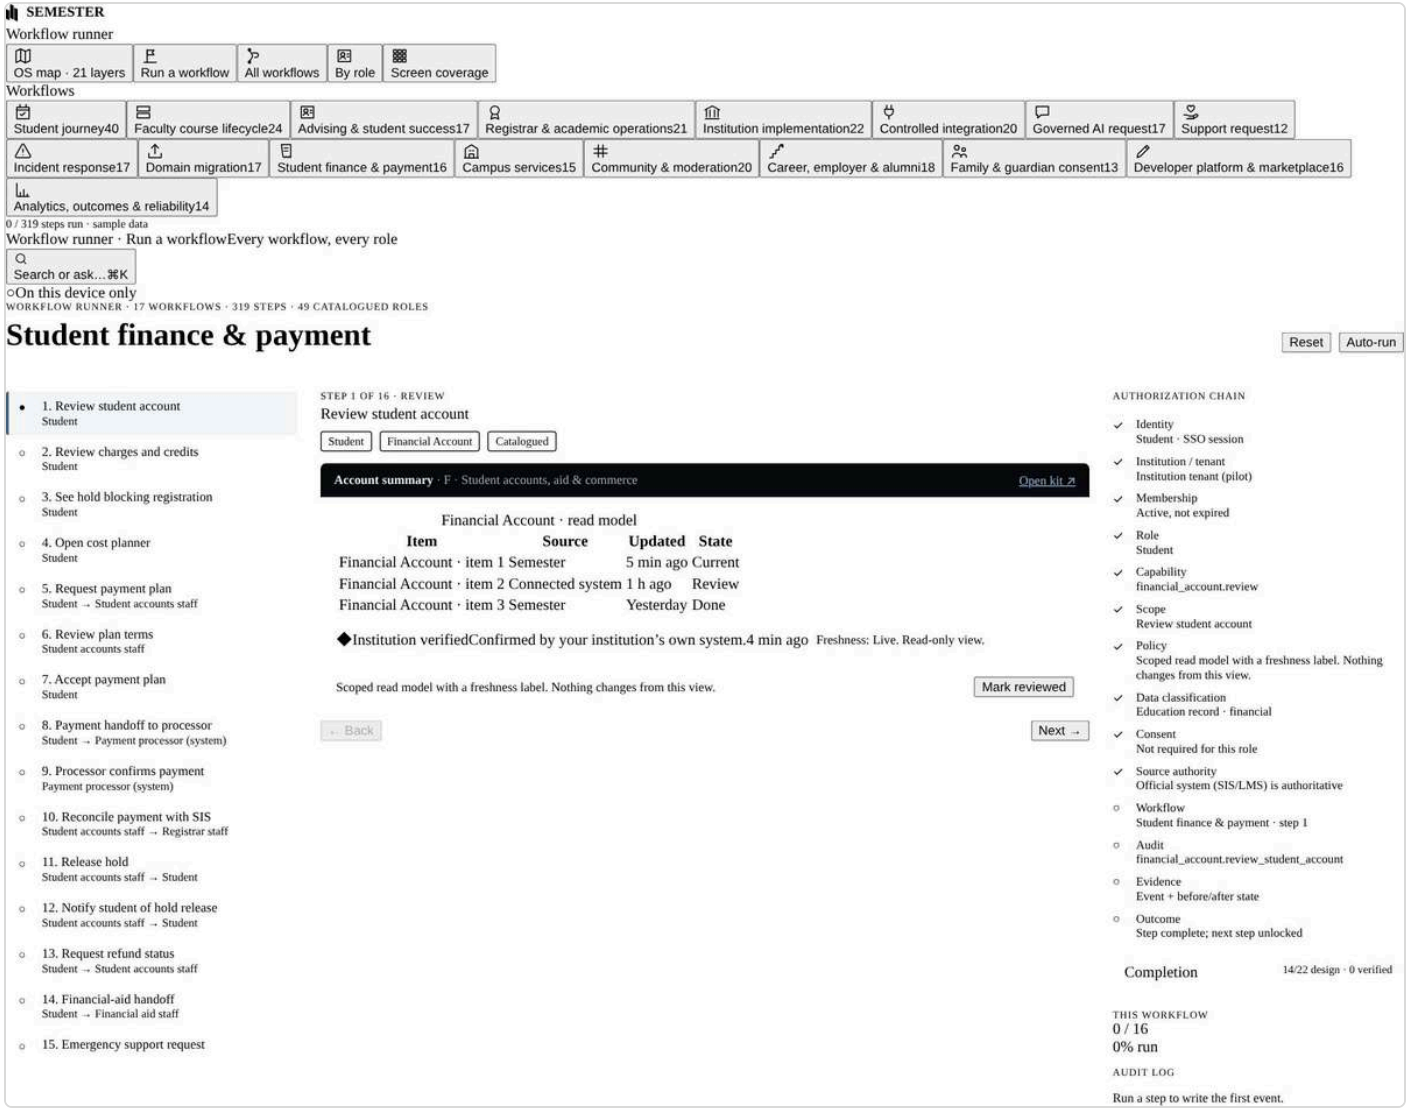

Student finance & payment16

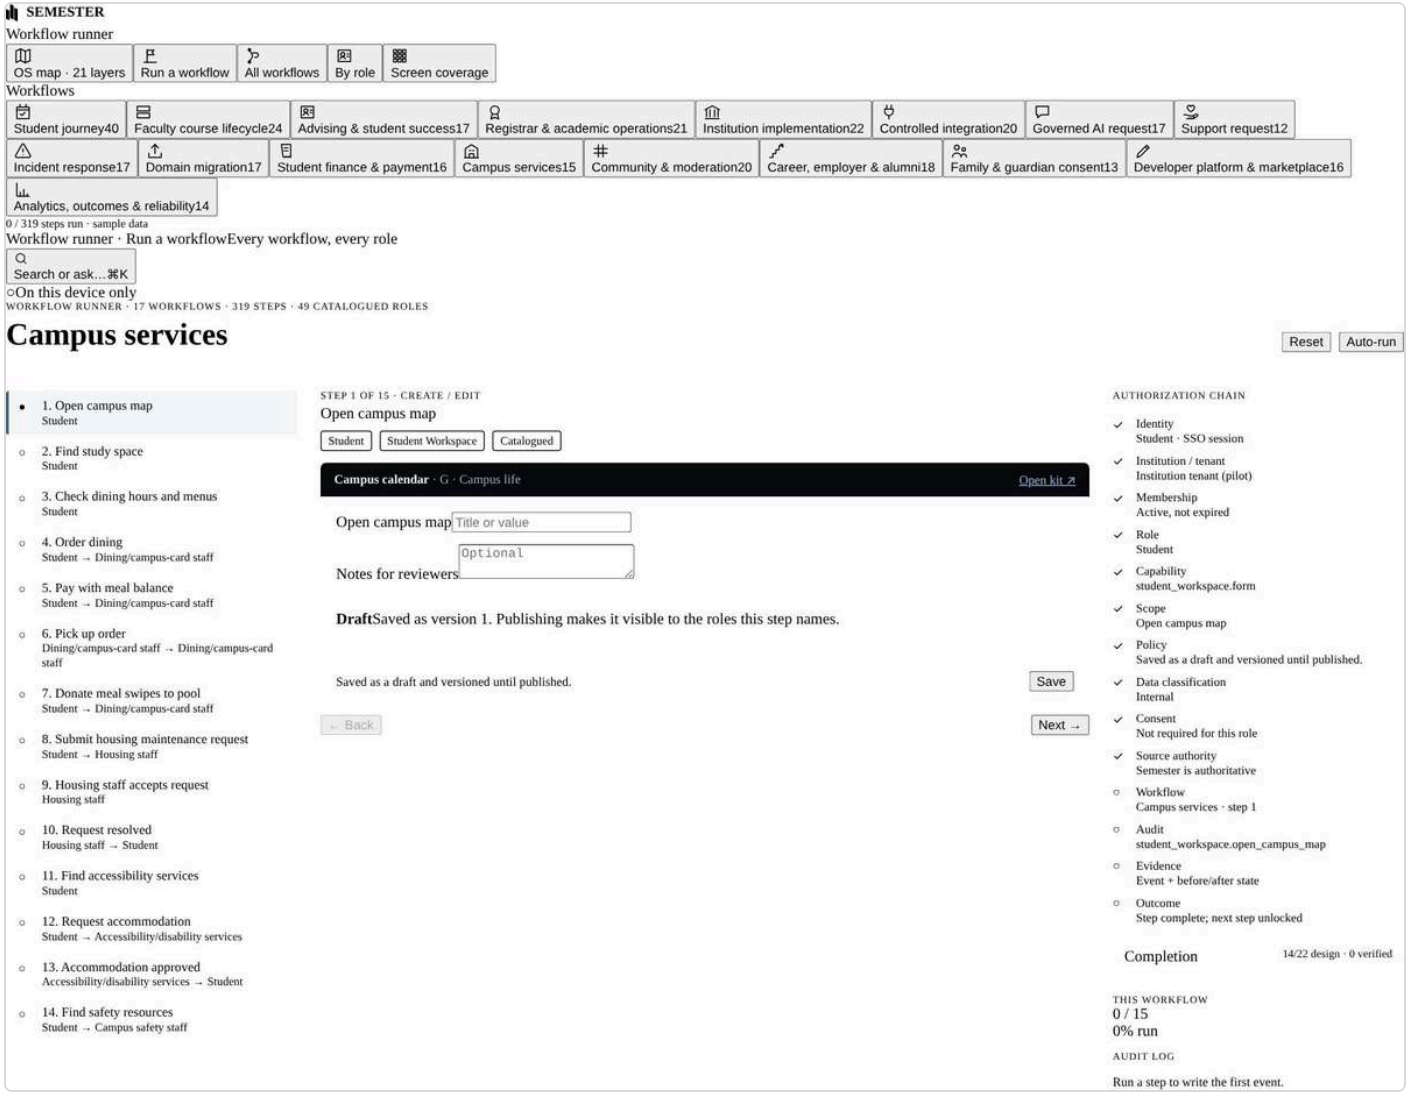

Campus services15

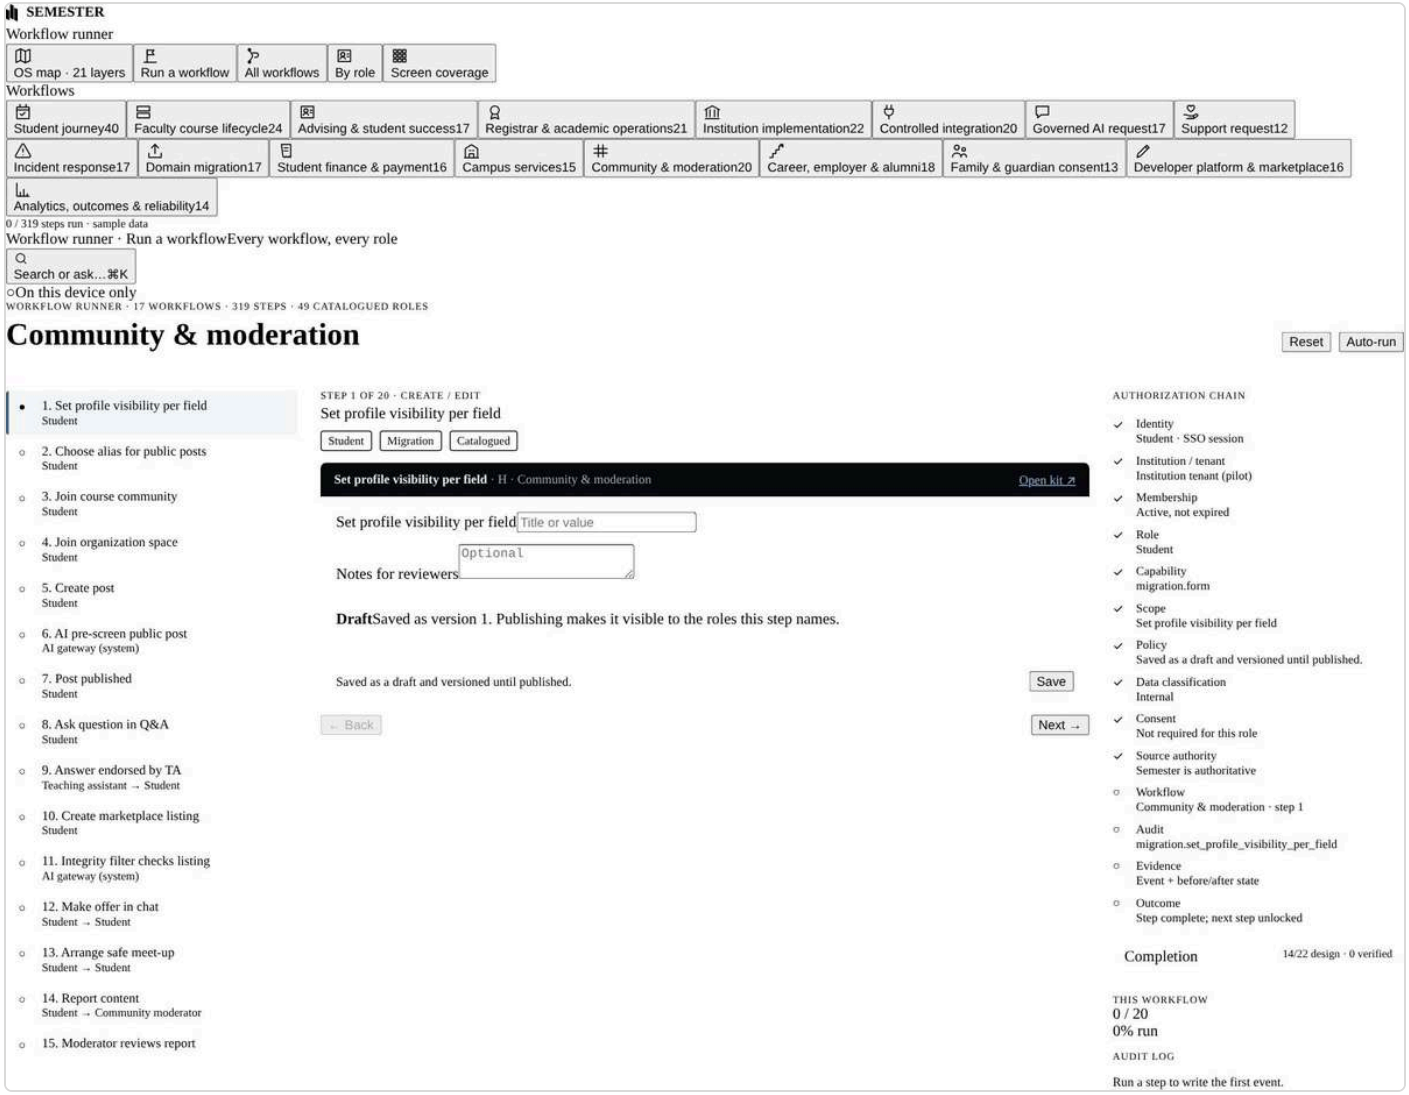

Community & moderation20

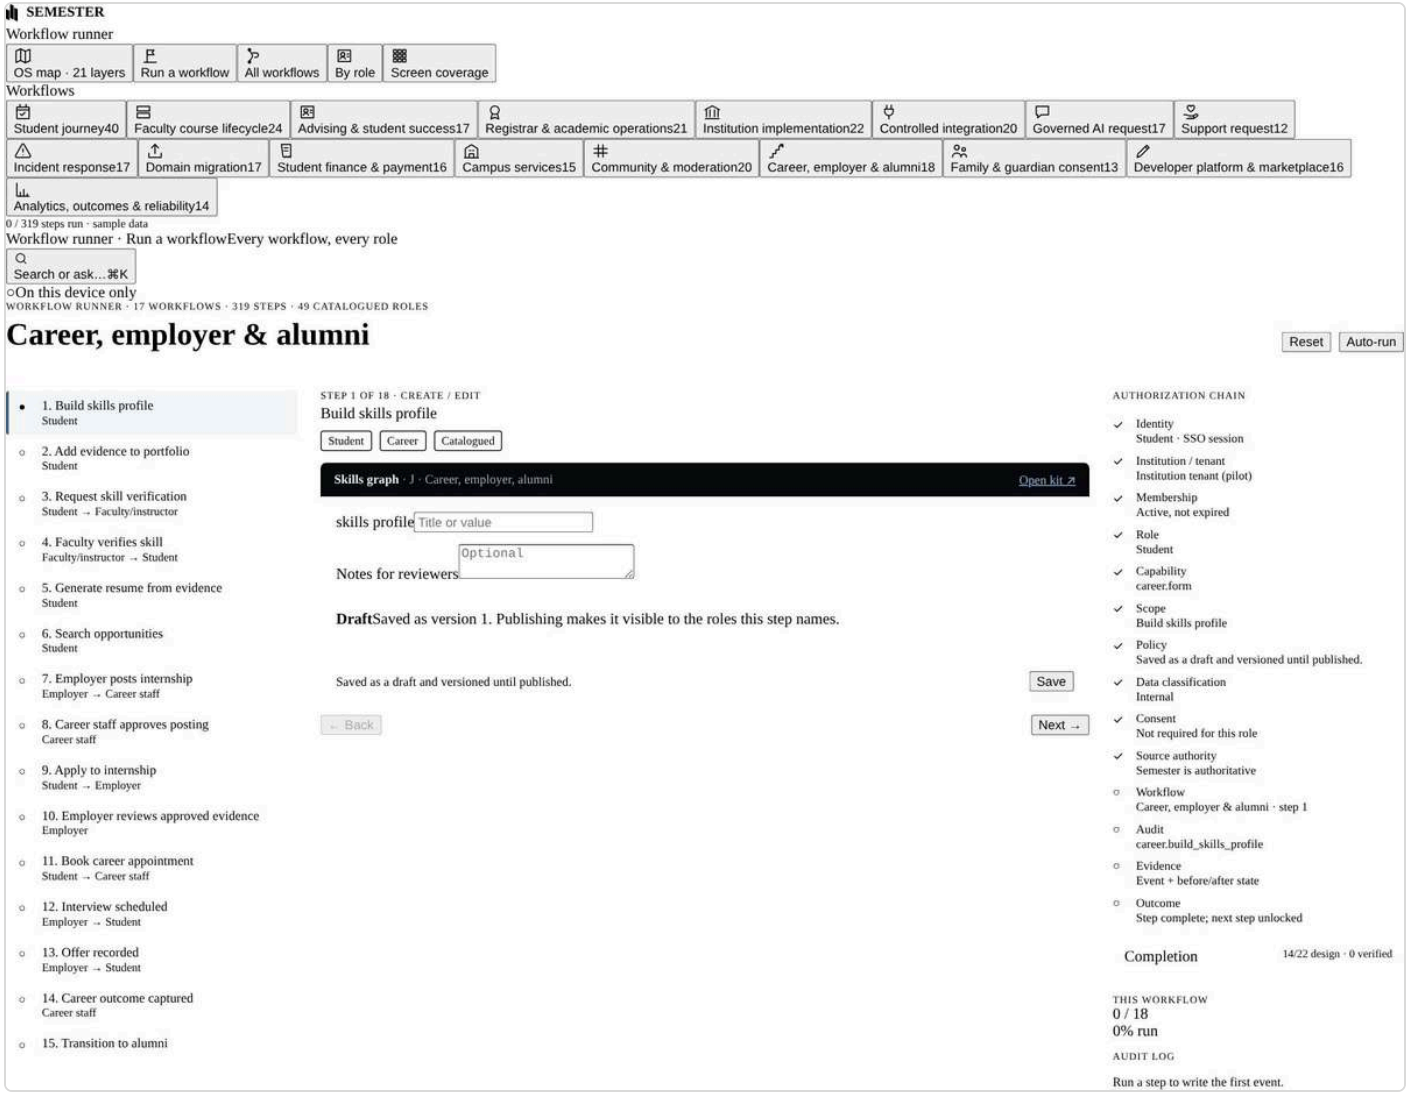

Career, employer & alumni18

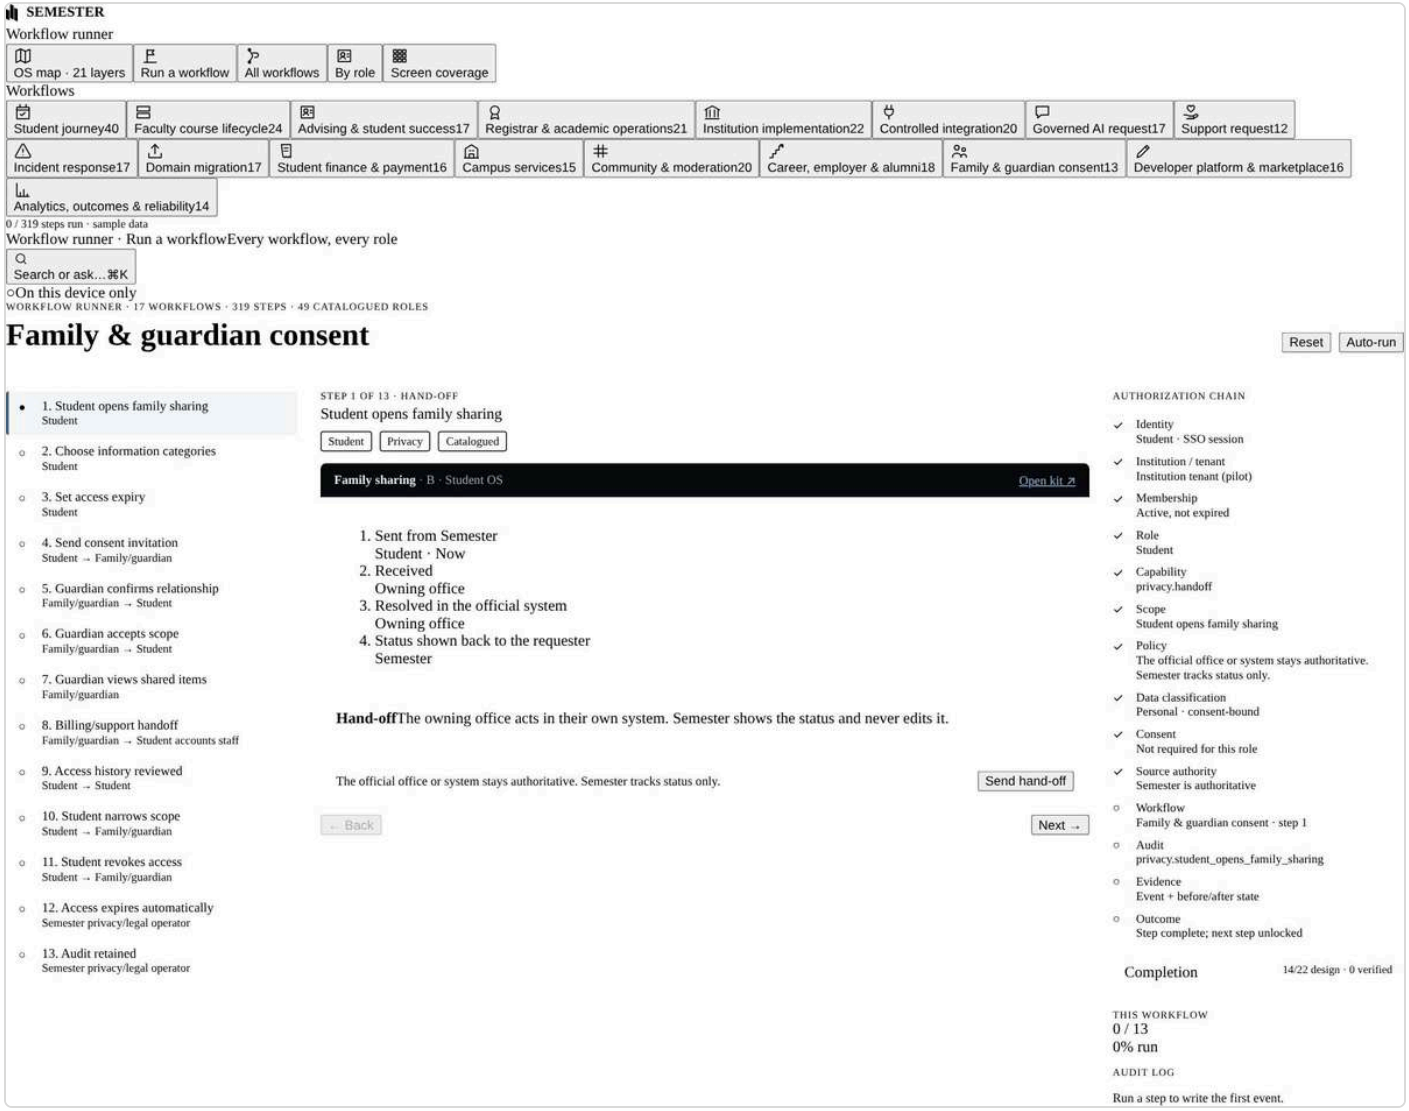

Family & guardian consent13

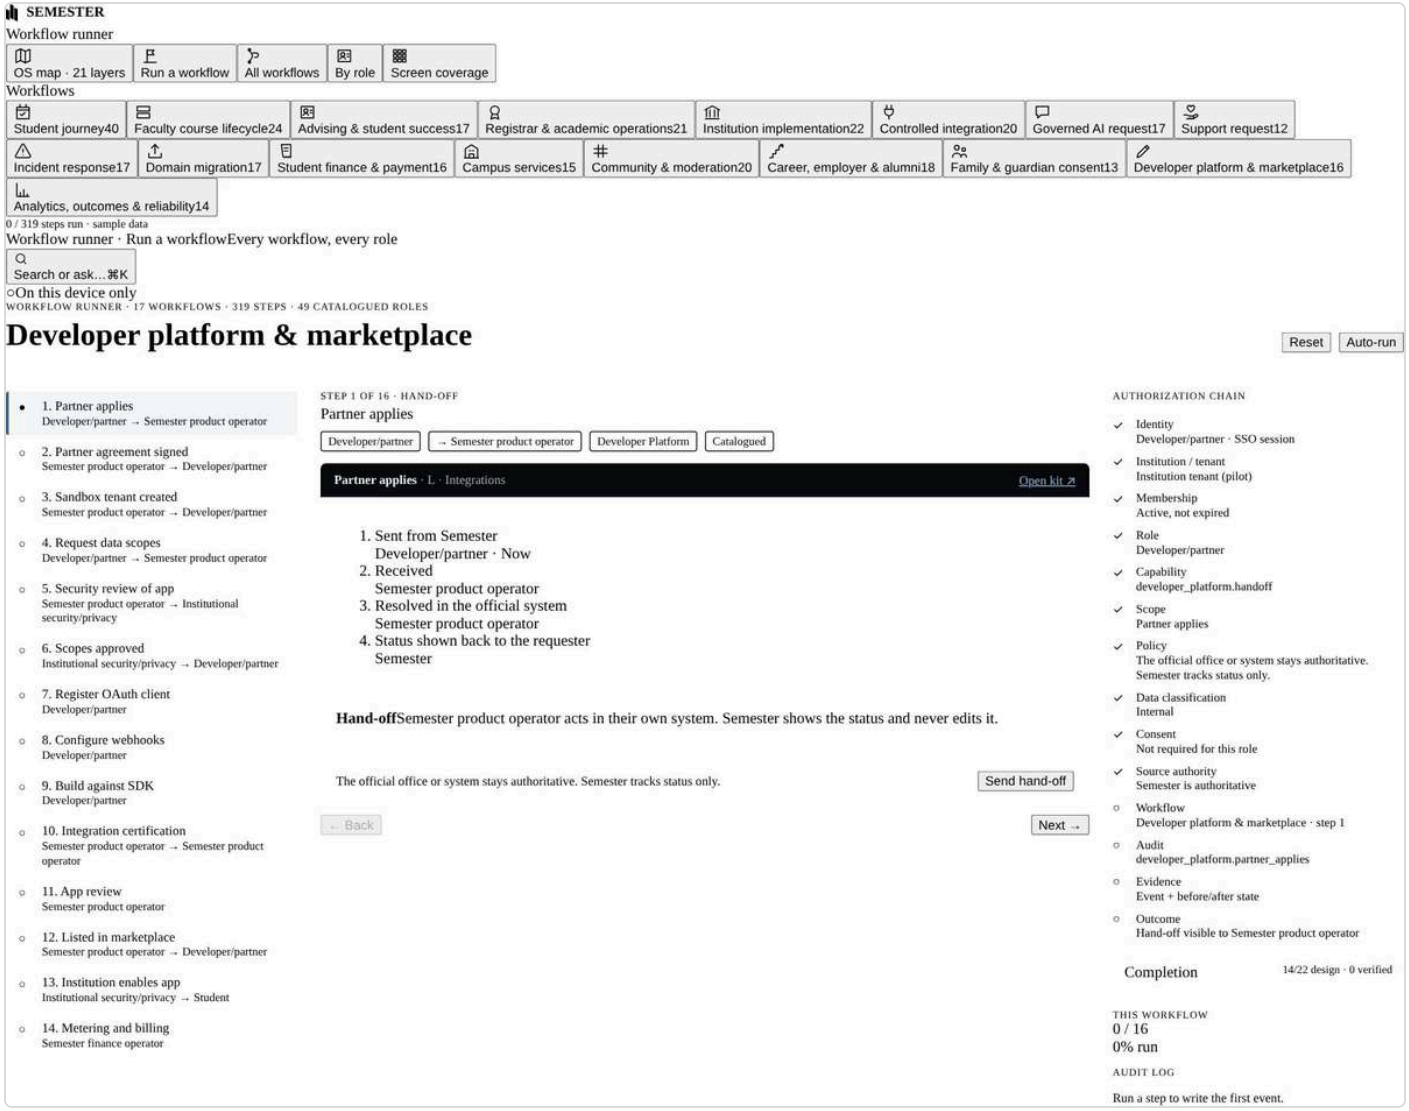

Developer platform & marketplace16

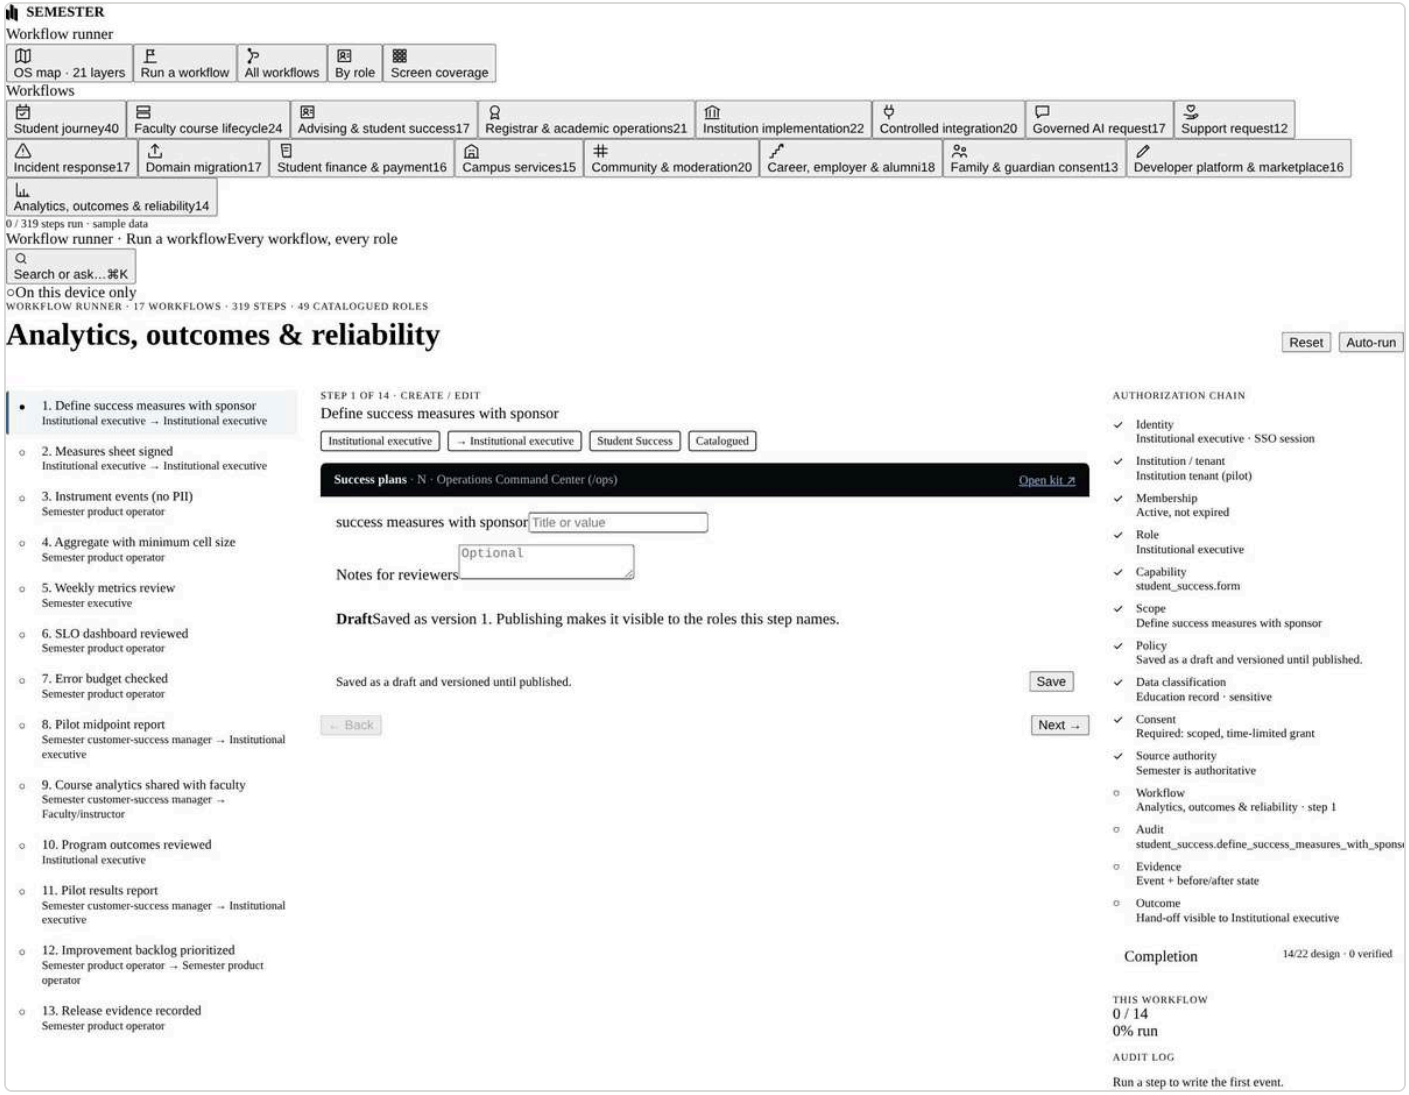

Analytics, outcomes & reliability14

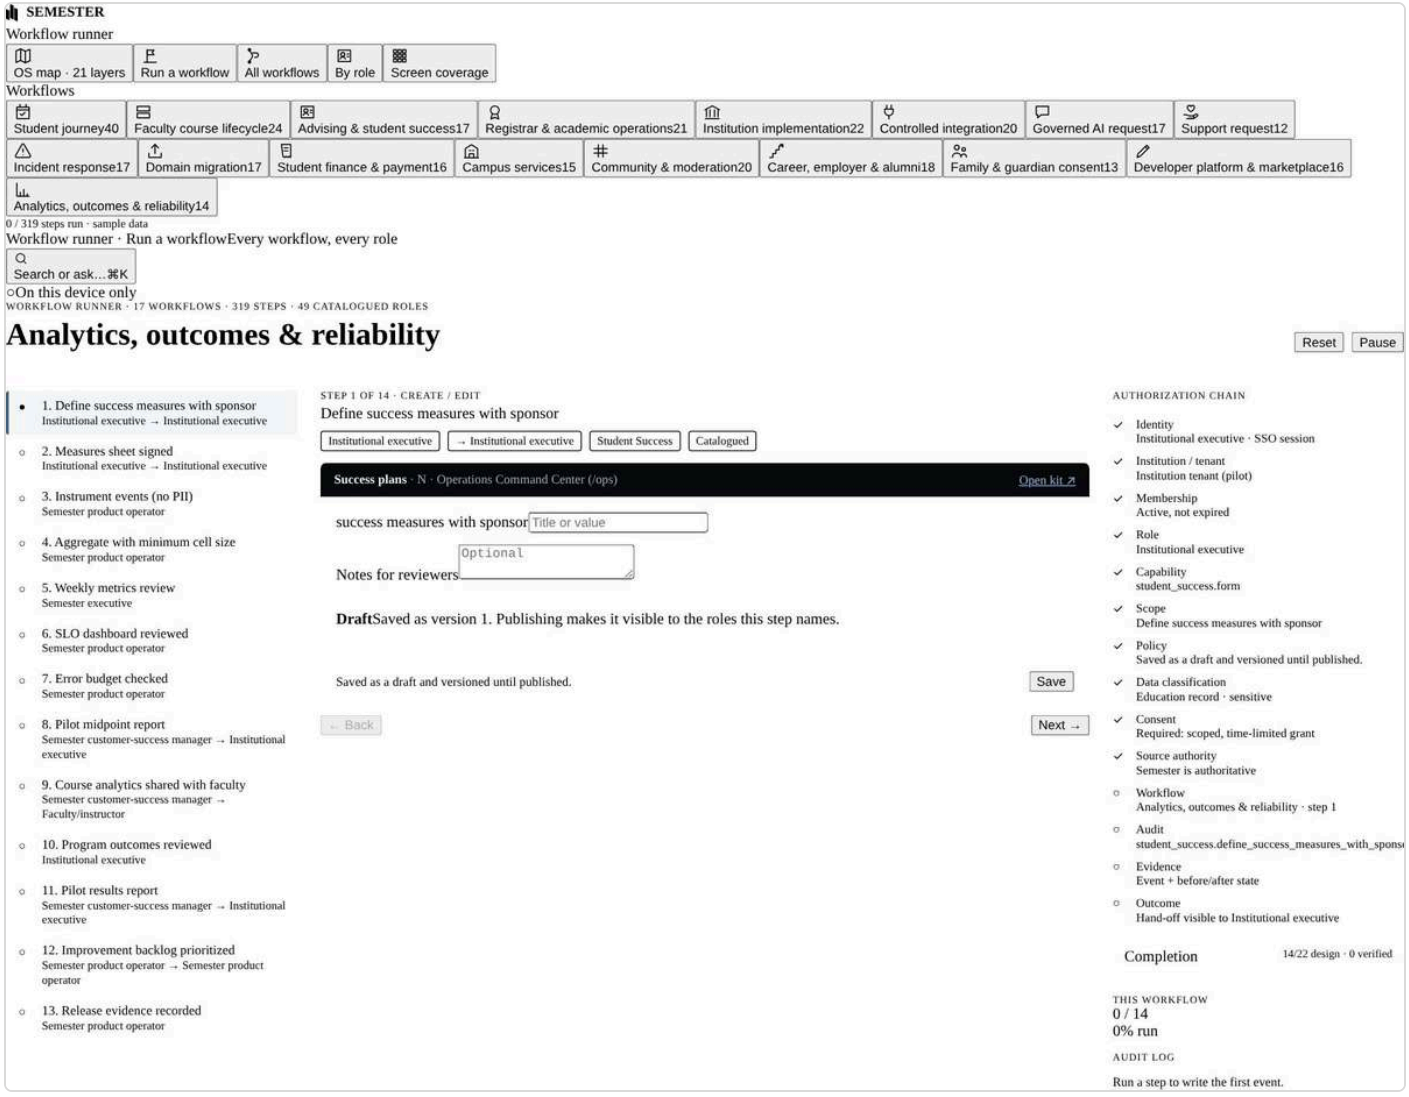

Run a workflow › Auto-run

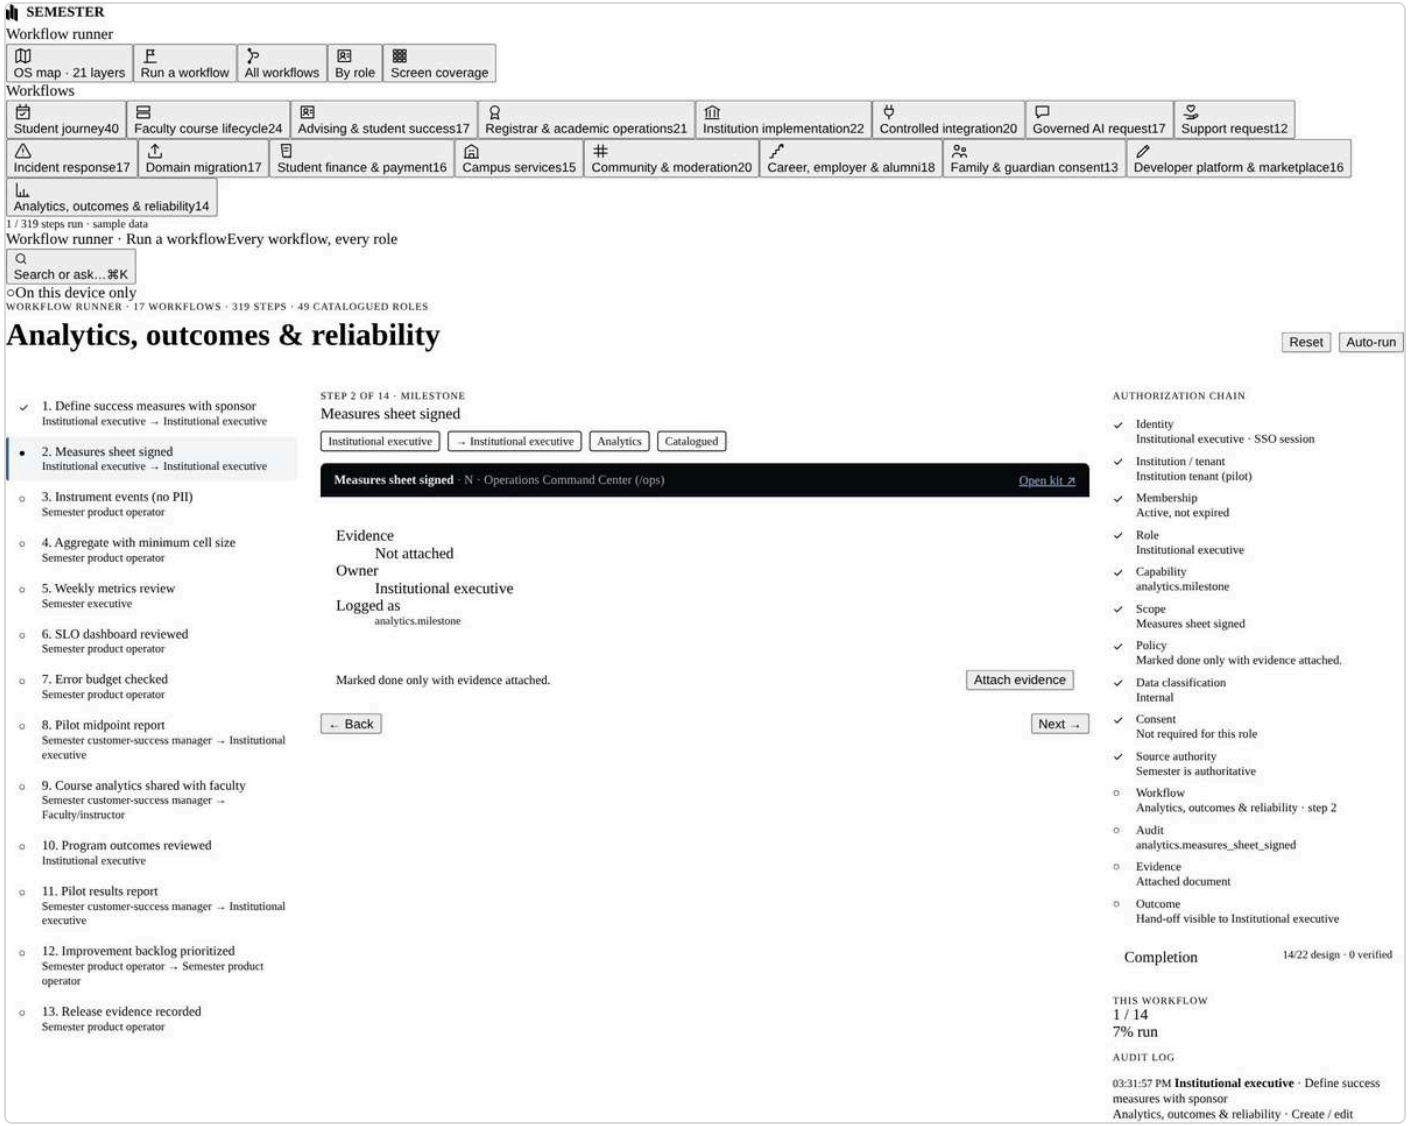

Run a workflow › Save

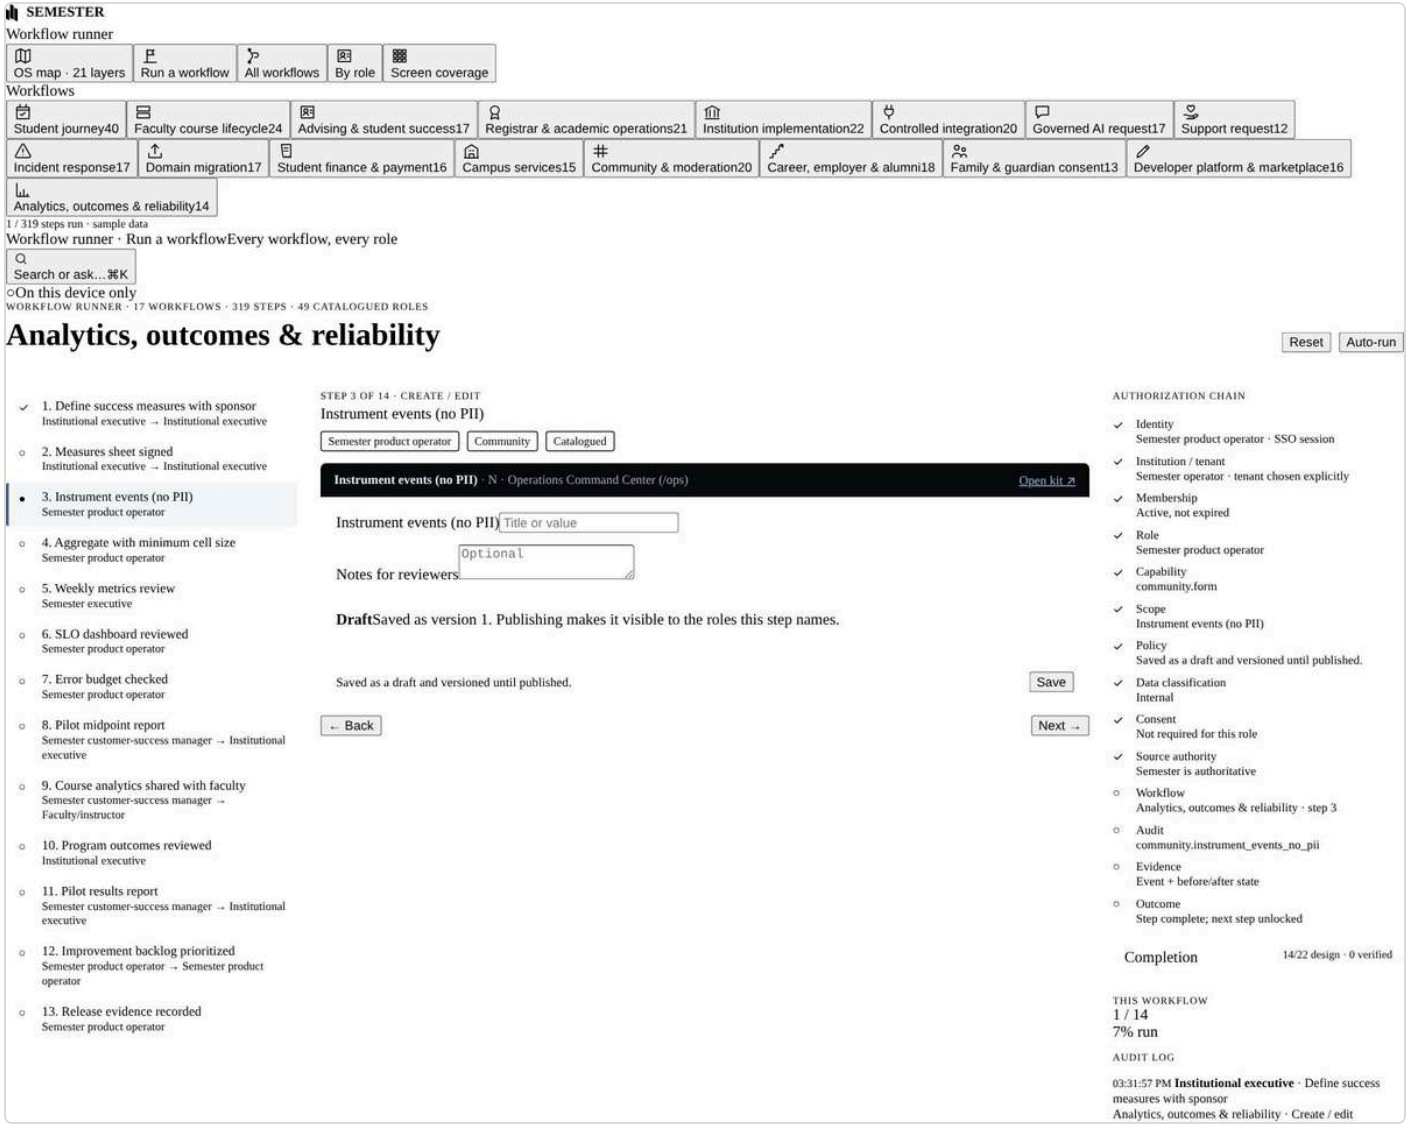

Run a workflow › Next →

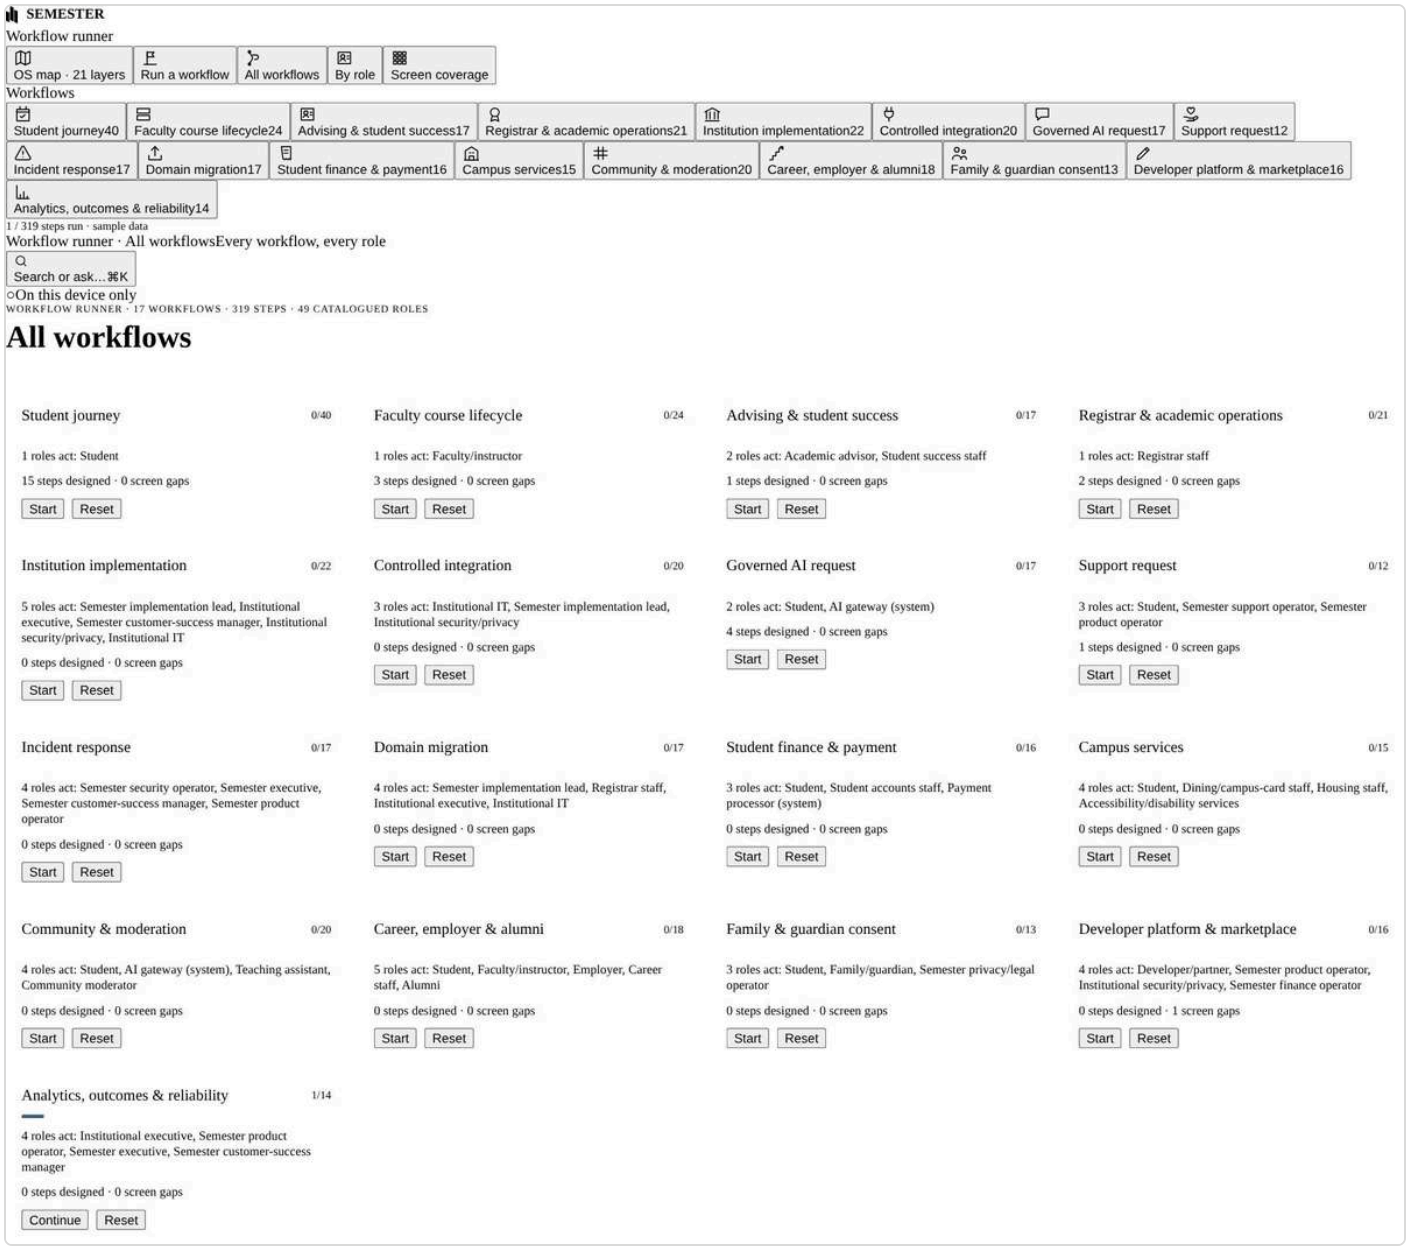

All workflows › Start

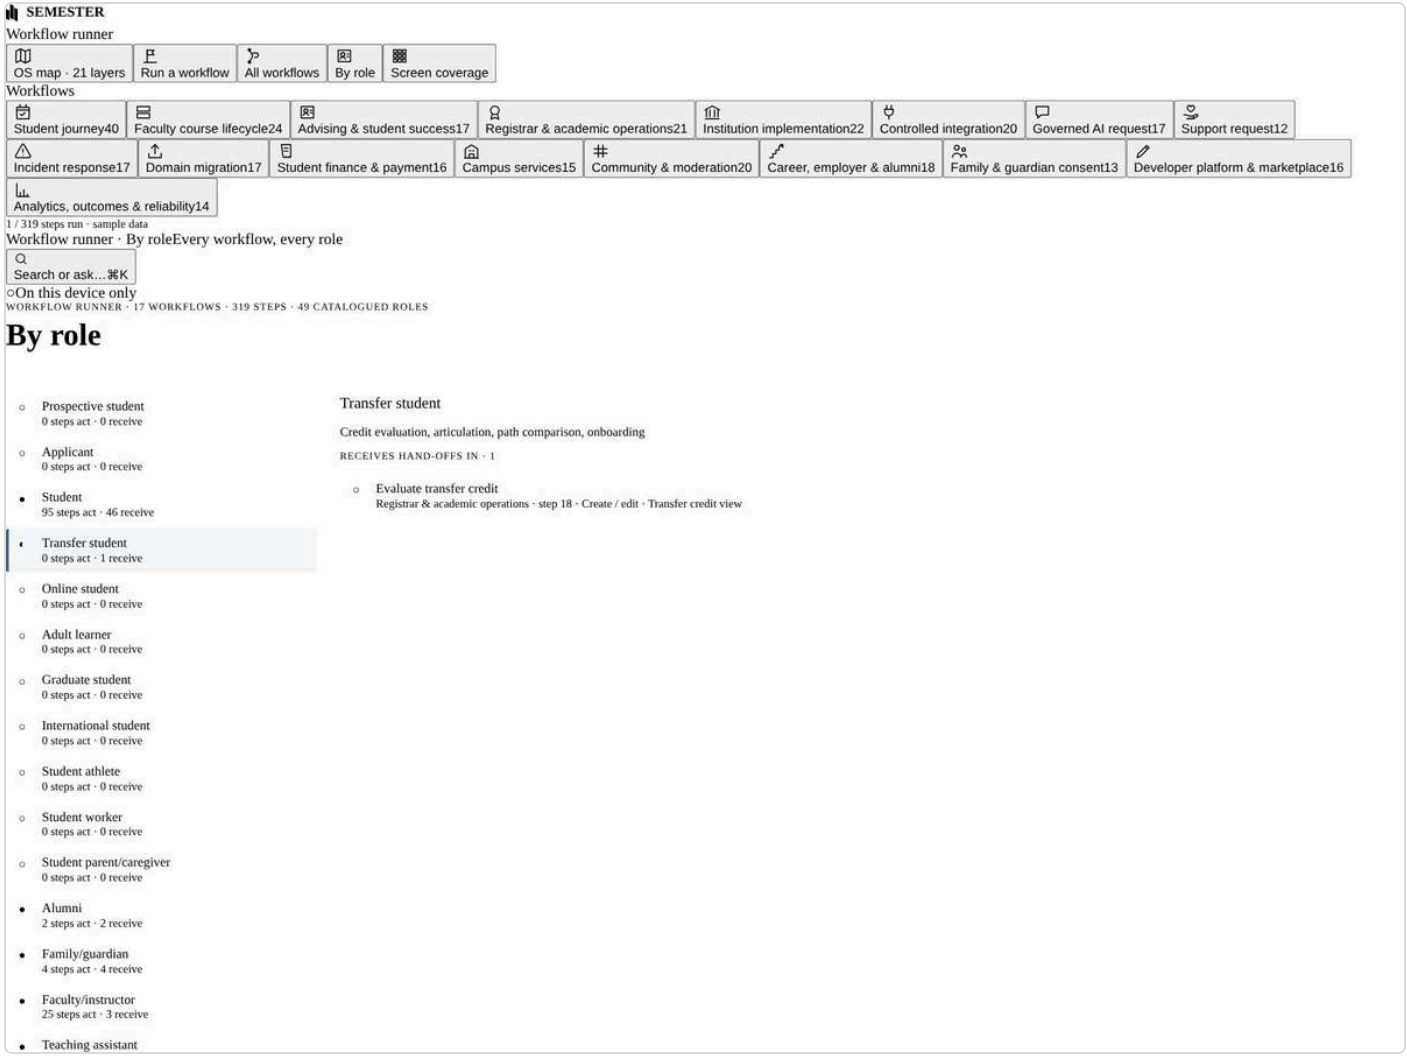
SEMESTER
Workflow runner
OS map · 21 layers
Run a workflow
All workflows
By role
Screen coverage
Workflows
Student journey40
Faculty course lifecycle24
Advising & student success17
Registrar & academic operations21
Institution implementation22
Controlled integration20
Governed AI request17
Support request12
Incident response17
Domain migration17
Student finance & payment16
Campus services15
Community & moderation20
Career, employer & alumni18
Family & guardian consent13
Developer platform & marketplace16
Analytics, outcomes & reliability14
1 / 319 steps run · sample data
Workflow runner · By roleEvery workflow, every role
Search or ask…⌘K
On this device only
WORKFLOW RUNNER · 17 WORKFLOWS · 319 STEPS · 49 CATALOGUED ROLES
By role
Prospective student
0 steps act · 0 receive
Applicant
0 steps act · 0 receive
Student
95 steps act · 46 receive
Transfer student
0 steps act · 1 receive
Online student
0 steps act · 0 receive
Adult learner
0 steps act · 0 receive
Graduate student
0 steps act · 0 receive
International student
0 steps act · 0 receive
Student athlete
0 steps act · 0 receive
Student worker
0 steps act · 0 receive
Student parent/caregiver
0 steps act · 0 receive
Alumni
2 steps act · 2 receive
Family/guardian
4 steps act · 4 receive
Faculty/instructor
25 steps act · 3 receive
Teaching assistant
Transfer student
Credit evaluation, articulation, path comparison, onboarding
RECEIVES HAND-OFFS IN · 1
Evaluate transfer credit
Registrar & academic operations · step 18 · Create / edit · Transfer credit view

By role › ◖

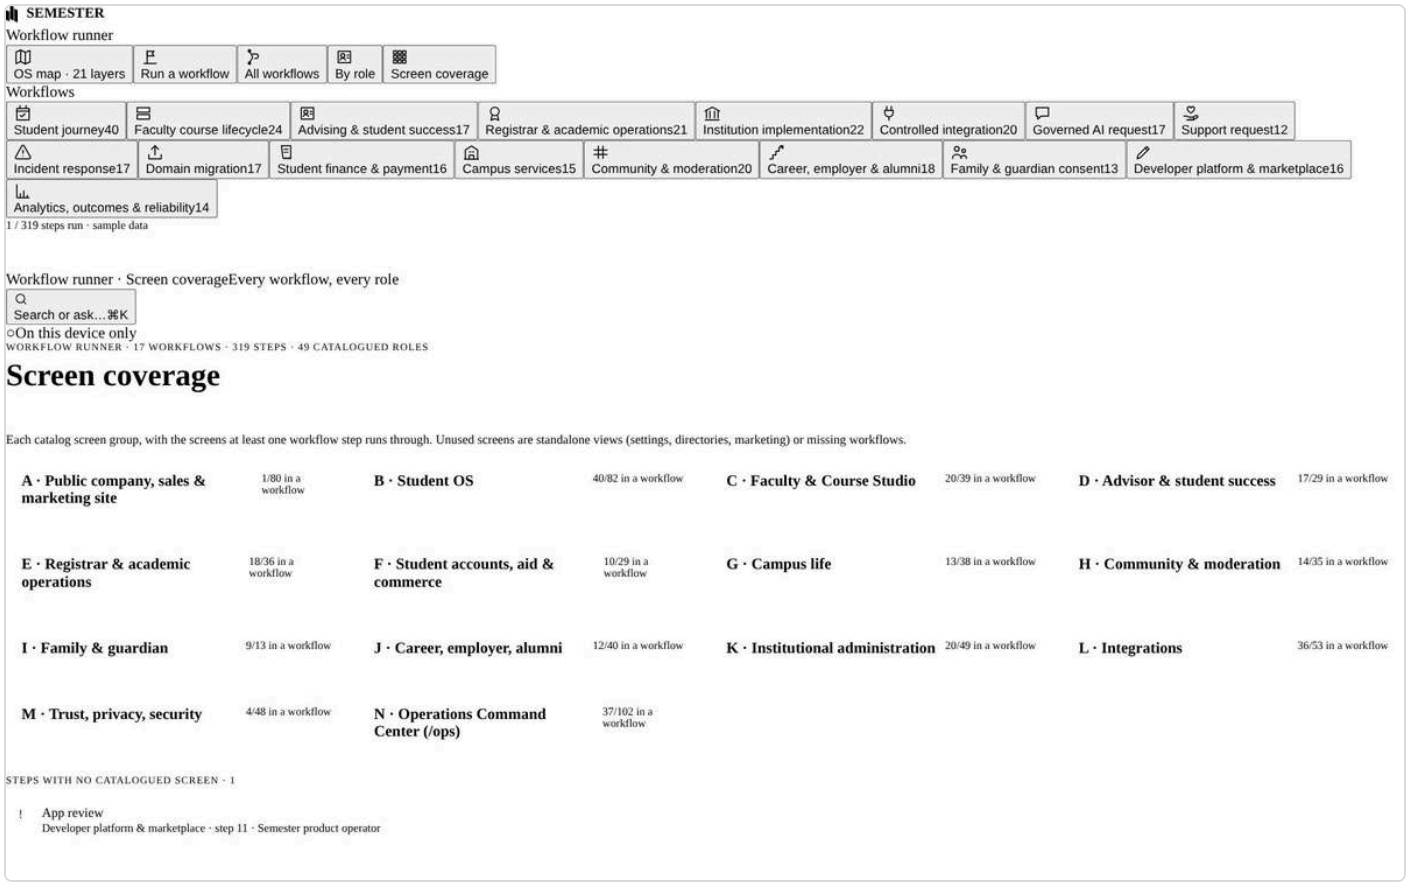

Screen coverage › A · Public company, sales & marketing site

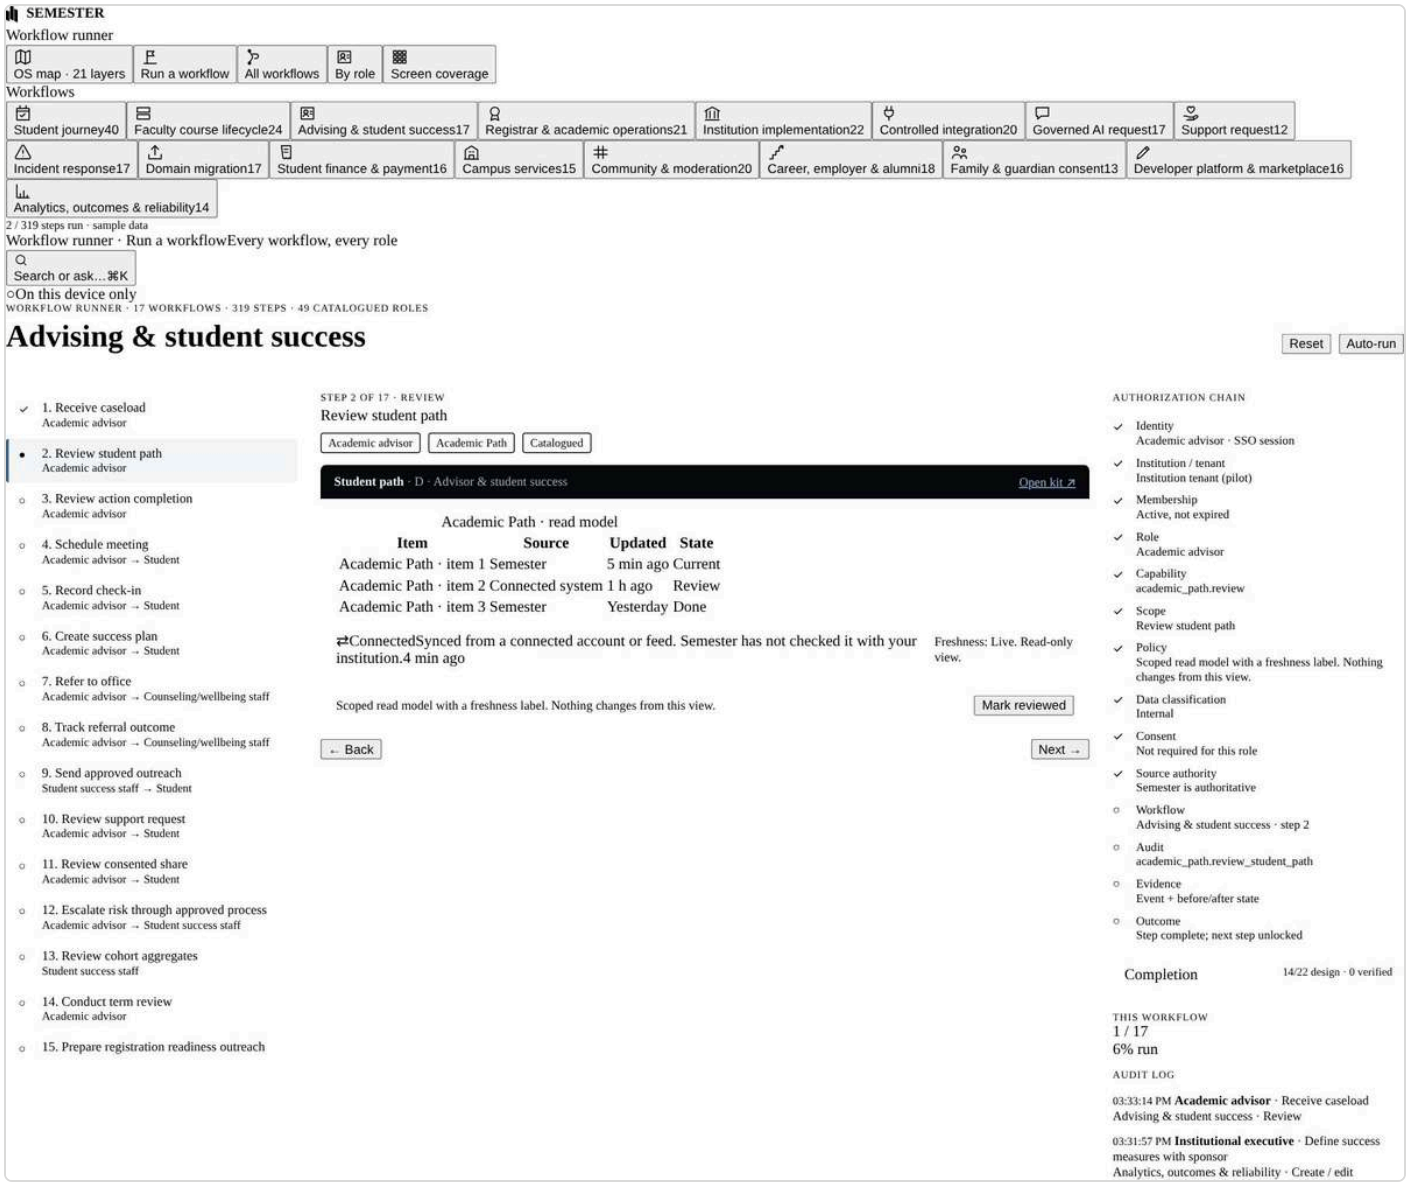

Advising & student success17 › Mark reviewed

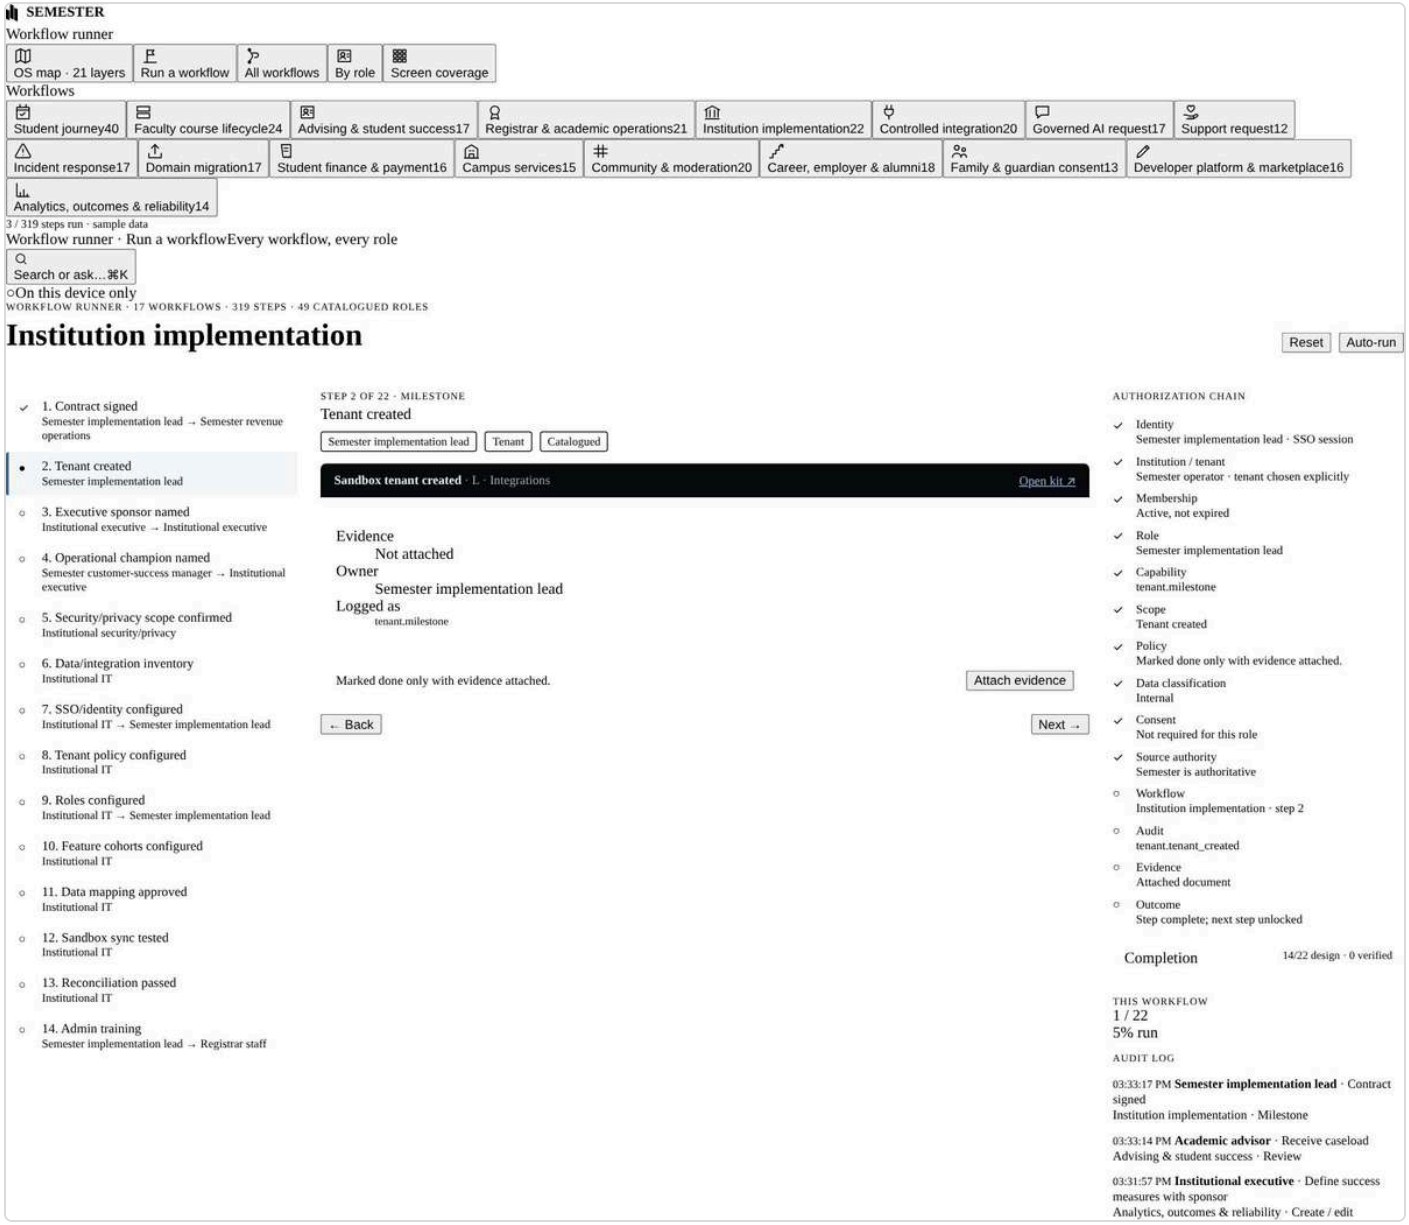

Institution implementation22 › Attach evidence

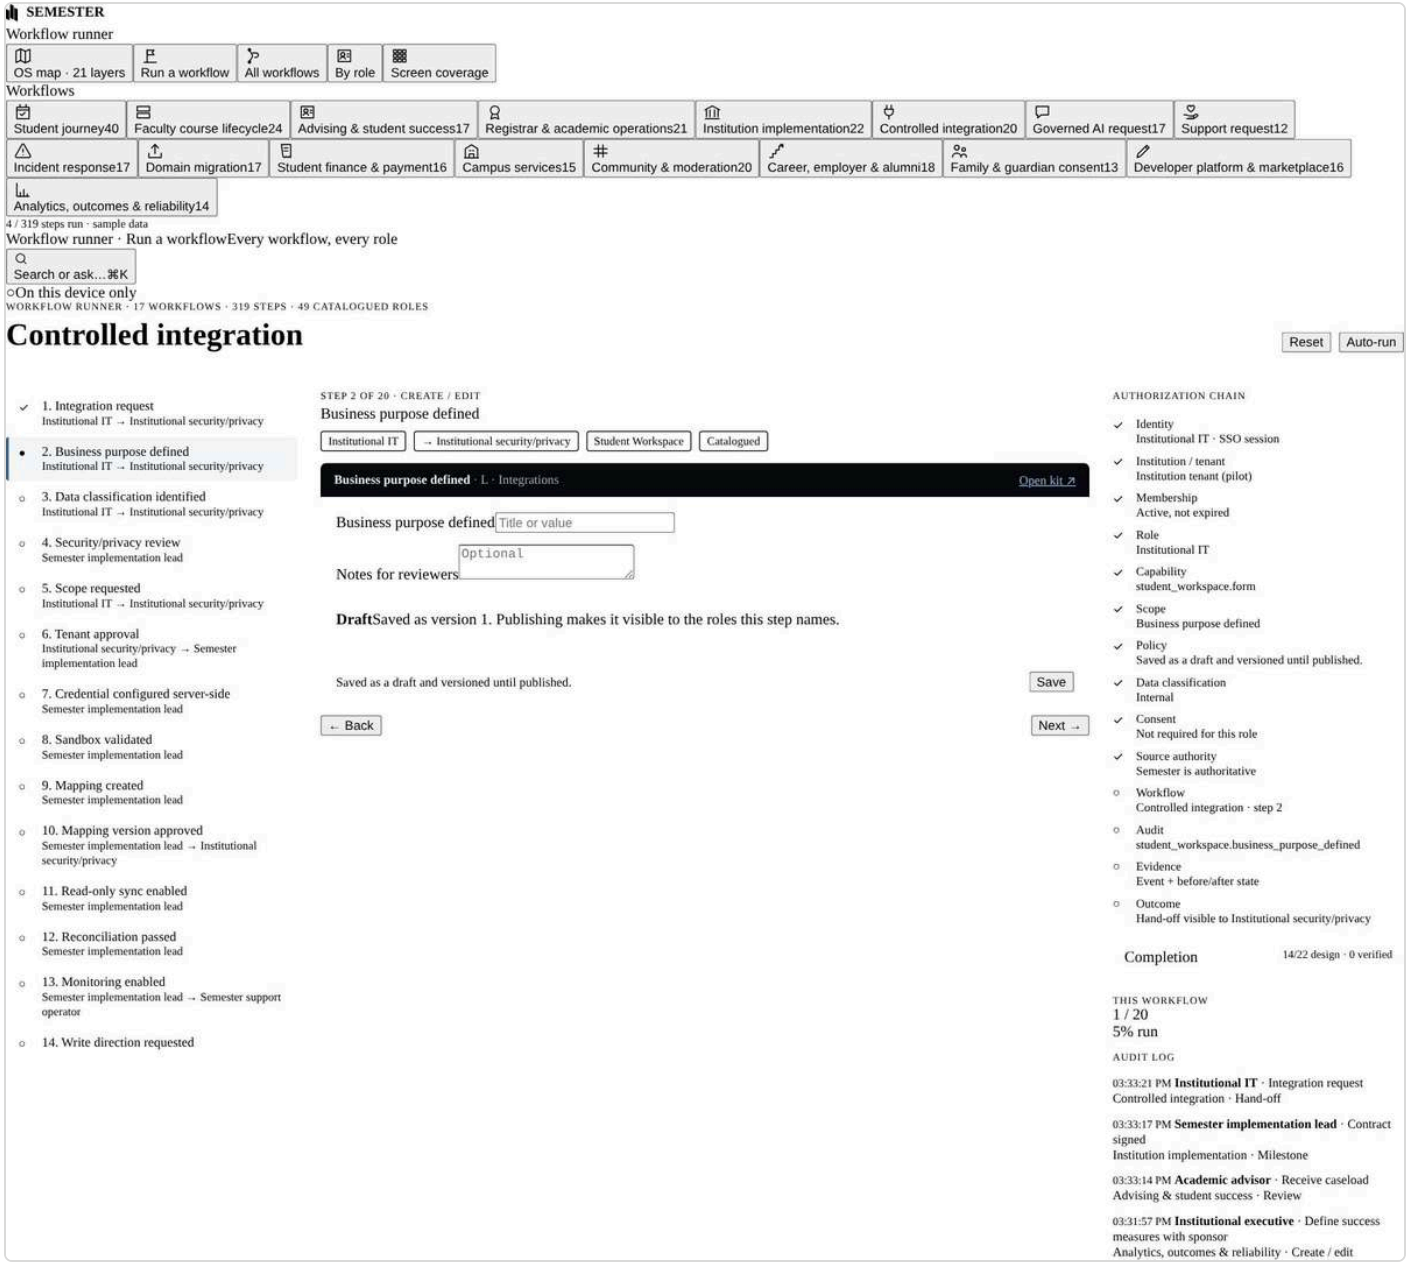

Controlled integration20 › Send hand-off

Governed AI request17 › Run check

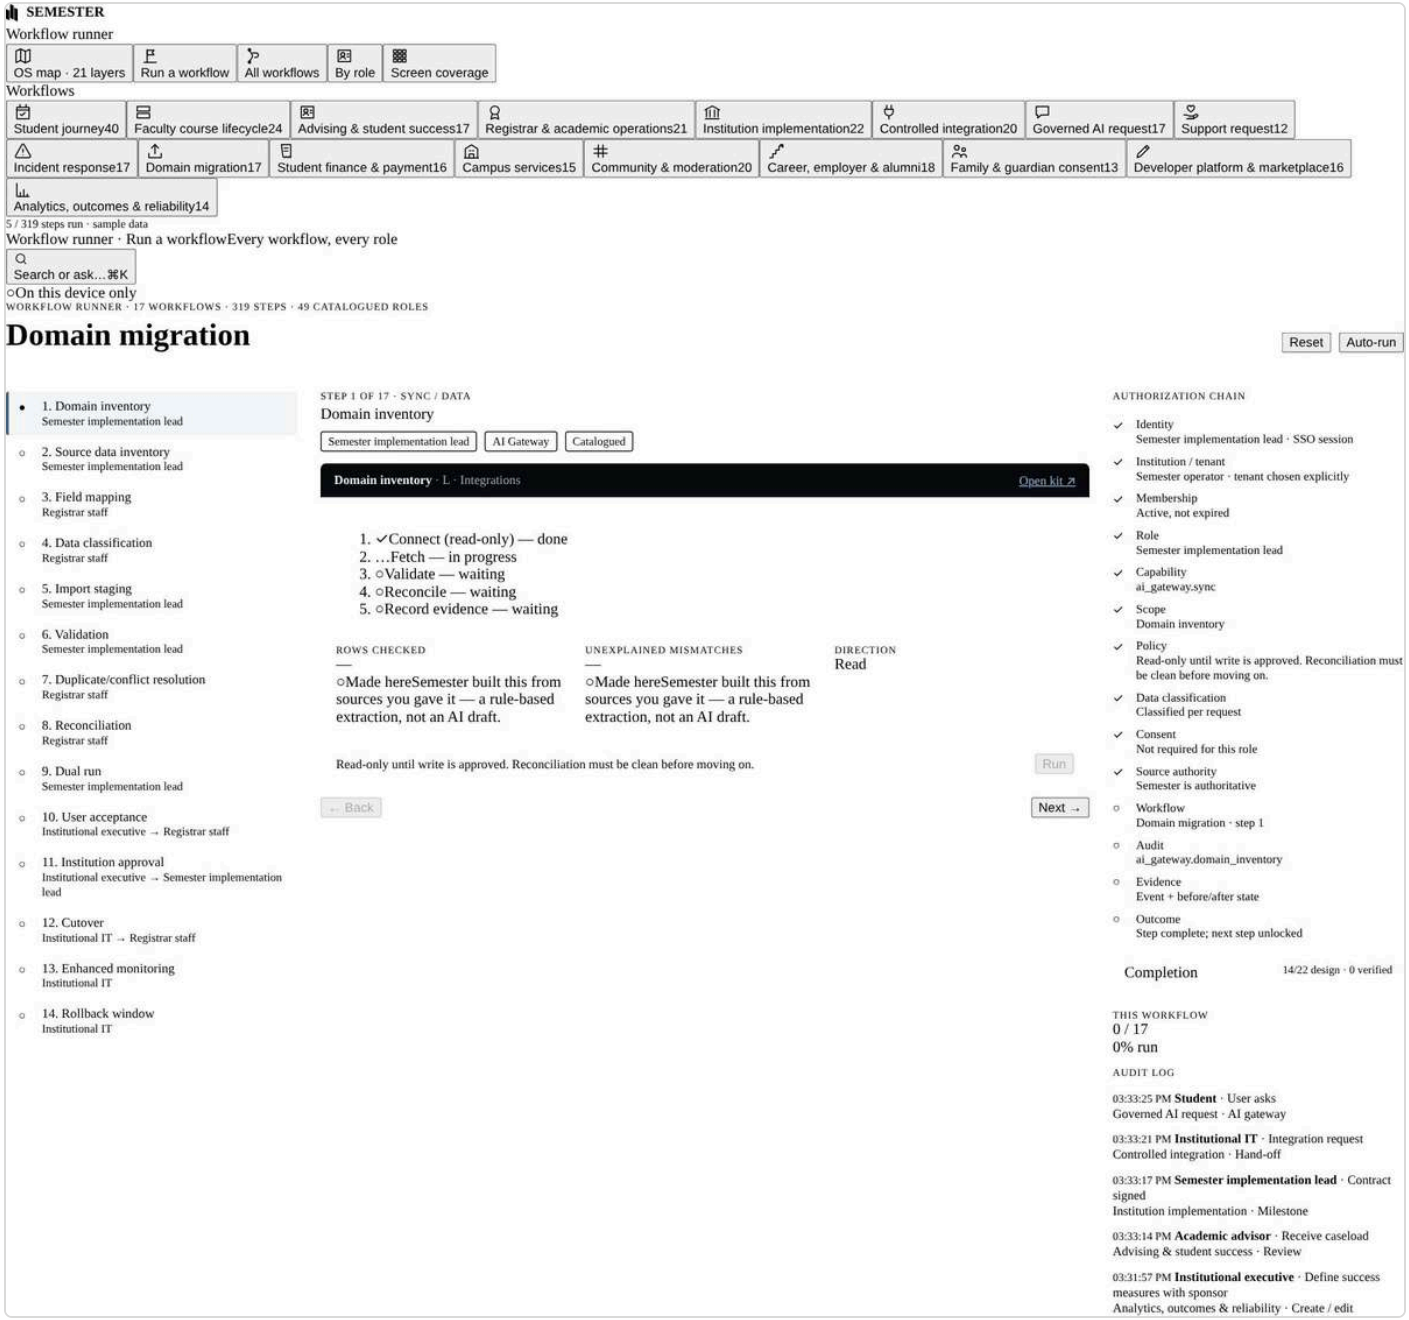

Domain migration17 › Run

Platform maturity

15 screens.

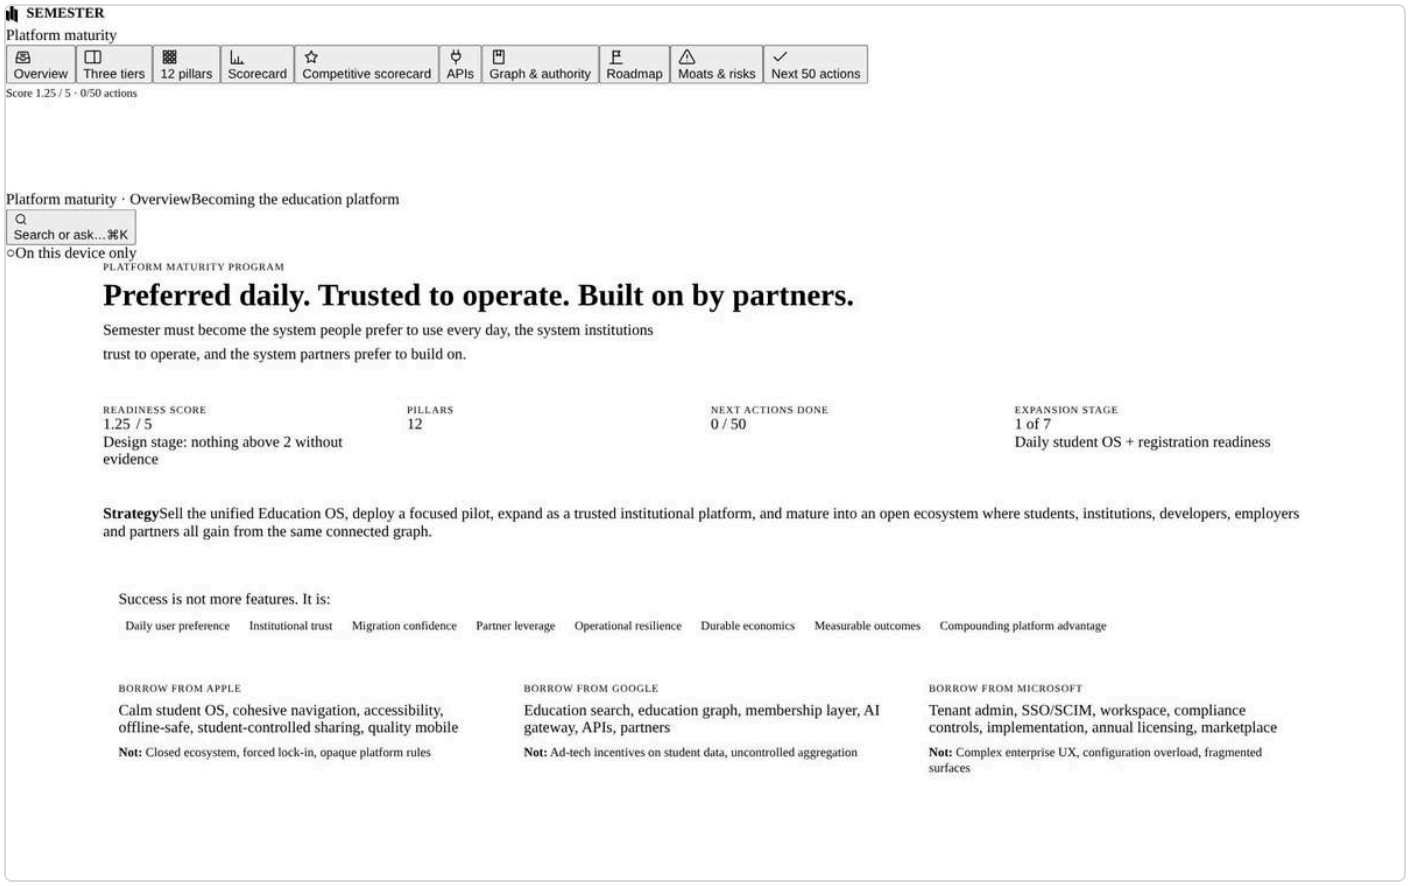

Opening view

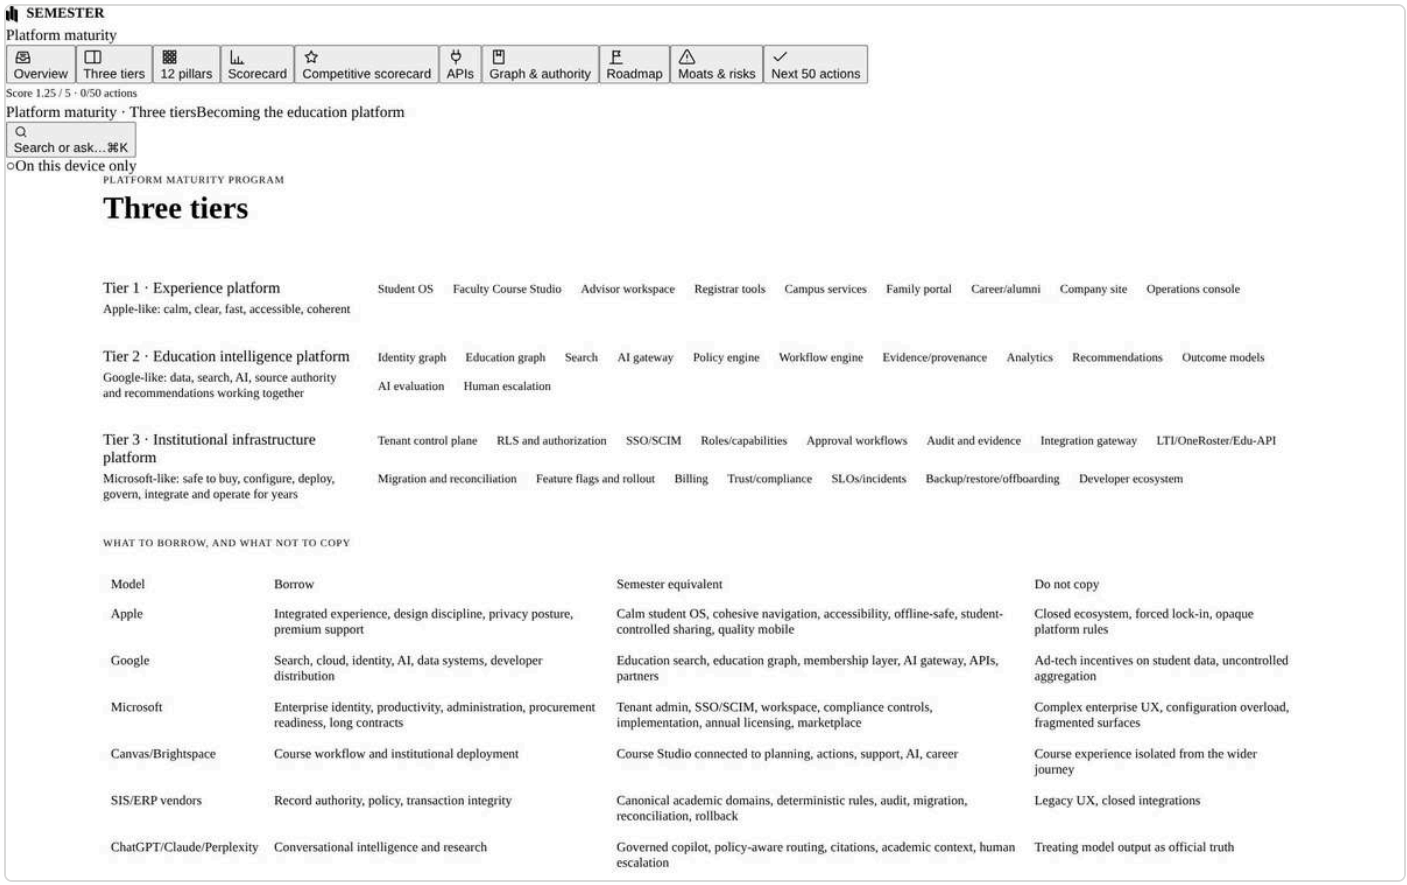
SEMESTER
Platform maturity
Overview
Three tiers
12 pillars
Scorecard
Competitive scorecard
APIs
Graph & authority
Roadmap
Moats & risks
Next 50 actions
Score 1.25 / 5 · 0/50 actions
Platform maturity · Three tiersBecoming the education platform
Search or ask…⌘K
On this device only
PLATFORM MATURITY PROGRAM
Three tiers
Tier 1 · Experience platform
Apple-like: calm, clear, fast, accessible, coherent
Student OS
Faculty Course Studio
Advisor workspace
Registrar tools
Campus services
Family portal
Career/alumni
Company site
Operations console
Tier 2 · Education intelligence platform
Google-like: data, search, AI, source authority and recommendations working together
Identity graph
Education graph
Search
AI gateway
Policy engine
Workflow engine
Evidence/provenance
Analytics
Recommendations
Outcome models
AI evaluation
Human escalation
Tier 3 · Institutional infrastructure platform
Microsoft-like: safe to buy, configure, deploy, govern, integrate and operate for years
Tenant control plane
RLS and authorization
SSO/SCIM
Roles/capabilities
Approval workflows
Audit and evidence
Integration gateway
LTI/OneRoster/Edu-API
Migration and reconciliation
Feature flags and rollout
Billing
Trust/compliance
SLOs/incidents
Backup/restore/offboarding
Developer ecosystem
WHAT TO BORROW, AND WHAT NOT TO COPY
Model
Borrow
Semester equivalent
Do not copy
Apple
Integrated experience, design discipline, privacy posture, premium support
Calm student OS, cohesive navigation, accessibility, offline-safe, student-controlled sharing, quality mobile
Closed ecosystem, forced lock-in, opaque platform rules
Google
Search, cloud, identity, AI, data systems, developer distribution
Education search, education graph, membership layer, AI gateway, APIs, partners
Ad-tech incentives on student data, uncontrolled aggregation
Microsoft
Enterprise identity, productivity, administration, procurement readiness, long contracts
Tenant admin, SSO/SCIM, workspace, compliance controls, implementation, annual licensing, marketplace
Complex enterprise UX, configuration overload, fragmented surfaces
Canvas/Brightspace
Course workflow and institutional deployment
Course Studio connected to planning, actions, support, AI, career
Course experience isolated from the wider journey
SIS/ERP vendors
Record authority, policy, transaction integrity
Canonical academic domains, deterministic rules, audit, migration, reconciliation, rollback
Legacy UX, closed integrations
ChatGPT/Claude/Perplexity
Conversational intelligence and research
Governed copilot, policy-aware routing, citations, academic context, human escalation
Treating model output as official truth

Three tiers

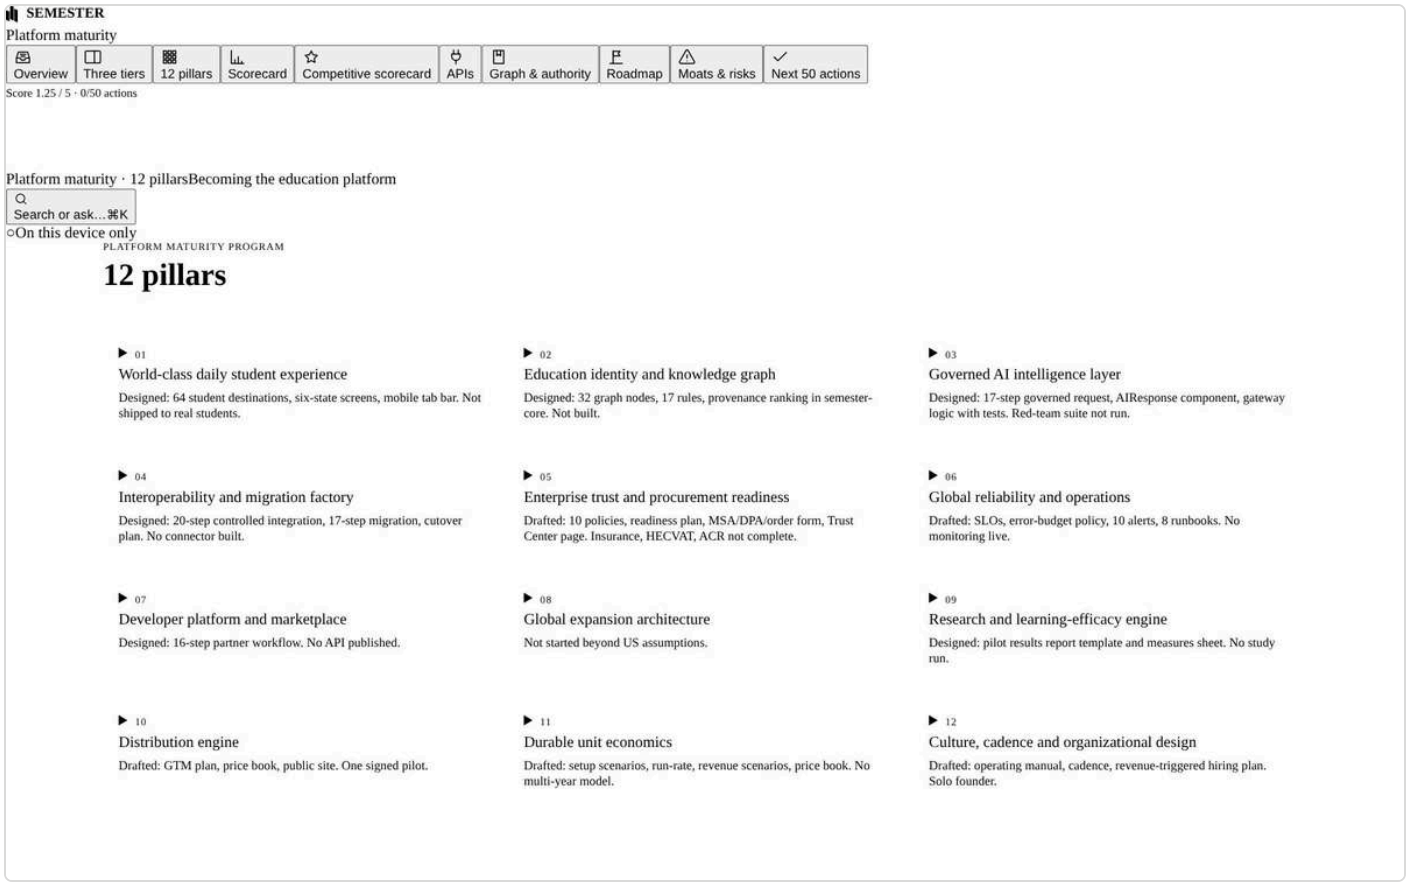
SEMESTER
Platform maturity
Overview
Three tiers
12 pillars
Scorecard
Competitive scorecard
APIs
Graph & authority
Roadmap
Moats & risks
Next 50 actions
Score 1.25 / 5 · 0/50 actions
Platform maturity · 12 pillarsBecoming the education platform
Search or ask…⌘K
On this device only
PLATFORM MATURITY PROGRAM
12 pillars
01
World-class daily student experience
Designed: 64 student destinations, six-state screens, mobile tab bar. Not shipped to real students.
02
Education identity and knowledge graph
Designed: 32 graph nodes, 17 rules, provenance ranking in semester-core. Not built.
03
Governed AI intelligence layer
Designed: 17-step governed request, AIResponse component, gateway logic with tests. Red-team suite not run.
04
Interoperability and migration factory
Designed: 20-step controlled integration, 17-step migration, cutover plan. No connector built.
05
Enterprise trust and procurement readiness
Drafted: 10 policies, readiness plan, MSA/DPA/order form, Trust Center page. Insurance, HECVAT, ACR not complete.
06
Global reliability and operations
Drafted: SLOs, error-budget policy, 10 alerts, 8 runbooks. No monitoring live.
07
Developer platform and marketplace
Designed: 16-step partner workflow. No API published.
08
Global expansion architecture
Not started beyond US assumptions.
09
Research and learning-efficacy engine
Designed: pilot results report template and measures sheet. No study run.
10
Distribution engine
Drafted: GTM plan, price book, public site. One signed pilot.
11
Durable unit economics
Drafted: setup scenarios, run-rate, revenue scenarios, price book. No multi-year model.
12
Culture, cadence and organizational design
Drafted: operating manual, cadence, revenue-triggered hiring plan. Solo founder.

12 pillars

SEMESTER

Platform maturity

Overview | Three tiers | 12 pillars | Scorecard | Competitive scorecard | APIs | Graph & authority | Roadmap | Moats & risks | Next 50 actions

Score 1.25 / 5 · 0/50 actions

Platform maturity · ScorecardBecoming the education platform

Search or ask…⌘K

○On this device only

PLATFORM MATURITY PROGRAM

Scorecard

0 none · 1 idea · 2 designed · 3 built, untested · 4 in production with evidence · 5 proven at scale. Scores save on this device. Raise a score only with evidence.

Dimension	Score	Level	Evidence
Product coherence	0 1 **2** 3 4 5	Designed	One design system, one shell, 673 screens rendered; not shipped
Daily student utility	0 1 **2** 3 4 5	Designed	Student app designed; no real users
Faculty/course utility	0 1 **2** 3 4 5	Designed	Course Studio partly designed
Institutional operations	0 1 **2** 3 4 5	Designed	Console + workflows designed
Data authority	0 1 **2** 3 4 5	Designed	Source labels + provenance logic; no live data
Tenant isolation	0 **1** 2 3 4 5	Idea	RLS migrations written, not run
Security	0 **1** 2 3 4 5	Idea	Policies drafted; controls not evidenced
Privacy	0 1 **2** 3 4 5	Designed	DPA, privacy policy, consent model drafted
Accessibility	0 1 **2** 3 4 5	Designed	WCAG 2.2 AA design rules, test plan; no ACR
AI governance	0 1 **2** 3 4 5	Designed	Gateway design + logic; red-team not run
Reliability	0 **1** 2 3 4 5	Idea	SLOs + runbooks drafted; no monitoring
Integration capability	0 **1** 2 3 4 5	Idea	Designed; no connector
Migration capability	0 **1** 2 3 4 5	Idea	Workflow + cutover designed
Support maturity	0 1 **2** 3 4 5	Designed	Support plan, macros, desk designed
Customer success	0 **1** 2 3 4 5	Idea	Plan only; first pilot not launched
Commercial readiness	0 1 **2** 3 4 5	Designed	Signed paid pilot; price book drafted
Financial sustainability	0 **1** 2 3 4 5	Idea	Bootstrapped; pre-revenue model
Developer ecosystem	**0** 1 2 3 4 5	None	Not started
Marketplace maturity	**0** 1 2 3 4 5	None	Not started (student marketplace ≠ app marketplace)
Global readiness	**0** 1 2 3 4 5	None	US-only assumptions
Research/outcome proof	0 **1** 2 3 4 5	Idea	Measures template; no study
Brand trust	0 **1** 2 3 4 5	Idea	Brand + site; one pilot, no case study
Partner ecosystem	**0** 1 2 3 4 5	None	None
Organizational maturity	0 **1** 2 3 4 5	Idea	Operating manual; solo founder

Scorecard

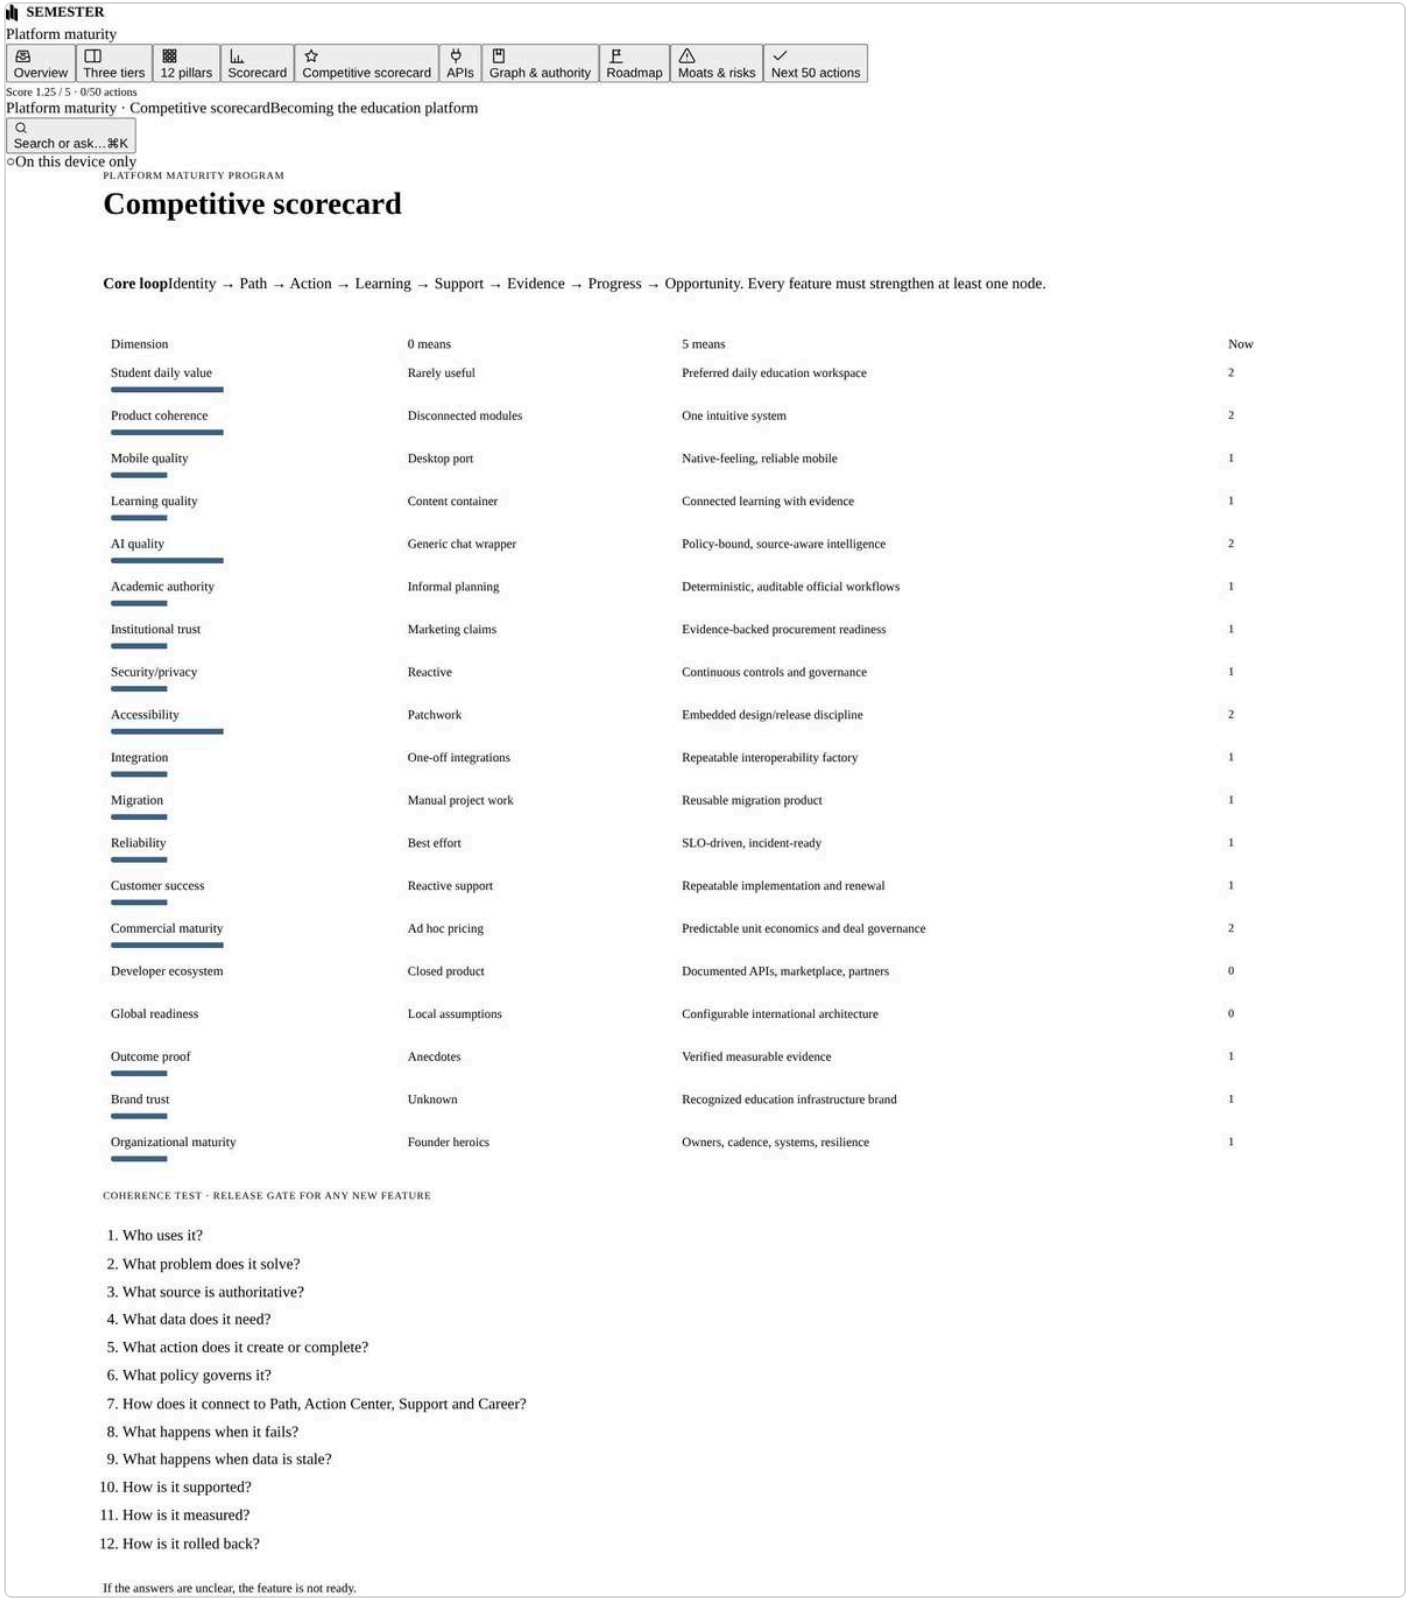

Competitive scorecard

PLATFORM MATURITY PROGRAM

APIs

Organized by authority and risk, not by page. High-impact writes go through capability-checked server commands, never raw table writes from the browser.

API	Primary resources	Write control
Identity	Accounts, sessions, memberships, SSO, SCIM, roles	Server-authorized; auditable
Tenant	Institutions, campuses, policies, configurations, feature state	Tenant admin + approval path
Academic	Terms, catalog, sections, enrollment, holds, records, grades	Deterministic policy + registrar authority
Learning	Courses, objectives, resources, assignments, assessments, study packs	Faculty/course-scoped capabilities
Workspace	Tasks, notes, files, calendar, plans, projects	Student ownership + sharing grants
AI	Requests, policy, providers, sources, usage, evaluations	Gateway-enforced, tenant/course policy
Student success	Caseload, check-ins, referrals, success plans, support	Purpose-limited, consent/role-scoped
Campus	Dining, housing, events, organizations, spaces	Service-owner policy + tenant scope
Career	Skills, evidence, credentials, opportunities, mentors	Student consent + verified claim rules
Family	Grants, invitations, scoped shares, revocation	Student-controlled, time-limited
Integrations	Connections, scopes, mappings, syncs, webhooks	Approval-gated, server-only credentials
Commercial	Quotes, contracts, subscriptions, invoices, entitlements	Finance capability + approvals
Trust	Controls, evidence, claims, artifacts, trust-room grants	Security/legal scoped
Operations	Approvals, incidents, SLOs, audits, rollouts, risks	Internal capabilities, two-person controls
Platform	Apps, API keys, OAuth clients, webhooks, marketplace	Tenant install approval + developer governance

EVERY API ANSWERS

IDENTITY
Who is calling?

SCOPE
Which tenant, customer, course or person may be accessed?

PURPOSE
Why is this data or action needed?

AUTHORITY
Official, derived, AI-generated, user-owned or external?

POLICY
Which rules constrain it?

VALIDATION
Are inputs structurally and semantically valid?

IDEMPOTENCY
Can a retry create duplicate harm?

AUDIT
What event must be recorded?

FRESHNESS
Live, delayed, stale or unavailable?

ERROR
What safe recovery or human hand-off is available?

EXAMPLE RESOURCES

GET /v1/identity/me
GET /v1/tenants/{tenantId}
GET /v1/tenants/{tenantId}/policy
GET /v1/academic/terms
GET /v1/academic/sections
POST /v1/academic/registration-requests
POST /v1/academic/registration-requests/{id}/decision
GET /v1/learning/courses/{courseId}
GET /v1/learning/gradebook
GET /v1/workspace/tasks
POST /v1/ai/requests
GET /v1/ai/sources
POST /v1/support/requests
GET /v1/advising/caseload
GET /v1/career/opportunities
POST /v1/family/grants
GET /v1/integrations/sync-runs
POST /v1/integrations/{id}/scope-approval
POST /v1/commercial/quotes/{id}/send
POST /v1/ops/approval-requests/{id}/decision
POST /v1/privacy/data-subject-requests/{id}/complete
GET /v1/platform/apps

APIs

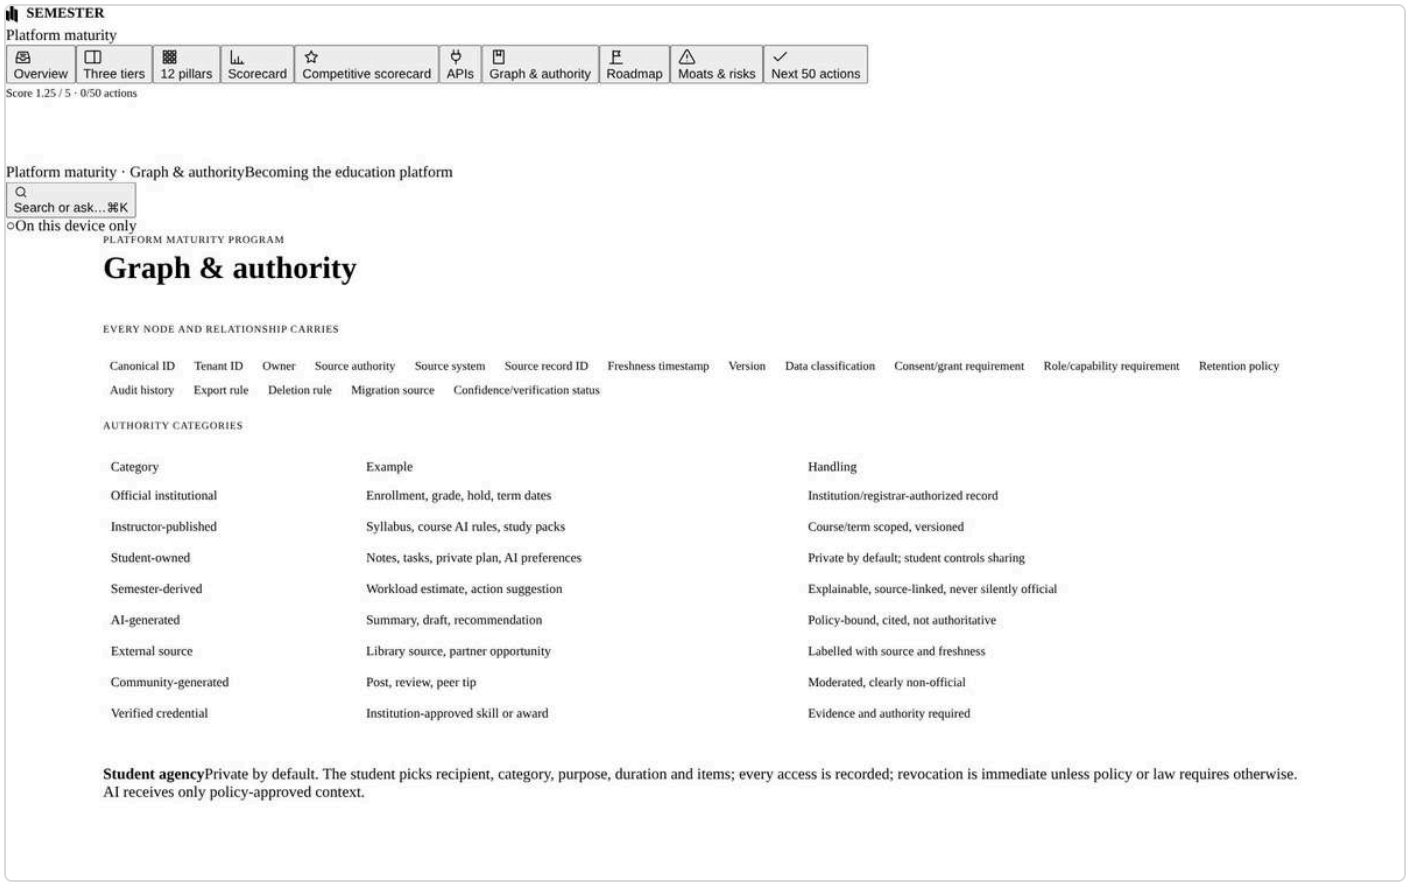

Graph & authority

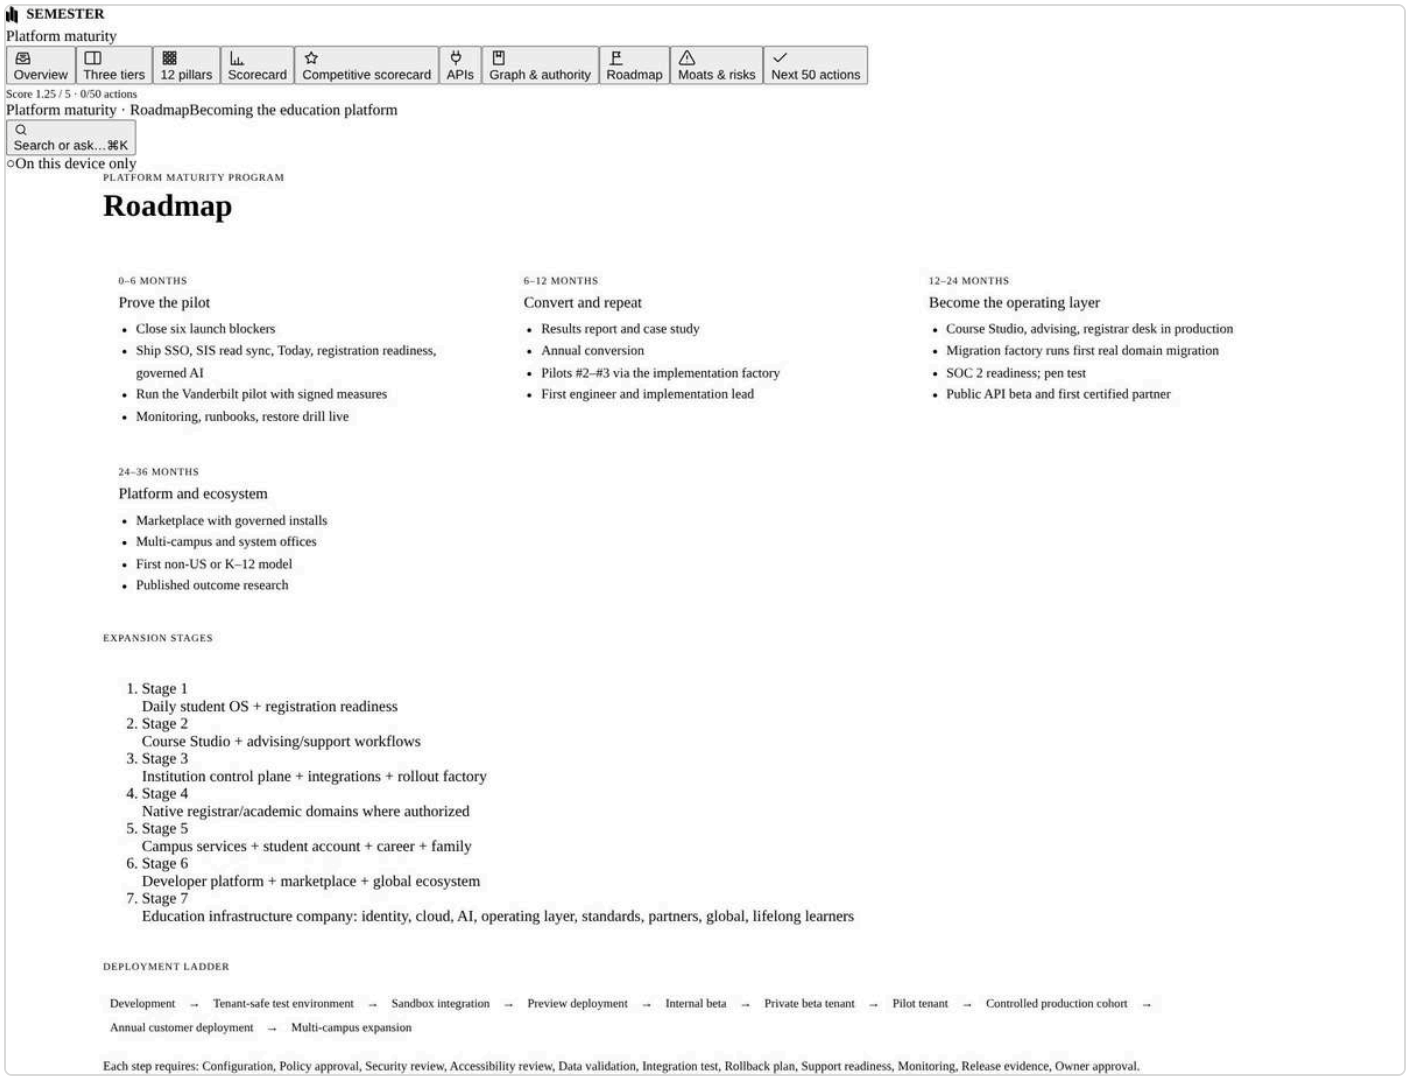
SEMESTER
Platform maturity
Overview
Three tiers
12 pillars
Scorecard
Competitive scorecard
APIs
Graph & authority
Roadmap
Moats & risks
Next 50 actions
Score 1.25 / 5 · 0/50 actions
Platform maturity · RoadmapBecoming the education platform
Search or ask…⌘K
On this device only
PLATFORM MATURITY PROGRAM
Roadmap
0–6 MONTHS
Prove the pilot
Close six launch blockers
Ship SSO, SIS read sync, Today, registration readiness, governed AI
Run the Vanderbilt pilot with signed measures
Monitoring, runbooks, restore drill live
6–12 MONTHS
Convert and repeat
Results report and case study
Annual conversion
Pilots #2–#3 via the implementation factory
First engineer and implementation lead
12–24 MONTHS
Become the operating layer
Course Studio, advising, registrar desk in production
Migration factory runs first real domain migration
SOC 2 readiness; pen test
Public API beta and first certified partner
24–36 MONTHS
Platform and ecosystem
Marketplace with governed installs
Multi-campus and system offices
First non-US or K–12 model
Published outcome research
EXPANSION STAGES
1. Stage 1
Daily student OS + registration readiness
2. Stage 2
Course Studio + advising/support workflows
3. Stage 3
Institution control plane + integrations + rollout factory
4. Stage 4
Native registrar/academic domains where authorized
5. Stage 5
Campus services + student account + career + family
6. Stage 6
Developer platform + marketplace + global ecosystem
7. Stage 7
Education infrastructure company: identity, cloud, AI, operating layer, standards, partners, global, lifelong learners
DEPLOYMENT LADDER
Development → Tenant-safe test environment → Sandbox integration → Preview deployment → Internal beta → Private beta tenant → Pilot tenant → Controlled production cohort → Annual customer deployment → Multi-campus expansion
Each step requires: Configuration, Policy approval, Security review, Accessibility review, Data validation, Integration test, Rollback plan, Support readiness, Monitoring, Release evidence, Owner approval.

Roadmap

SEMESTER
Platform maturity
Overview
Three tiers
12 pillars
Scorecard
Competitive scorecard
APIs
Graph & authority
Roadmap
Moats & risks
Next 50 actions
Score 1.25 / 5 · 0/50 actions
Platform maturity · Moats & risksBecoming the education platform
Search or ask…⌘K
On this device only
PLATFORM MATURITY PROGRAM
Moats & risks
Top 20 moats to build
1. Daily student workspace students prefer over their tool stack
2. Source authority and freshness on every fact
3. Education graph of relationships, not just records
4. Governed AI that is course-, policy- and source-aware
5. Zero student records to AI providers, proven by tests
6. Migration factory that makes replacement safer than staying
7. Reconciliation engine with rollback on every domain
8. Consent and sharing model students trust
9. Tenant isolation proven per table in CI
10. Trust Center with evidence, not claims
11. One design system across product, site and ops
12. Implementation factory: signature to launch in weeks
13. Pilot-to-annual playbook with signed measures
14. Outcome evidence from real cohorts
15. Interoperability with LTI, OneRoster, Edu-API, SIS adapters
16. Developer platform with certification and scoped installs
17. Marketplace governed by the same consent model
18. Company runs on Semester: nobody leaves the product
19. Accessibility as a product feature, not a checkbox
20. Long institutional relationships through renewal evidence
Top 20 highest-risk gaps
Pilot launches without insurance or DPA
Contract breach
P0
Student data exposure across tenants
Trust ends
P0
AI receives student records
FERPA + trust
P0
SIS data shown wrongly
Student harm
P0
Solo founder capacity
Delivery slips
P0
SSO failures on launch day
Adoption
P1
ACR not ready
Procurement block
P1
Breadth outruns depth
Nothing is excellent
P1
No monitoring at launch
Silent failures
P1
Pilot measures not signed
No proof
P1
Pricing too low to fund support
Economics
P1
Long procurement cycles
Runway
P1
Integration variety per institution
Implementation cost
P1
Incumbent bundling
Lost deals
P2
AI provider cost or policy change
Margins
P2
Accessibility regressions
Exclusion + legal
P1
Key-person dependency
Continuity
P1
Regulatory change (state student-privacy laws)
Rework
P2
Marketplace misuse (integrity, safety)
Trust
P2
Over-claiming in marketing
FTC + trust
P1

Moats & risks

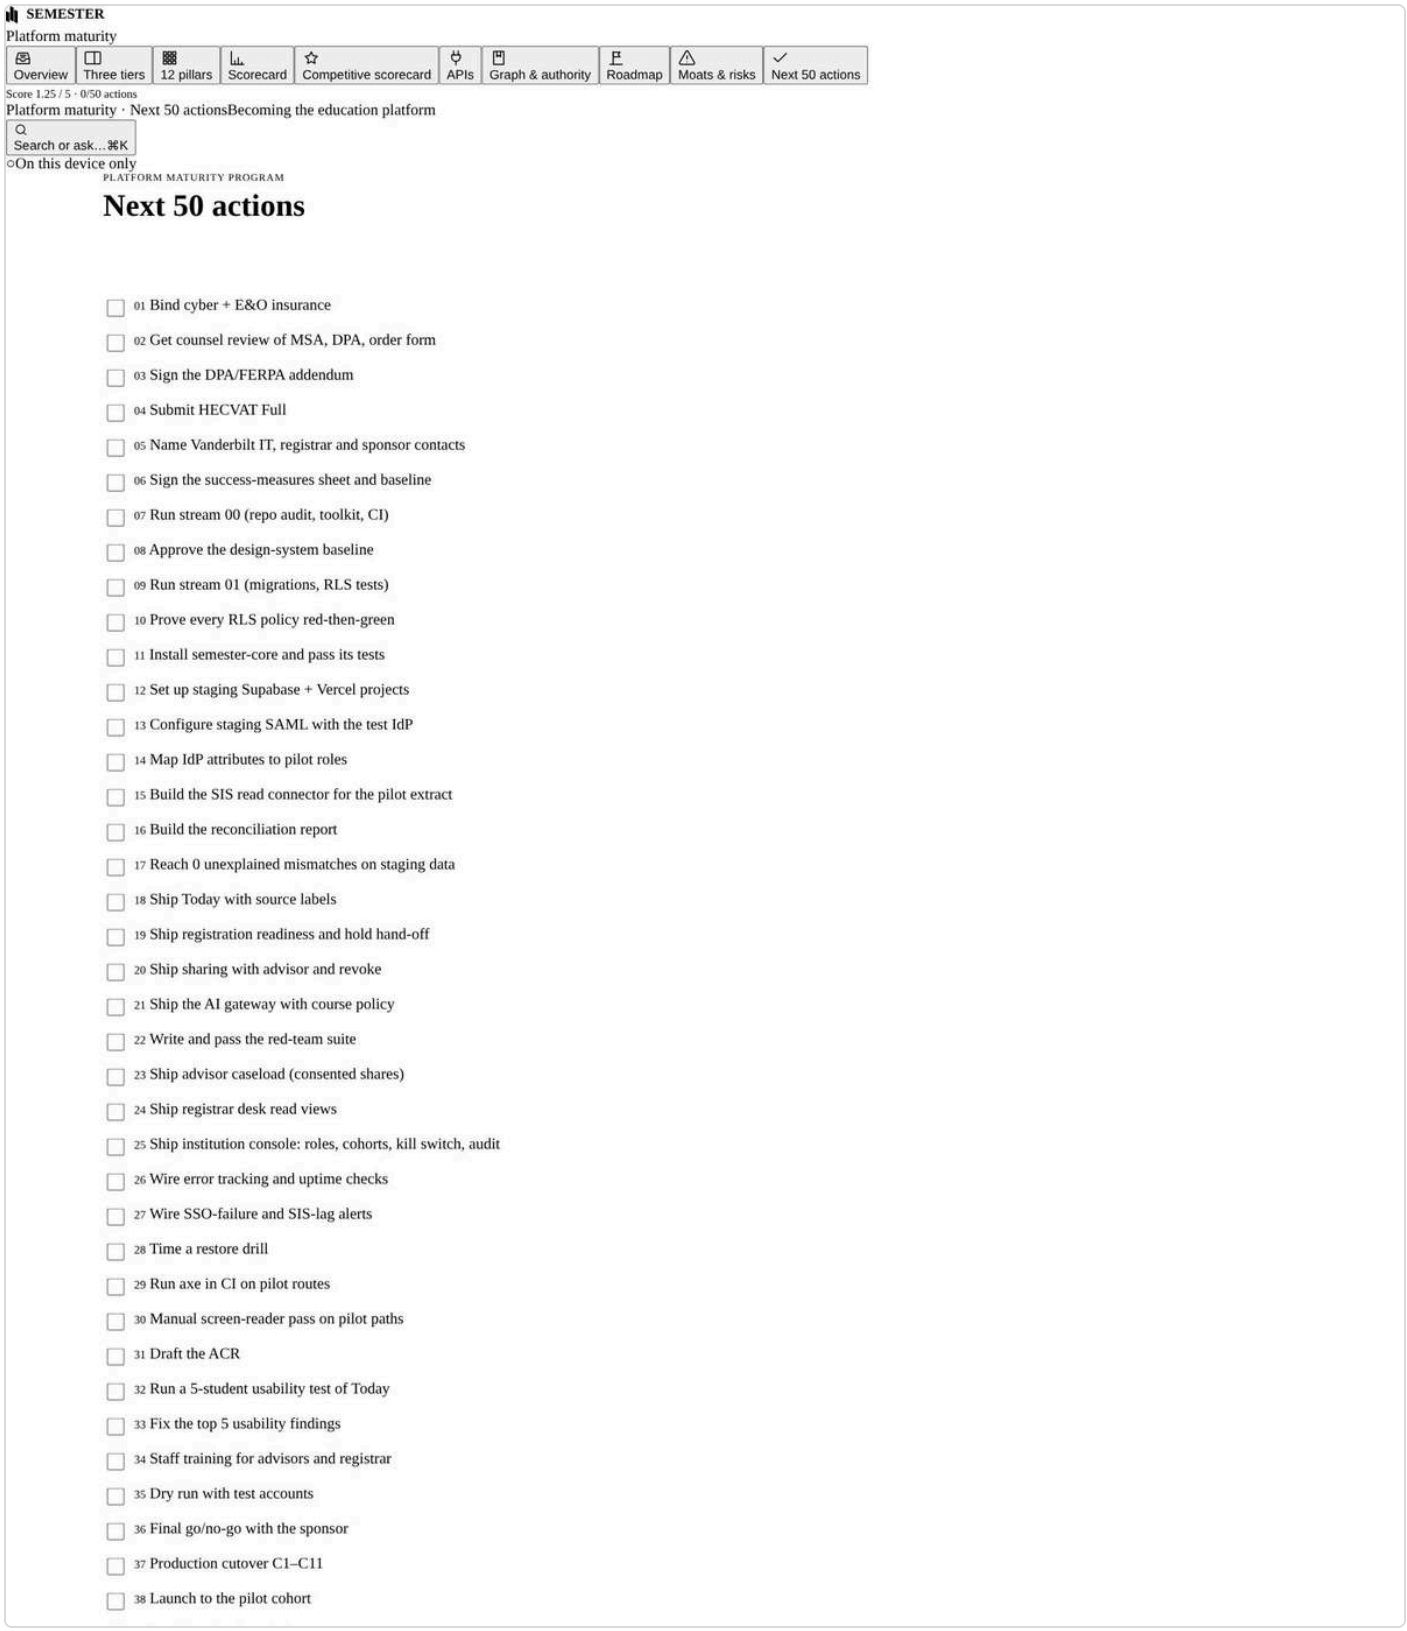

Next 50 actions (1/2)

- [ ] 39 Run day-1 and week-1 support
- [ ] 40 Week-1 review with the sponsor
- [ ] 41 Midpoint review and case-study permission
- [ ] 42 Build the 40-account target list
- [ ] 43 Book 10 discovery calls
- [ ] 44 Publish pilot, pricing and trust pages
- [ ] 45 Extend finance model to 36 months
- [ ] 46 Results report at end of term
- [ ] 47 Annual conversion proposal
- [ ] 48 Hire the founding engineer on trigger
- [ ] 49 Start pilot #2 through the implementation factory
- [ ] 50 Publish the case study

Next 50 actions (2/2)

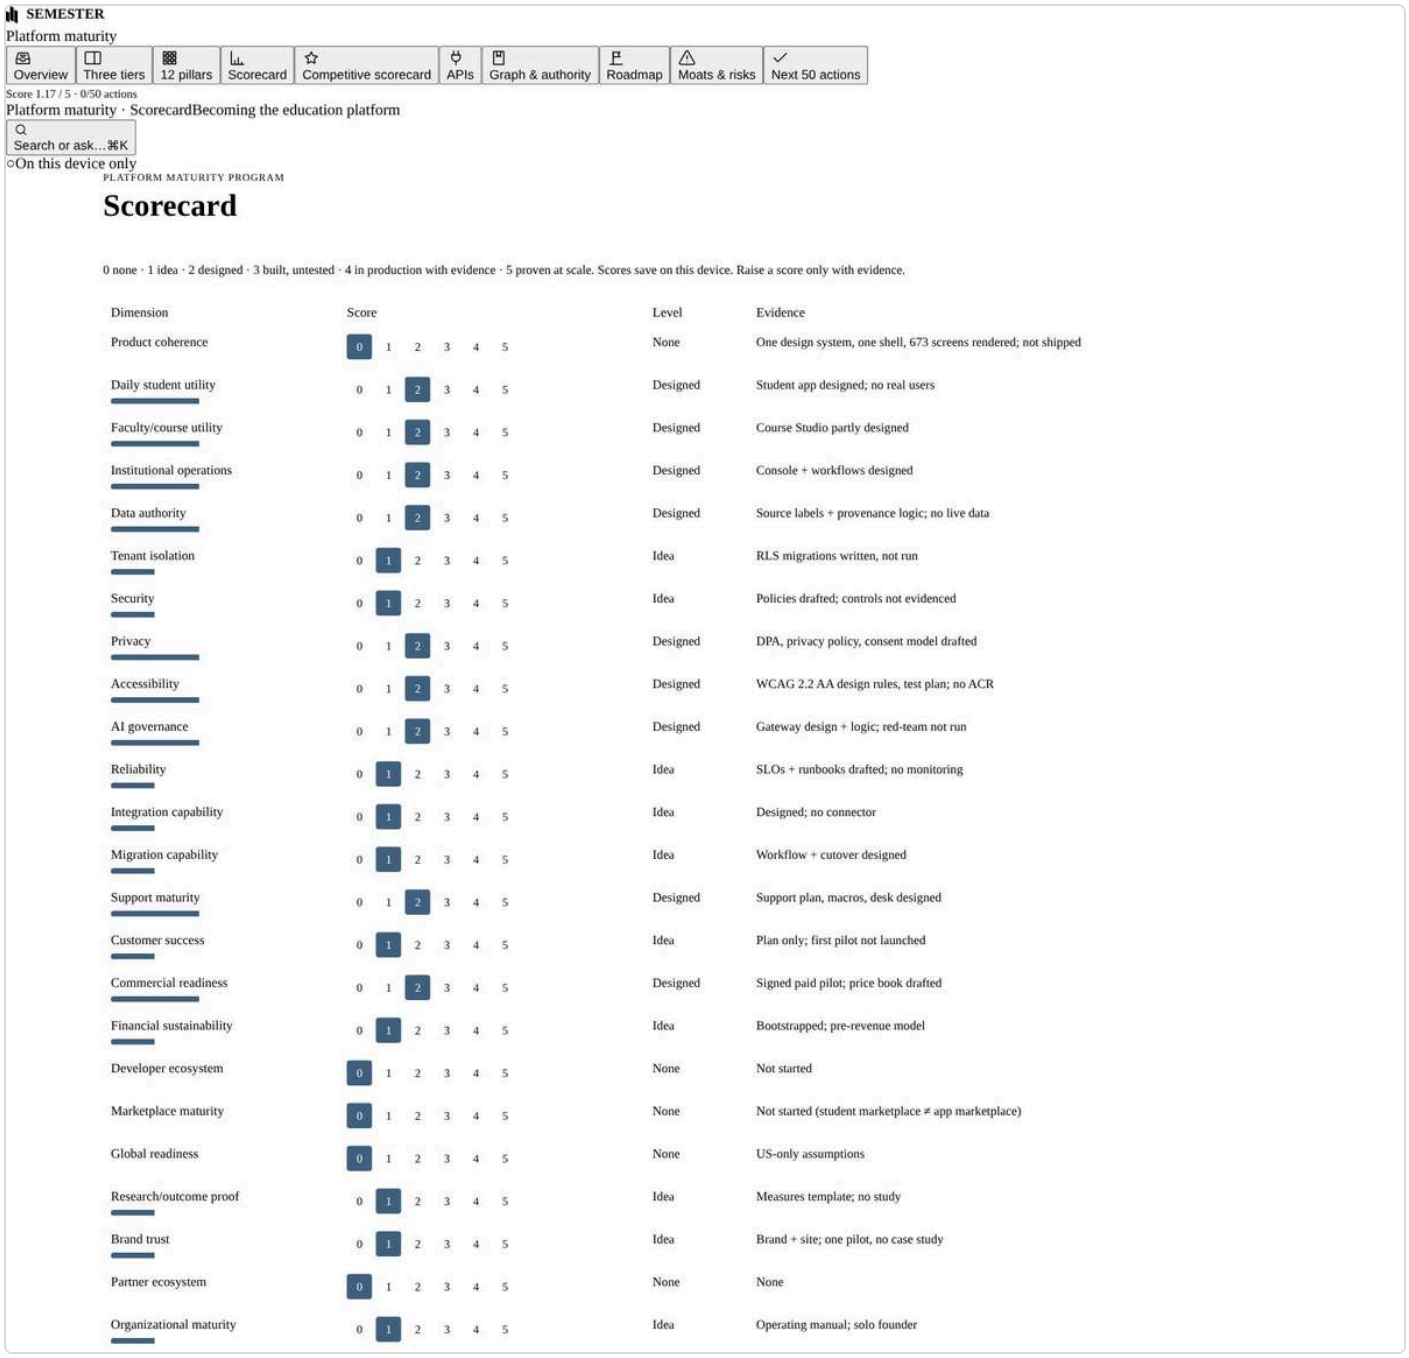

Scorecard › 0 — None

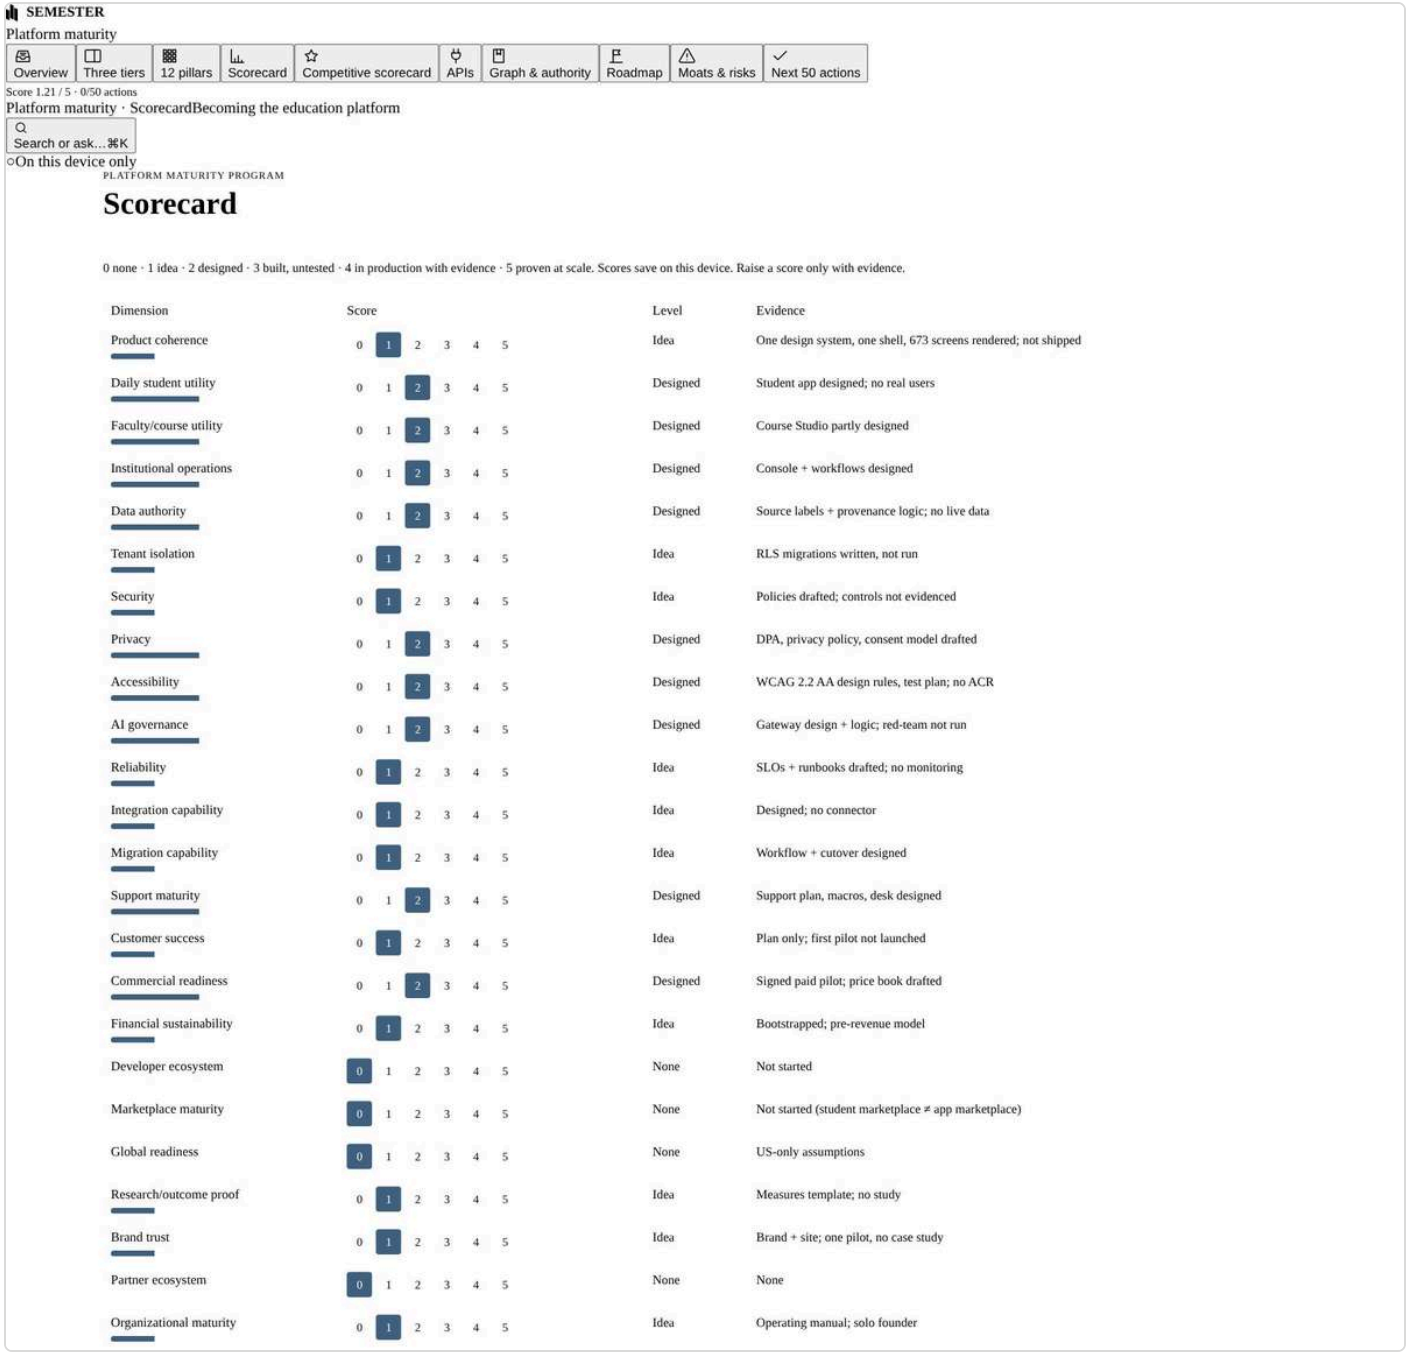

Scorecard › 1 — Idea

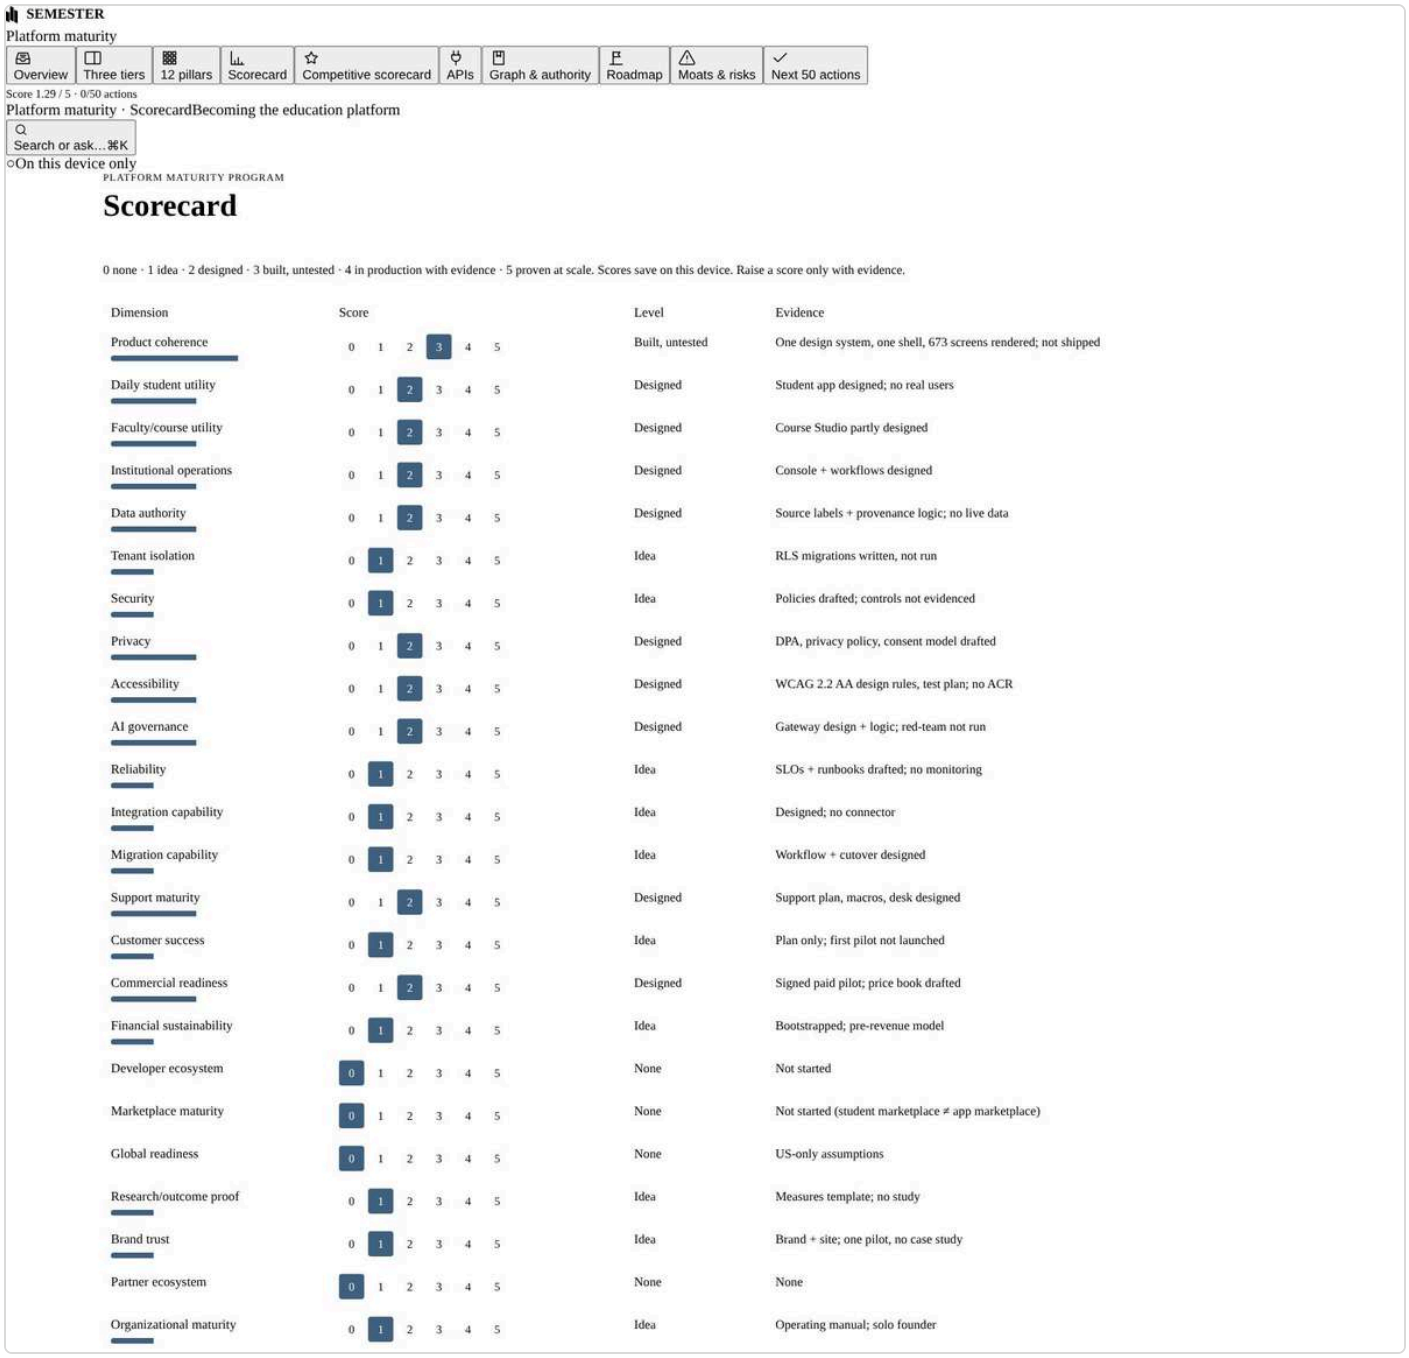

Scorecard › 3 — Built, untested

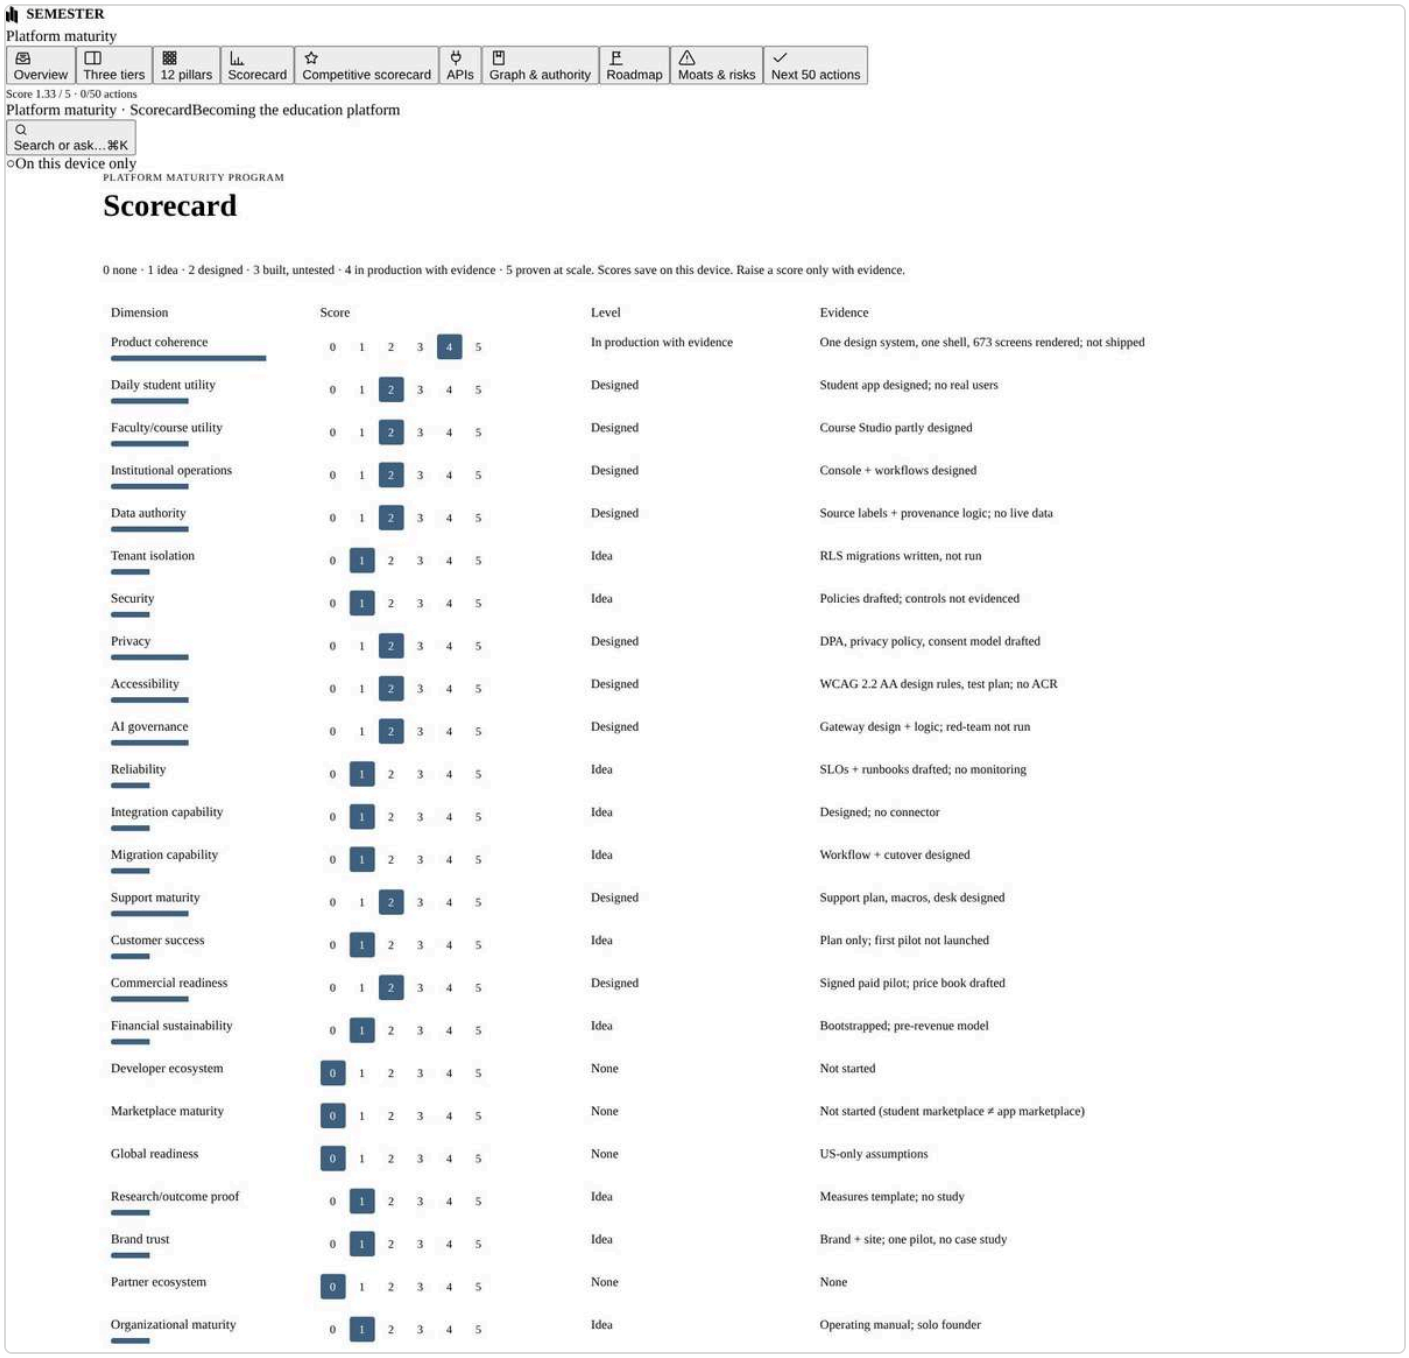

Scorecard › 4 — In production with evidence

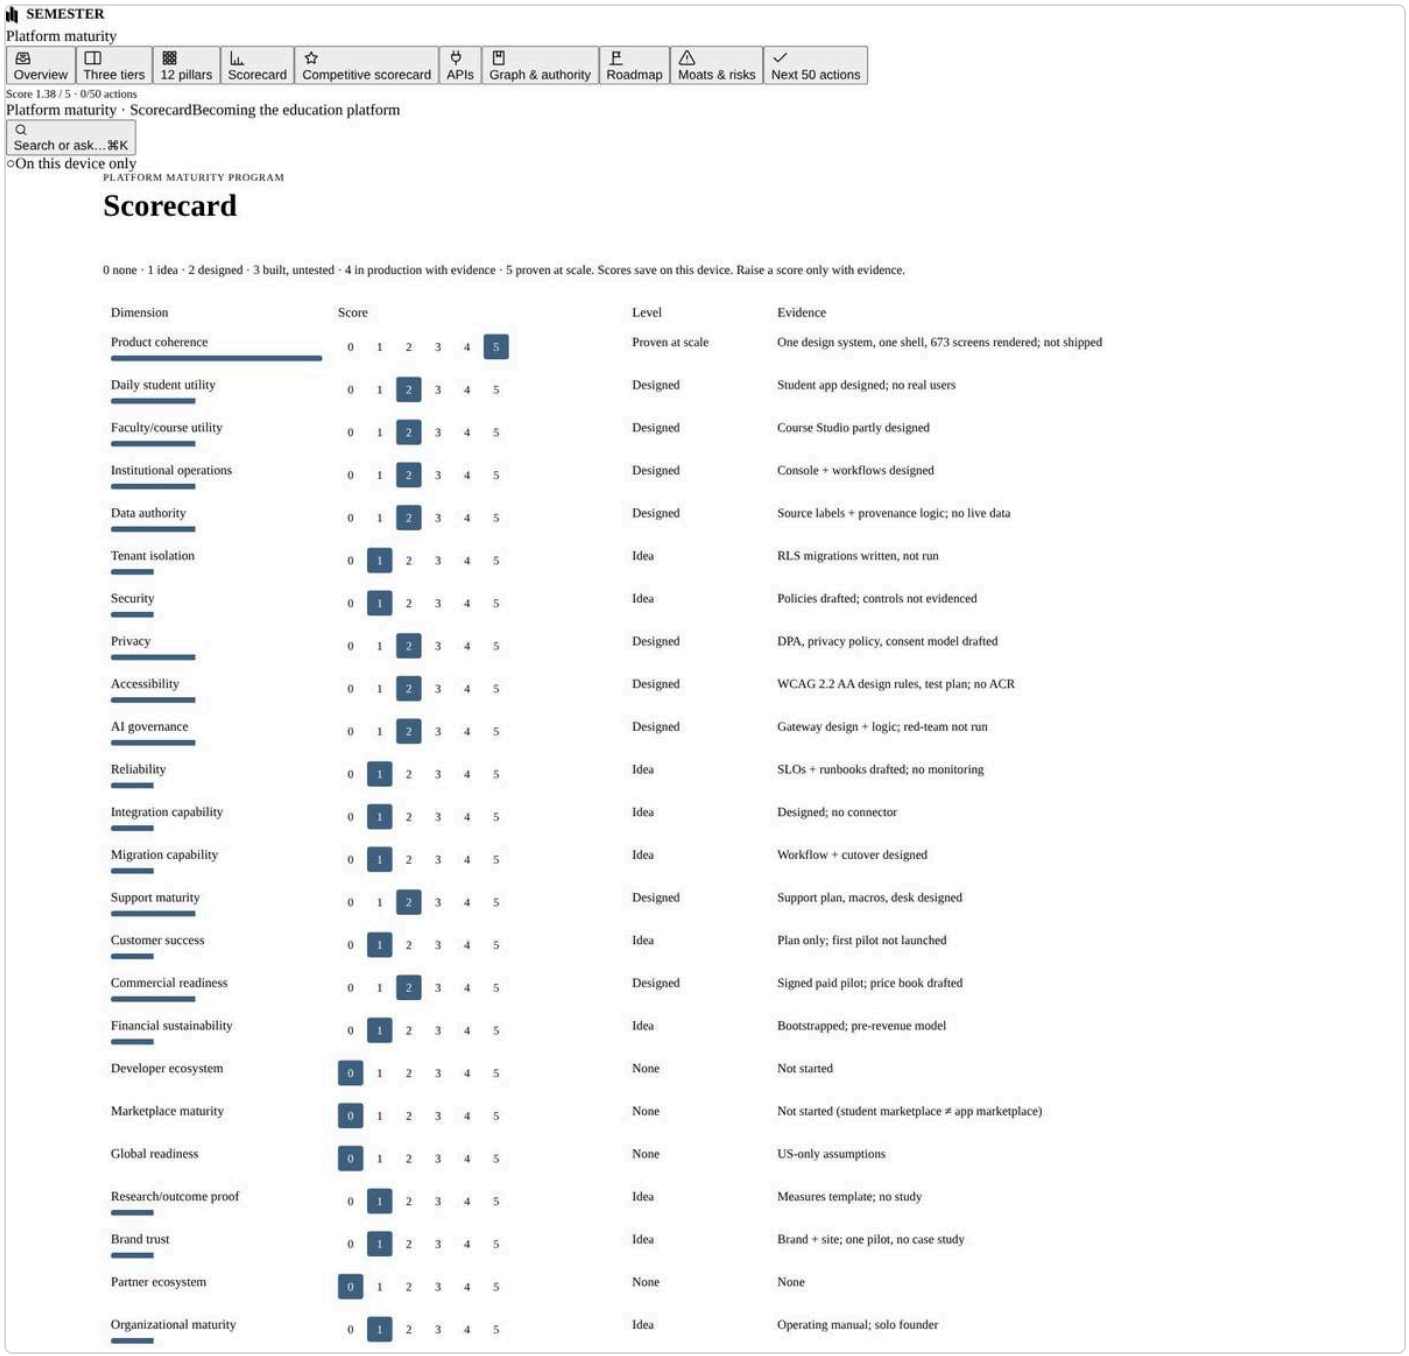

Scorecard › 5 — Proven at scale

Community

23 screens.

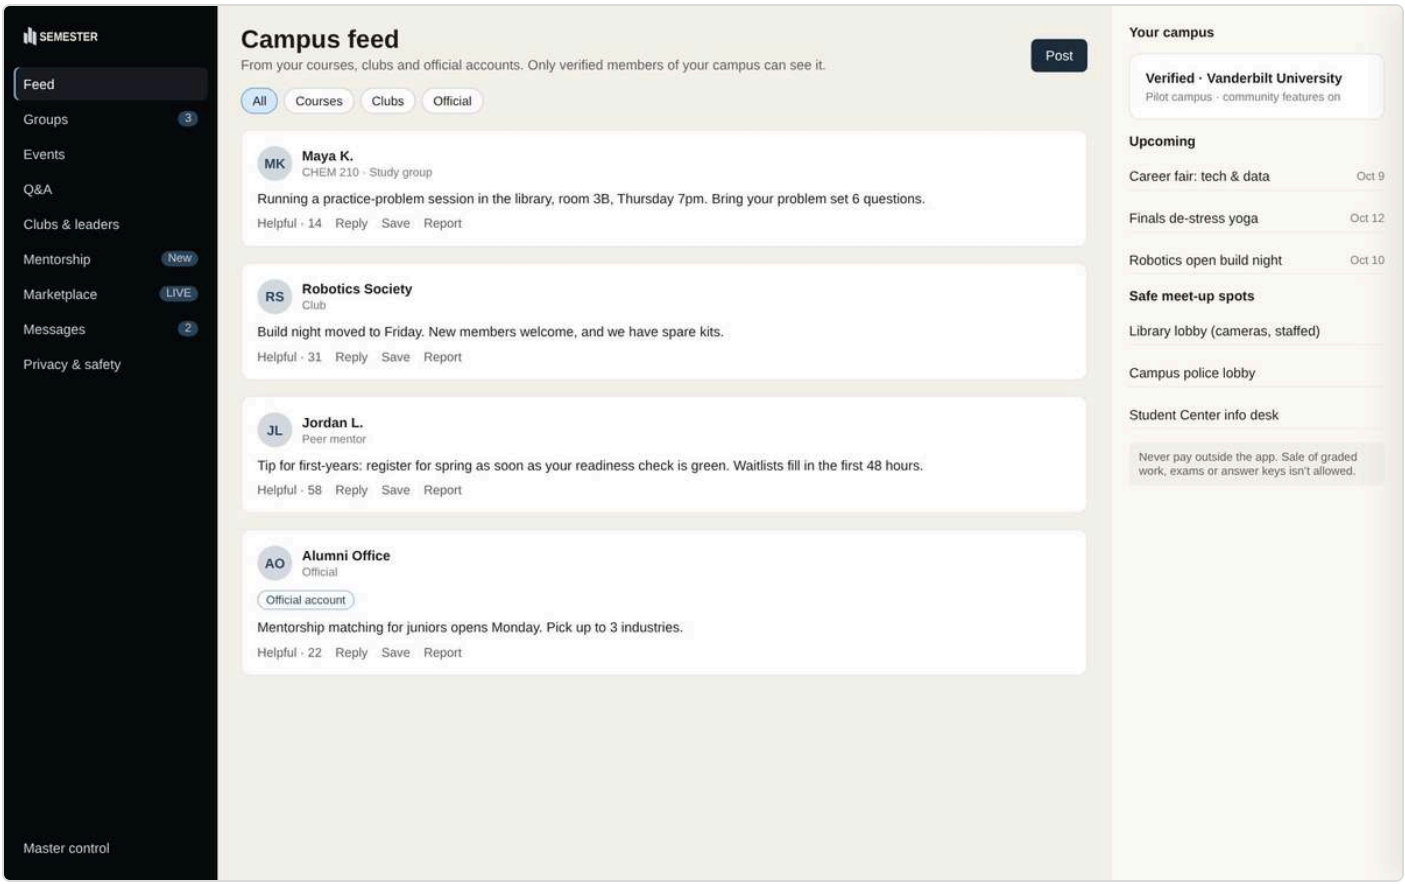

Opening view

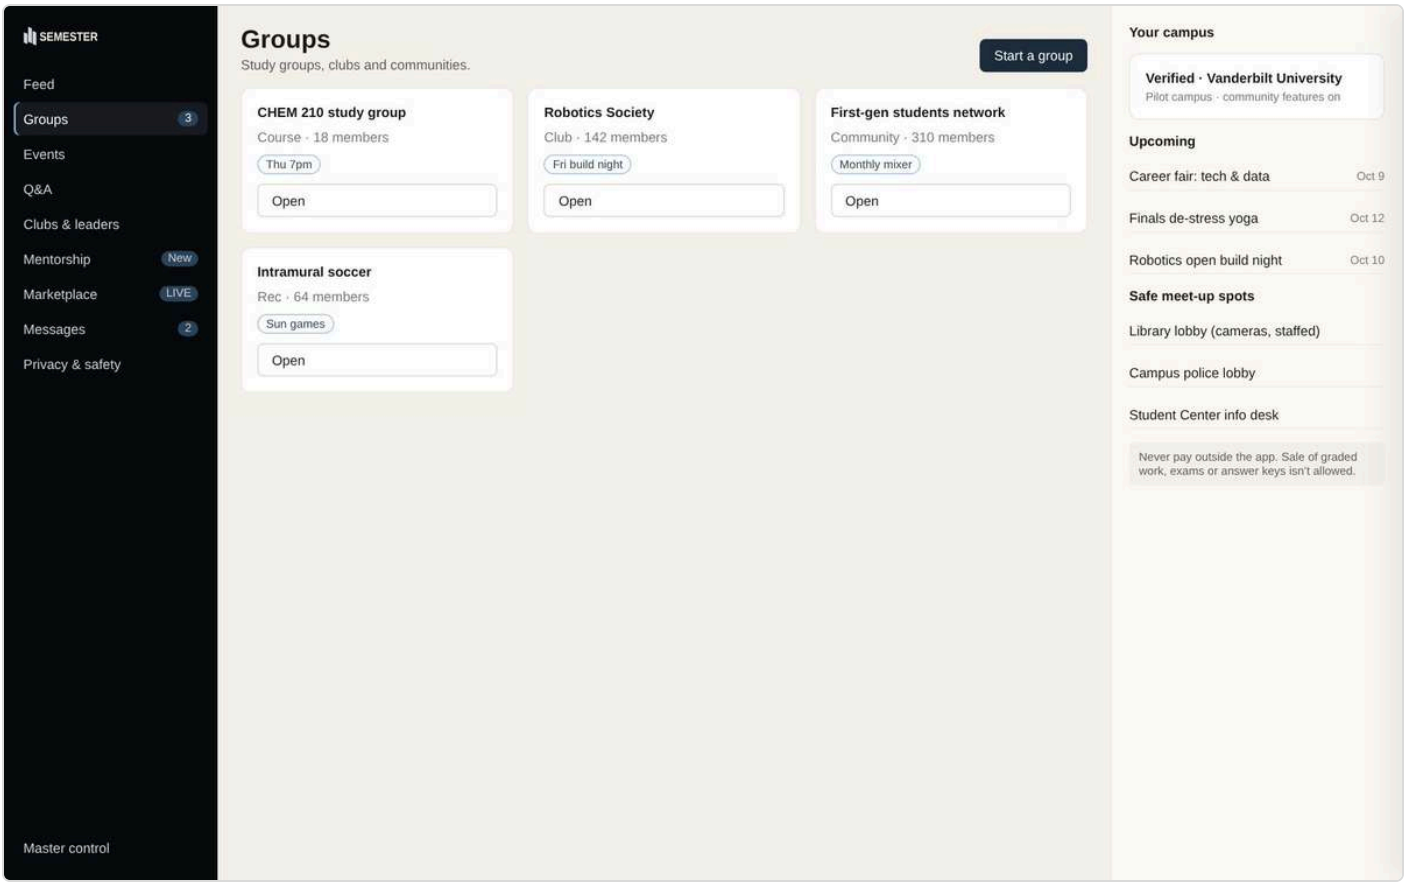
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Groups
Study groups, clubs and communities.
Start a group
CHEM 210 study group
Course · 18 members
Thu 7pm
Open
Robotics Society
Club · 142 members
Fri build night
Open
First-gen students network
Community · 310 members
Monthly mixer
Open
Intramural soccer
Rec · 64 members
Sun games
Open
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Groups

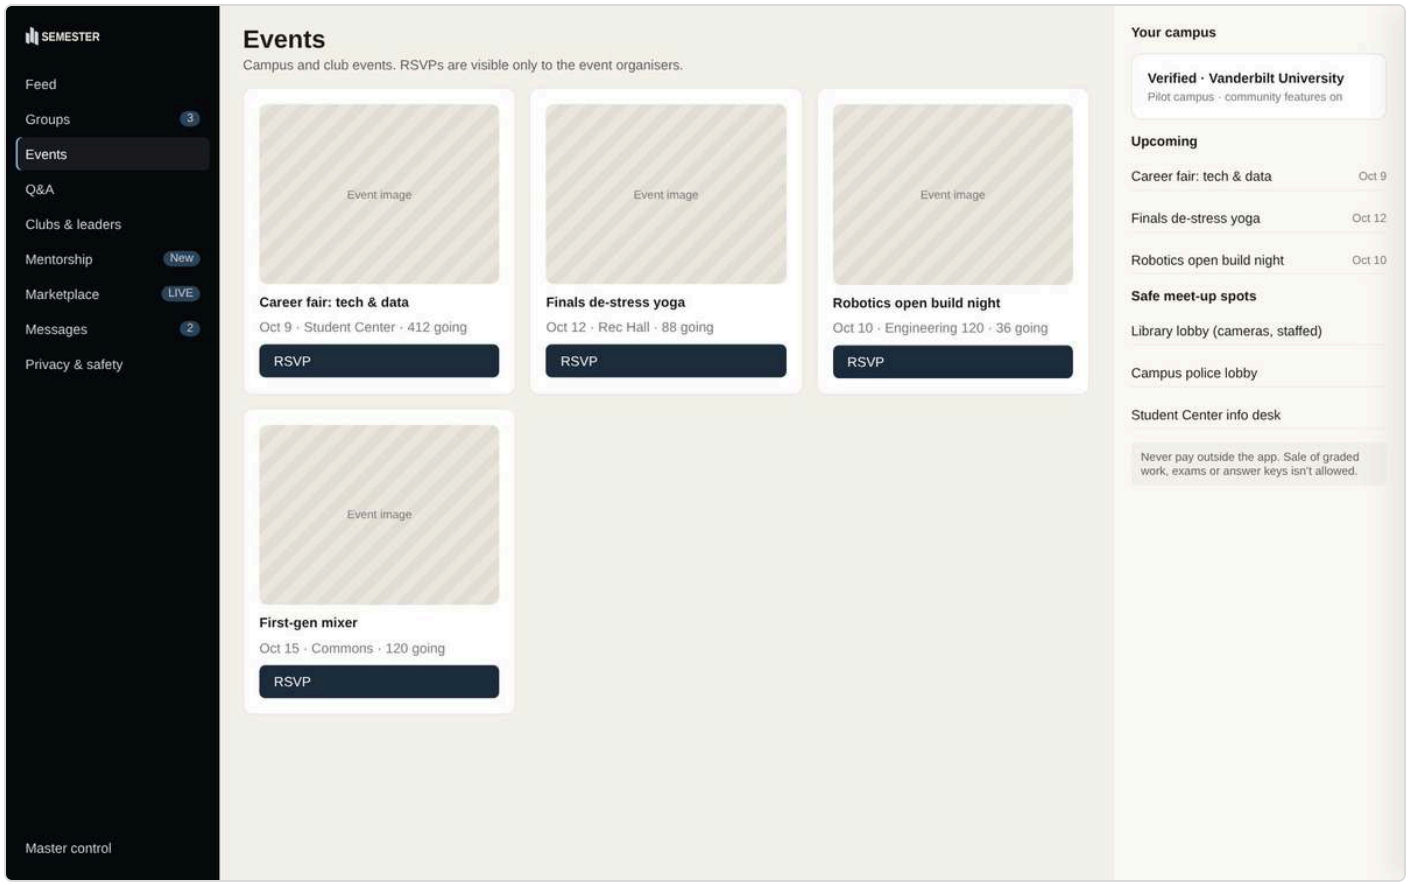
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Events
Campus and club events. RSVPs are visible only to the event organisers.
Event image
Career fair: tech & data
Oct 9 · Student Center · 412 going
RSVP
Event image
Finals de-stress yoga
Oct 12 · Rec Hall · 88 going
RSVP
Event image
Robotics open build night
Oct 10 · Engineering 120 · 36 going
RSVP
Event image
First-gen mixer
Oct 15 · Commons · 120 going
RSVP
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Events

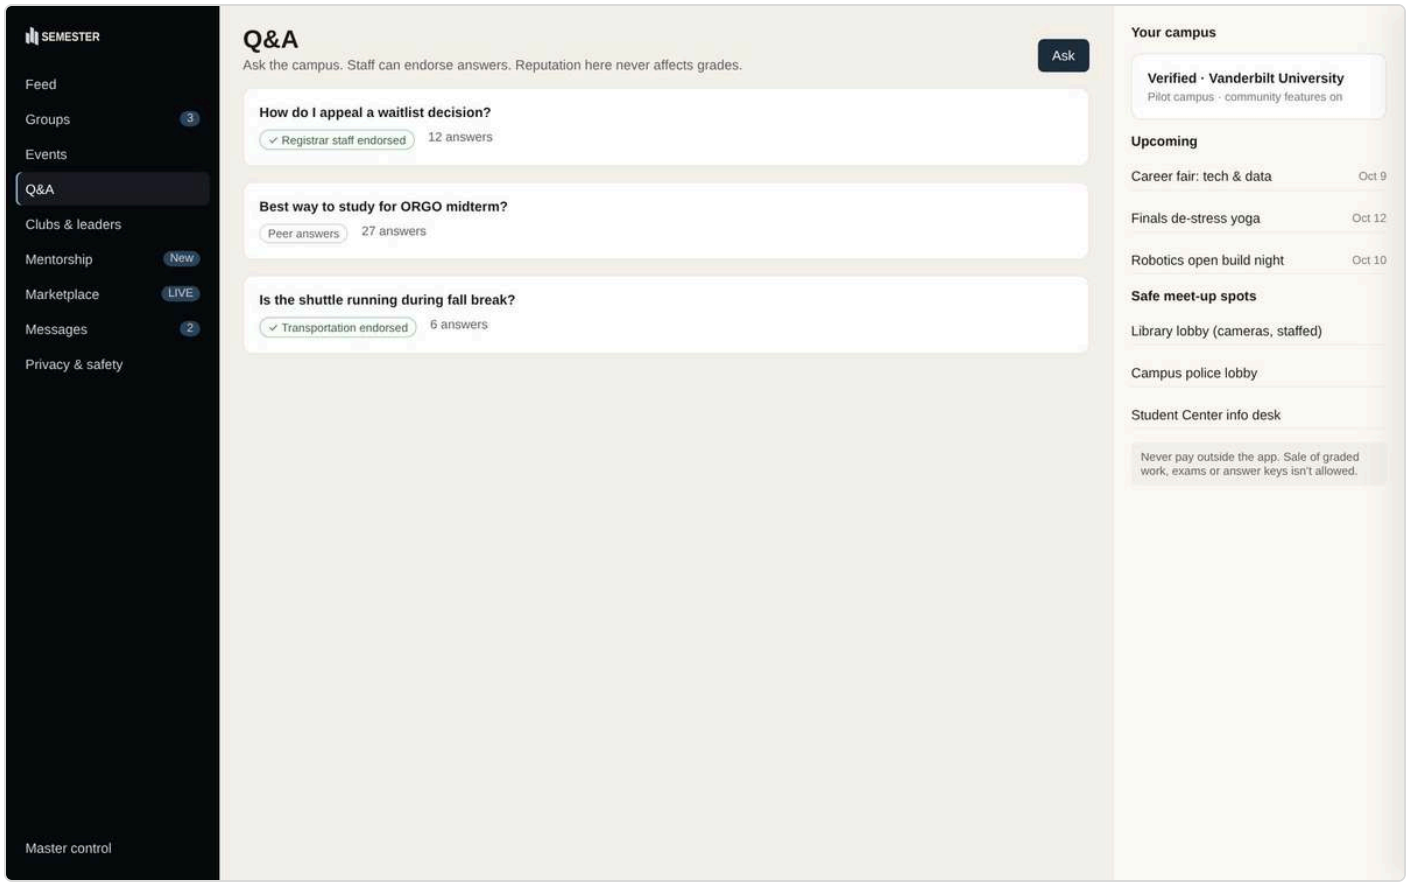
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Q&A
Ask the campus. Staff can endorse answers. Reputation here never affects grades.
Ask
How do I appeal a waitlist decision?
✓ Registrar staff endorsed
12 answers
Best way to study for ORGO midterm?
Peer answers
27 answers
Is the shuttle running during fall break?
✓ Transportation endorsed
6 answers
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Q&A

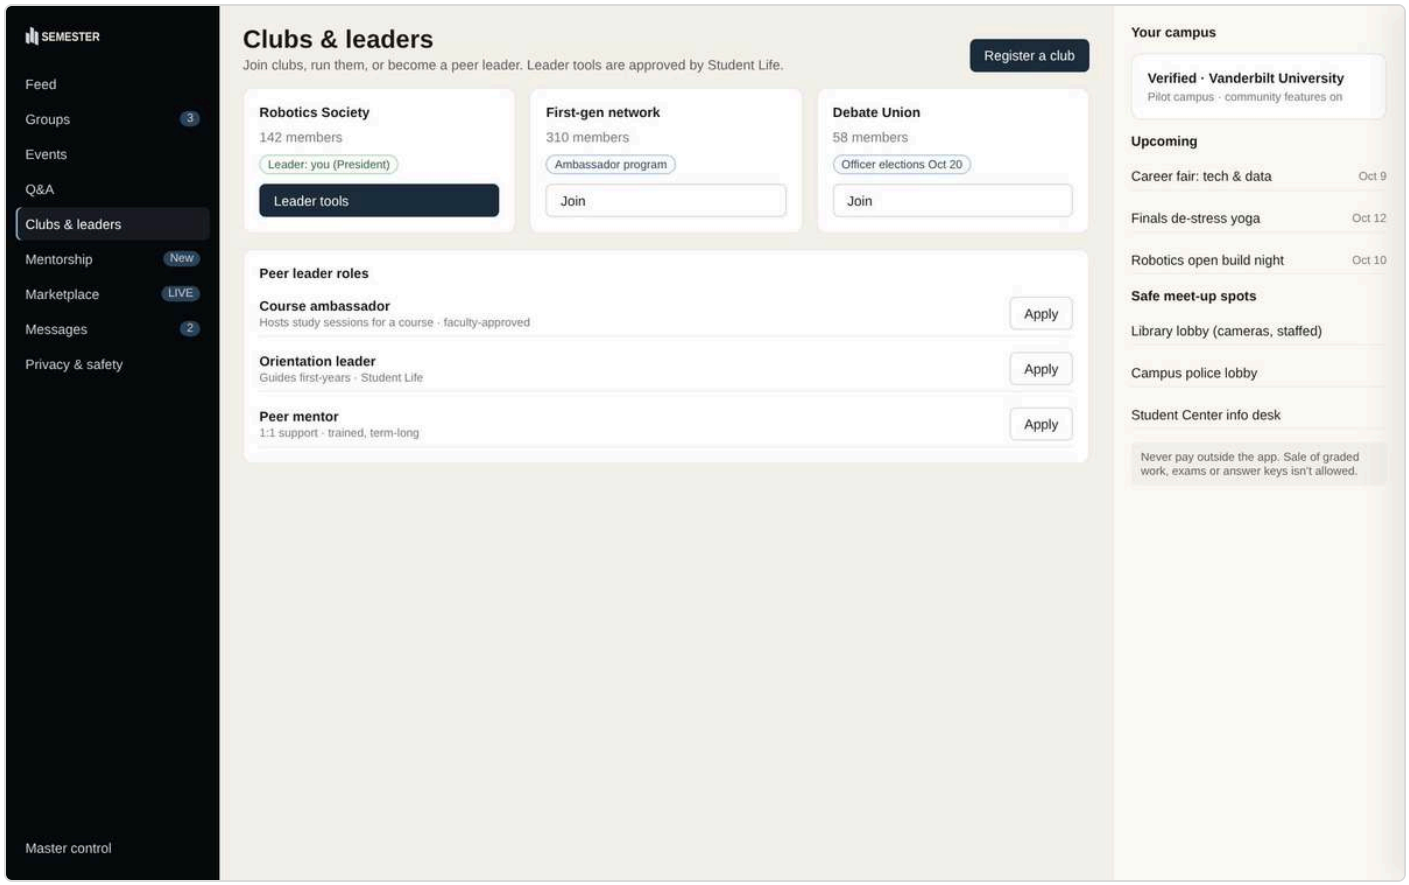

Clubs & leaders

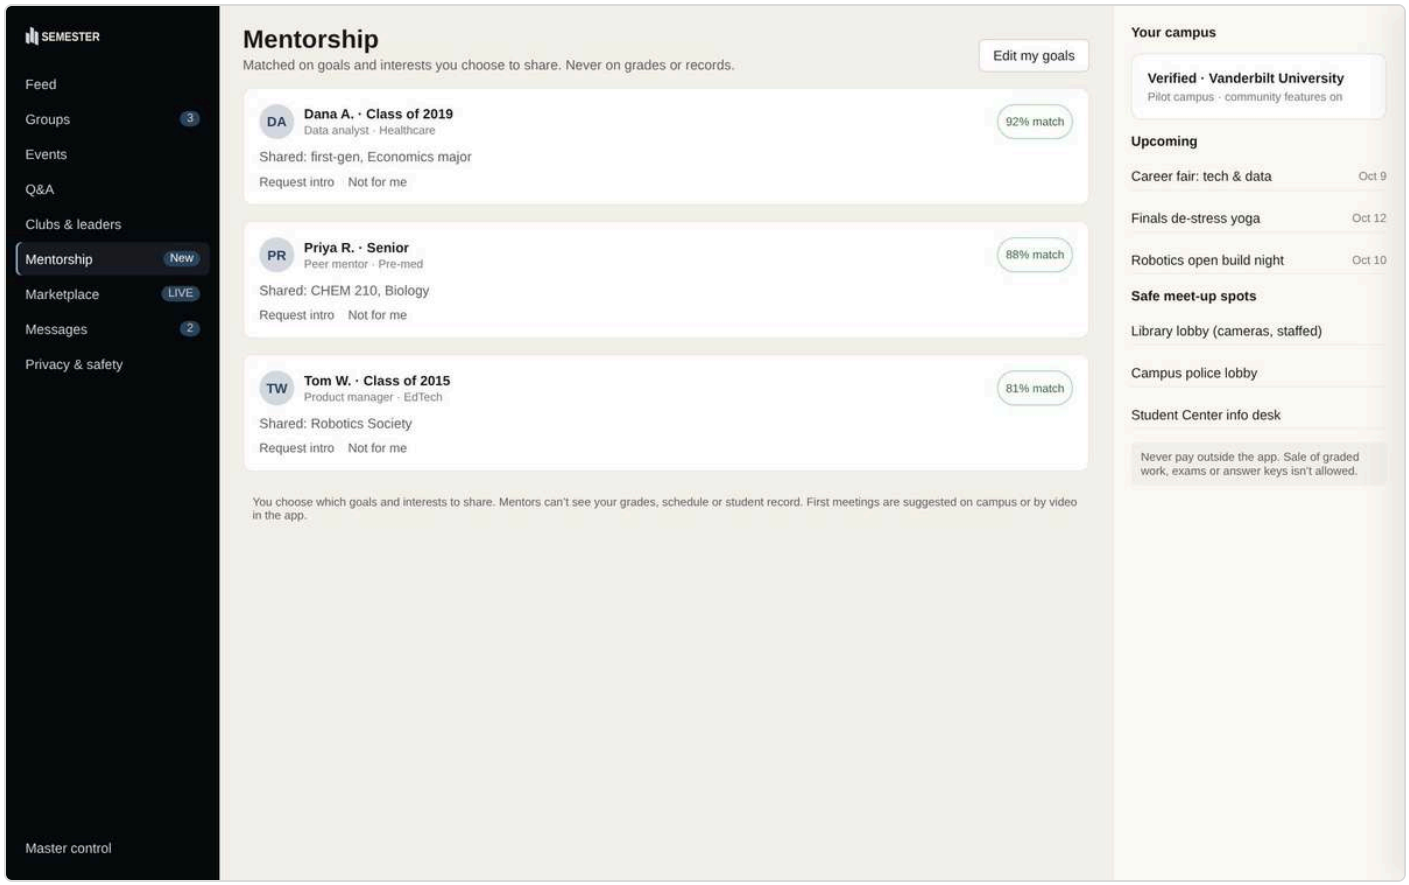
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Mentorship
Matched on goals and interests you choose to share. Never on grades or records.
Edit my goals
DA
Dana A. · Class of 2019
Data analyst · Healthcare
92% match
Shared: first-gen, Economics major
Request intro
Not for me
PR
Priya R. · Senior
Peer mentor · Pre-med
88% match
Shared: CHEM 210, Biology
Request intro
Not for me
TW
Tom W. · Class of 2015
Product manager · EdTech
81% match
Shared: Robotics Society
Request intro
Not for me
You choose which goals and interests to share. Mentors can't see your grades, schedule or student record. First meetings are suggested on campus or by video in the app.
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data
Oct 9
Finals de-stress yoga
Oct 12
Robotics open build night
Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Mentorship

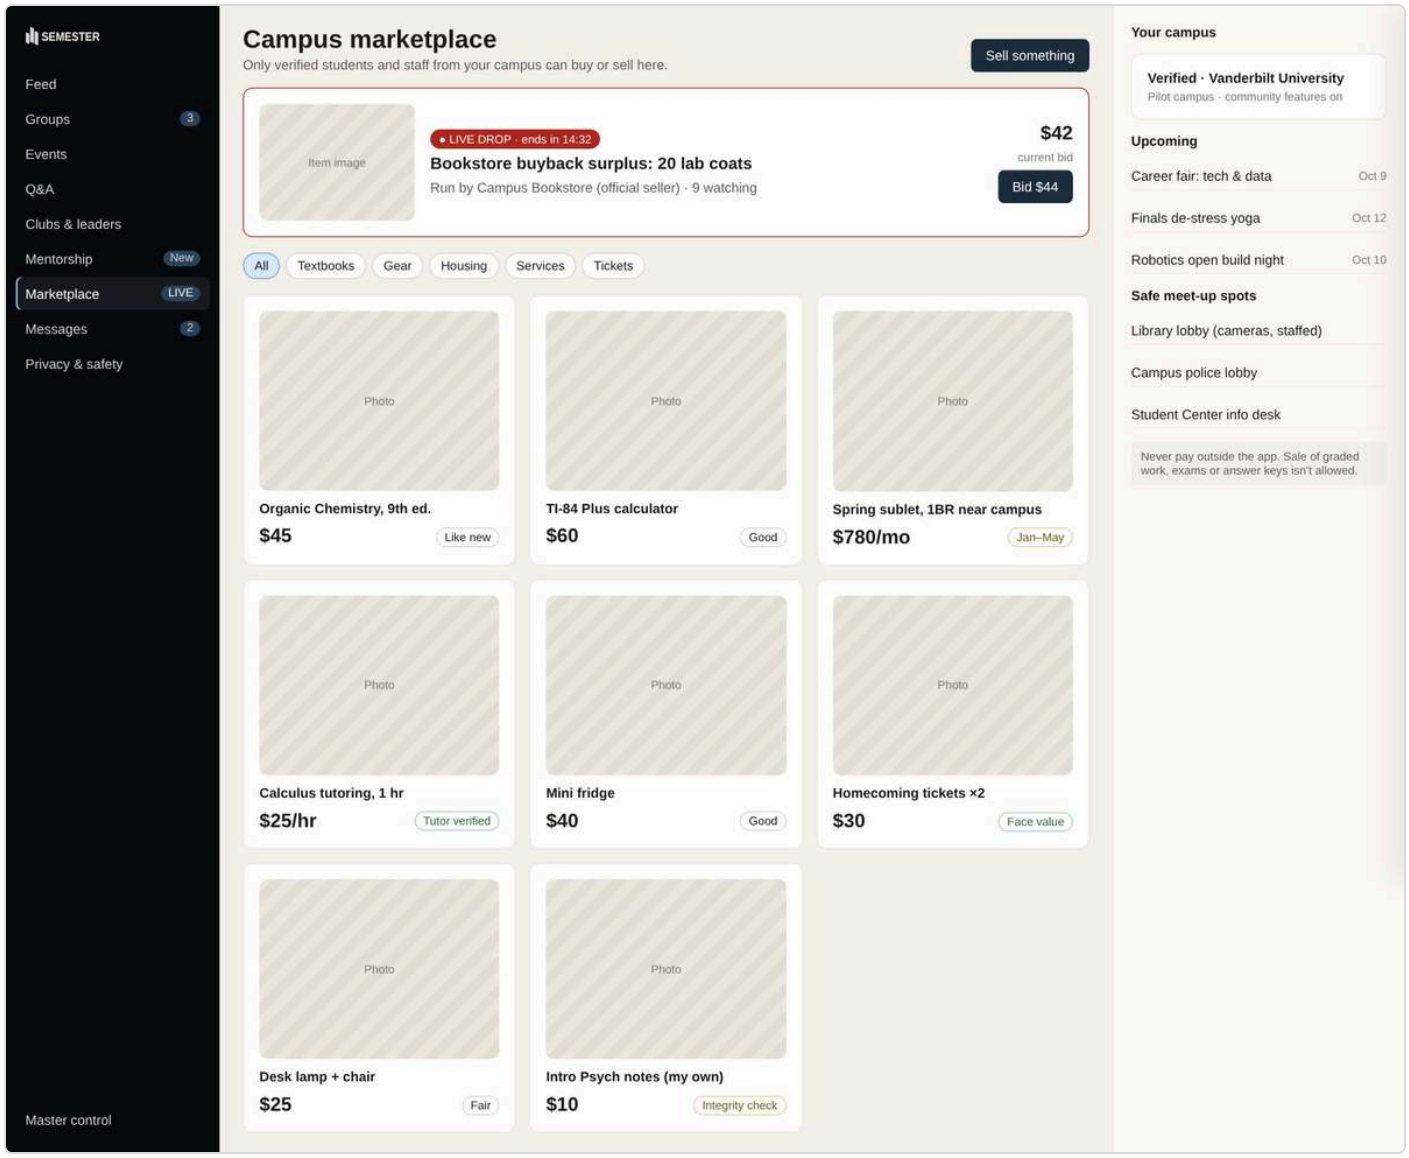

Marketplace

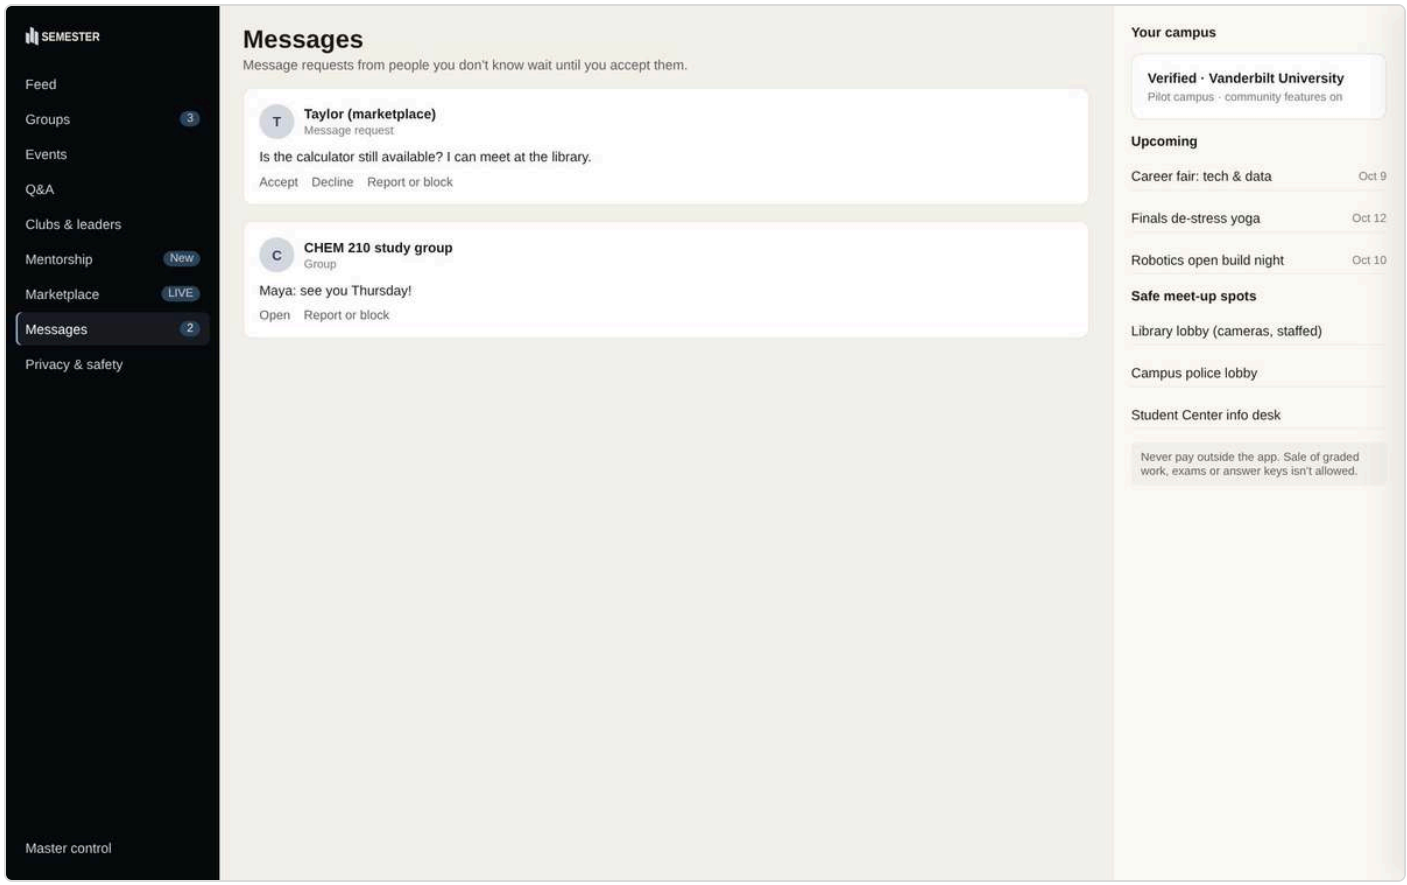
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Messages
Message requests from people you don't know wait until you accept them.
T
Taylor (marketplace)
Message request
Is the calculator still available? I can meet at the library.
Accept Decline Report or block
C
CHEM 210 study group
Group
Maya: see you Thursday!
Open Report or block
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Messages

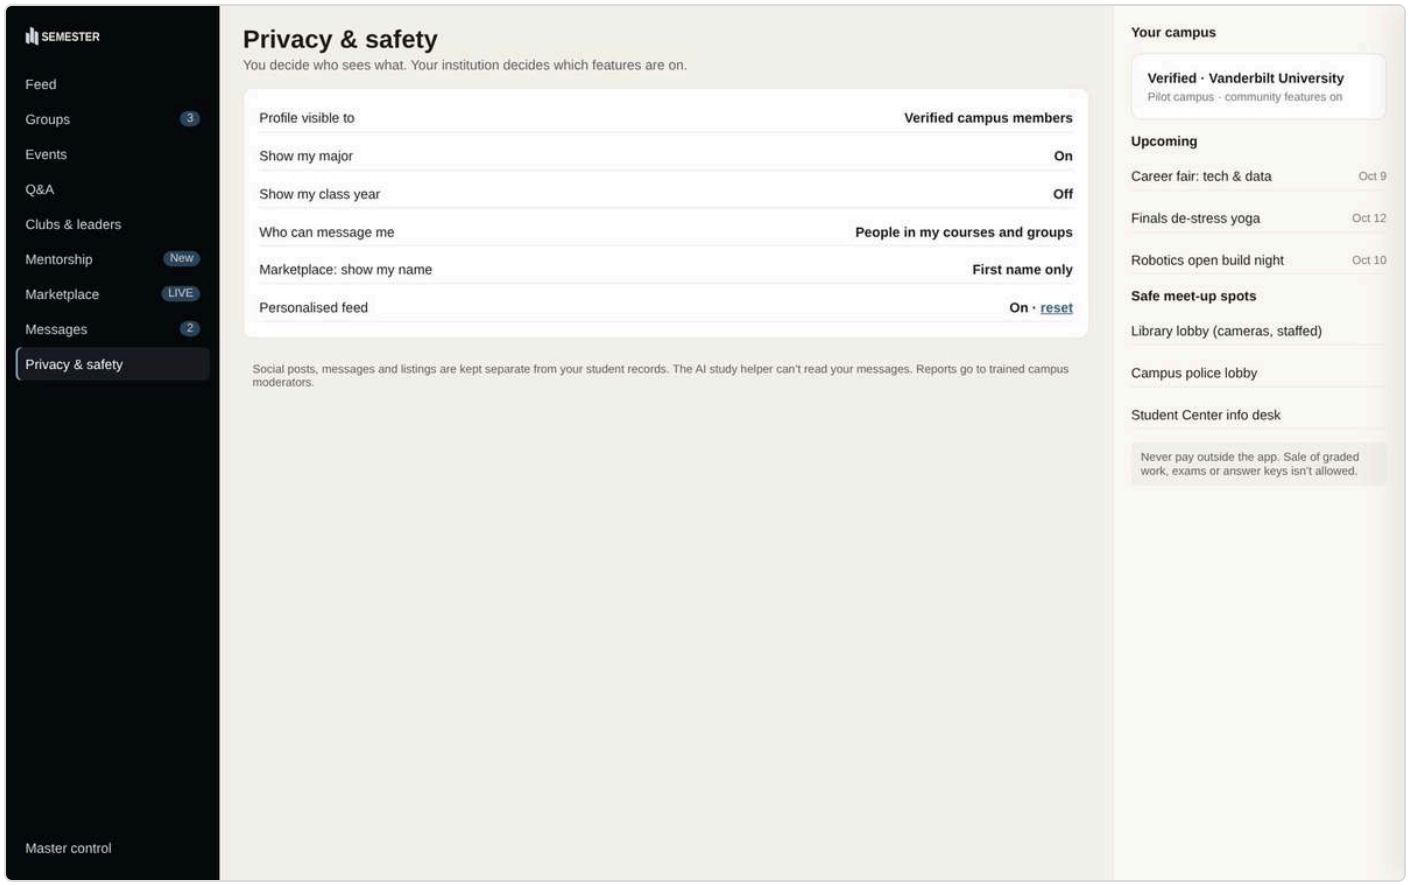

Privacy & safety

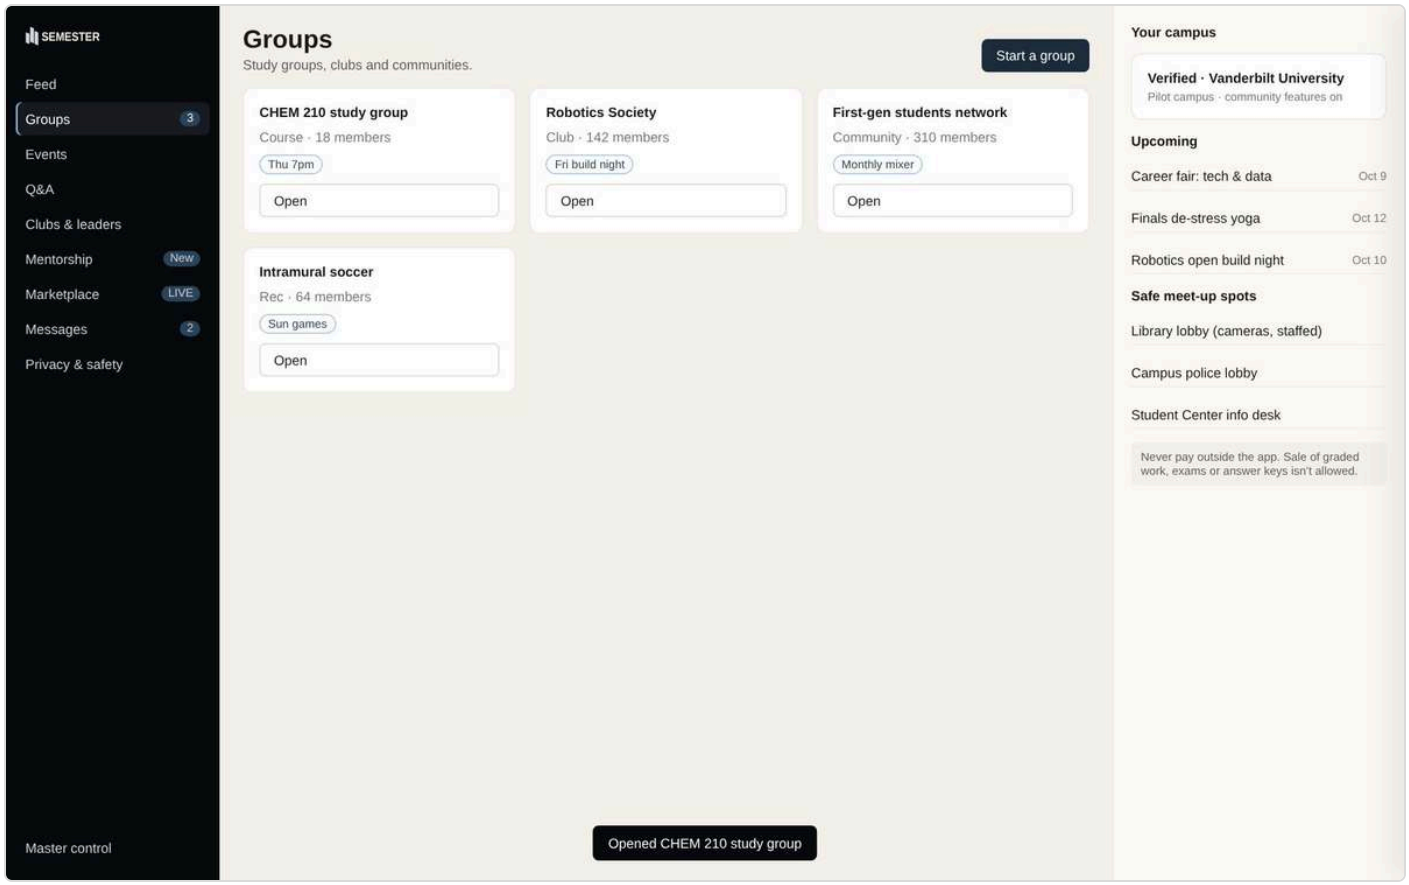
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Groups
Study groups, clubs and communities.
Start a group
CHEM 210 study group
Course · 18 members
Thu 7pm
Open
Robotics Society
Club · 142 members
Fri build night
Open
First-gen students network
Community · 310 members
Monthly mixer
Open
Intramural soccer
Rec · 64 members
Sun games
Open
Opened CHEM 210 study group
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Groups › Open

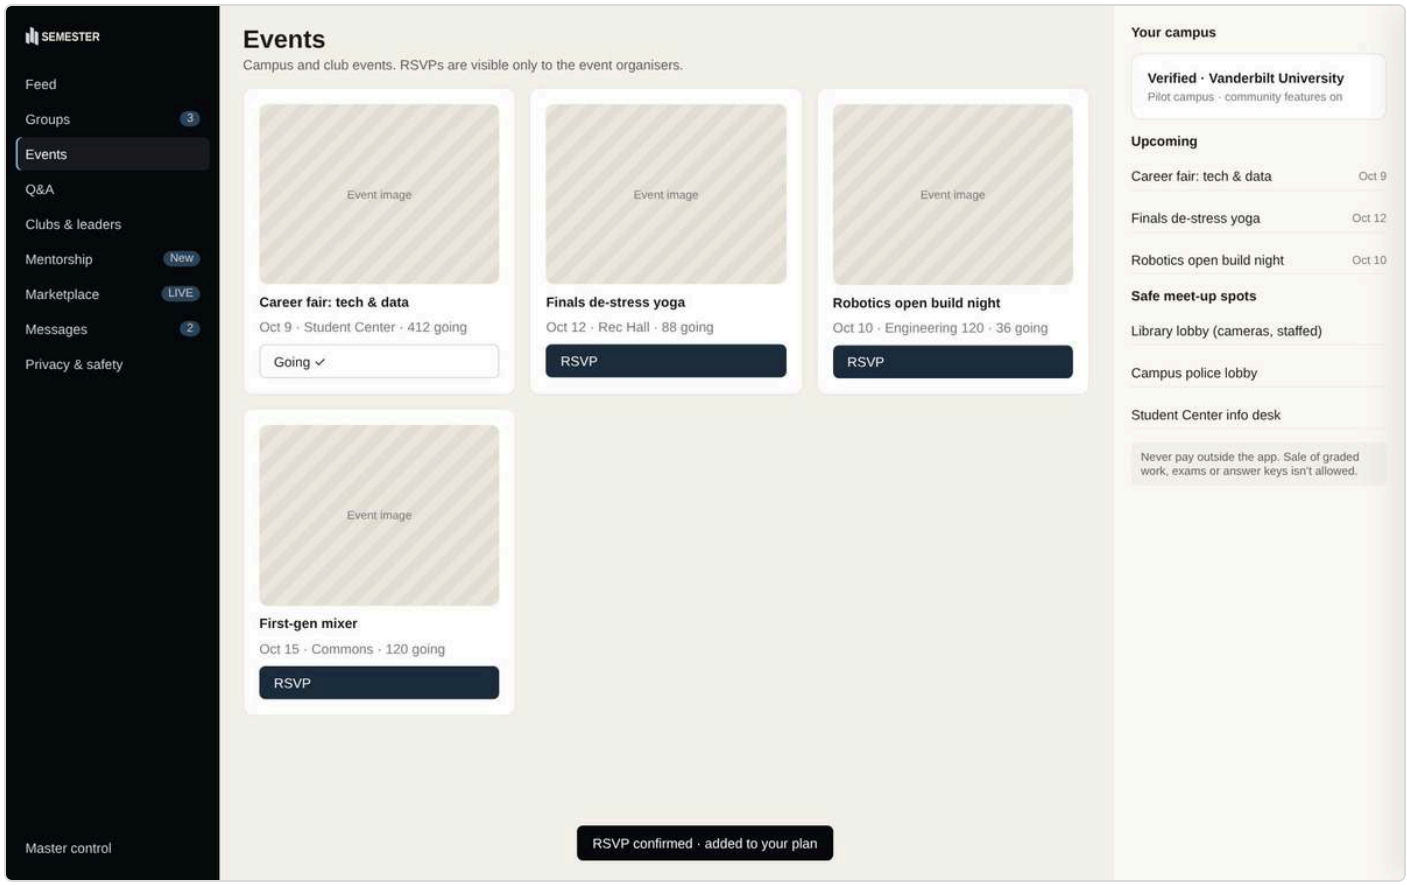
SEMESTER
Feed
Groups 3
Events
Q&A
Clubs & leaders
Mentorship New
Marketplace LIVE
Messages 2
Privacy & safety
Master control
Events
Campus and club events. RSVPs are visible only to the event organisers.
Event image
Career fair: tech & data
Oct 9 · Student Center · 412 going
Going ✓
Event image
Finals de-stress yoga
Oct 12 · Rec Hall · 88 going
RSVP
Event image
Robotics open build night
Oct 10 · Engineering 120 · 36 going
RSVP
Event image
First-gen mixer
Oct 15 · Commons · 120 going
RSVP
RSVP confirmed · added to your plan
Your campus
Verified · Vanderbilt University
Pilot campus · community features on
Upcoming
Career fair: tech & data Oct 9
Finals de-stress yoga Oct 12
Robotics open build night Oct 10
Safe meet-up spots
Library lobby (cameras, staffed)
Campus police lobby
Student Center info desk
Never pay outside the app. Sale of graded work, exams or answer keys isn't allowed.

Events › RSVP

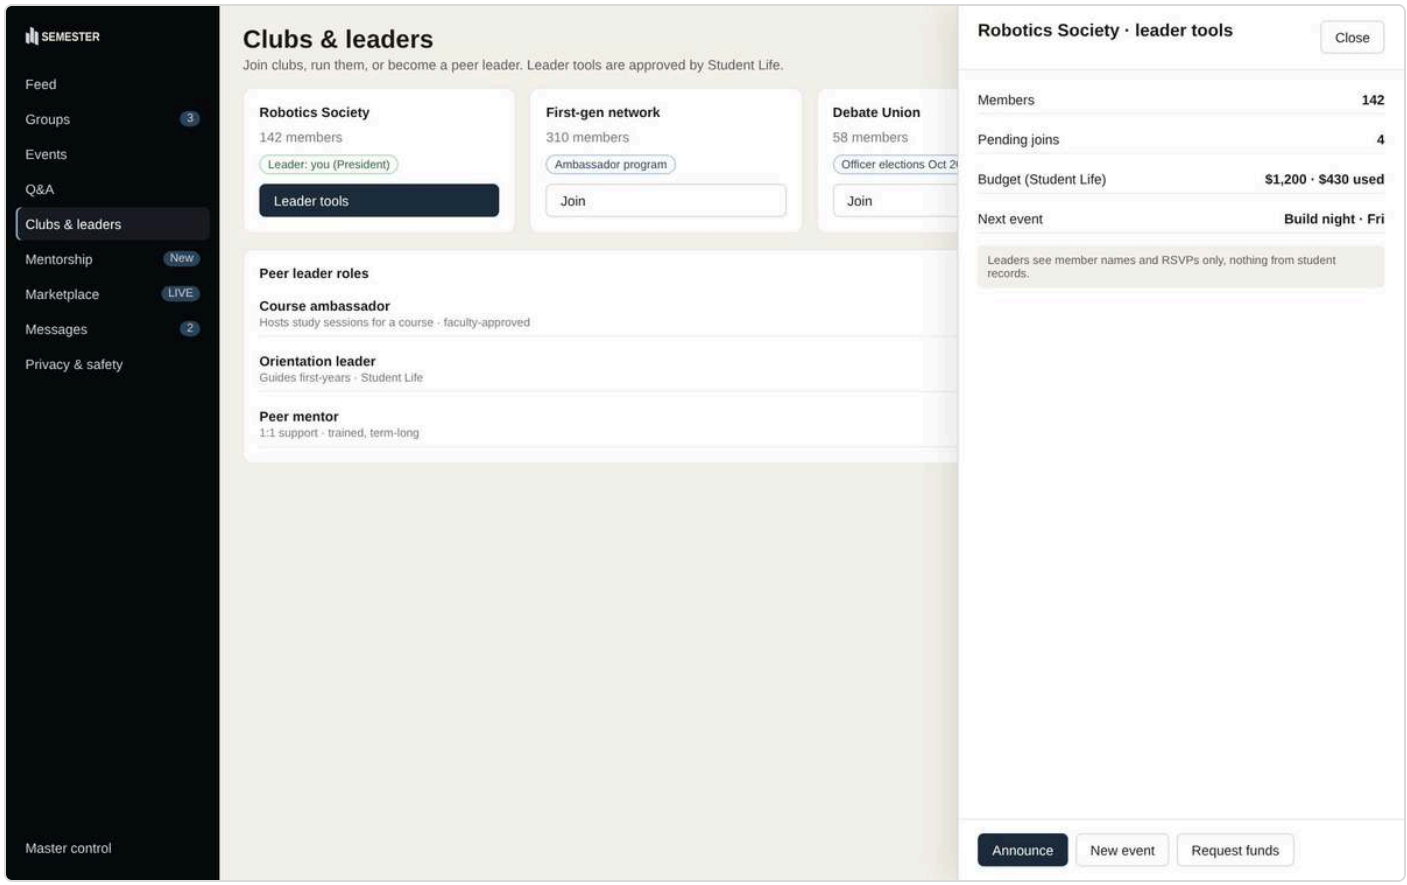

Clubs & leaders › Leader tools

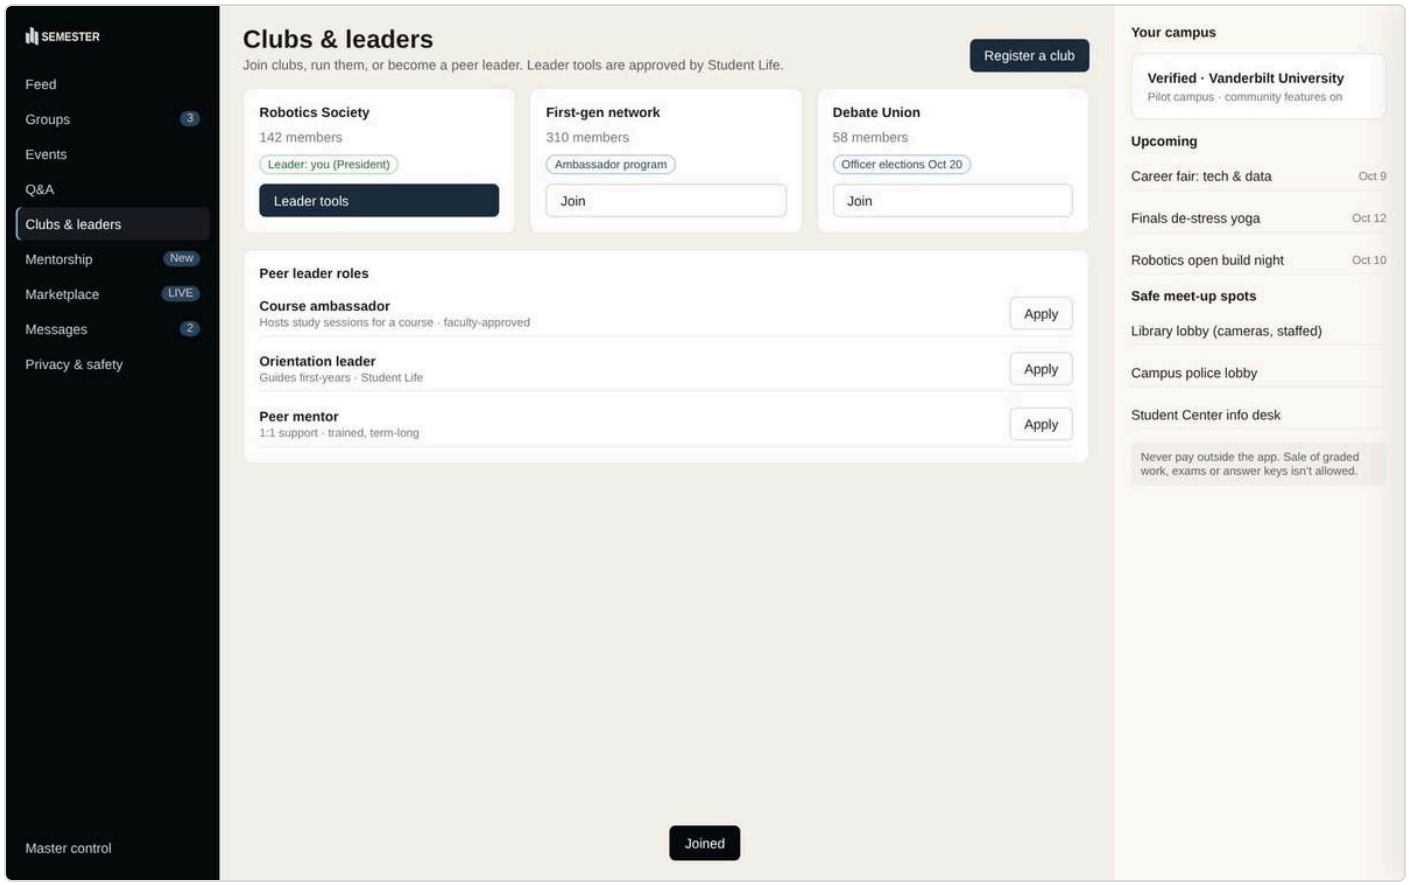

Clubs & leaders › Join

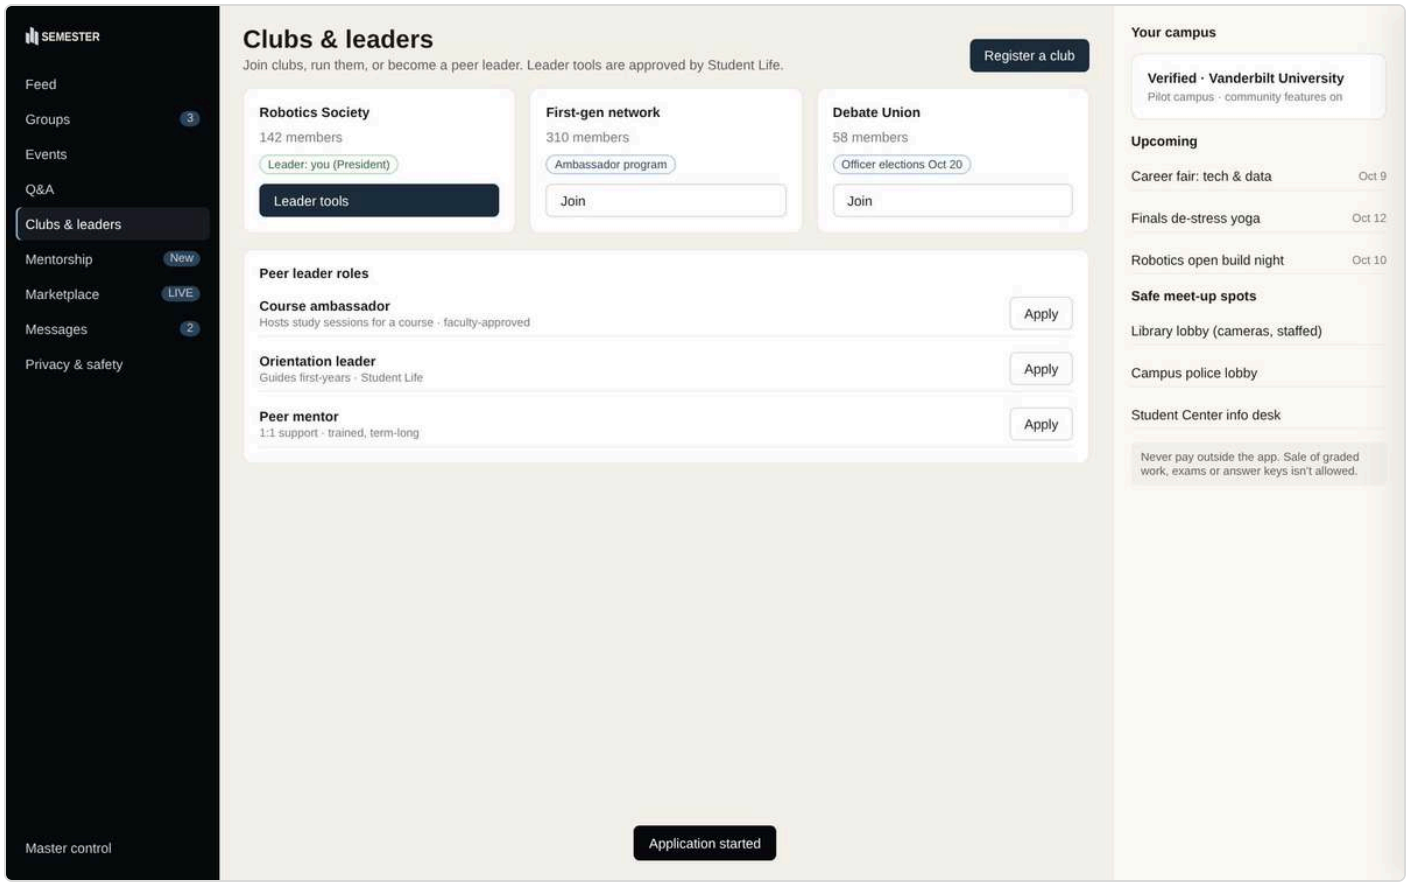

Clubs & leaders › Apply

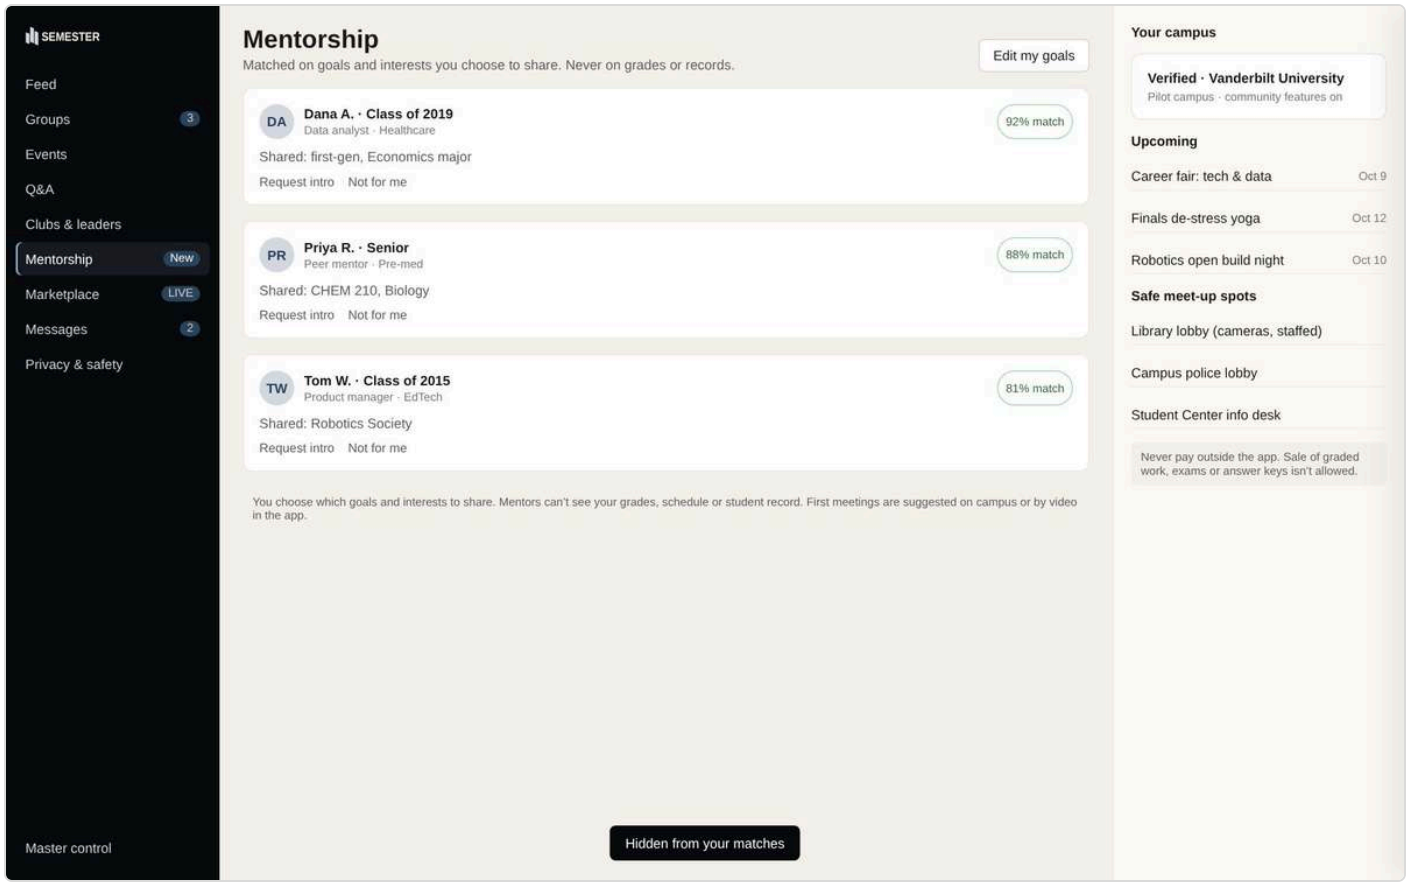

Mentorship › Not for me

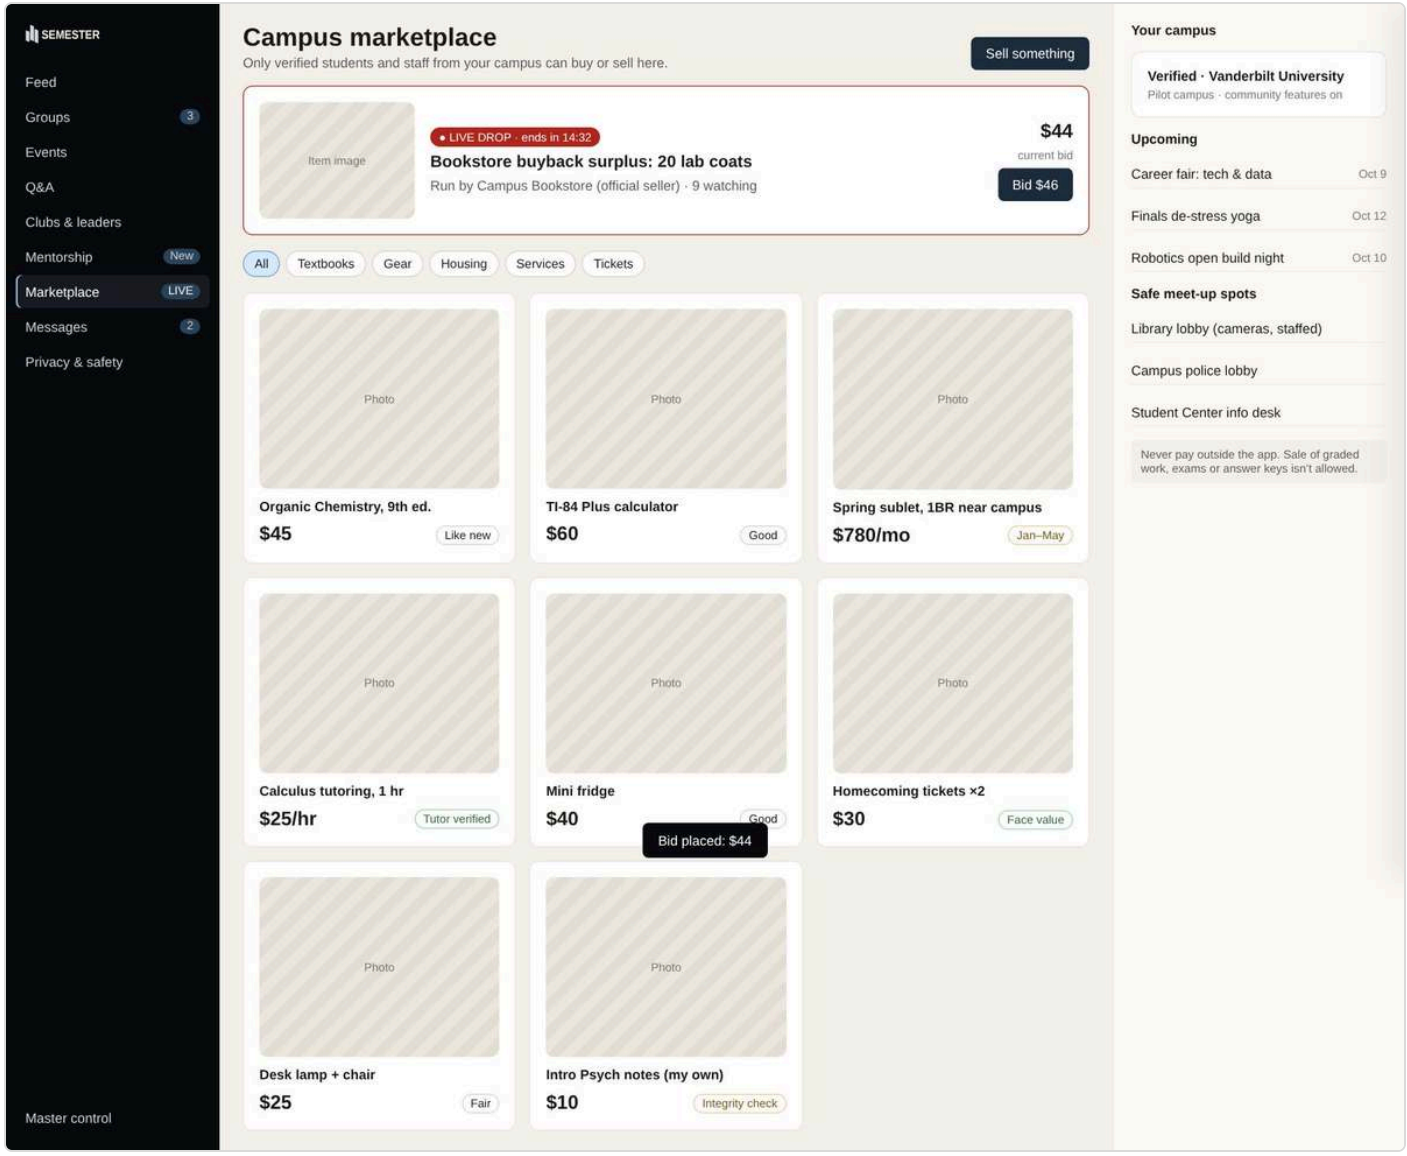

Marketplace › Bid $44

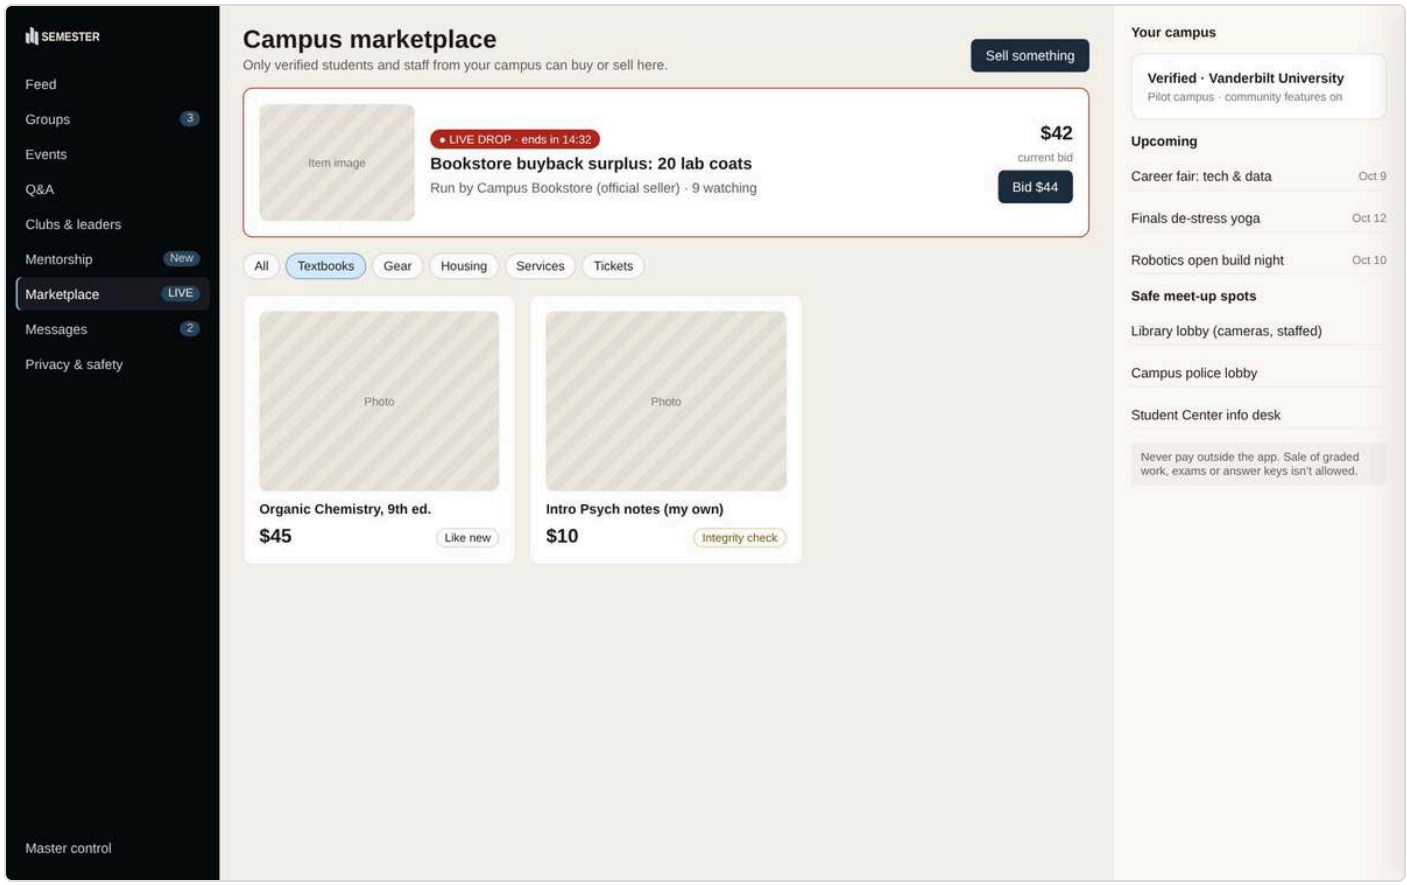

Marketplace › Textbooks

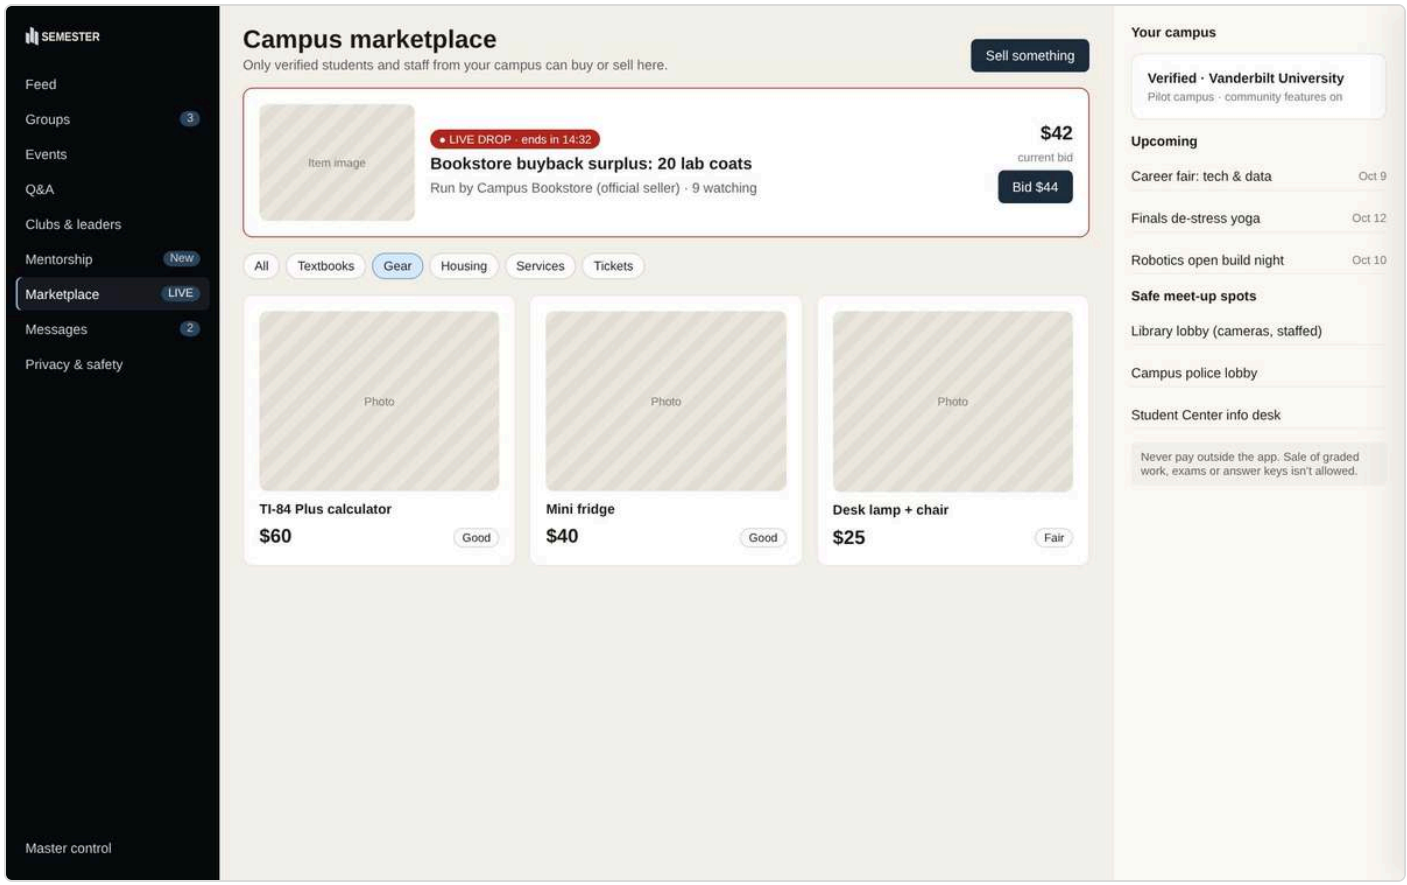

Marketplace › Gear

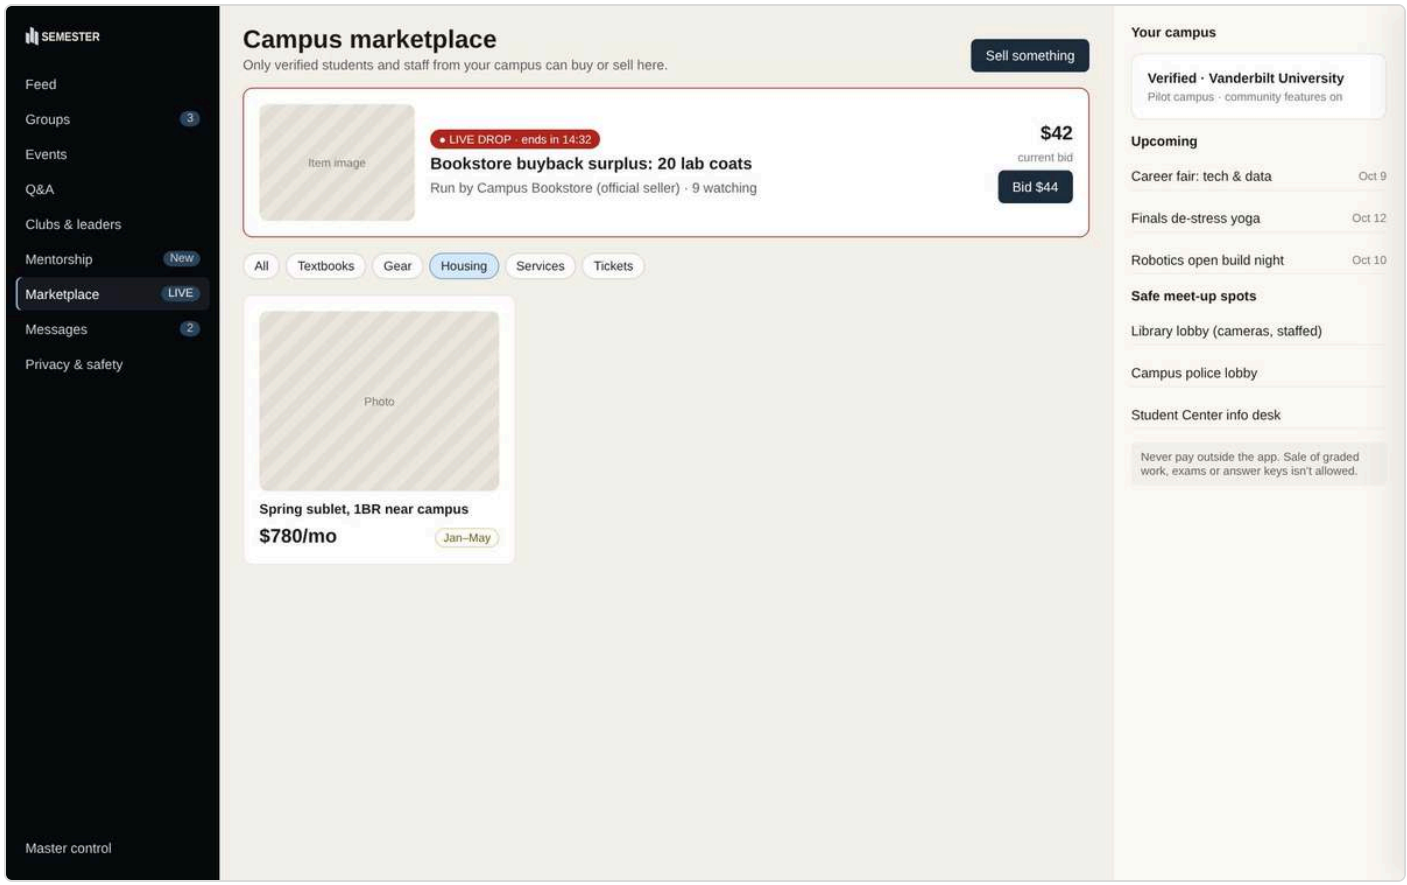

Marketplace › Housing

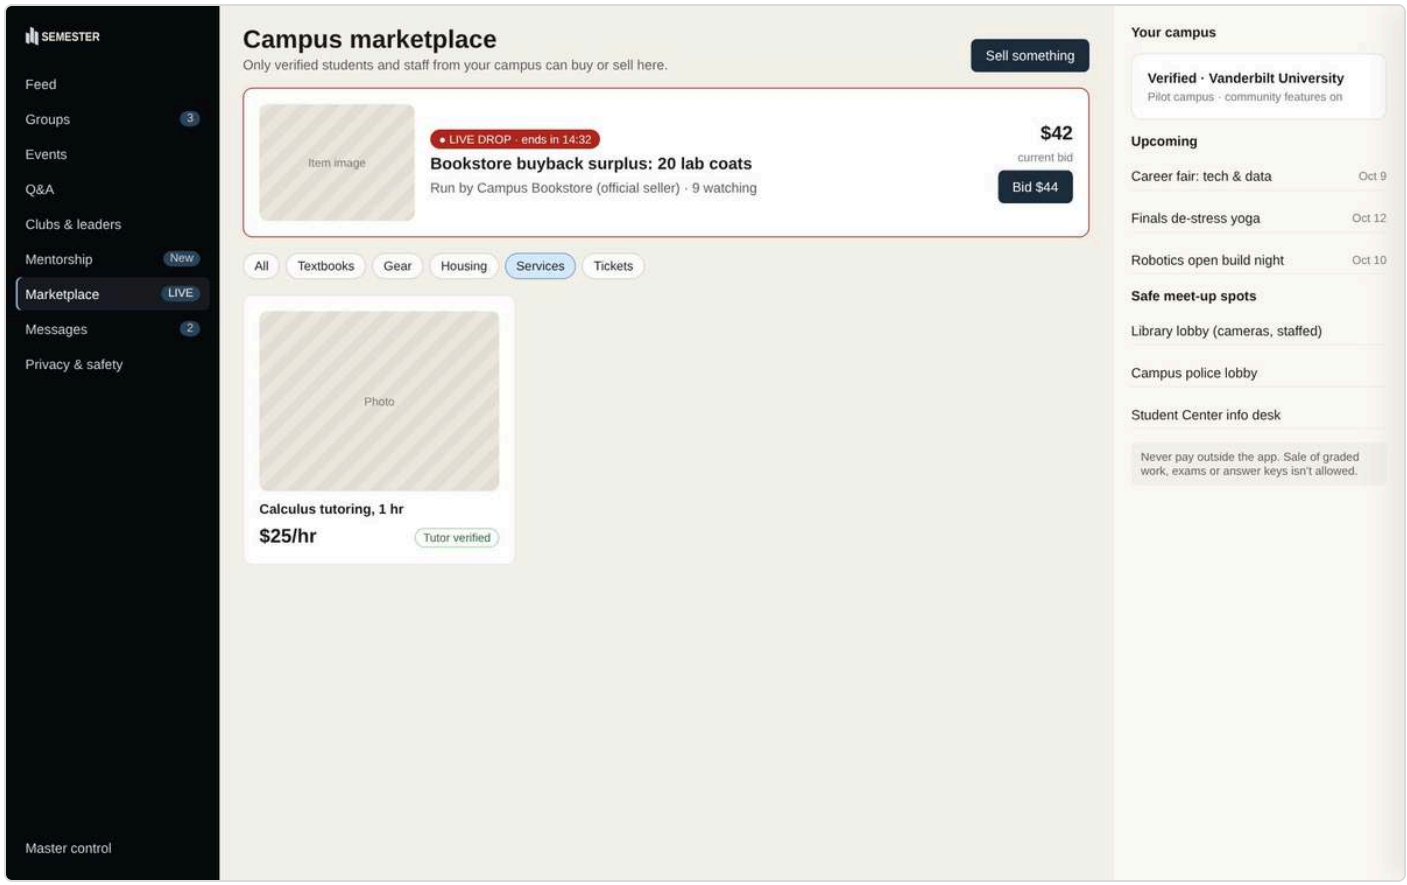

Marketplace › Services

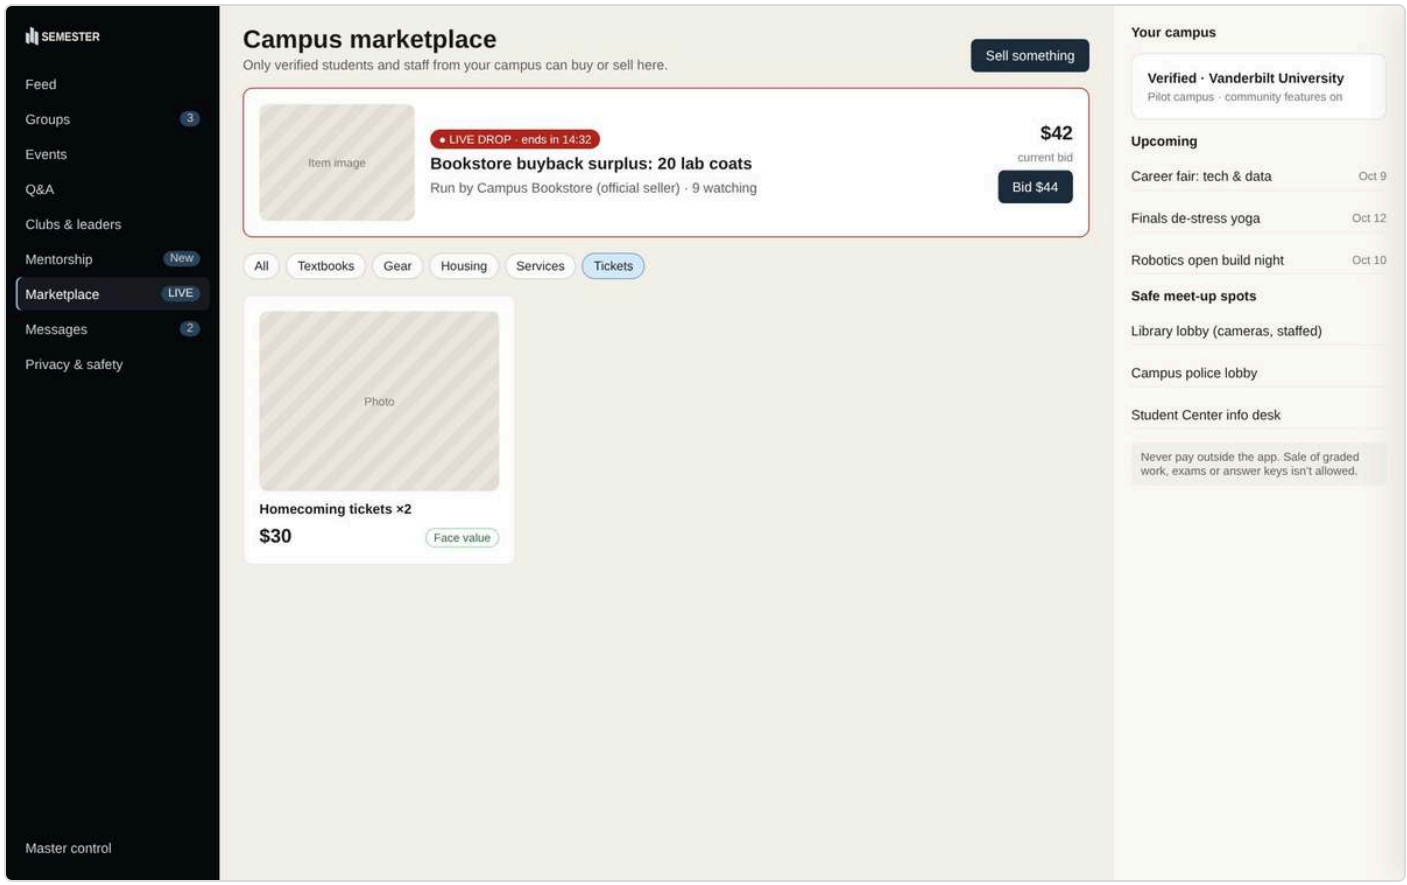

Marketplace › Tickets

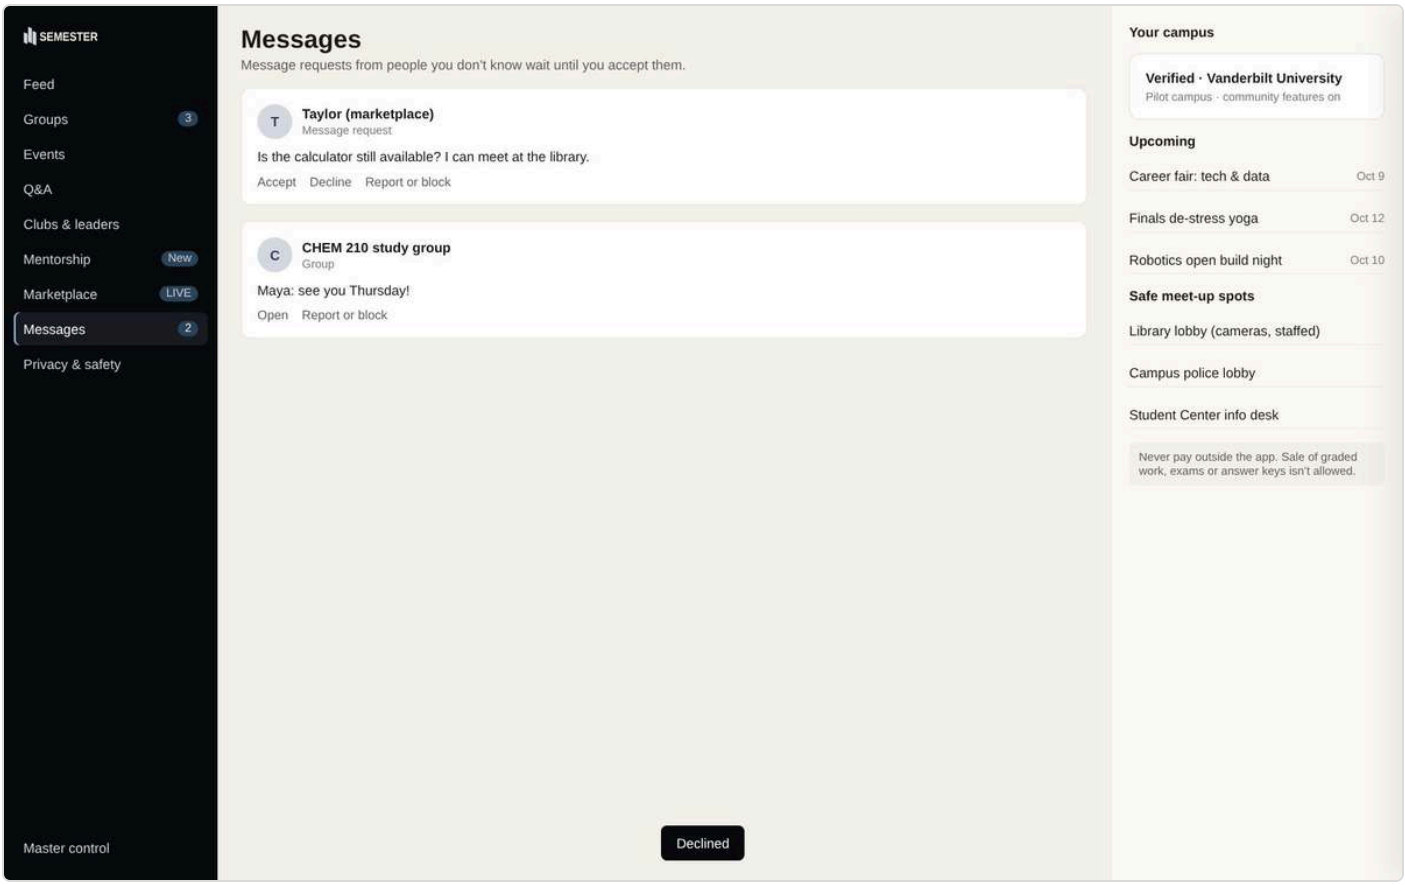

Messages › Decline

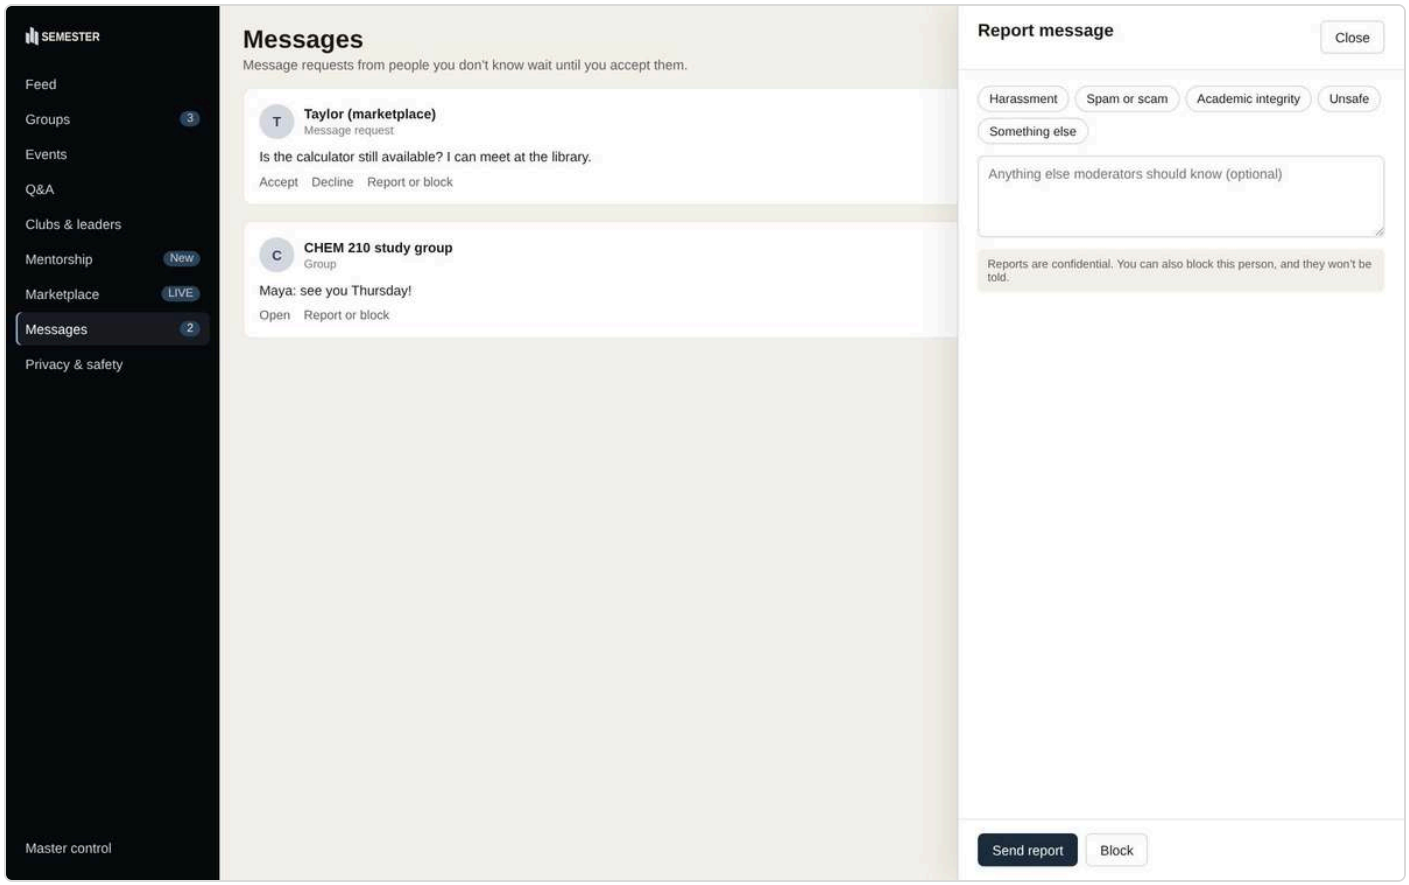

Messages › Report or block

Forms

3 screens.

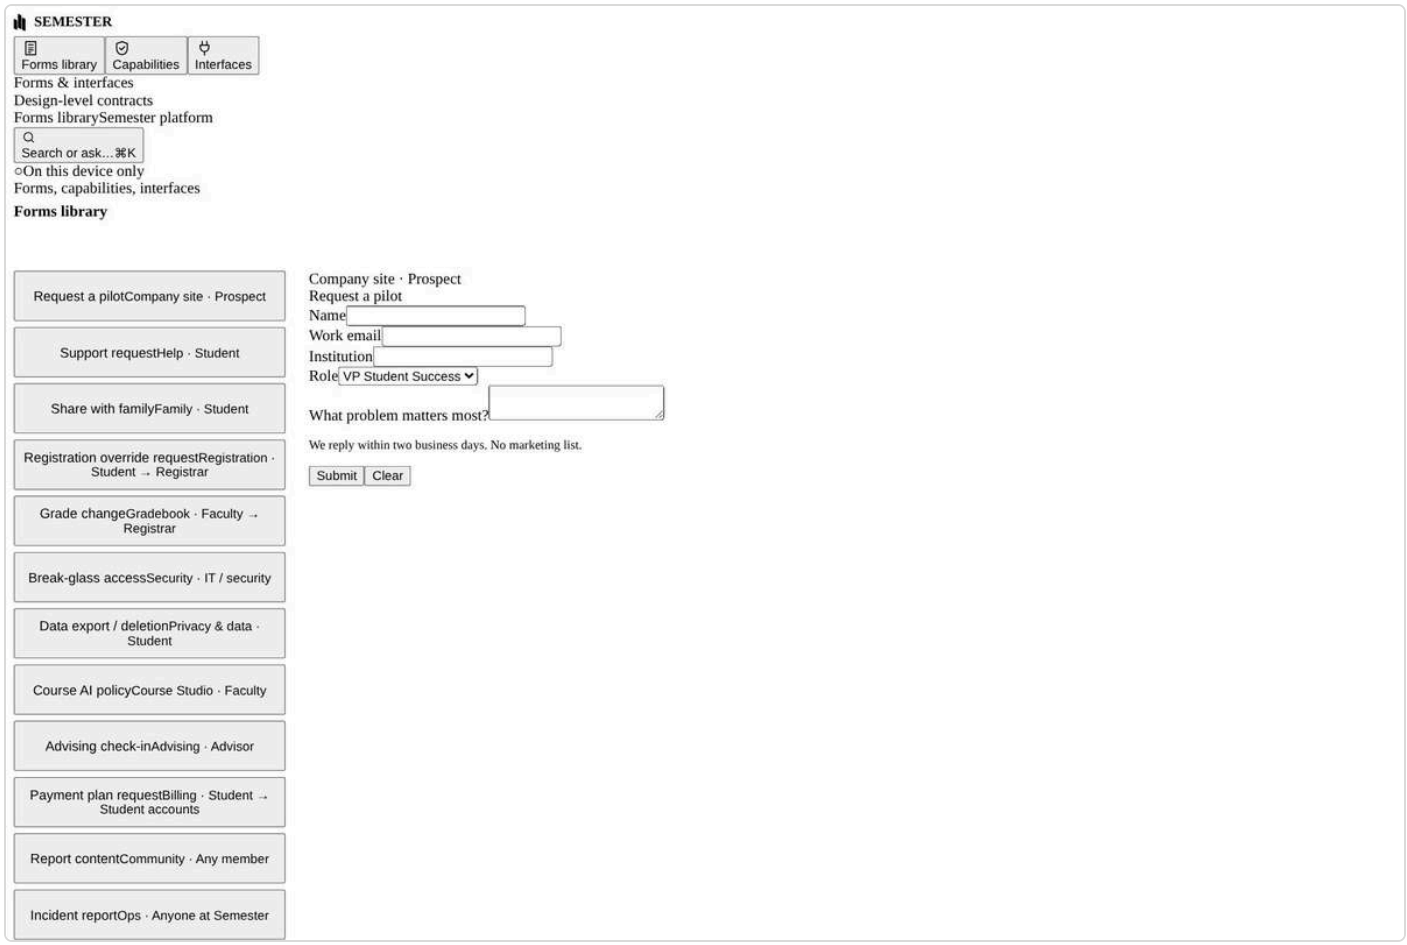

Opening view

Capabilities

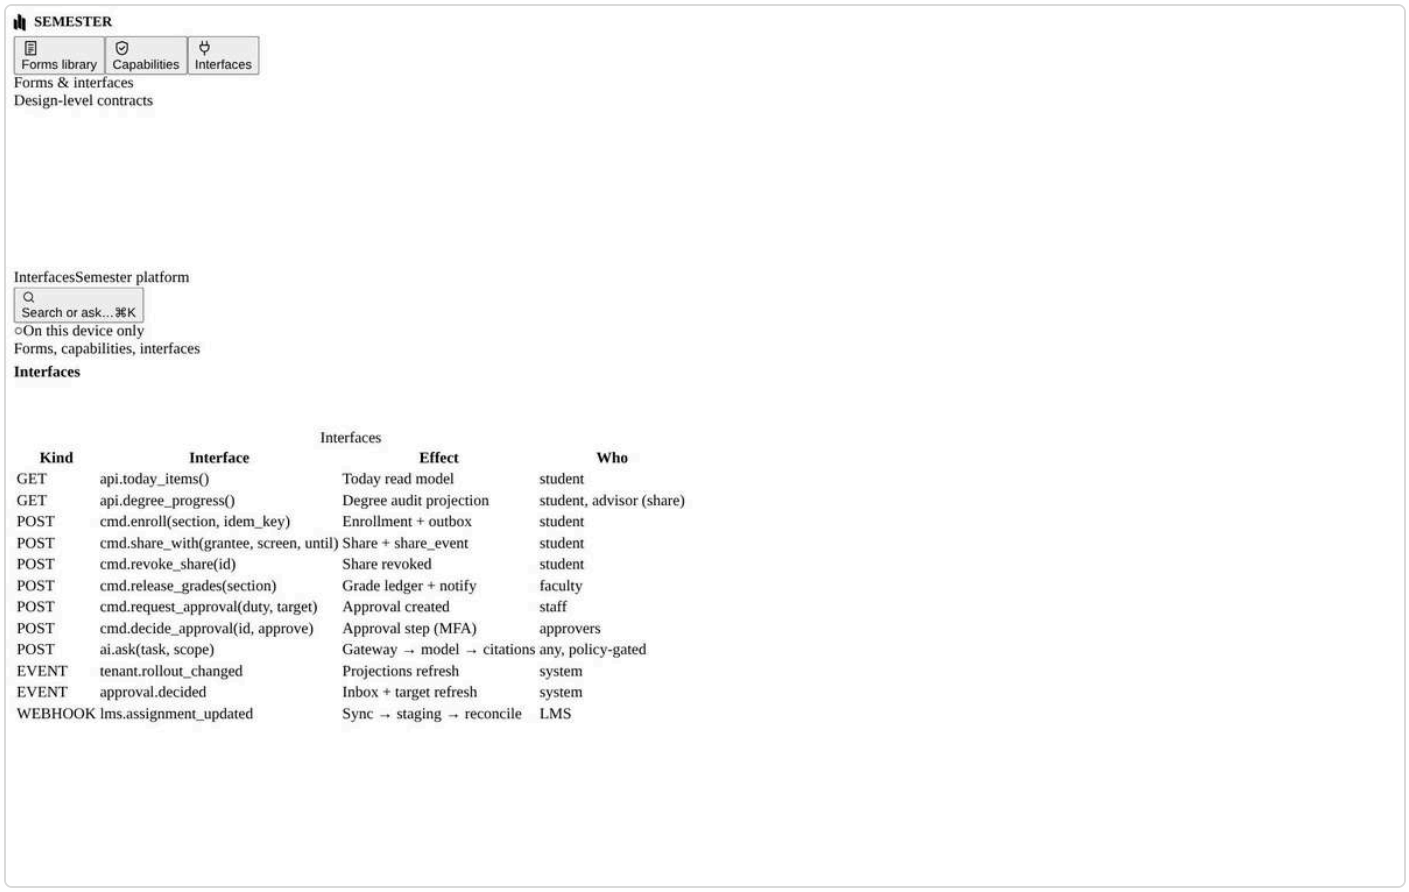
SEMESTER
Forms library
Capabilities
Interfaces
Forms & interfaces
Design-level contracts
InterfacesSemester platform
Search or ask... ⌘K
On this device only
Forms, capabilities, interfaces
Interfaces
Interfaces
Kind Interface Effect Who
GET api.today_items() Today read model student
GET api.degree_progress() Degree audit projection student, advisor (share)
POST cmd.enroll(section, idem_key) Enrollment + outbox student
POST cmd.share_with(grantee, screen, until) Share + share_event student
POST cmd.revoke_share(id) Share revoked student
POST cmd.release_grades(section) Grade ledger + notify faculty
POST cmd.request_approval(duty, target) Approval created staff
POST cmd.decide_approval(id, approve) Approval step (MFA) approvers
POST ai.ask(task, scope) Gateway → model → citations any, policy-gated
EVENT tenant.rollout_changed Projections refresh system
EVENT approval.decided Inbox + target refresh system
WEBHOOK lms.assignment_updated Sync → staging → reconcile LMS

Interfaces

Wireframes

25 screens.

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · StudentLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Student · 64 screens

Every screen a student can open

OnHide screens this role can't open

Today — What do I need to do now? 3

Today full

Course hub full

Notifications full

Plan — What is coming up, and how do I organise it? 12



Calendar full

Registration full

Changes full

Decisions full

Runway full

Pathway full

Applying full

Launchpad full

Career full

Opportunities full

Costs & billing full

Notes & tasks full

Learn — How do I get this academic work done? 21



Courses full

Grades full

Import full

Sources full

Opening view (1/4)

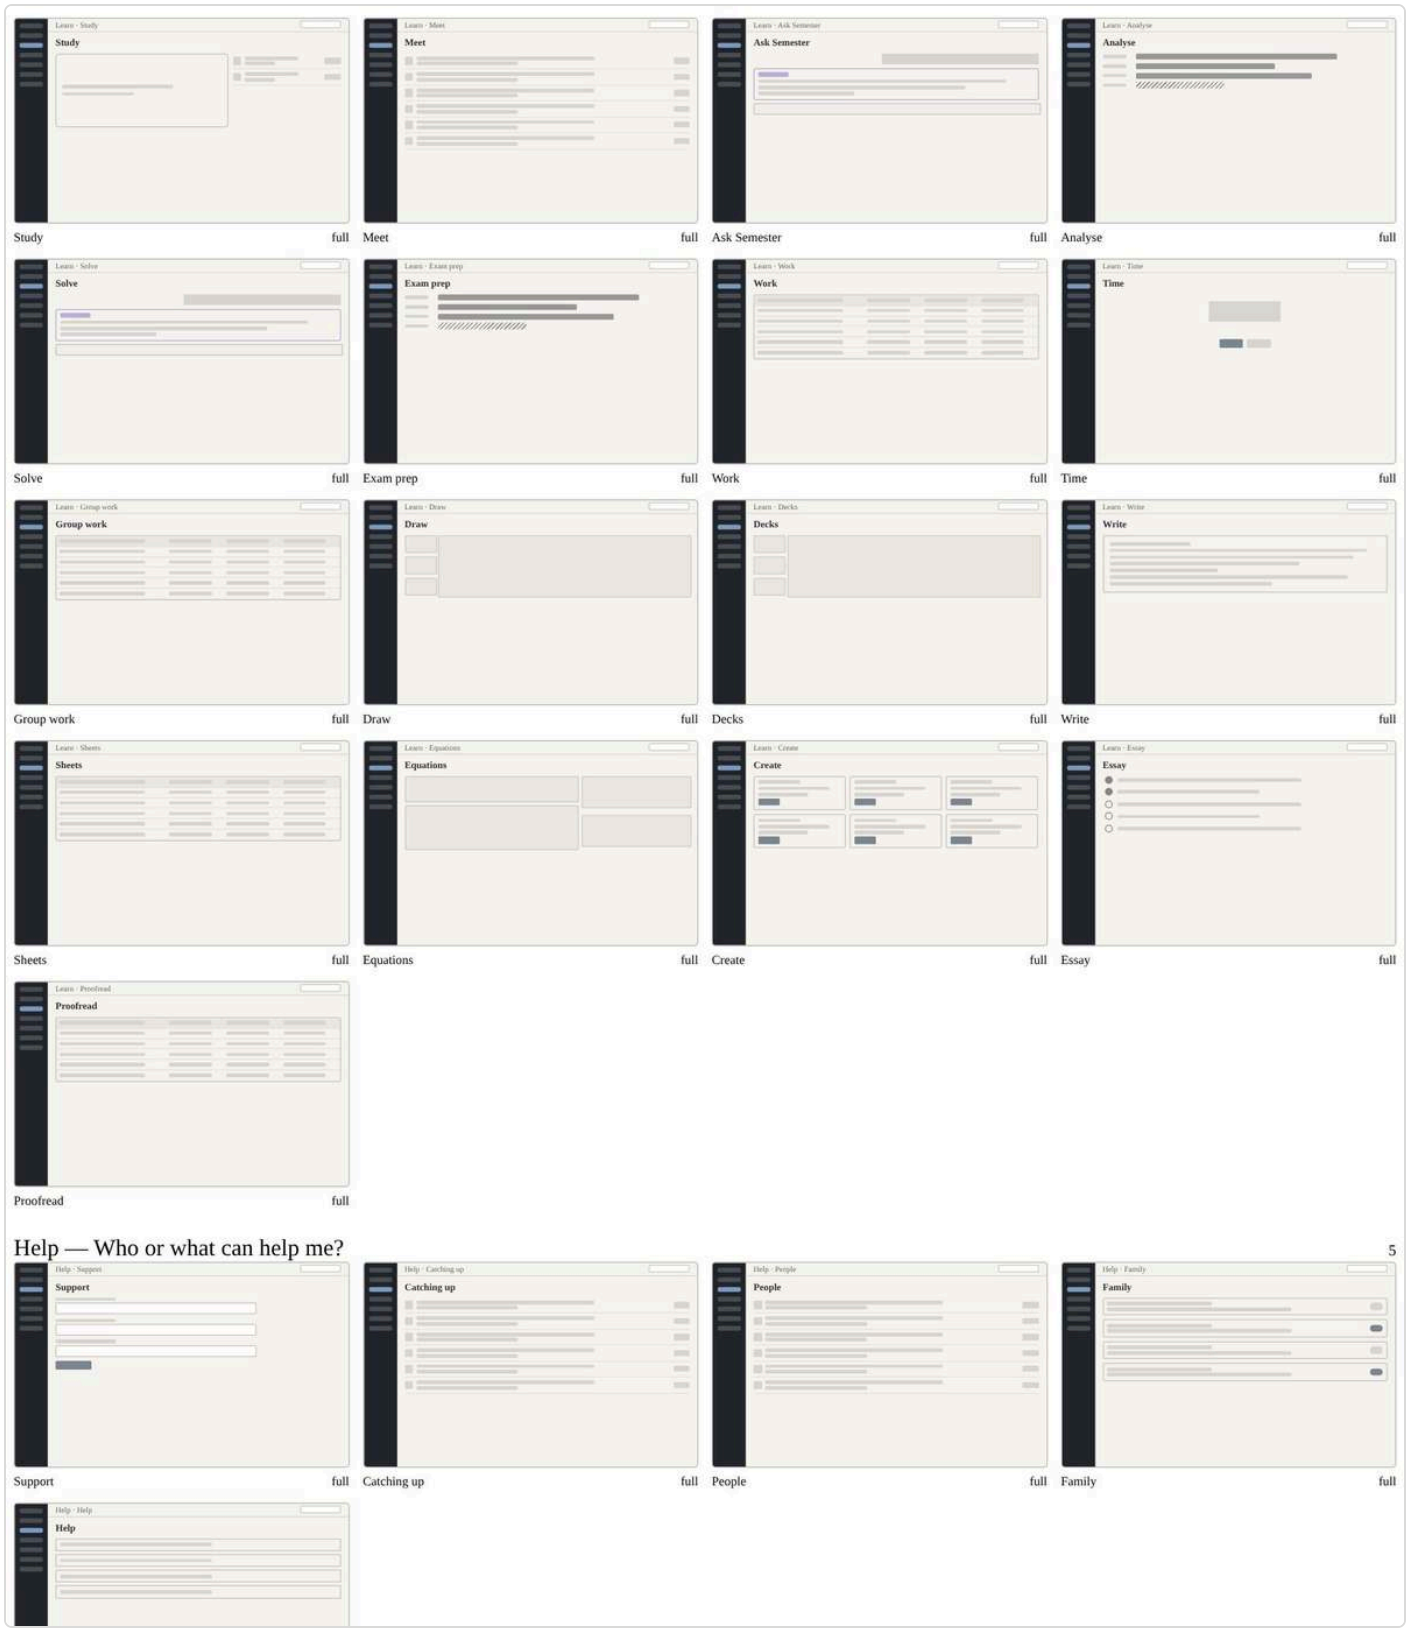

Opening view (2/4)

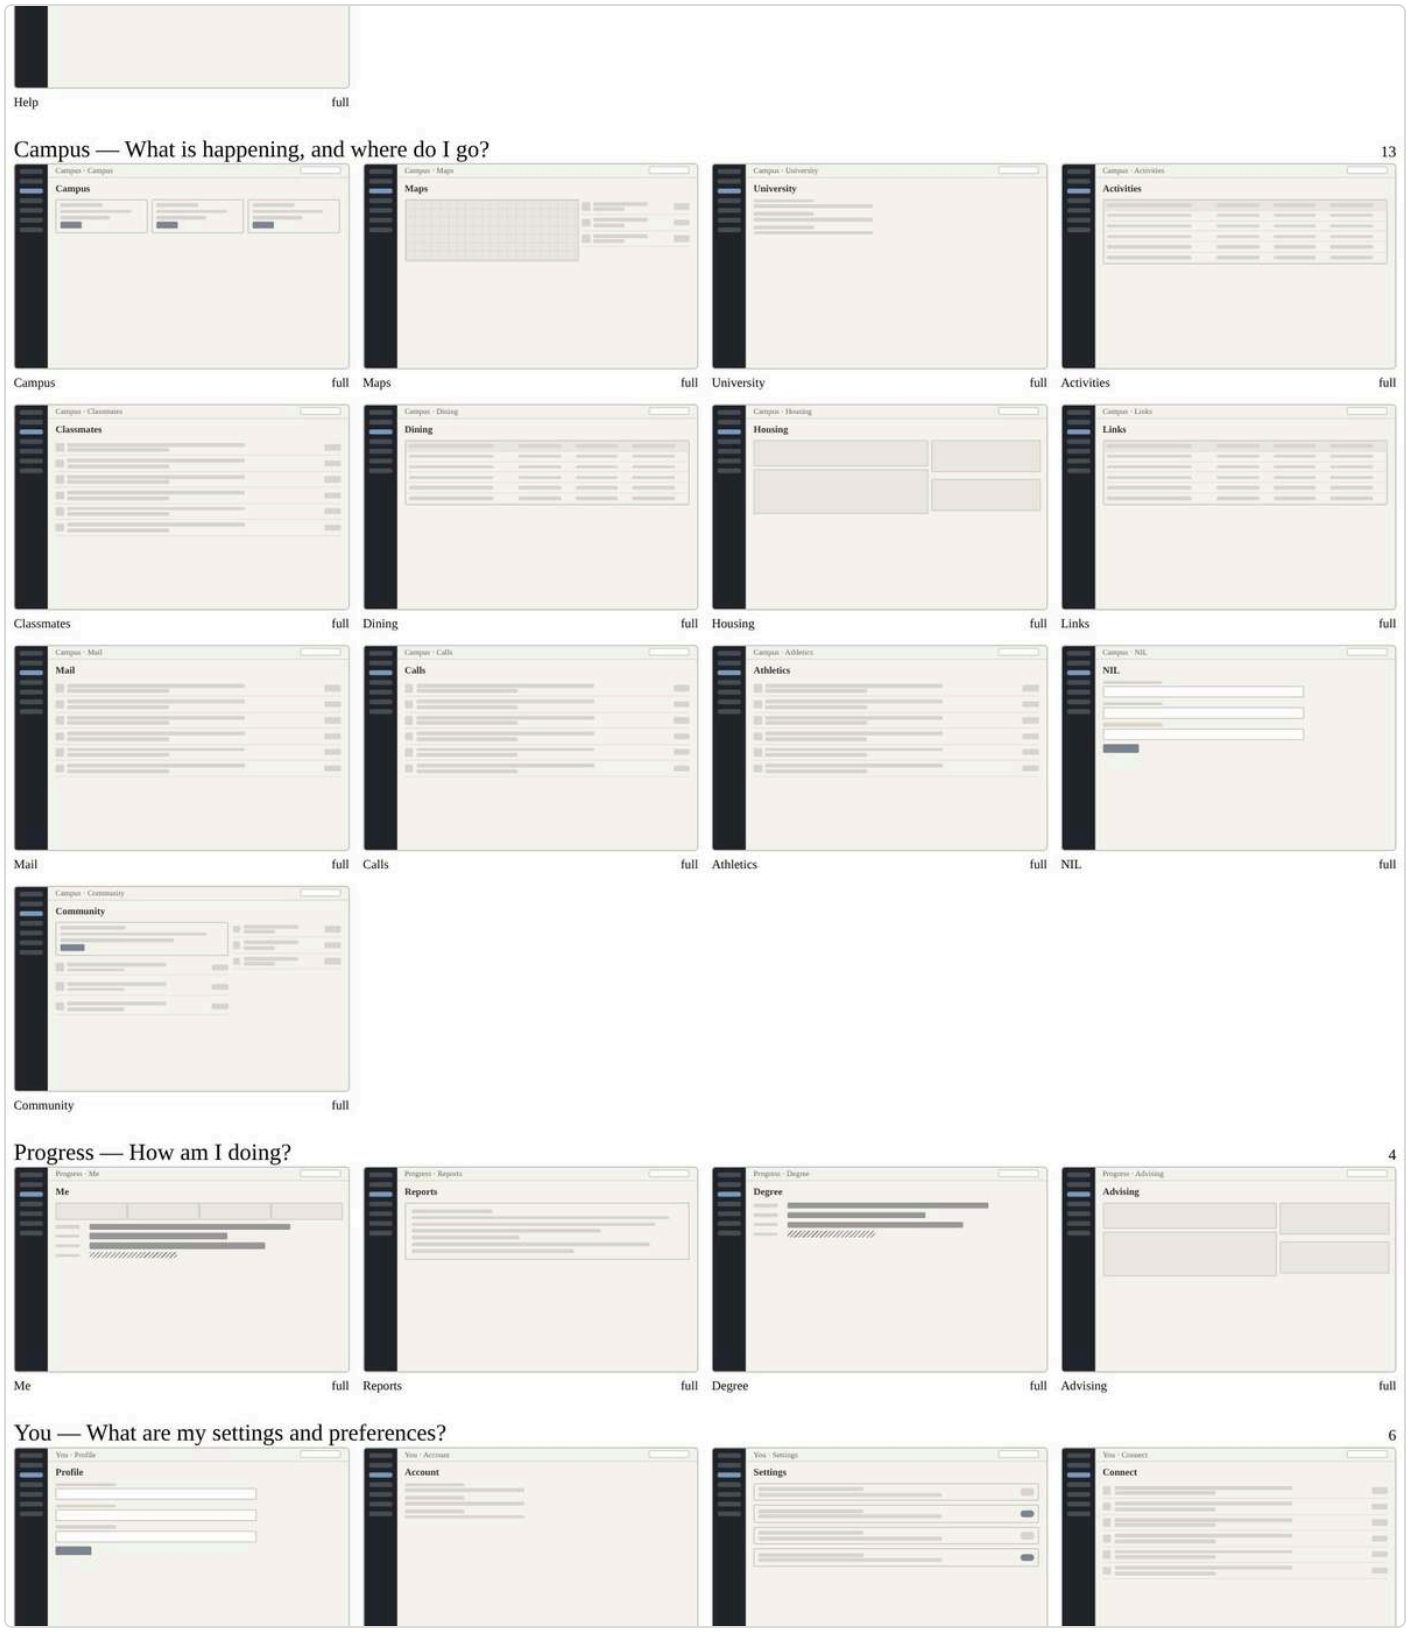

Opening view (3/4)

Opening view (4/4)

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · ApplicantLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Applicant · 13 screens

Every screen a applicant can open

OnHide screens this role can't open

Today — What do I need to do now?

1

Notifications full

Plan — What is coming up, and how do I organise it?

1

Applying full

Help — Who or what can help me?

2

Support full

Help full

Campus — What is happening, and where do I go?

4

Campus read



Maps read



University read

Activities read

You — What are my settings and preferences?

5

Applicant13 (1/2)

Applicant13 (2/2)

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · GuardianLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Guardian · 11 screens

Every screen a guardian can open

OnHide screens this role can't open

Today — What do I need to do now?

1

Notifications full

Plan — What is coming up, and how do I organise it?

2



Calendar shared

Costs & billing shared

Learn — How do I get this academic work done?

1

Grades shared

Help — Who or what can help me?

3



Support full

Family shared

Help full

You — What are my settings and preferences?

4

Profile full



Account full

Settings full

Privacy & data full

Guardian11

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · AlumniLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Alumni · 13 screens

Every screen a alumni can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it?

2

Career full

Opportunities full

Help — Who or what can help me?

3

Support full

People full

Help full

Campus — What is happening, and where do I go?

2



Mail full

Community full

Progress — How am I doing?

1

Degree read

You — What are my settings and preferences?

5

Alumni13 (1/2)

Profile
full
Account
full
Settings
full
Privacy & data
full
You · Export
Export
Export
full

Alumni13 (2/2)

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · FacultyLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Faculty · 14 screens

Every screen a faculty can open

OnHide screens this role can't open

Today — What do I need to do now?

1

Notifications full

Plan — What is coming up, and how do I organise it?

2



Calendar full

Changes scoped

Learn — How do I get this academic work done?

5



Courses scoped



Grades scoped

Sources scoped

Study scoped

Meet full

Help — Who or what can help me?

3



Faculty14 (1/2)

Support full

People read

Help full

Campus — What is happening, and where do I go? 1

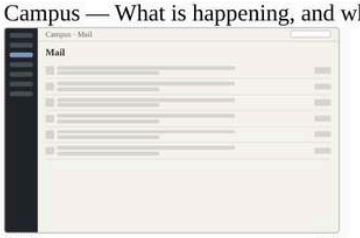

Mail full

You — What are my settings and preferences? 2

Profile full

Settings full

Faculty14 (2/2)

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Teaching assistantLow-fi · real Semester layout

Search or ask… ⌘K

On this device only

Teaching assistant · 10 screens

Every screen a teaching assistant can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it? 2



Calendar full

Changes scoped

Learn — How do I get this academic work done? 3



Courses scoped



Grades scoped

Meet full

Help — Who or what can help me? 2

Support full

Help full

Campus — What is happening, and where do I go? 1



Mail full

You — What are my settings and preferences? 2

Profile full

Settings full

Teaching assistant10

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · AdvisorLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Advisor · 11 screens

Every screen a advisor can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it?

2



Calendar full

Registration read

Learn — How do I get this academic work done?

1

Meet full

Help — Who or what can help me?

3

Support full

People read

Help full

Campus — What is happening, and where do I go?

1

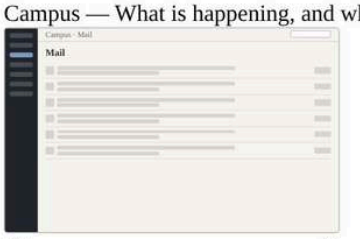

Mail full

Progress — How am I doing?

2

Advisor11 (1/2)

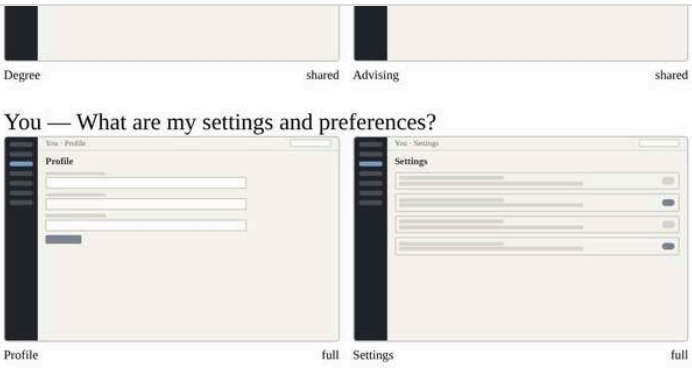

Advisor11 (2/2)

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8

Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · RegistrarLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Registrar · 9 screens

Every screen a registrar can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it? 3



Calendar full

Registration full

Changes full

Learn — How do I get this academic work done? 1

Grades audited

Help — Who or what can help me? 3

Support full

People read

Help full

Progress — How am I doing? 1

Degree full

You — What are my settings and preferences? 1



Settings full

Registrar9

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · FinanceLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Finance · 4 screens

Every screen a finance can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it? 1

Costs & billing full

Help — Who or what can help me? 2

Support full

Help full

You — What are my settings and preferences? 1



Settings full

Finance4

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Student affairsLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Student affairs · 7 screens

Every screen a student affairs can open

OnHide screens this role can't open

Help — Who or what can help me? 3

Support shared

Catching up shared

Help full

Campus — What is happening, and where do I go? 3

Dining scoped

Housing scoped

Community scoped

You — What are my settings and preferences? 1



Settings full

Student affairs7

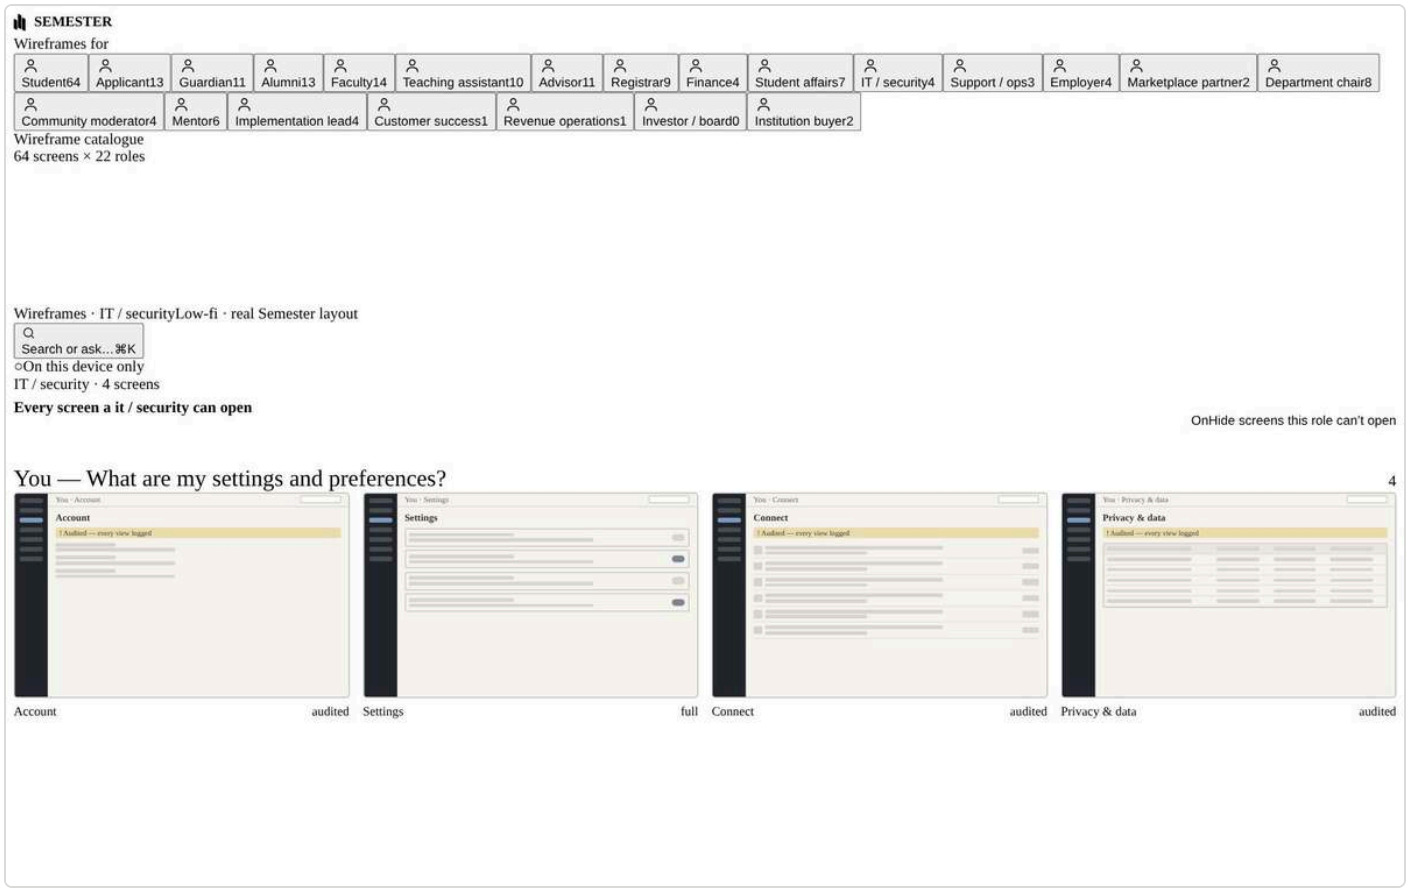

IT / security4

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Support / opsLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Support / ops · 3 screens

Every screen a support / ops can open

OnHide screens this role can't open

Help — Who or what can help me?

2

Support scoped

Help full

You — What are my settings and preferences?

1

Connect scoped

Support / ops3

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · EmployerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Employer · 4 screens

Every screen a employer can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it?

2

Career shared

Opportunities scoped

Campus — What is happening, and where do I go?

1



Mail scoped

You — What are my settings and preferences?

1



Settings full

Employer4

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Marketplace partnerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Marketplace partner · 2 screens

Every screen a marketplace partner can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it?

1

Opportunities scoped

You — What are my settings and preferences?

1

Settings full

Marketplace partner2

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8

Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Department chairLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Department chair · 8 screens

Every screen a department chair can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it? 2

Registration read

Changes full

Learn — How do I get this academic work done? 2

Courses read

Grades audited

Help — Who or what can help me? 3

Support full

People read

Help full

You — What are my settings and preferences? 1



Settings full

Department chair8

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Community moderatorLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Community moderator · 4 screens

Every screen a community moderator can open

OnHide screens this role can't open

Help — Who or what can help me?

1



Help full

Campus — What is happening, and where do I go?

2



Classmates read

Community scoped

You — What are my settings and preferences?

1



Settings full

Community moderator4

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8 | Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · MentorLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Mentor · 6 screens

Every screen a mentor can open

OnHide screens this role can't open

Plan — What is coming up, and how do I organise it? 2

Career shared

Opportunities read

Learn — How do I get this academic work done? 1

Meet scoped

Help — Who or what can help me? 1

Help full

Campus — What is happening, and where do I go? 1



Mail scoped

You — What are my settings and preferences? 1



Settings full

Mentor6

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8

Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Implementation leadLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Implementation lead · 4 screens

Every screen a implementation lead can open

OnHide screens this role can't open

Help — Who or what can help me?

2

Support scoped

Help full

You — What are my settings and preferences?

2



Settings full

Connect audited

Implementation lead4

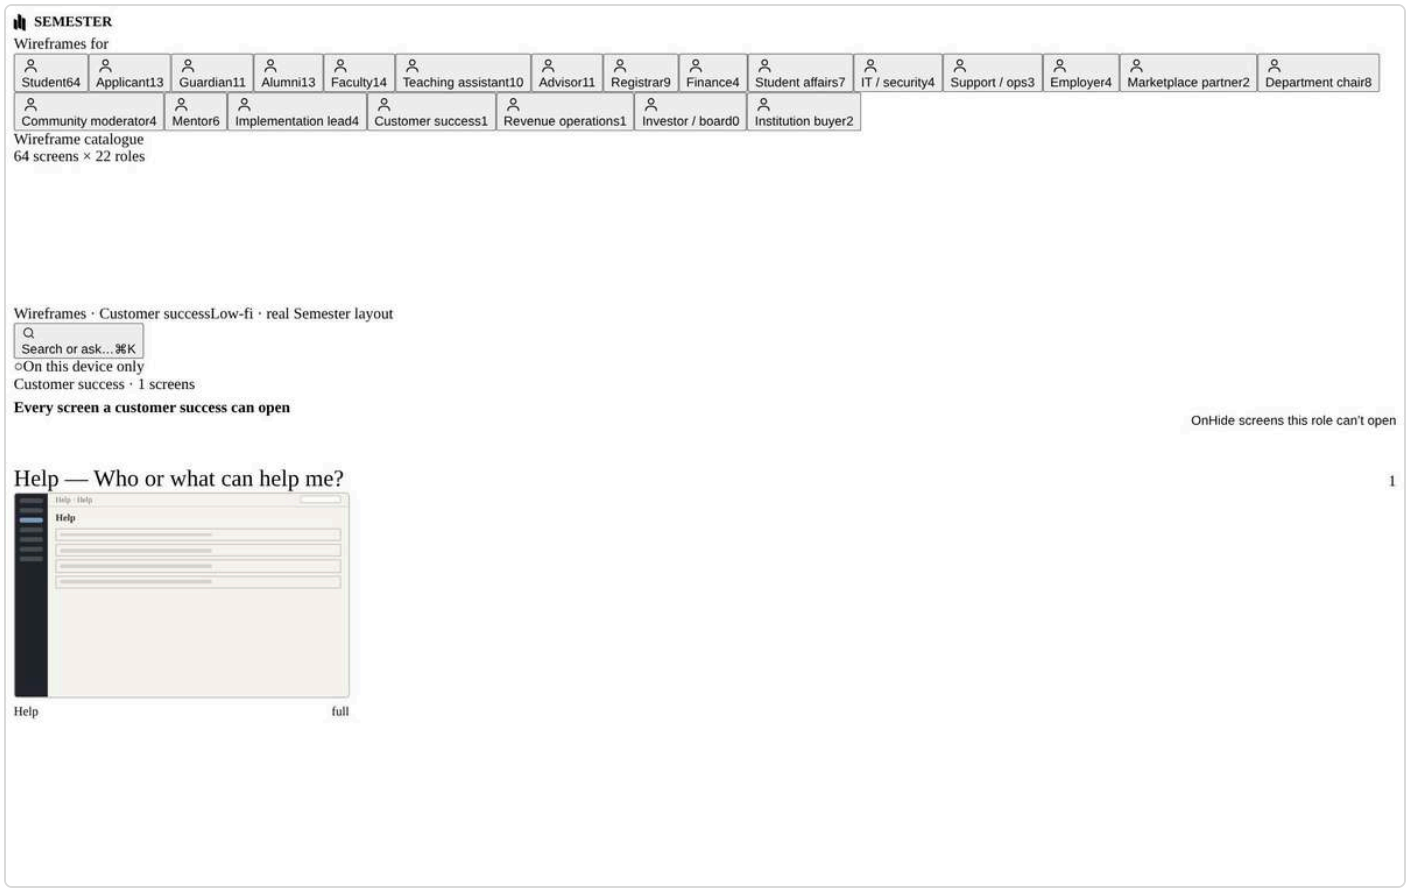

Customer success1

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Revenue operationsLow-fi · real Semester layout

Search or ask… ⌘K

On this device only

Revenue operations · 1 screens

Every screen a revenue operations can open

OnHide screens this role can't open

Help — Who or what can help me?

1

Help full

Revenue operations1

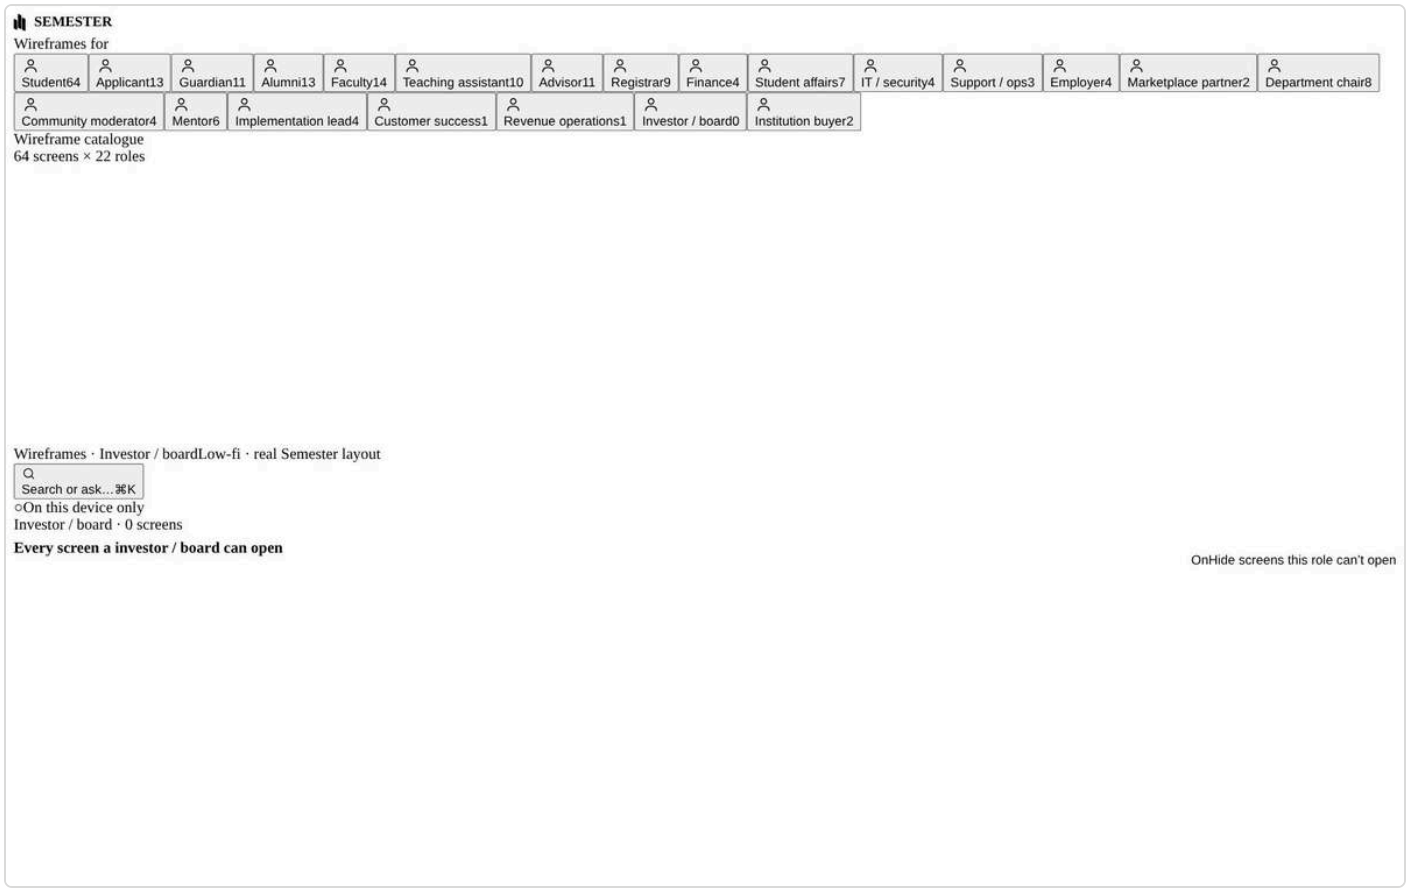

Investor / board0

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Institution buyerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Institution buyer · 2 screens

Every screen a institution buyer can open

OnHide screens this role can't open

Help — Who or what can help me?

1

Help read

Campus — What is happening, and where do I go?

1



University read

Institution buyer2

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Institution buyerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Institution buyer · 64 screens

Every screen a institution buyer can open

OffHide screens this role can't open

Today — What do I need to do now? 3

Today none · Course hub none · Notifications none

Plan — What is coming up, and how do I organise it? 12

Calendar none · Registration none · Changes none · Decisions none

Runway none · Pathway none · Applying none · Launchpad none

Career none · Opportunities none · Costs & billing none · Notes & tasks none

Learn — How do I get this academic work done? 21

Courses none · Grades none · Import none · Sources none

OnHide screens this role can't open (1/4)

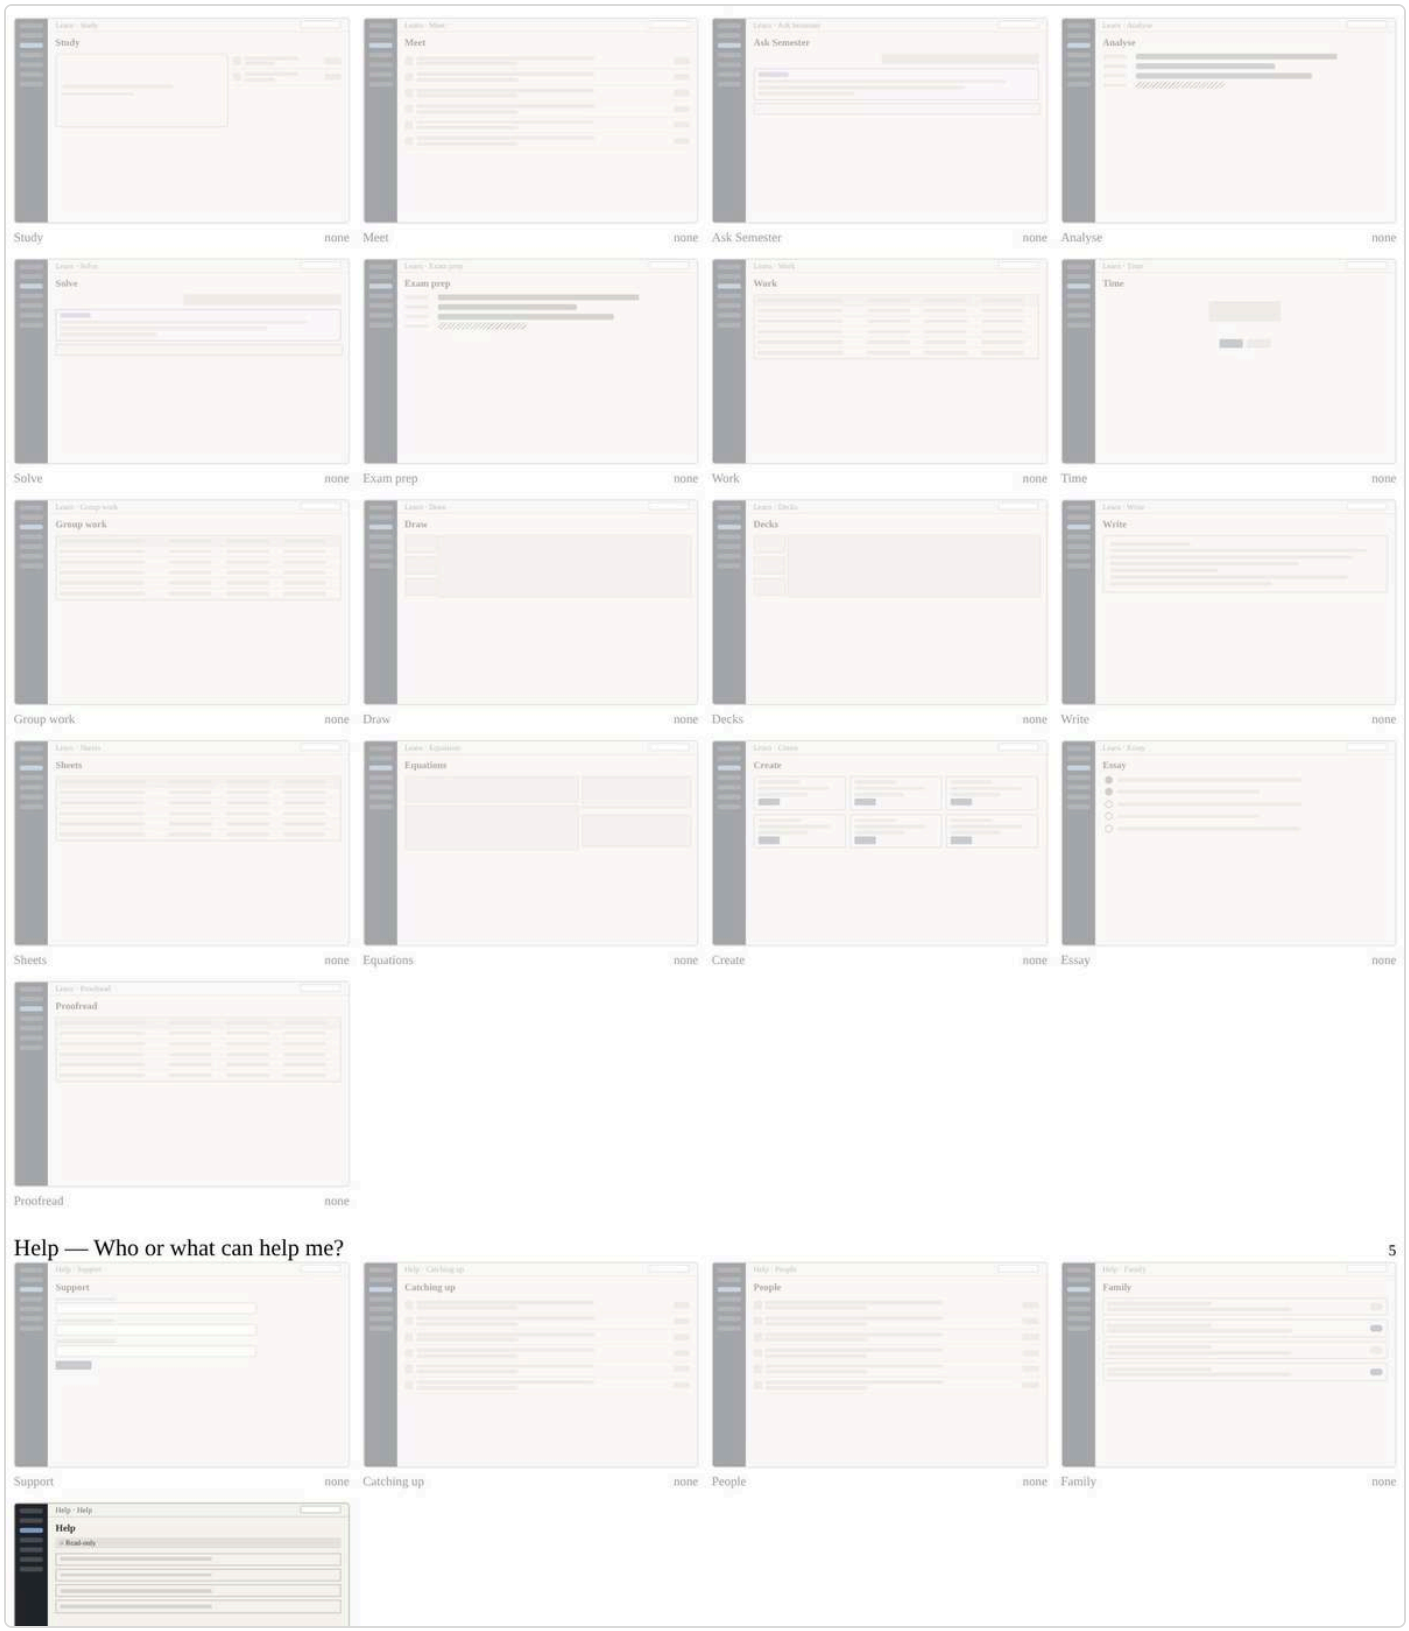

Help — Who or what can help me? 5

OnHide screens this role can't open (2/4)

Help read

Campus — What is happening, and where do I go? 13

Campus none

Maps none



University read



Activities none

Classmates none

Dining none

Housing none

Links none

Mail none

Calls none

Athletics none

NIL none



Community none

Progress — How am I doing? 4

Me none



Reports none



Degree none



Advising none

You — What are my settings and preferences? 6

OnHide screens this role can't open (3/4)

OnHide screens this role can't open (4/4)

SEMESTER

Wireframes for

Student64 Applicant13 Guardian11 Alumni13 Faculty14 Teaching assistant10 Advisor11 Registrar9 Finance4 Student affairs7 IT / security4 Support / ops3 Employer4 Marketplace partner2 Department chair8 Community moderator4 Mentor6 Implementation lead4 Customer success1 Revenue operations1 Investor / board0 Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Institution buyerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Institution buyer · 2 screens

Every screen a institution buyer can open

OnHide screens this role can't open

Help — Who or what can help me?

1

Help read

Campus — What is happening, and where do I go?

1

University read

Help · Institution buyer

Access

Read-only

Layout

faq

Hi-fi

see Atlas

Open wireframe: Help

SEMESTER

Wireframes for

Student64 | Applicant13 | Guardian11 | Alumni13 | Faculty14 | Teaching assistant10 | Advisor11 | Registrar9 | Finance4 | Student affairs7 | IT / security4 | Support / ops3 | Employer4 | Marketplace partner2 | Department chair8

Community moderator4 | Mentor6 | Implementation lead4 | Customer success1 | Revenue operations1 | Investor / board0 | Institution buyer2

Wireframe catalogue

64 screens × 22 roles

Wireframes · Institution buyerLow-fi · real Semester layout

Search or ask… ⌘K

○On this device only

Institution buyer · 2 screens

Every screen a institution buyer can open

OnHide screens this role can't open

Help — Who or what can help me?

1

Help read

Campus — What is happening, and where do I go?

1

University read

University · Institution buyer

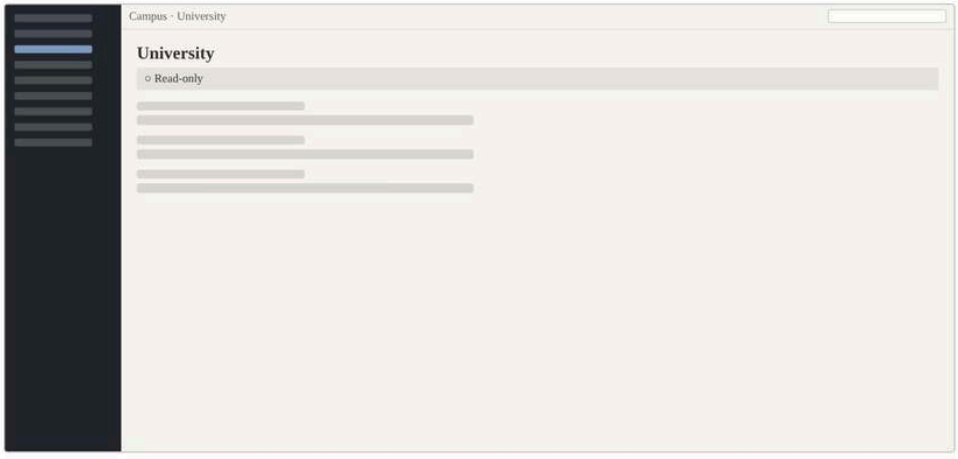

Access

Read-only

Layout

fields

Hi-fi

see Atlas

Open wireframe: University

Demo video

Opening view

Platform shell

7 screens.

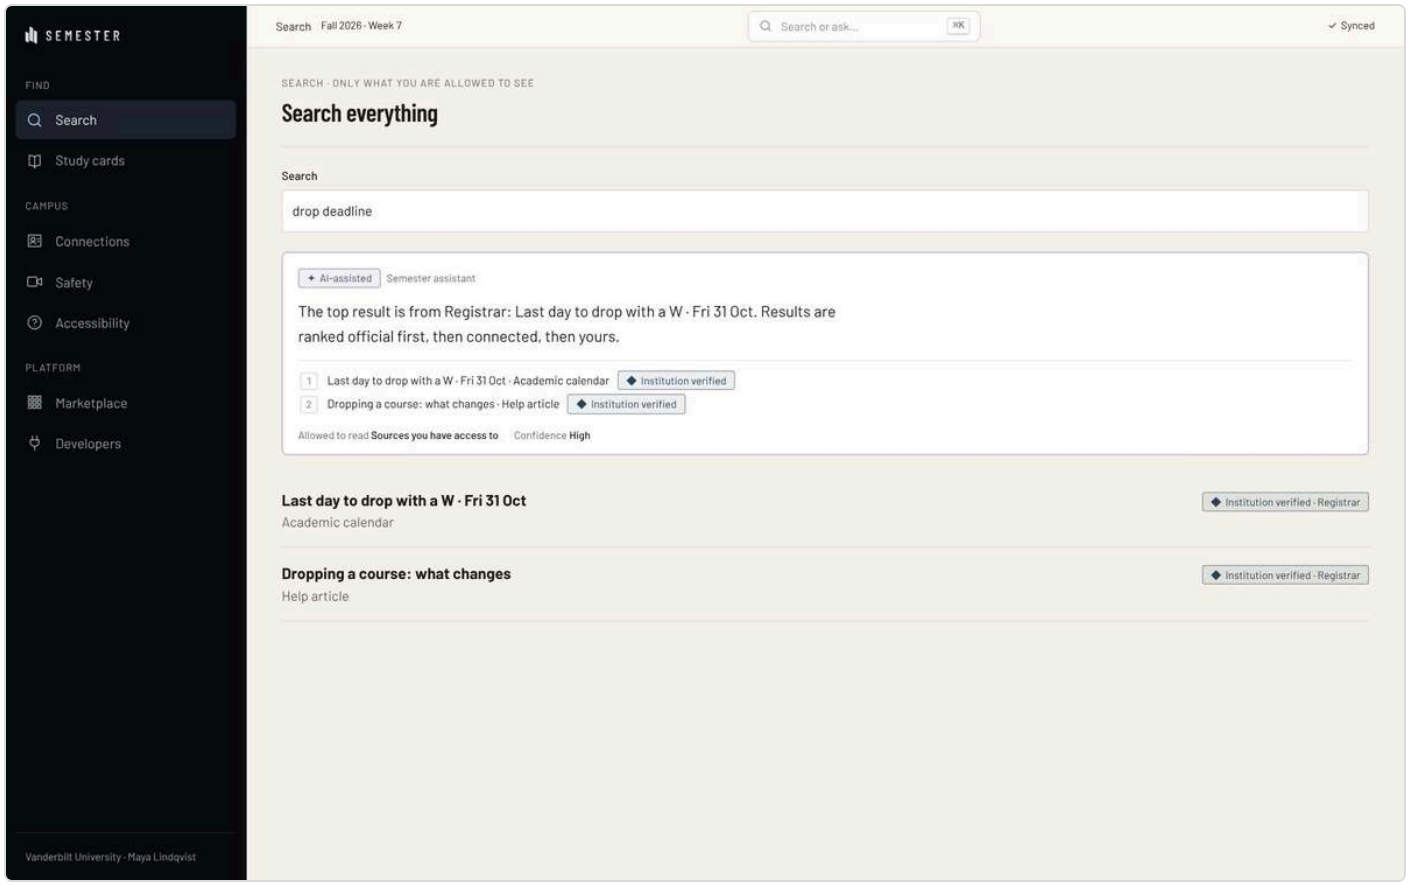

Opening view

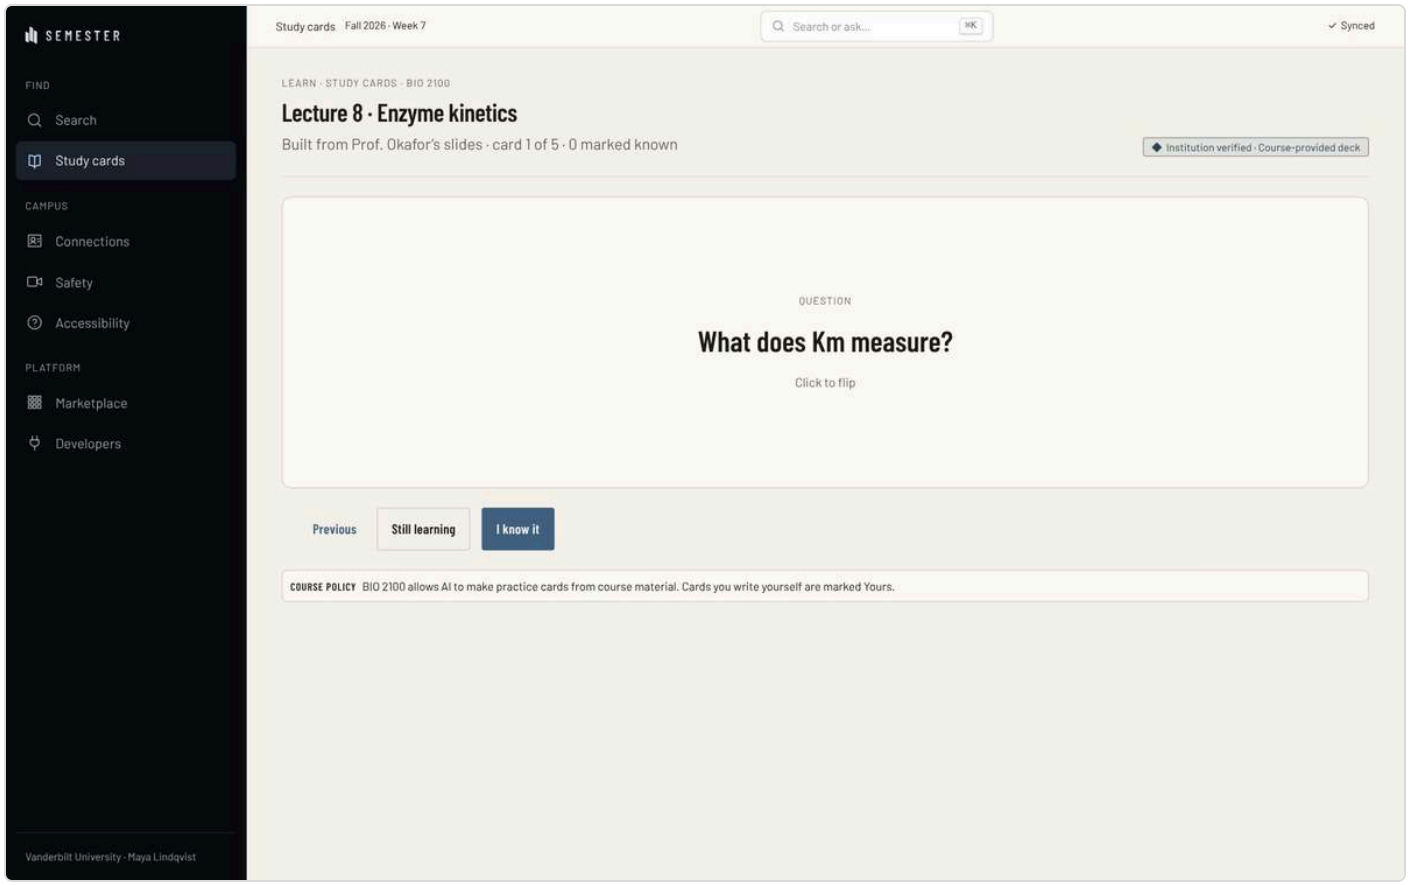
SEMESTER
FIND
Search
Study cards
CAMPUS
Connections
Safety
Accessibility
PLATFORM
Marketplace
Developers
Vanderbilt University · Maya Lindqvist
Study cards · Fall 2026 · Week 7
Search or ask...
⌘K
Synced
LEARN · STUDY CARDS · BIO 2100
Lecture 8 · Enzyme kinetics
Built from Prof. Okafor's slides · card 1 of 5 · 0 marked known
Institution verified · Course-provided deck
QUESTION
What does Km measure?
Click to flip
Previous
Still learning
I know it
COURSE POLICY BIO 2100 allows AI to make practice cards from course material. Cards you write yourself are marked Yours.

Study cards

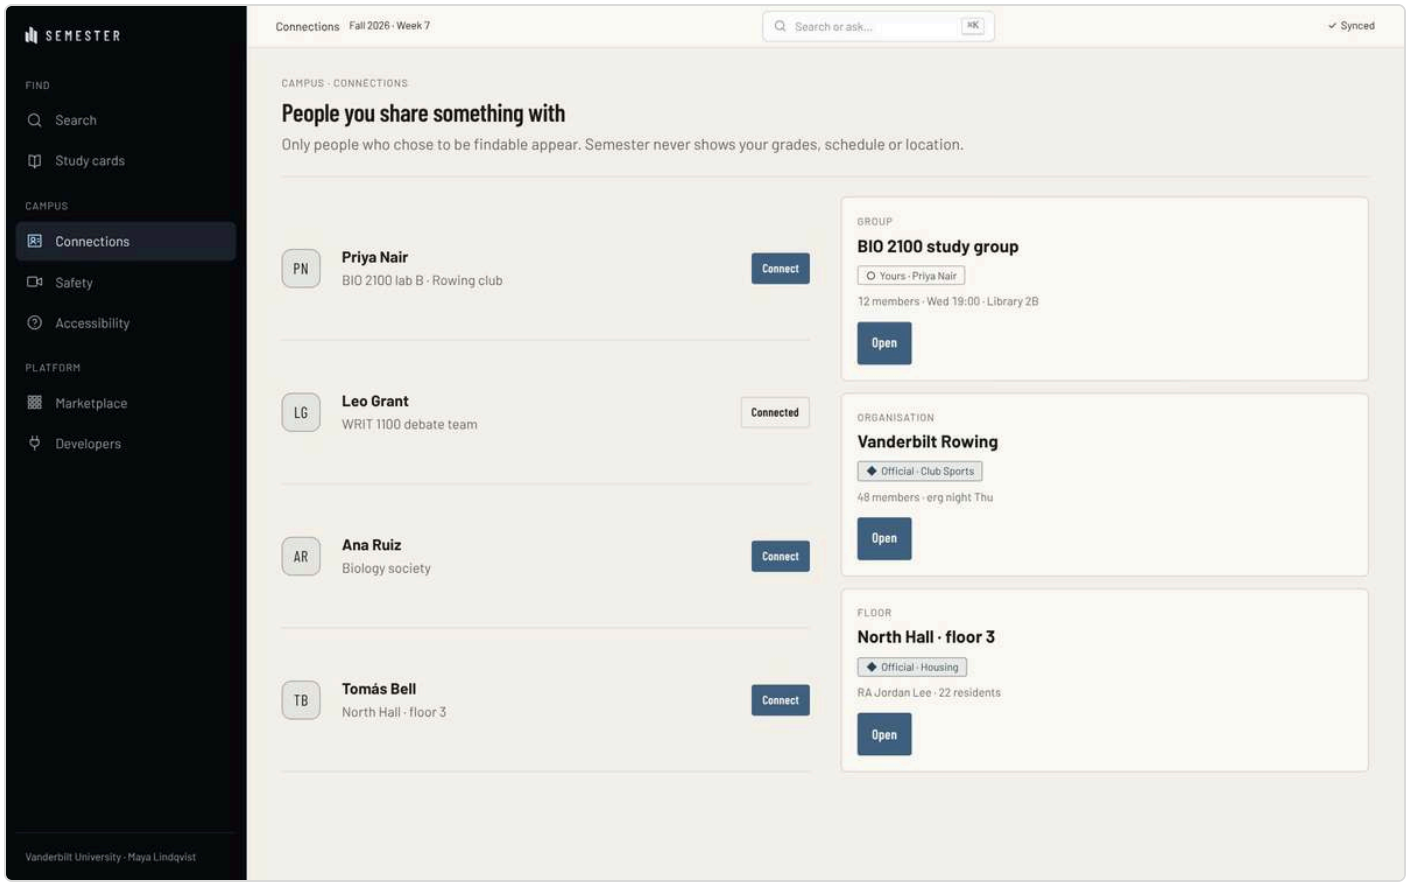

Connections

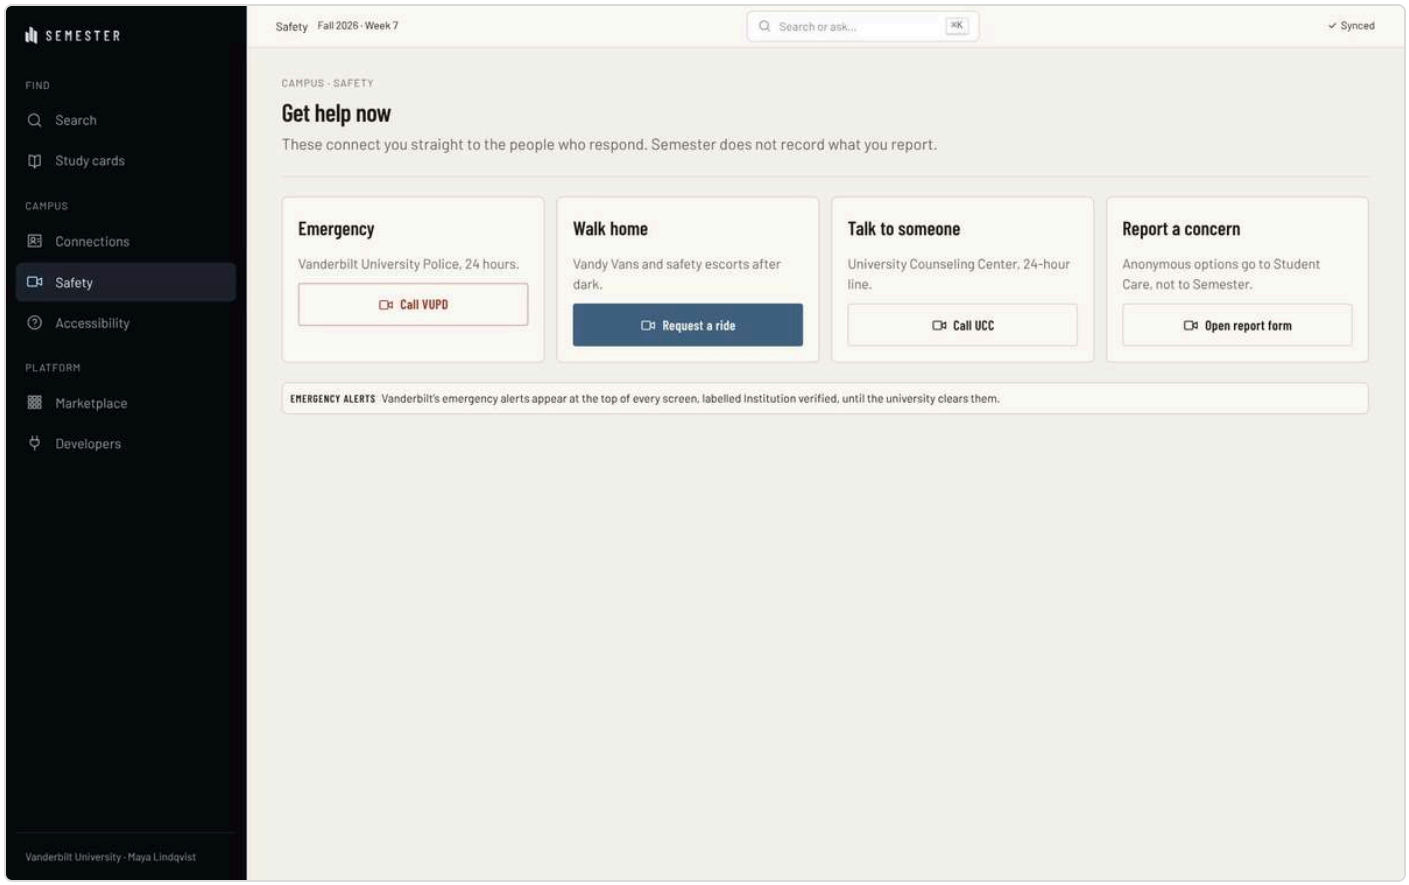
SEMESTER
FIND
Search
Study cards
CAMPUS
Connections
Safety
Accessibility
PLATFORM
Marketplace
Developers
Vanderbilt University · Maya Lindqvist
Safety Fall 2026 · Week 7
Search or ask...
⌘K
Synced
CAMPUS · SAFETY
Get help now
These connect you straight to the people who respond. Semester does not record what you report.
Emergency
Vanderbilt University Police, 24 hours.
Call VUPD
Walk home
Vandy Vans and safety escorts after dark.
Request a ride
Talk to someone
University Counseling Center, 24-hour line.
Call UCC
Report a concern
Anonymous options go to Student Care, not to Semester.
Open report form
EMERGENCY ALERTS Vanderbilt's emergency alerts appear at the top of every screen, labelled Institution verified, until the university clears them.

Safety

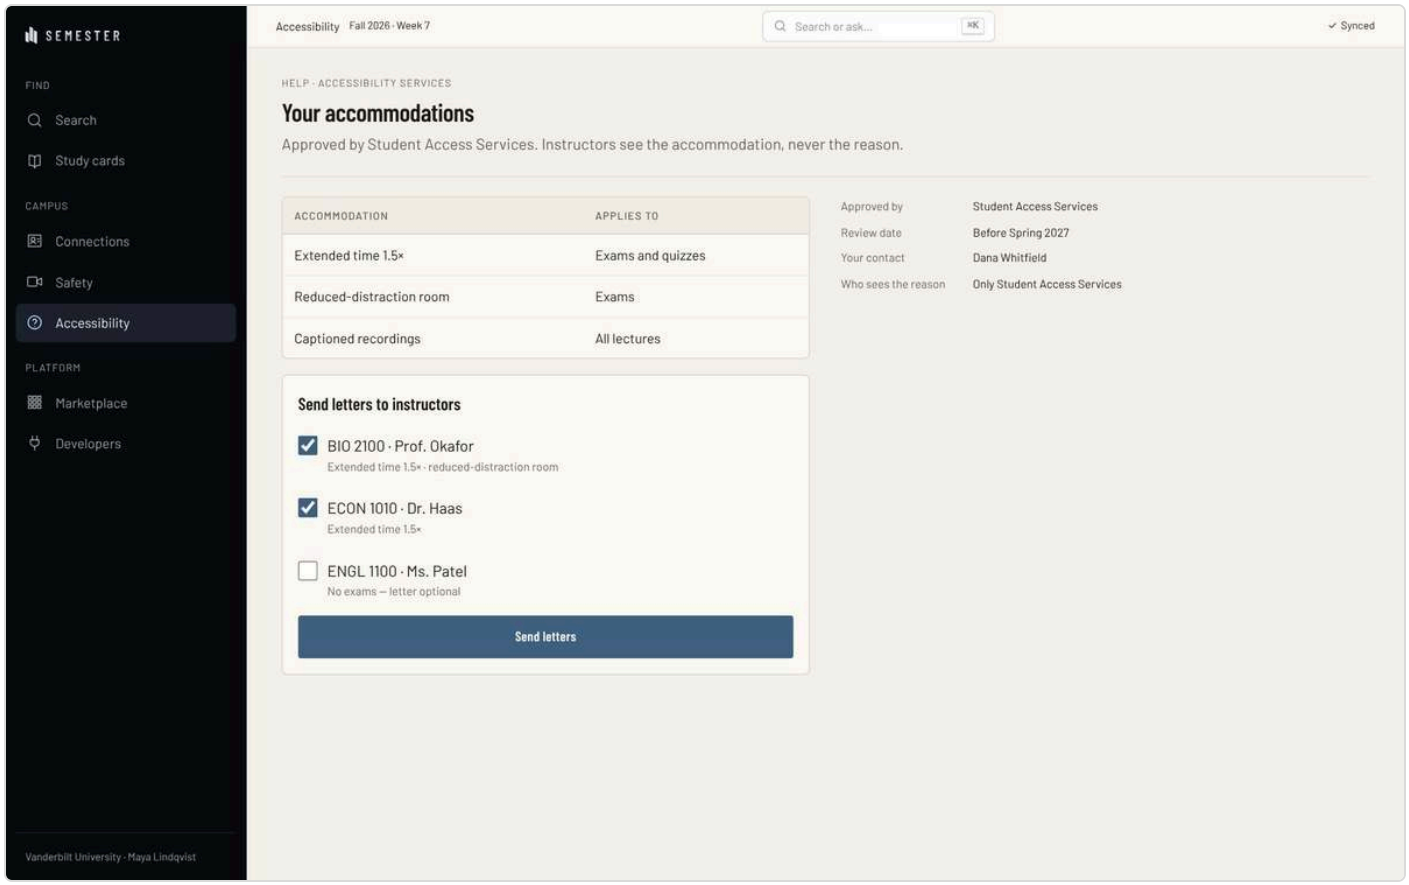

Accessibility

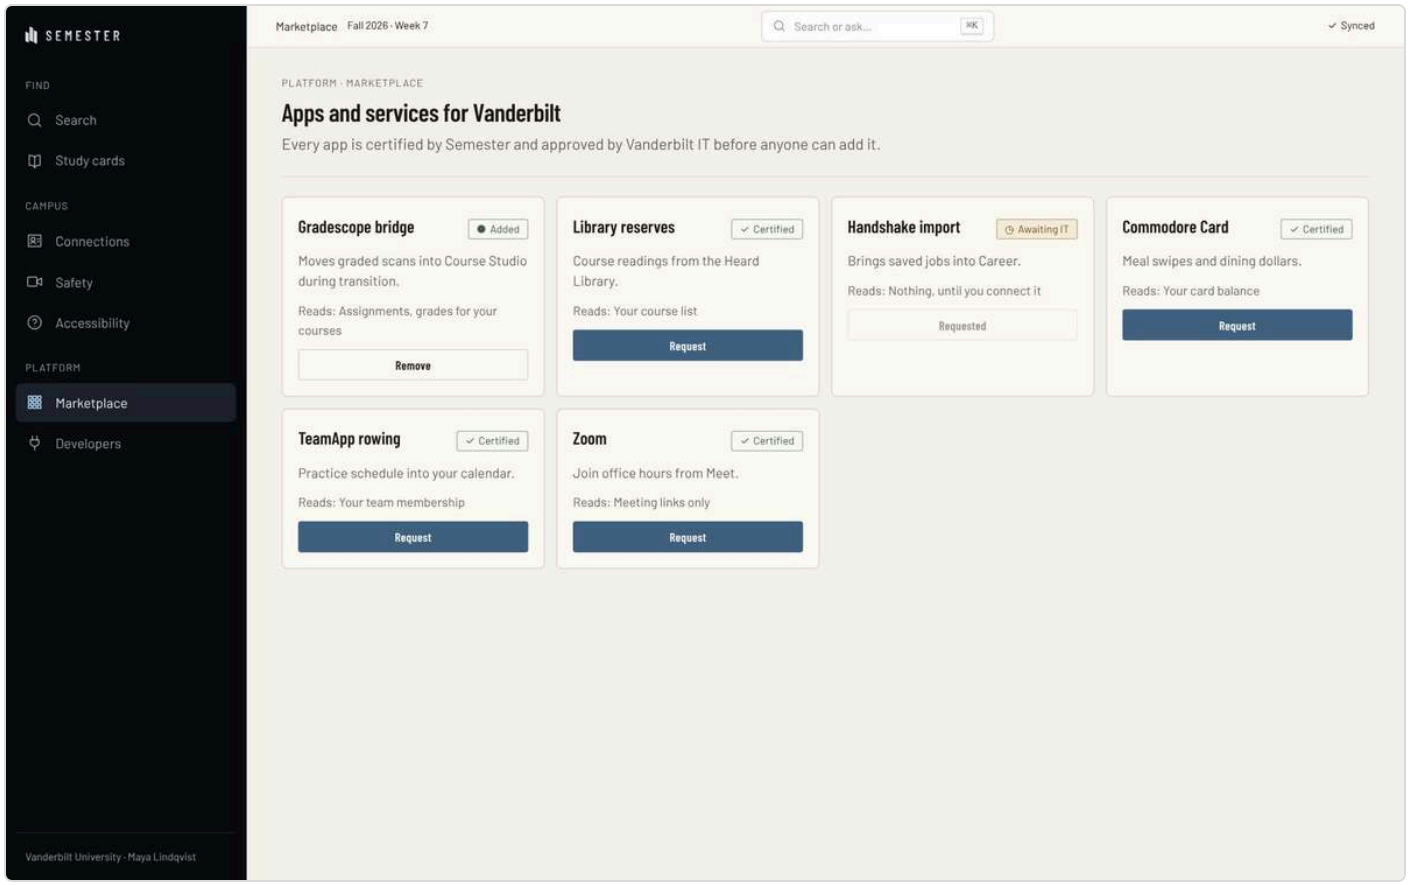

Marketplace

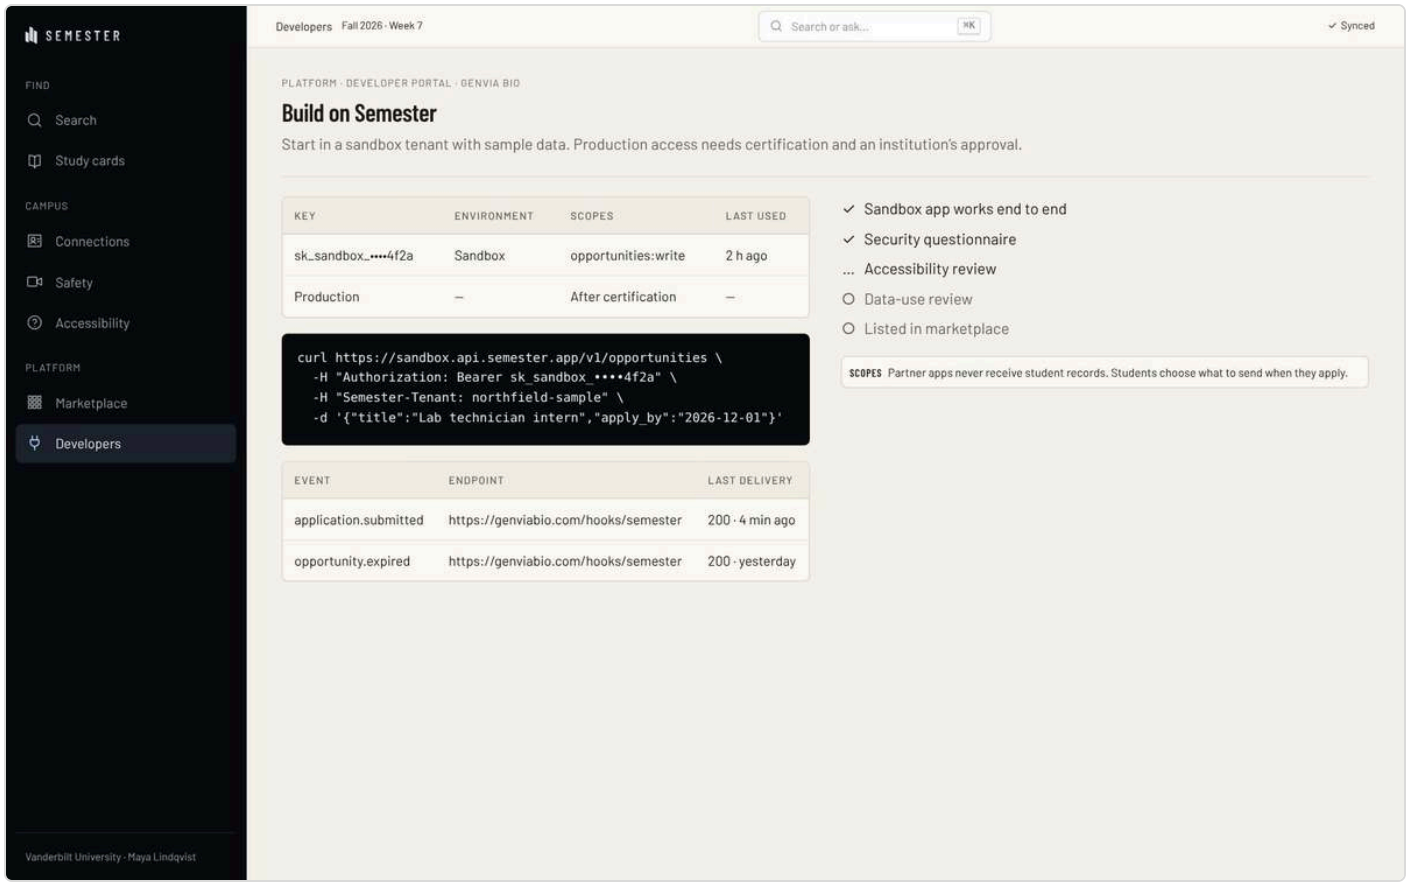
SEMESTER
FIND
Search
Study cards
CAMPUS
Connections
Safety
Accessibility
PLATFORM
Marketplace
Developers
Vanderbilt University · Maya Lindqvist
Developers Fall 2026 · Week 7
Search or ask...
⌘K
Synced
PLATFORM · DEVELOPER PORTAL · GENVIA BIO
Build on Semester
Start in a sandbox tenant with sample data. Production access needs certification and an institution's approval.
KEY
ENVIRONMENT
SCOPES
LAST USED
sk_sandbox_••••4f2a
Sandbox
opportunities:write
2 h ago
Production
—
After certification
—
curl https://sandbox.api.semester.app/v1/opportunities \
-H "Authorization: Bearer sk_sandbox_••••4f2a" \
-H "Semester-Tenant: northfield-sample" \
-d '{"title":"Lab technician intern","apply_by":"2026-12-01"}'
EVENT
ENDPOINT
LAST DELIVERY
application.submitted
https://genviabio.com/hooks/semester
200 · 4 min ago
opportunity.expired
https://genviabio.com/hooks/semester
200 · yesterday
✓ Sandbox app works end to end
✓ Security questionnaire
... Accessibility review
○ Data-use review
○ Listed in marketplace
SCOPES Partner apps never receive student records. Students choose what to send when they apply.

Developers

Student screen template

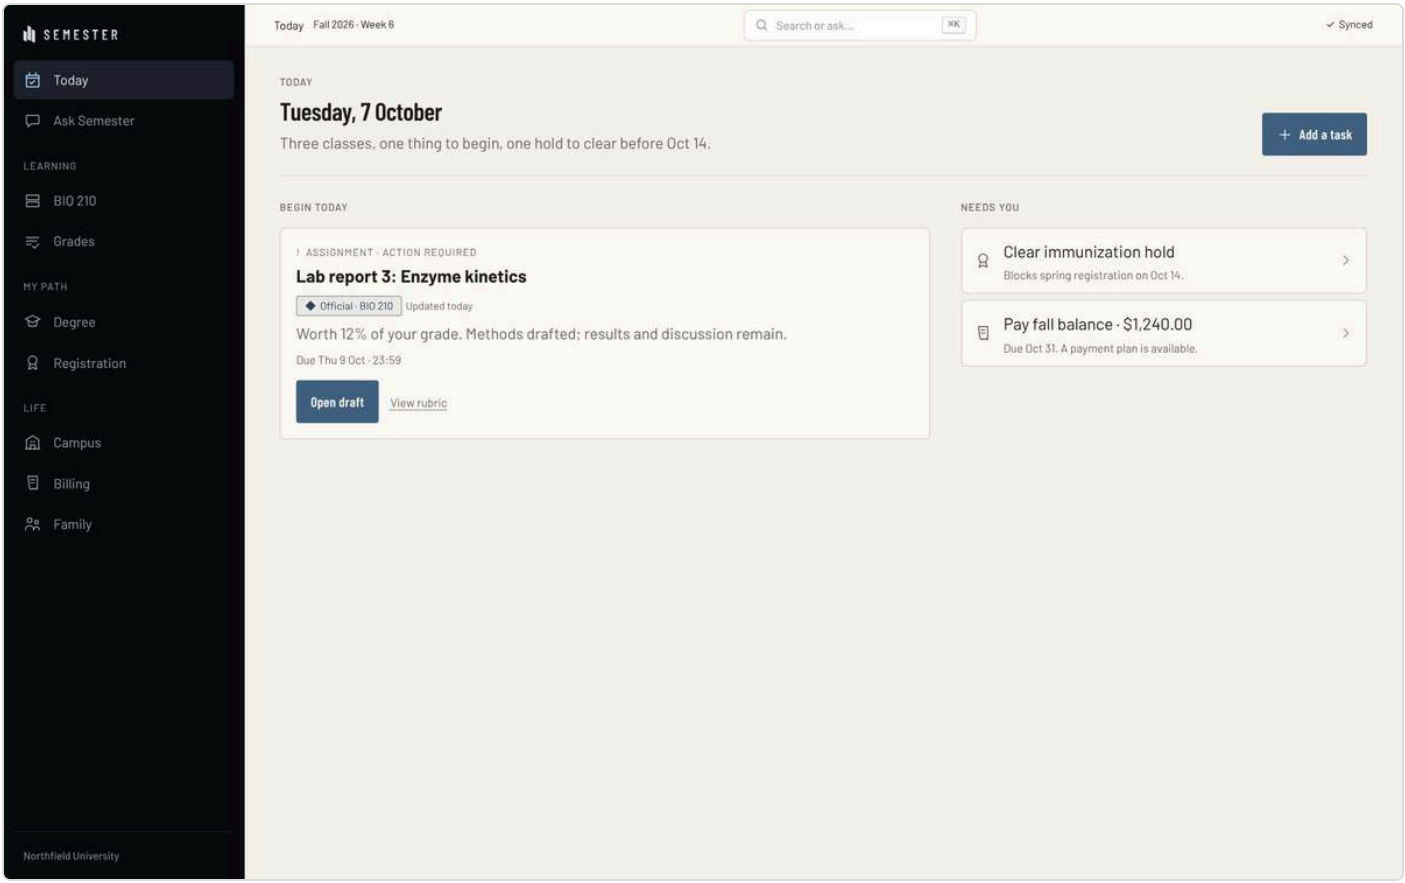

Opening view

PRODUCT · TEMPLATE

Institution OS

7 screens.

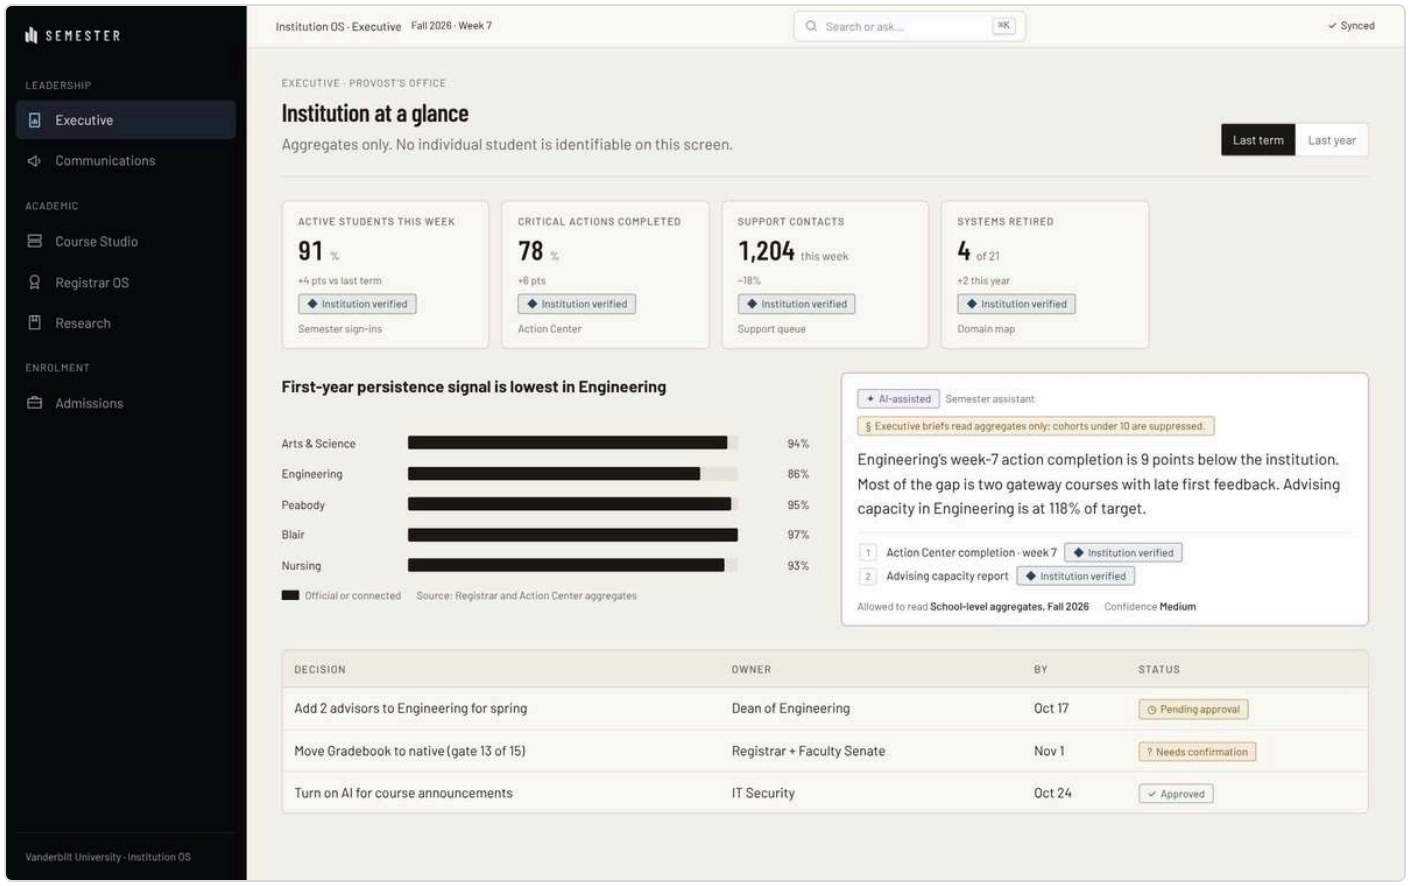

Opening view

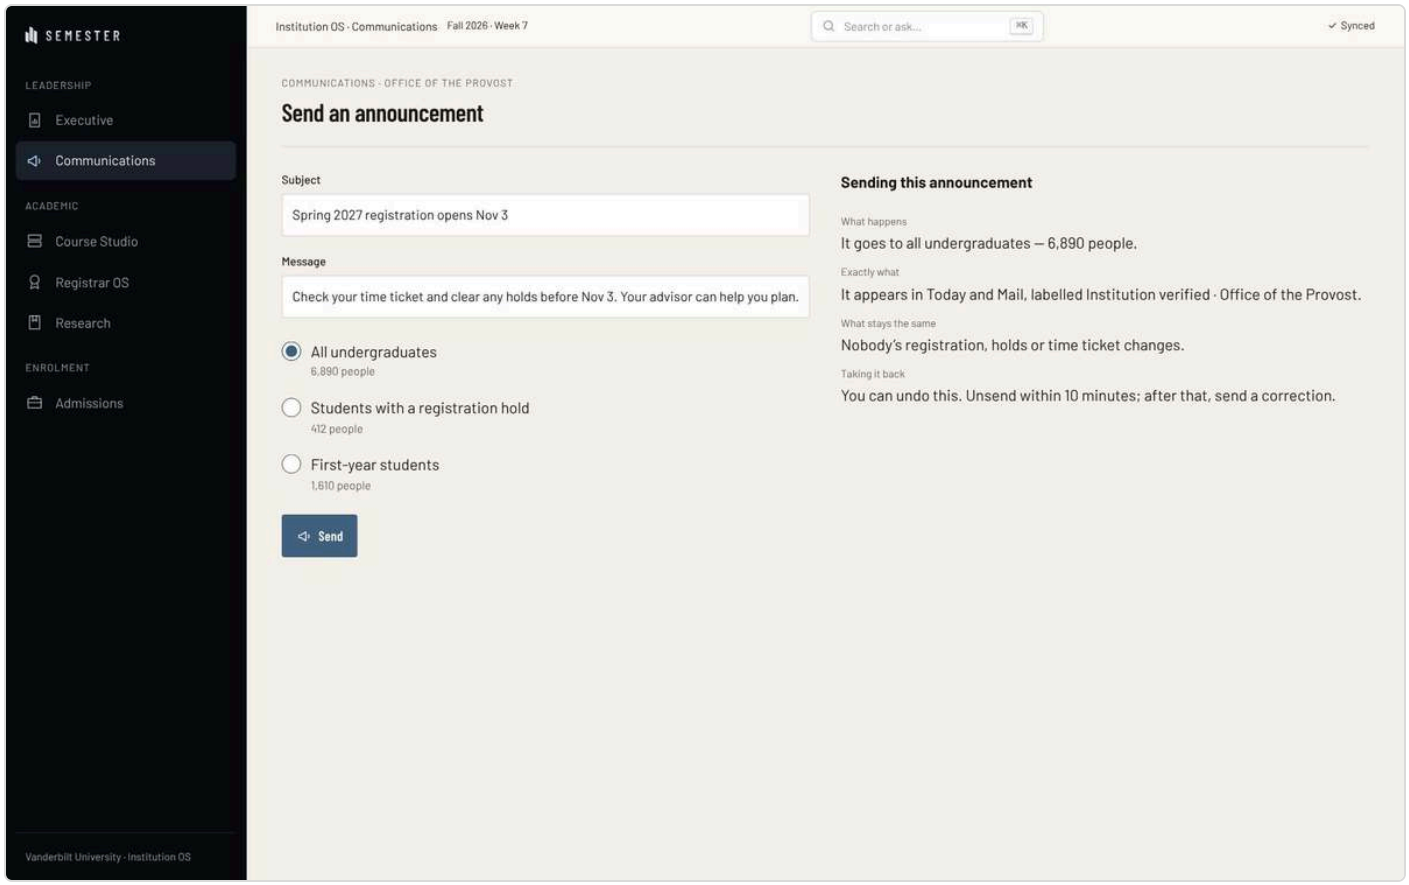

Communications

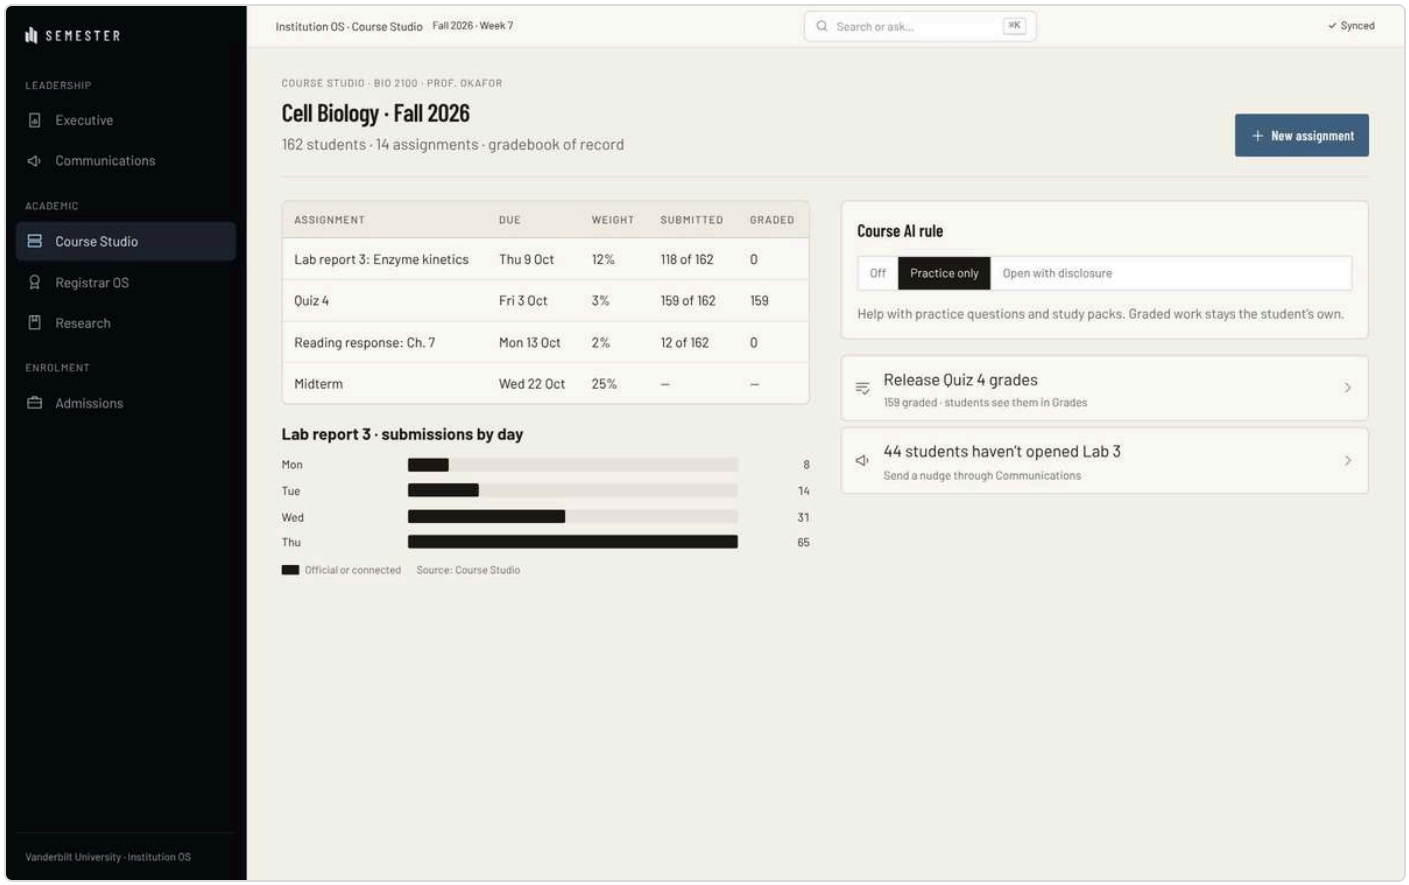

Course Studio

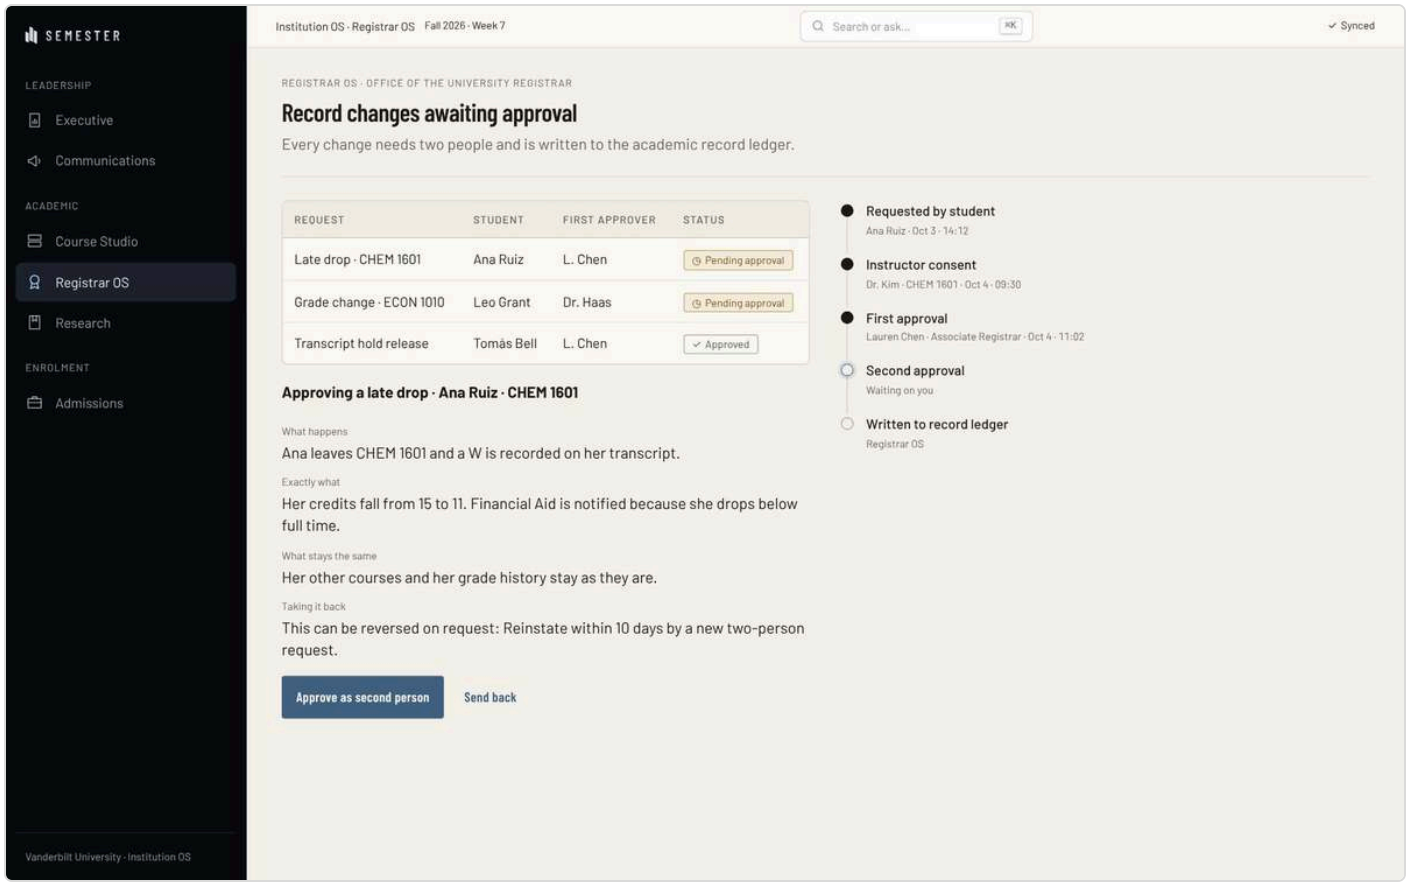

Registrar OS

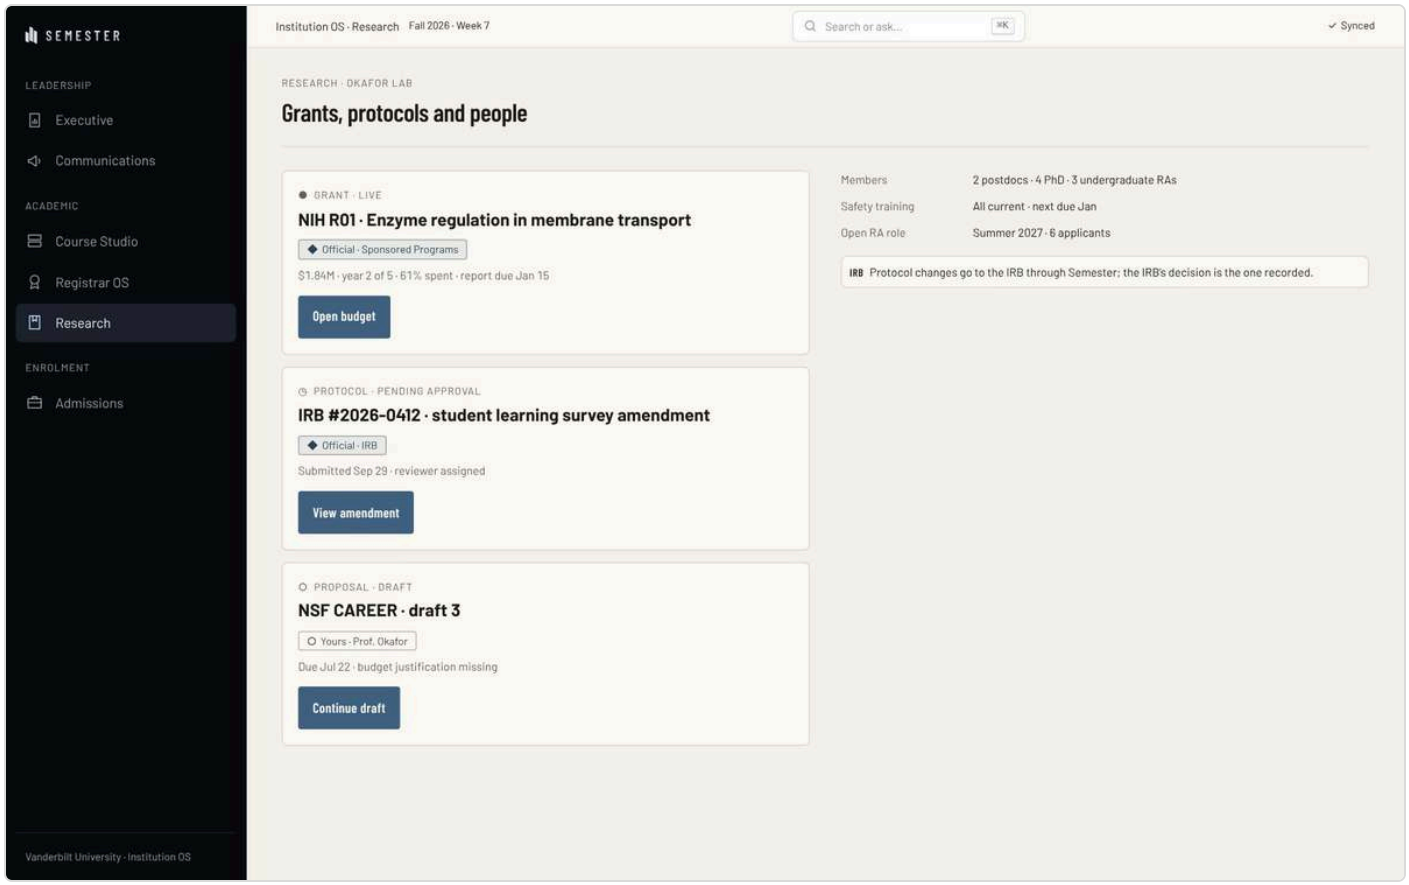
SEMESTER
LEADERSHIP
Executive
Communications
ACADEMIC
Course Studio
Registrar OS
Research
ENROLMENT
Admissions
Vanderbilt University · Institution OS
Institution OS · Research Fall 2026 · Week 7
Search or ask... ⌘K
Synced
RESEARCH · OKAFOR LAB
Grants, protocols and people
GRANT · LIVE
NIH R01 · Enzyme regulation in membrane transport
Official · Sponsored Programs
$1.84M · year 2 of 5 · 61% spent · report due Jan 15
Open budget
PROTOCOL · PENDING APPROVAL
IRB #2026-0412 · student learning survey amendment
Official · IRB
Submitted Sep 29 · reviewer assigned
View amendment
PROPOSAL · DRAFT
NSF CAREER · draft 3
Yours · Prof. Okafor
Due Jul 22 · budget justification missing
Continue draft
Members
2 postdocs · 4 PhD · 3 undergraduate RAs
Safety training
All current · next due Jan
Open RA role
Summer 2027 · 6 applicants
IRB Protocol changes go to the IRB through Semester; the IRB's decision is the one recorded.

Research

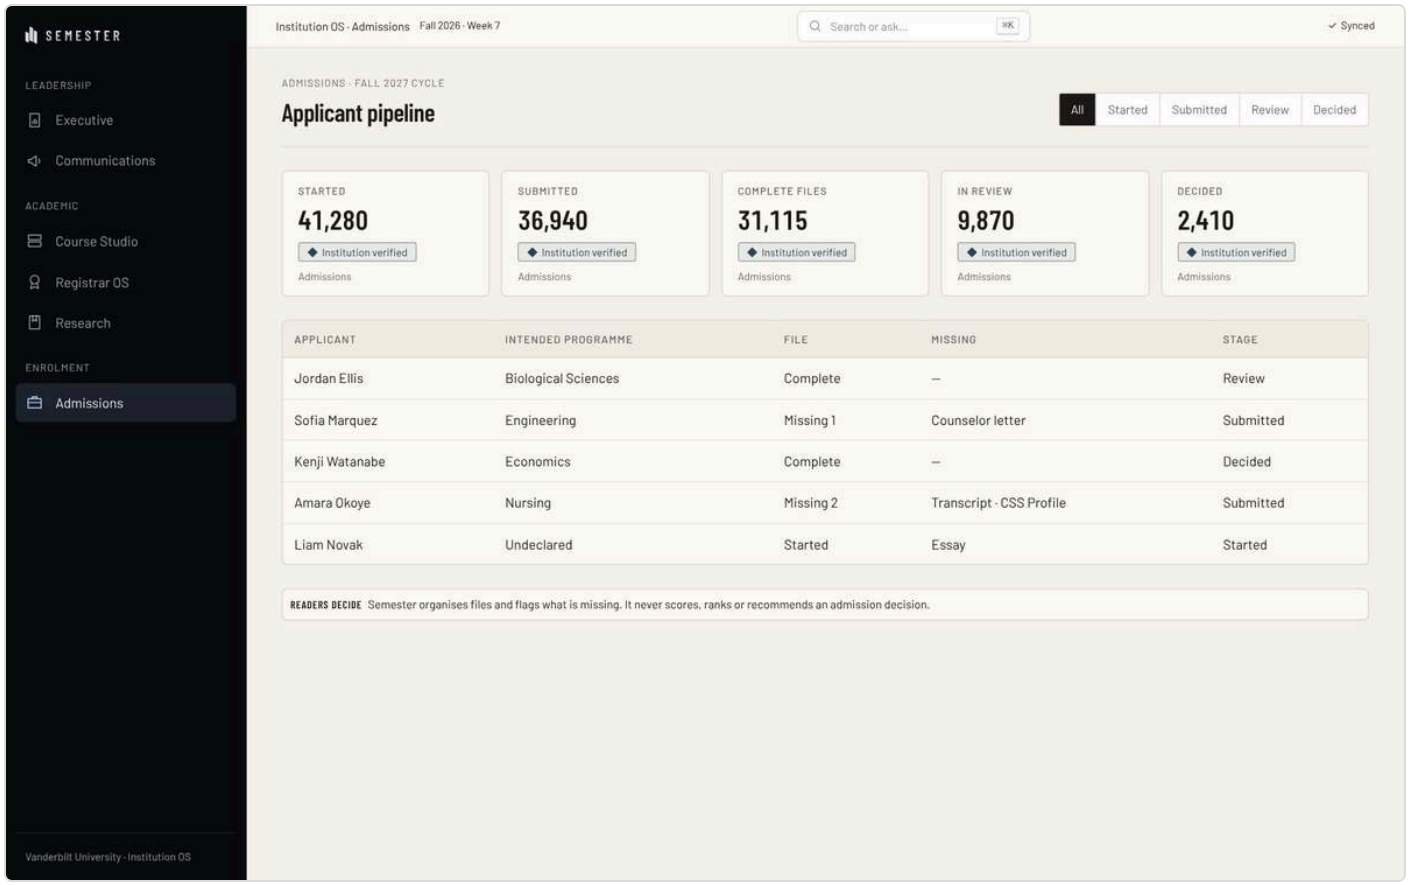
SEMESTER
Institution OS · Admissions
Fall 2026 · Week 7
Search or ask...
⌘K
Synced
LEADERSHIP
Executive
Communications
ACADEMIC
Course Studio
Registrar OS
Research
ENROLMENT
Admissions
Vanderbilt University · Institution OS
ADMISSIONS · FALL 2027 CYCLE
Applicant pipeline
All
Started
Submitted
Review
Decided
STARTED
41,280
Institution verified
Admissions
SUBMITTED
36,940
Institution verified
Admissions
COMPLETE FILES
31,115
Institution verified
Admissions
IN REVIEW
9,870
Institution verified
Admissions
DECIDED
2,410
Institution verified
Admissions
APPLICANT
INTENDED PROGRAMME
FILE
MISSING
STAGE
Jordan Ellis
Biological Sciences
Complete
–
Review
Sofia Marquez
Engineering
Missing 1
Counselor letter
Submitted
Kenji Watanabe
Economics
Complete
–
Decided
Amara Okoye
Nursing
Missing 2
Transcript · CSS Profile
Submitted
Liam Novak
Undeclared
Started
Essay
Started
READERS DECIDE
Semester organises files and flags what is missing. It never scores, ranks or recommends an admission decision.

Admissions

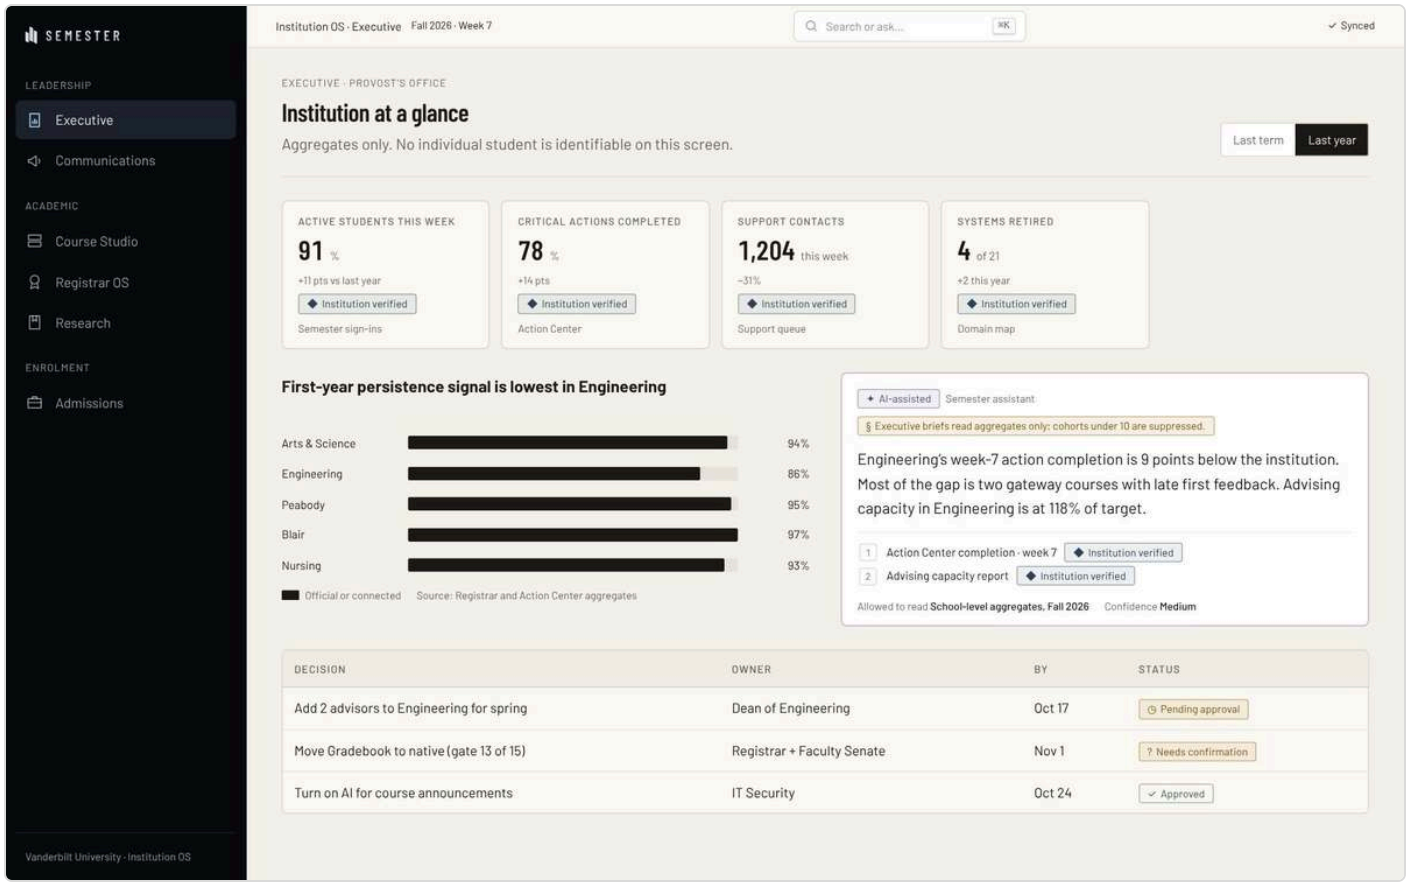
SEMESTER
LEADERSHIP
Executive
Communications
ACADEMIC
Course Studio
Registrar OS
Research
ENROLMENT
Admissions
Vanderbilt University · Institution OS
Institution OS · Executive Fall 2026 · Week 7
Search or ask... ⌘K
Synced
EXECUTIVE · PROVOST'S OFFICE
Institution at a glance
Aggregates only. No individual student is identifiable on this screen.
Last term
Last year
ACTIVE STUDENTS THIS WEEK
91 %
+11 pts vs last year
Institution verified
Semester sign-ins
CRITICAL ACTIONS COMPLETED
78 %
+14 pts
Institution verified
Action Center
SUPPORT CONTACTS
1,204 this week
−31%
Institution verified
Support queue
SYSTEMS RETIRED
4 of 21
+2 this year
Institution verified
Domain map
First-year persistence signal is lowest in Engineering
Arts & Science 94%
Engineering 86%
Peabody 95%
Blair 97%
Nursing 93%
Official or connected
Source: Registrar and Action Center aggregates
AI-assisted
Semester assistant
§ Executive briefs read aggregates only; cohorts under 10 are suppressed.
Engineering's week-7 action completion is 9 points below the institution. Most of the gap is two gateway courses with late first feedback. Advising capacity in Engineering is at 118% of target.
1 Action Center completion · week 7
Institution verified
2 Advising capacity report
Institution verified
Allowed to read School-level aggregates, Fall 2026
Confidence Medium
DECISION
OWNER
BY
STATUS
Add 2 advisors to Engineering for spring
Dean of Engineering
Oct 17
Pending approval
Move Gradebook to native (gate 13 of 15)
Registrar + Faculty Senate
Nov 1
? Needs confirmation
Turn on AI for course announcements
IT Security
Oct 24
Approved

Last year

Console screen template

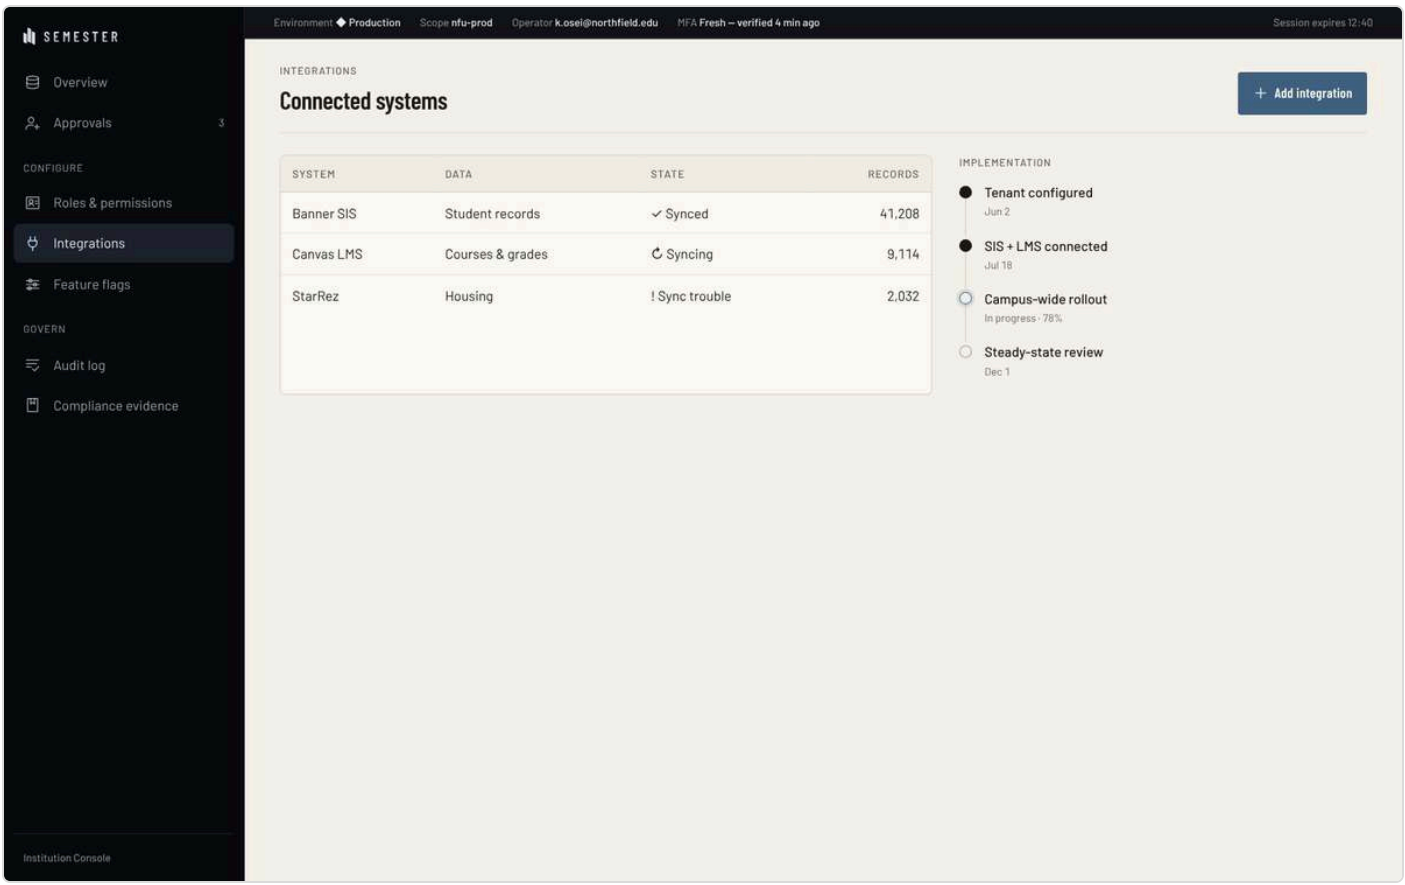

Opening view

Privacy center

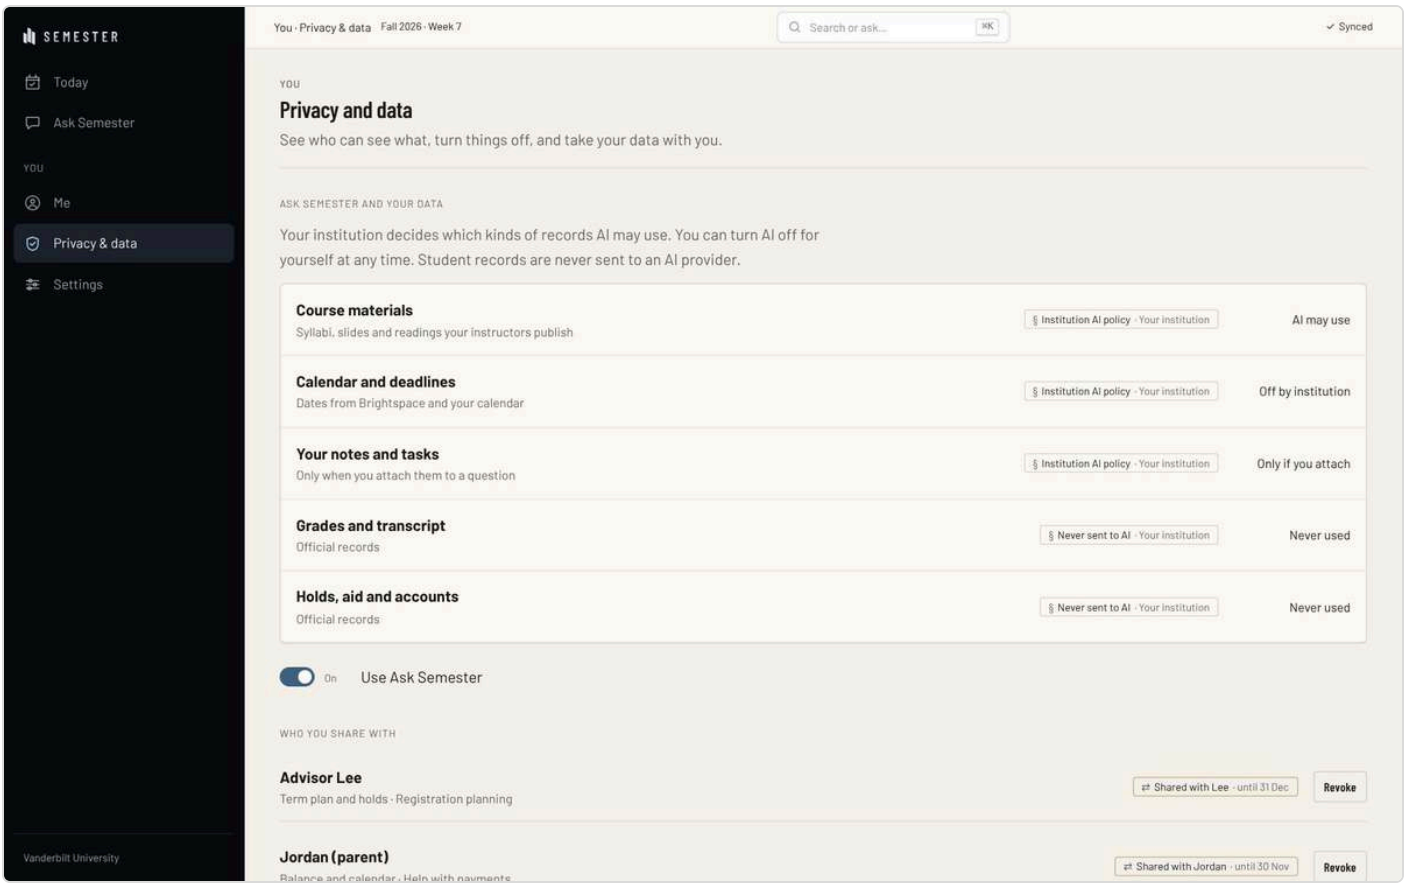

Opening view

Student quick start

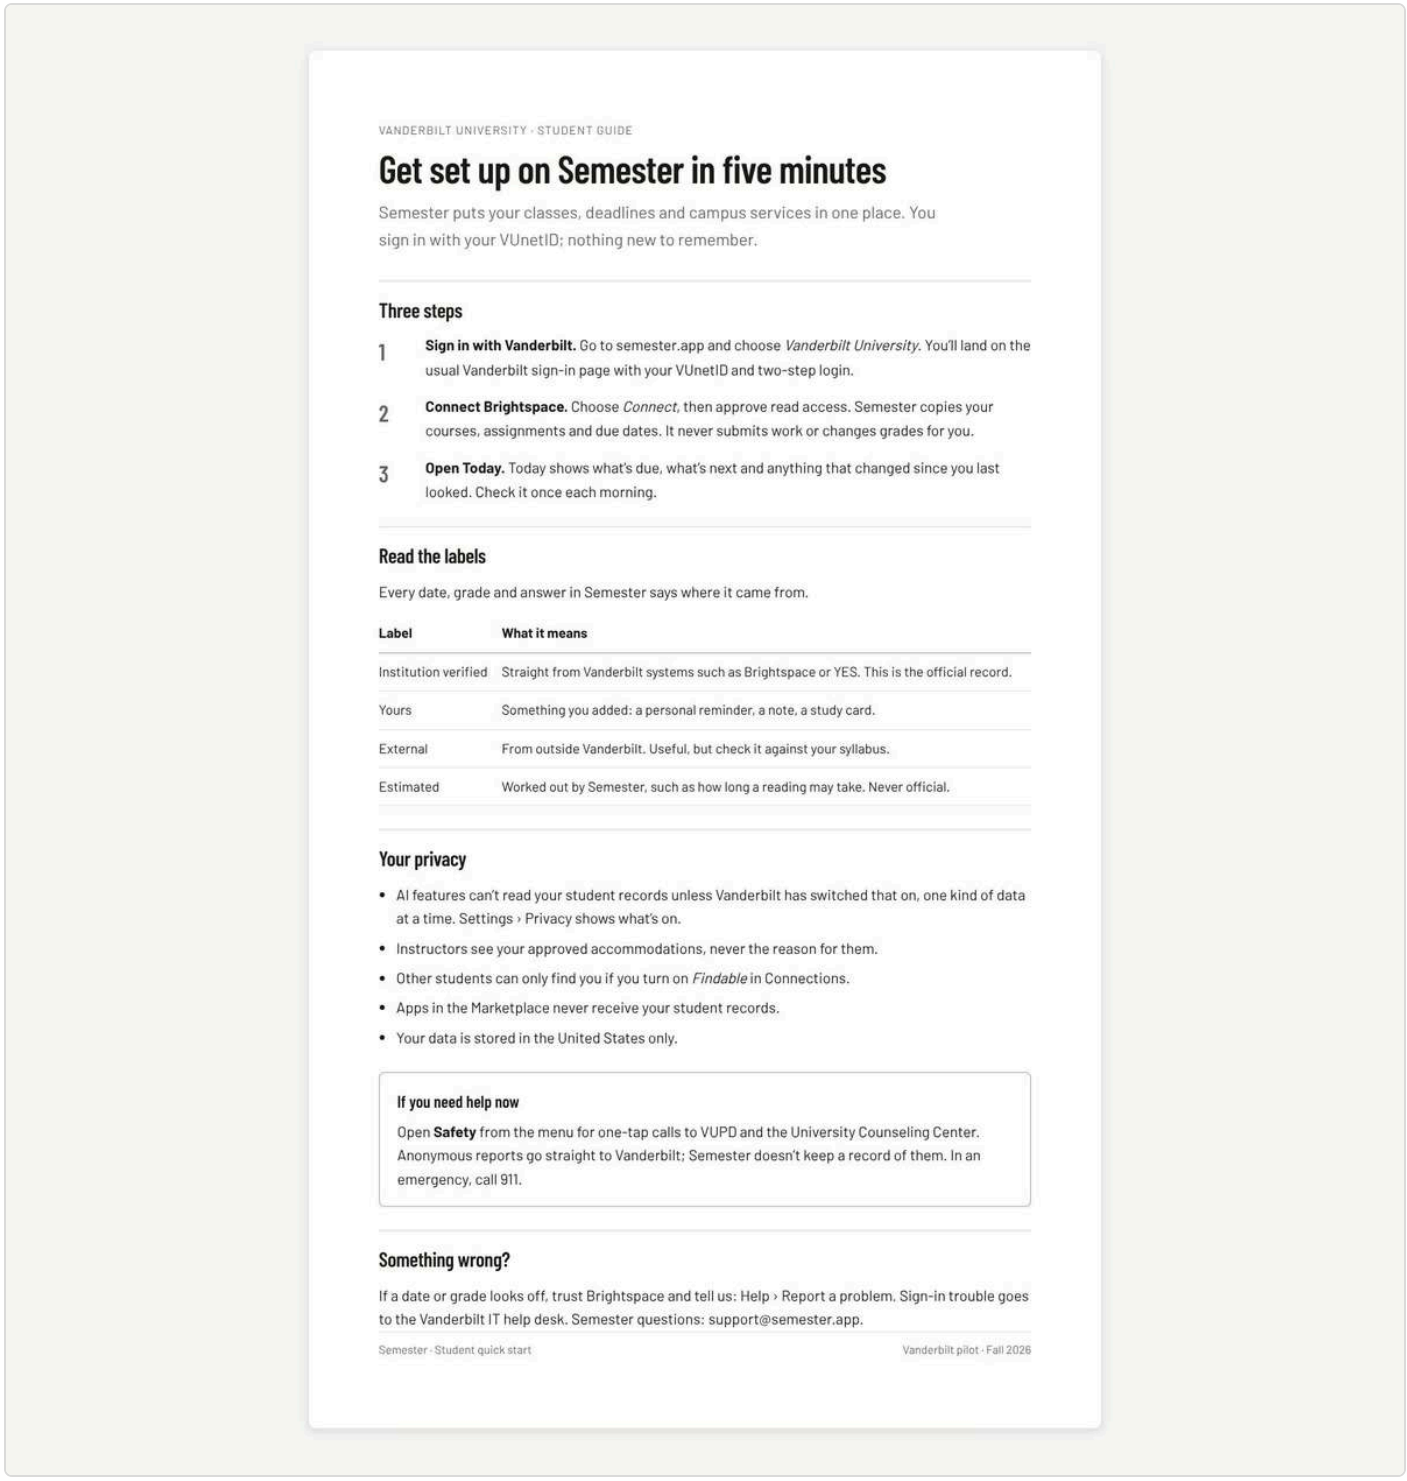

VANDERBILT UNIVERSITY · STUDENT GUIDE

Get set up on Semester in five minutes

Semester puts your classes, deadlines and campus services in one place. You sign in with your VUnetID; nothing new to remember.

Three steps

1. **Sign in with Vanderbilt.** Go to semester.app and choose *Vanderbilt University*. You'll land on the usual Vanderbilt sign-in page with your VUnetID and two-step login.
2. **Connect Brightspace.** Choose *Connect*, then approve read access. Semester copies your courses, assignments and due dates. It never submits work or changes grades for you.
3. **Open Today.** Today shows what's due, what's next and anything that changed since you last looked. Check it once each morning.

Read the labels

Every date, grade and answer in Semester says where it came from.

Label	What it means
Institution verified	Straight from Vanderbilt systems such as Brightspace or YES. This is the official record.
Yours	Something you added: a personal reminder, a note, a study card.
External	From outside Vanderbilt. Useful, but check it against your syllabus.
Estimated	Worked out by Semester, such as how long a reading may take. Never official.

Your privacy

- AI features can't read your student records unless Vanderbilt has switched that on, one kind of data at a time. Settings › Privacy shows what's on.
- Instructors see your approved accommodations, never the reason for them.
- Other students can only find you if you turn on *Findable* in Connections.
- Apps in the Marketplace never receive your student records.
- Your data is stored in the United States only.

If you need help now

Open **Safety** from the menu for one-tap calls to VUPD and the University Counseling Center. Anonymous reports go straight to Vanderbilt; Semester doesn't keep a record of them. In an emergency, call 911.

Something wrong?

If a date or grade looks off, trust Brightspace and tell us: Help › Report a problem. Sign-in trouble goes to the Vanderbilt IT help desk. Semester questions: support@semester.app.

Semester · Student quick start — Vanderbilt pilot · Fall 2026

Opening view

Education OS domain map

20 screens.

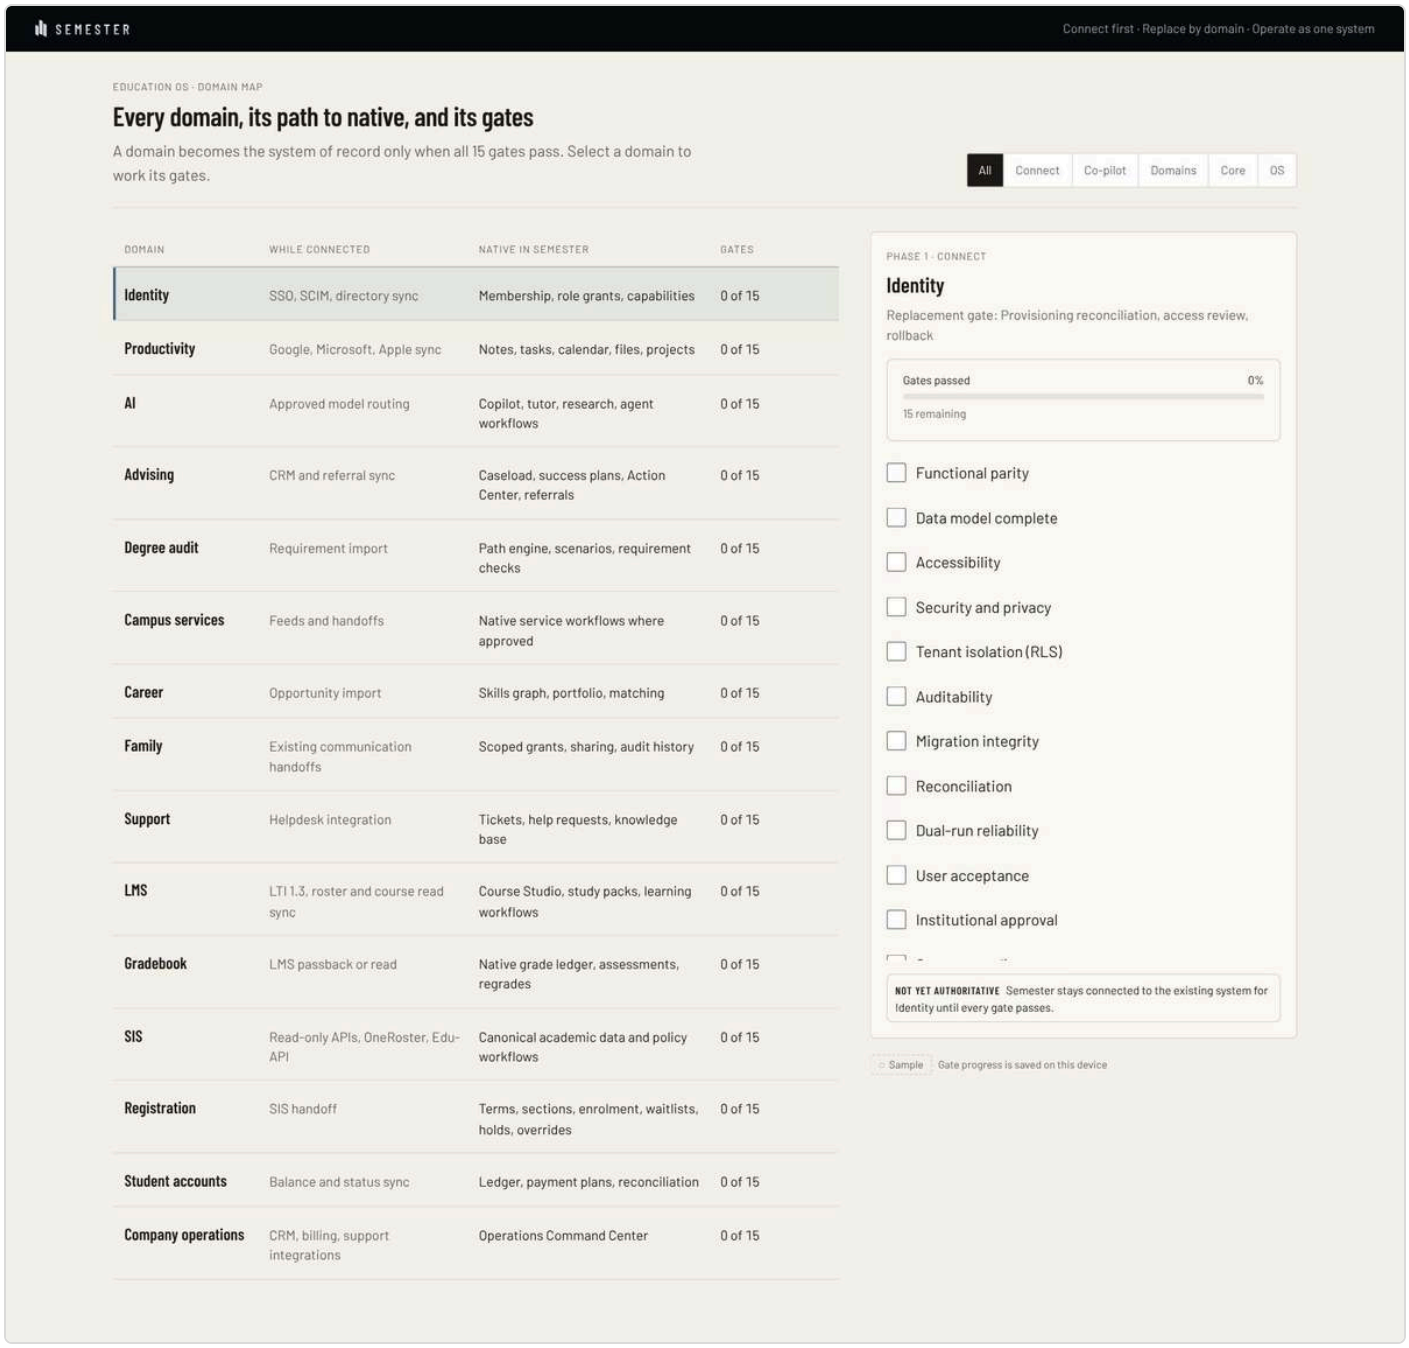

Opening view

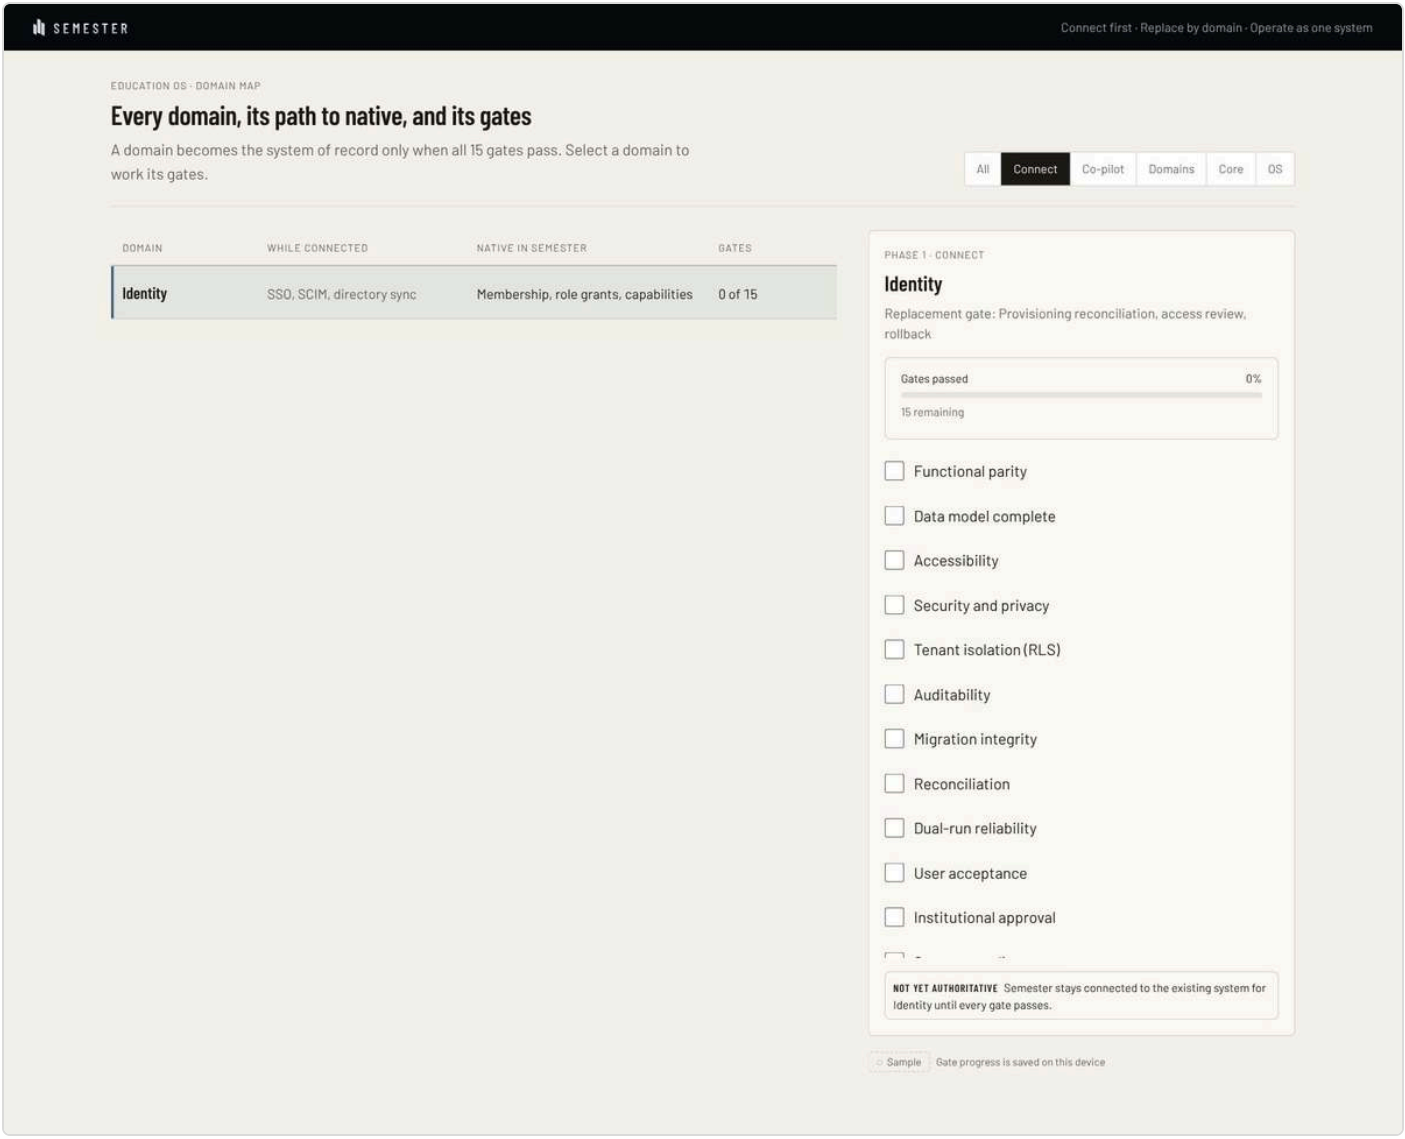
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
PHASE 1 · CONNECT
Identity
Replacement gate: Provisioning reconciliation, access review, rollback
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Identity until every gate passes.
Sample
Gate progress is saved on this device

Connect

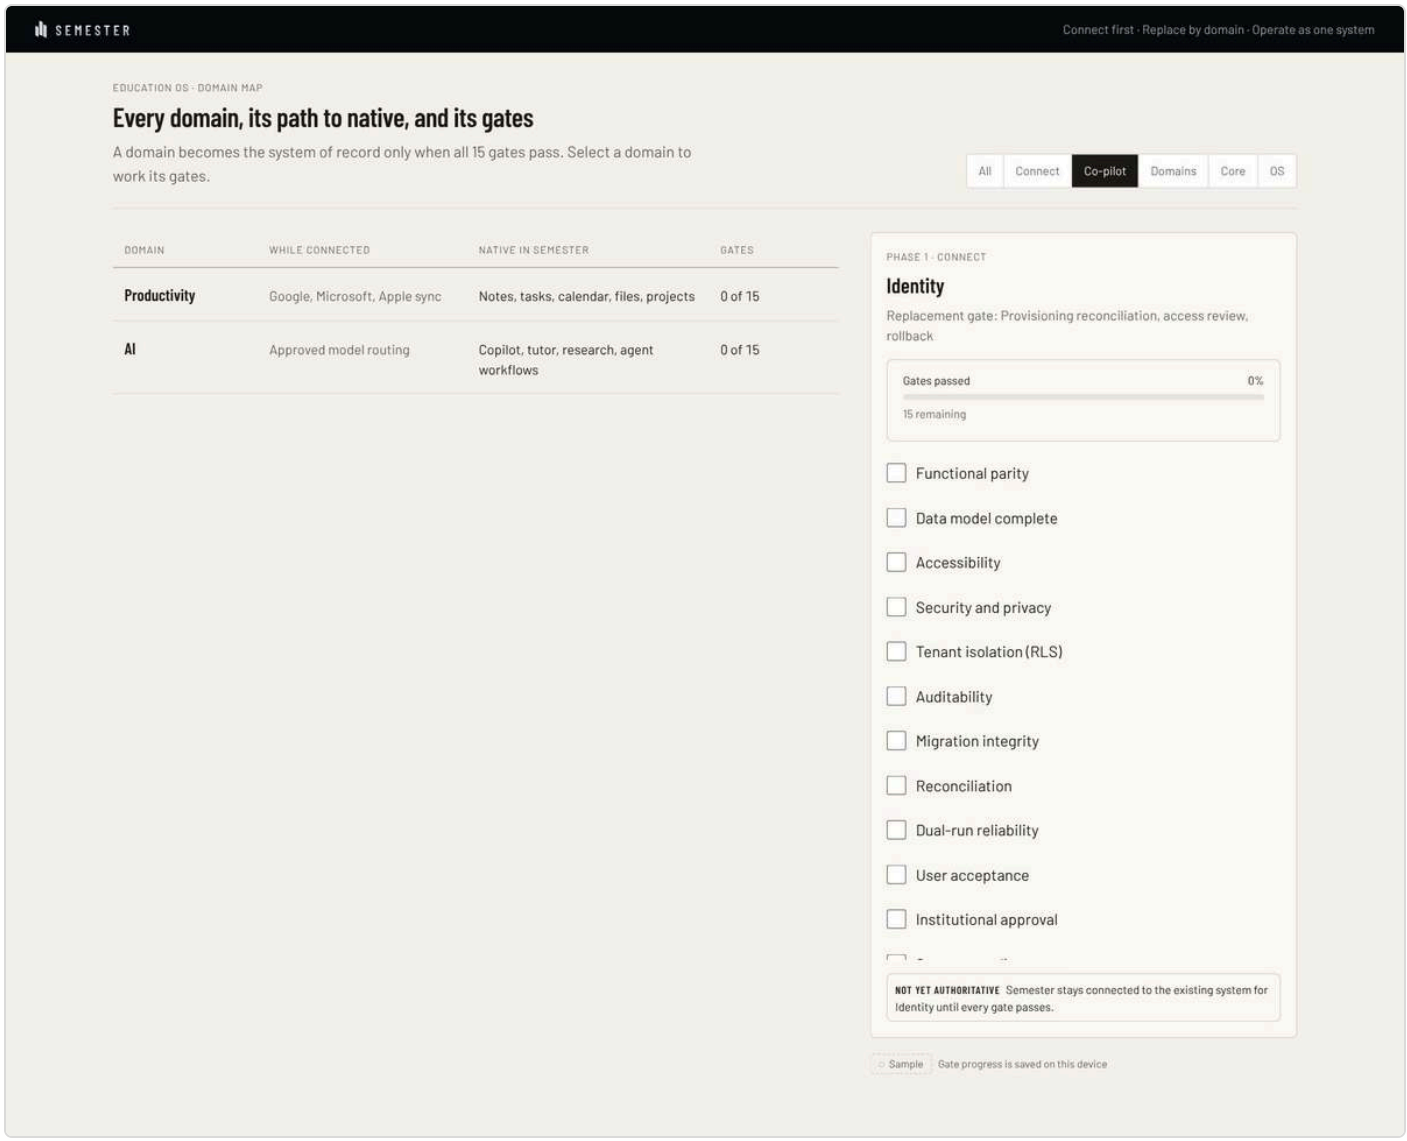
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
PHASE 1 · CONNECT
Identity
Replacement gate: Provisioning reconciliation, access review, rollback
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Identity until every gate passes.
Sample
Gate progress is saved on this device

Co-pilot

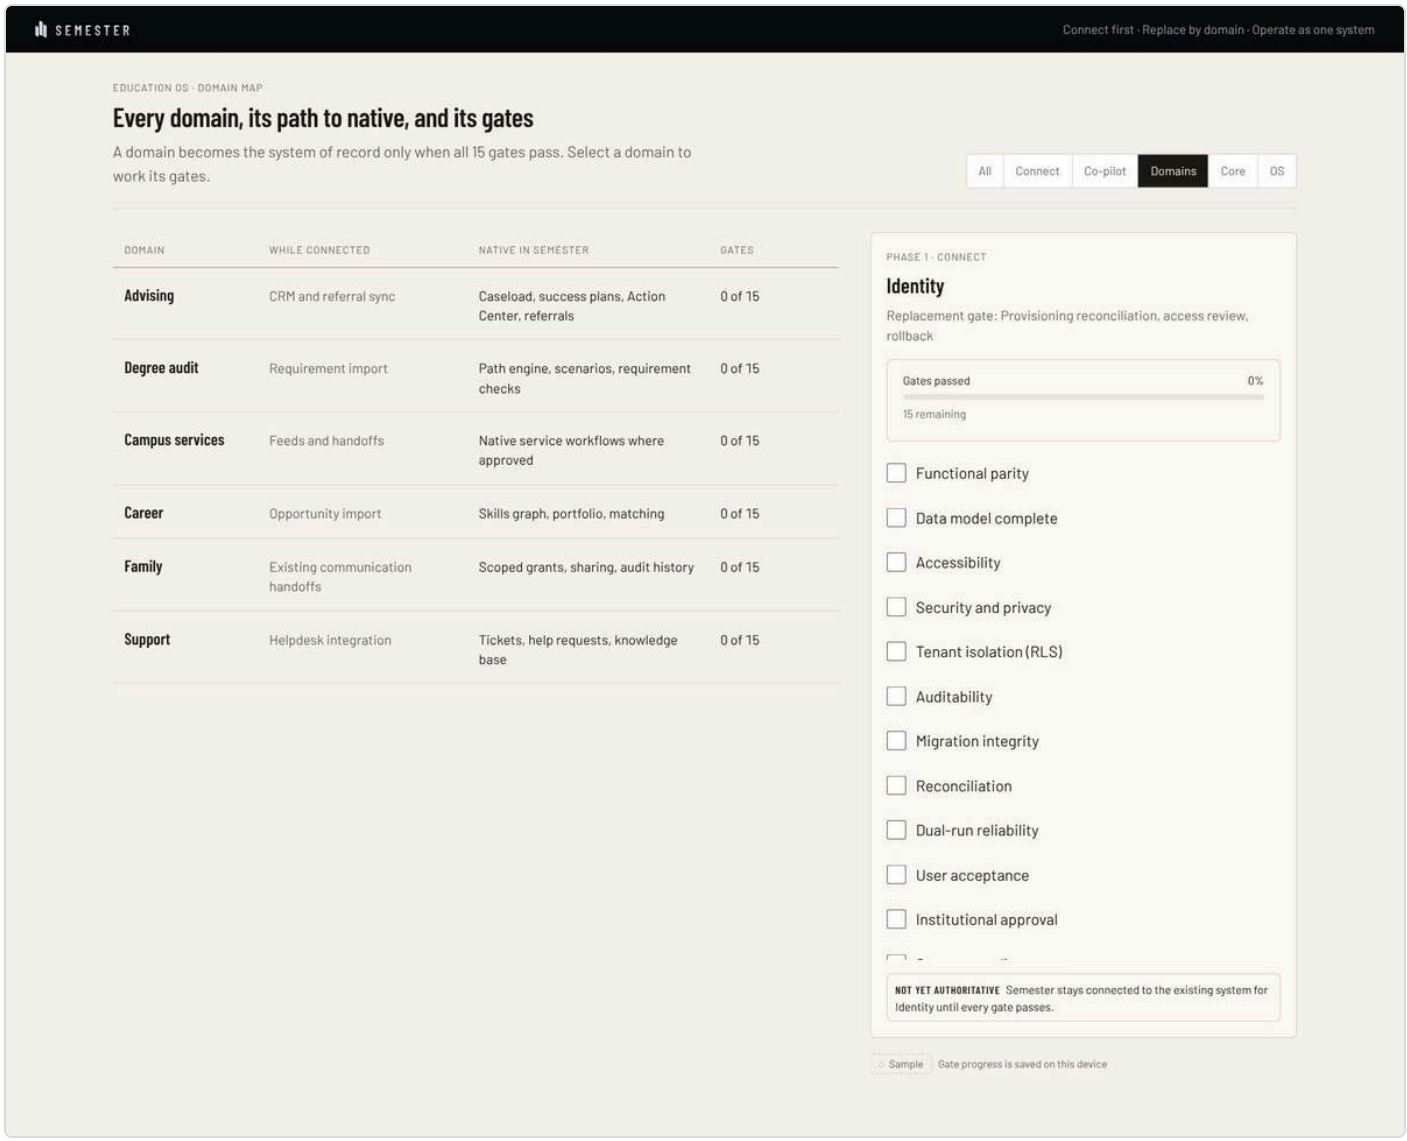
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
PHASE 1 · CONNECT
Identity
Replacement gate: Provisioning reconciliation, access review, rollback
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Identity until every gate passes.
Sample
Gate progress is saved on this device

Domains

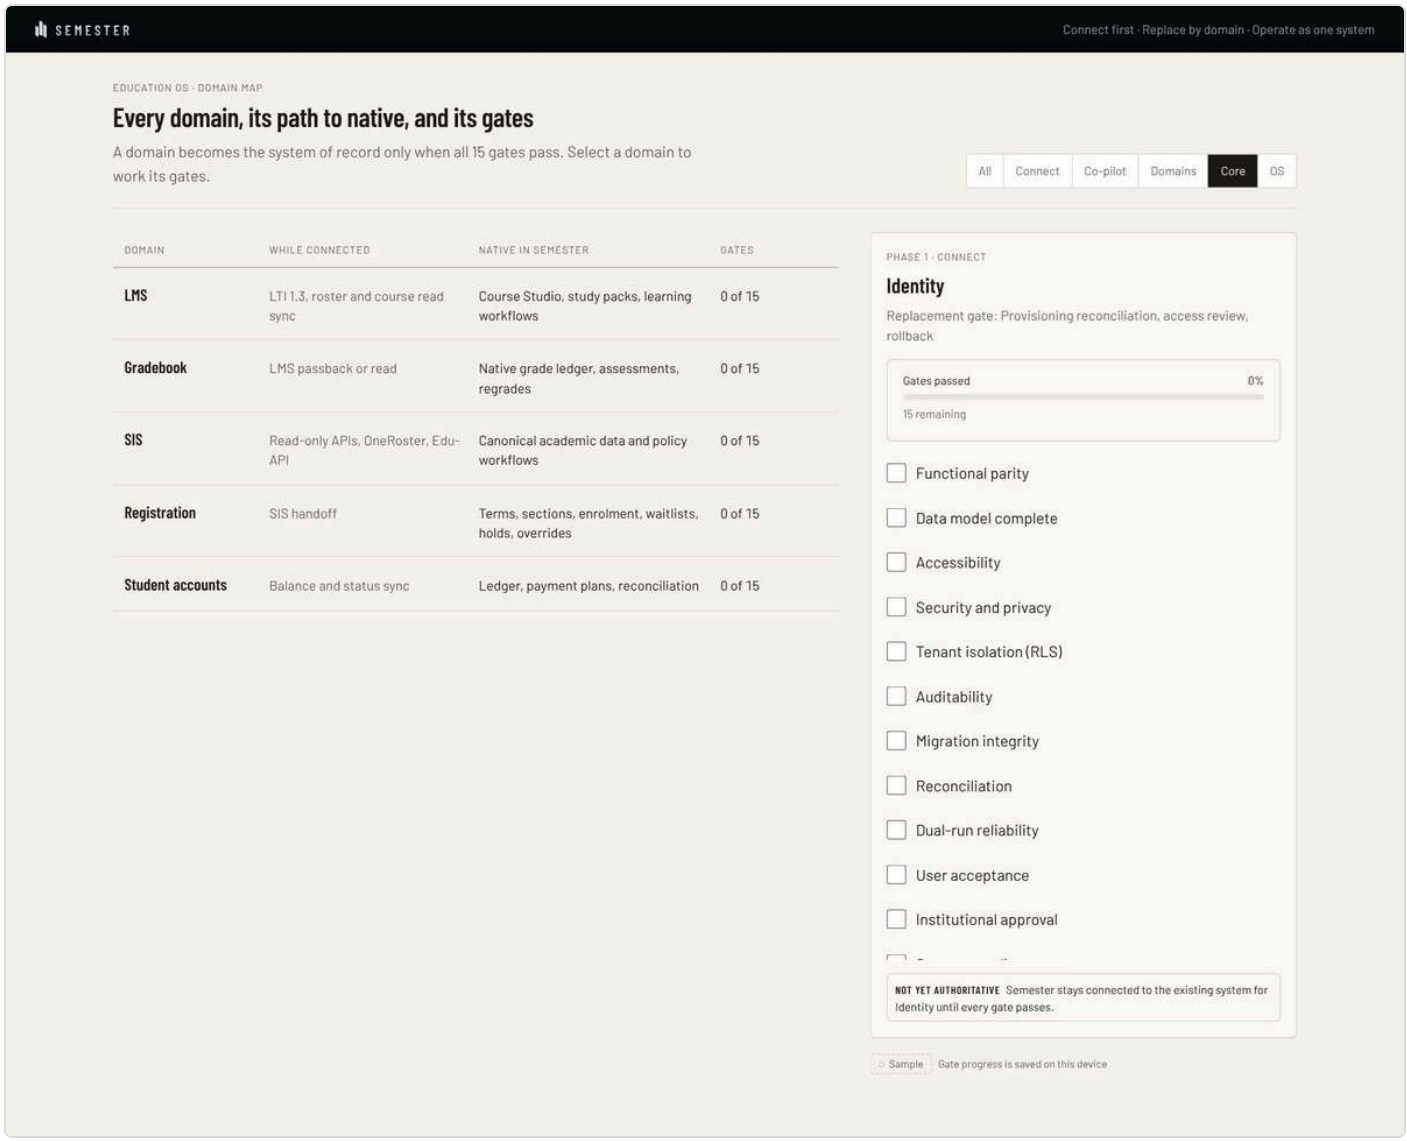
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
PHASE 1 · CONNECT
Identity
Replacement gate: Provisioning reconciliation, access review, rollback
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Identity until every gate passes.
Sample
Gate progress is saved on this device

Core

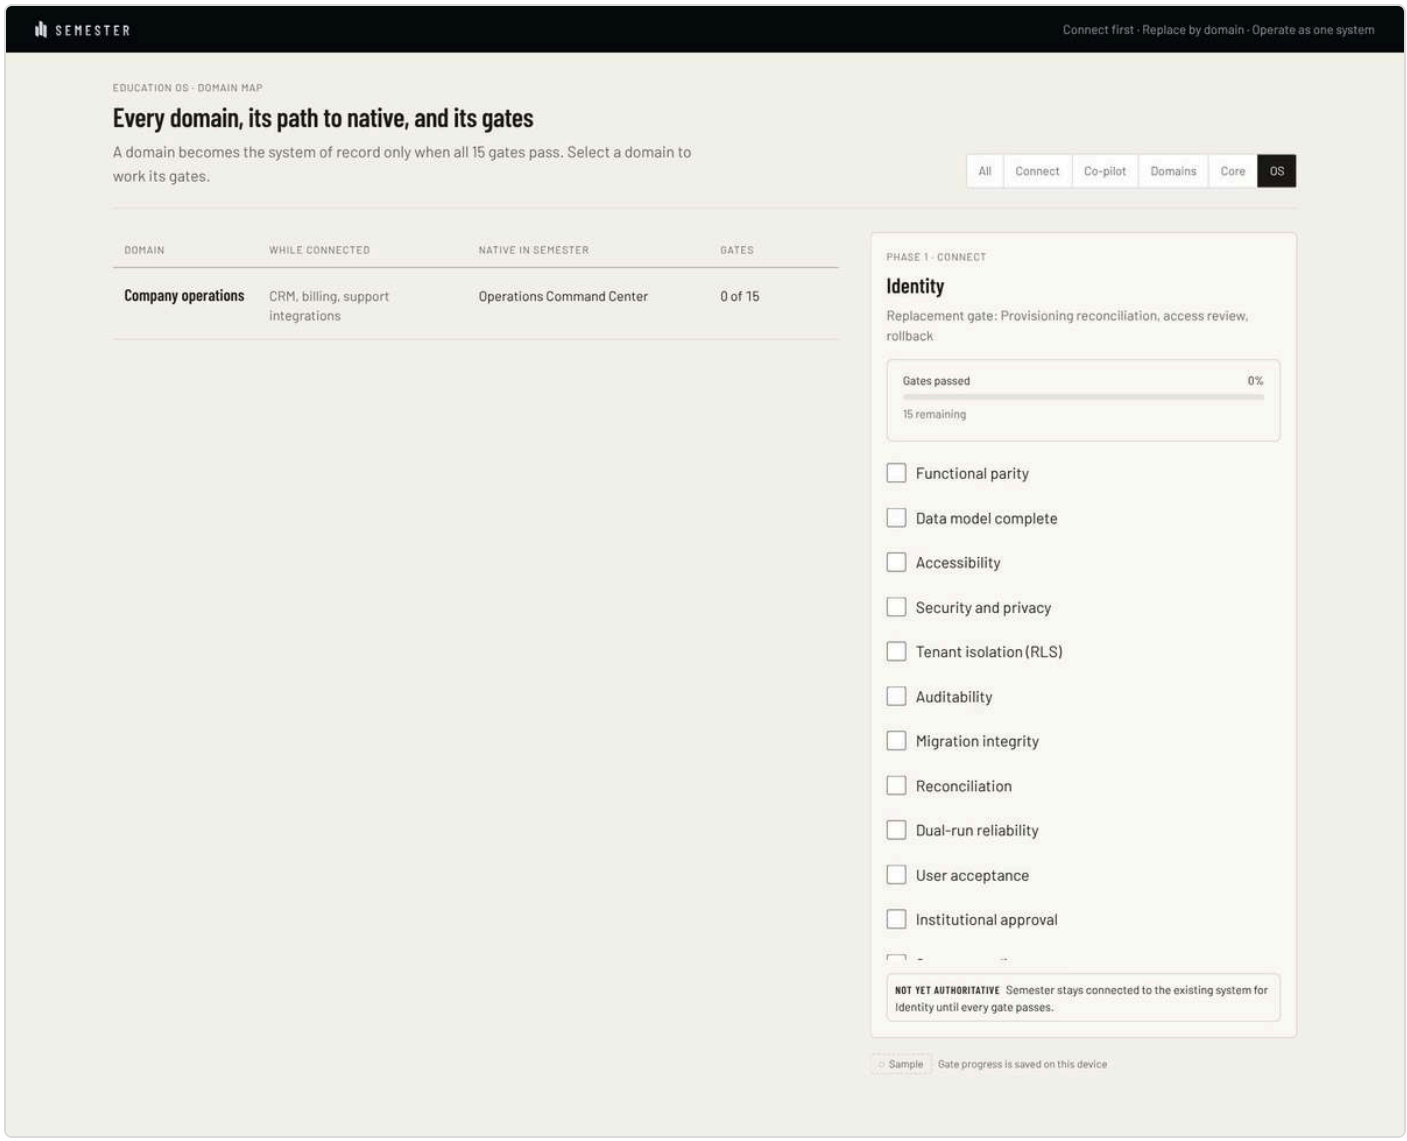
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 1 · CONNECT
Identity
Replacement gate: Provisioning reconciliation, access review, rollback
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Identity until every gate passes.
Sample
Gate progress is saved on this device

OS

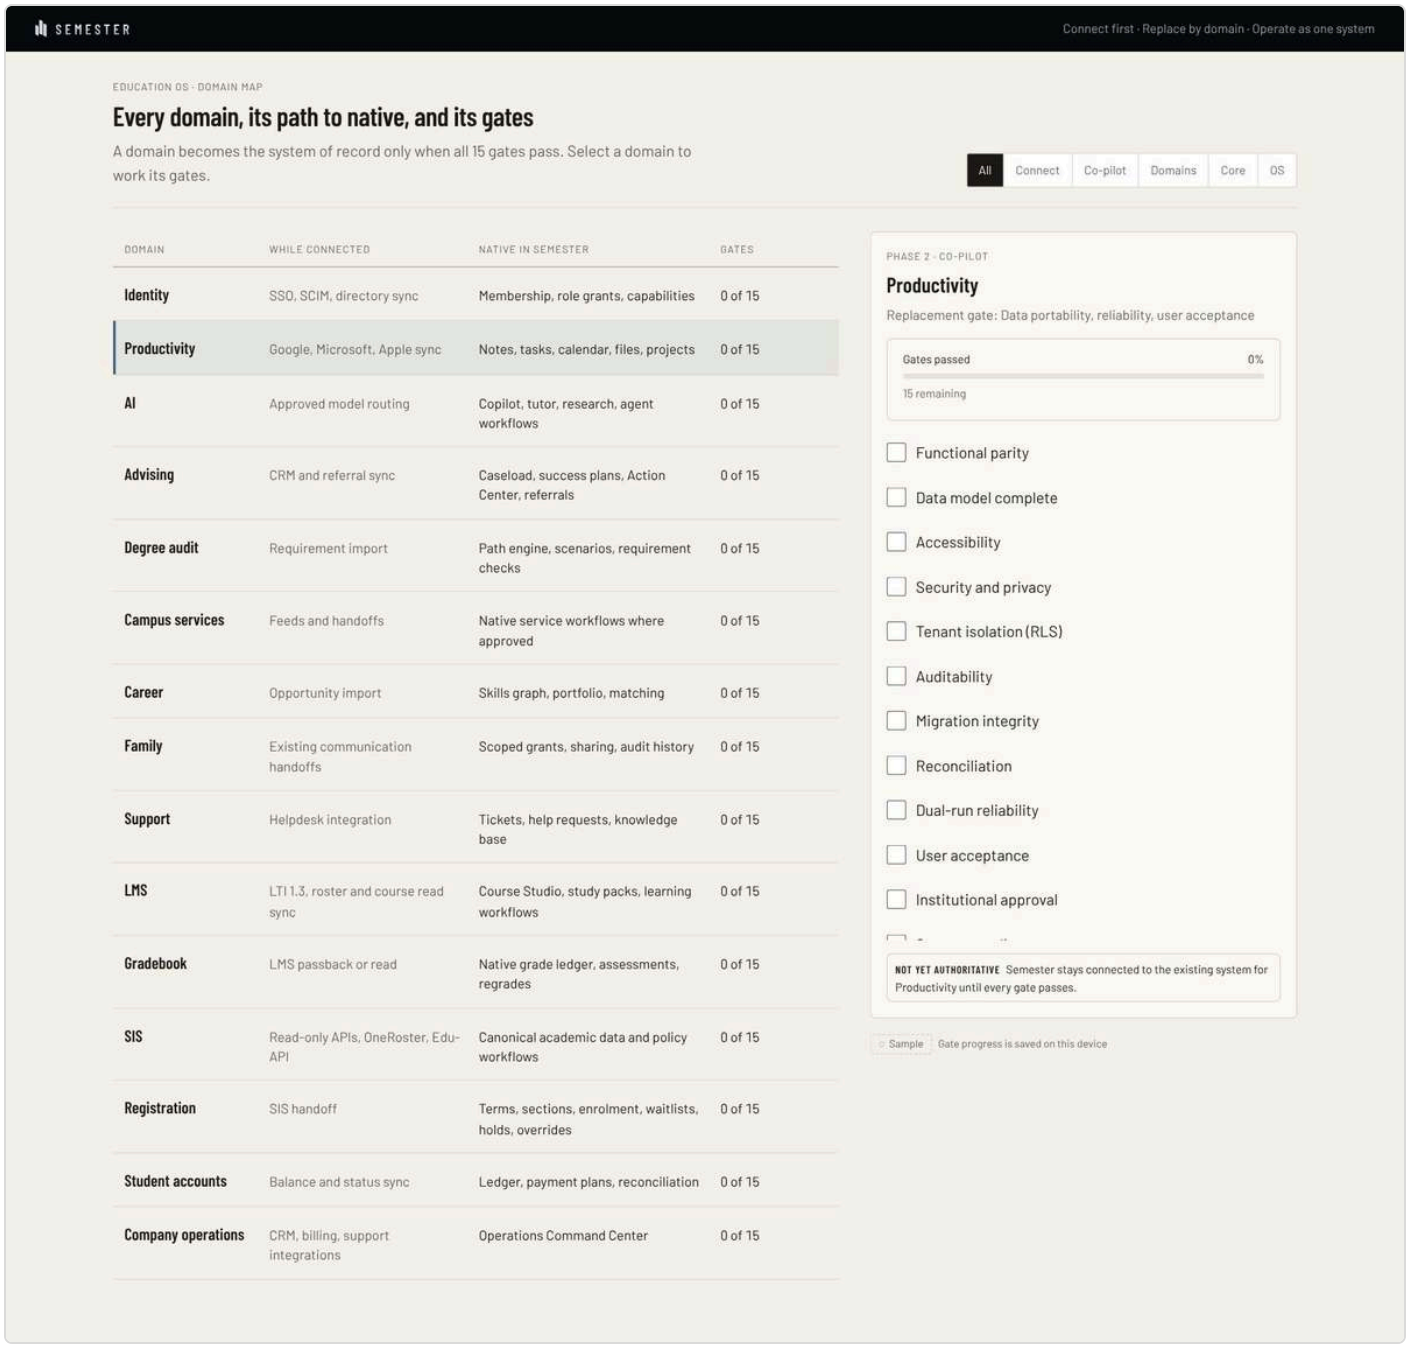

Productivity

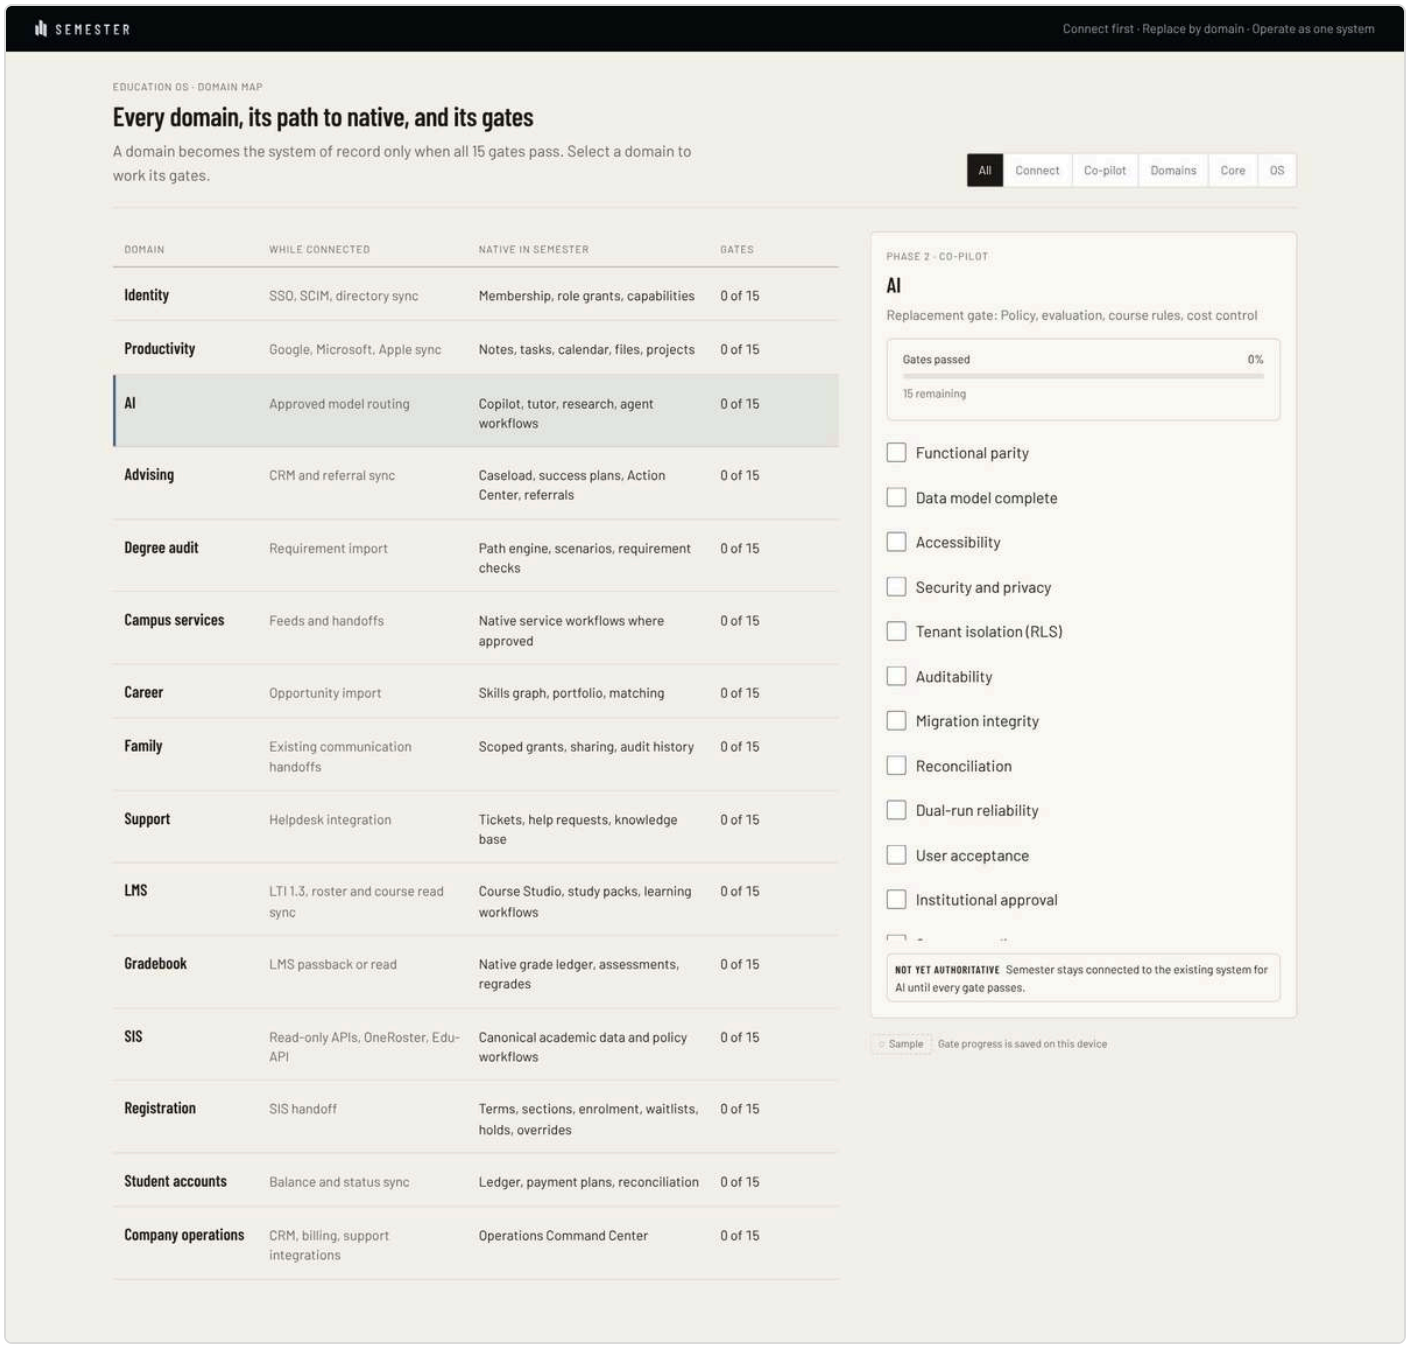
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 2 · CO-PILOT
AI
Replacement gate: Policy, evaluation, course rules, cost control
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for AI until every gate passes.
Sample
Gate progress is saved on this device

AI

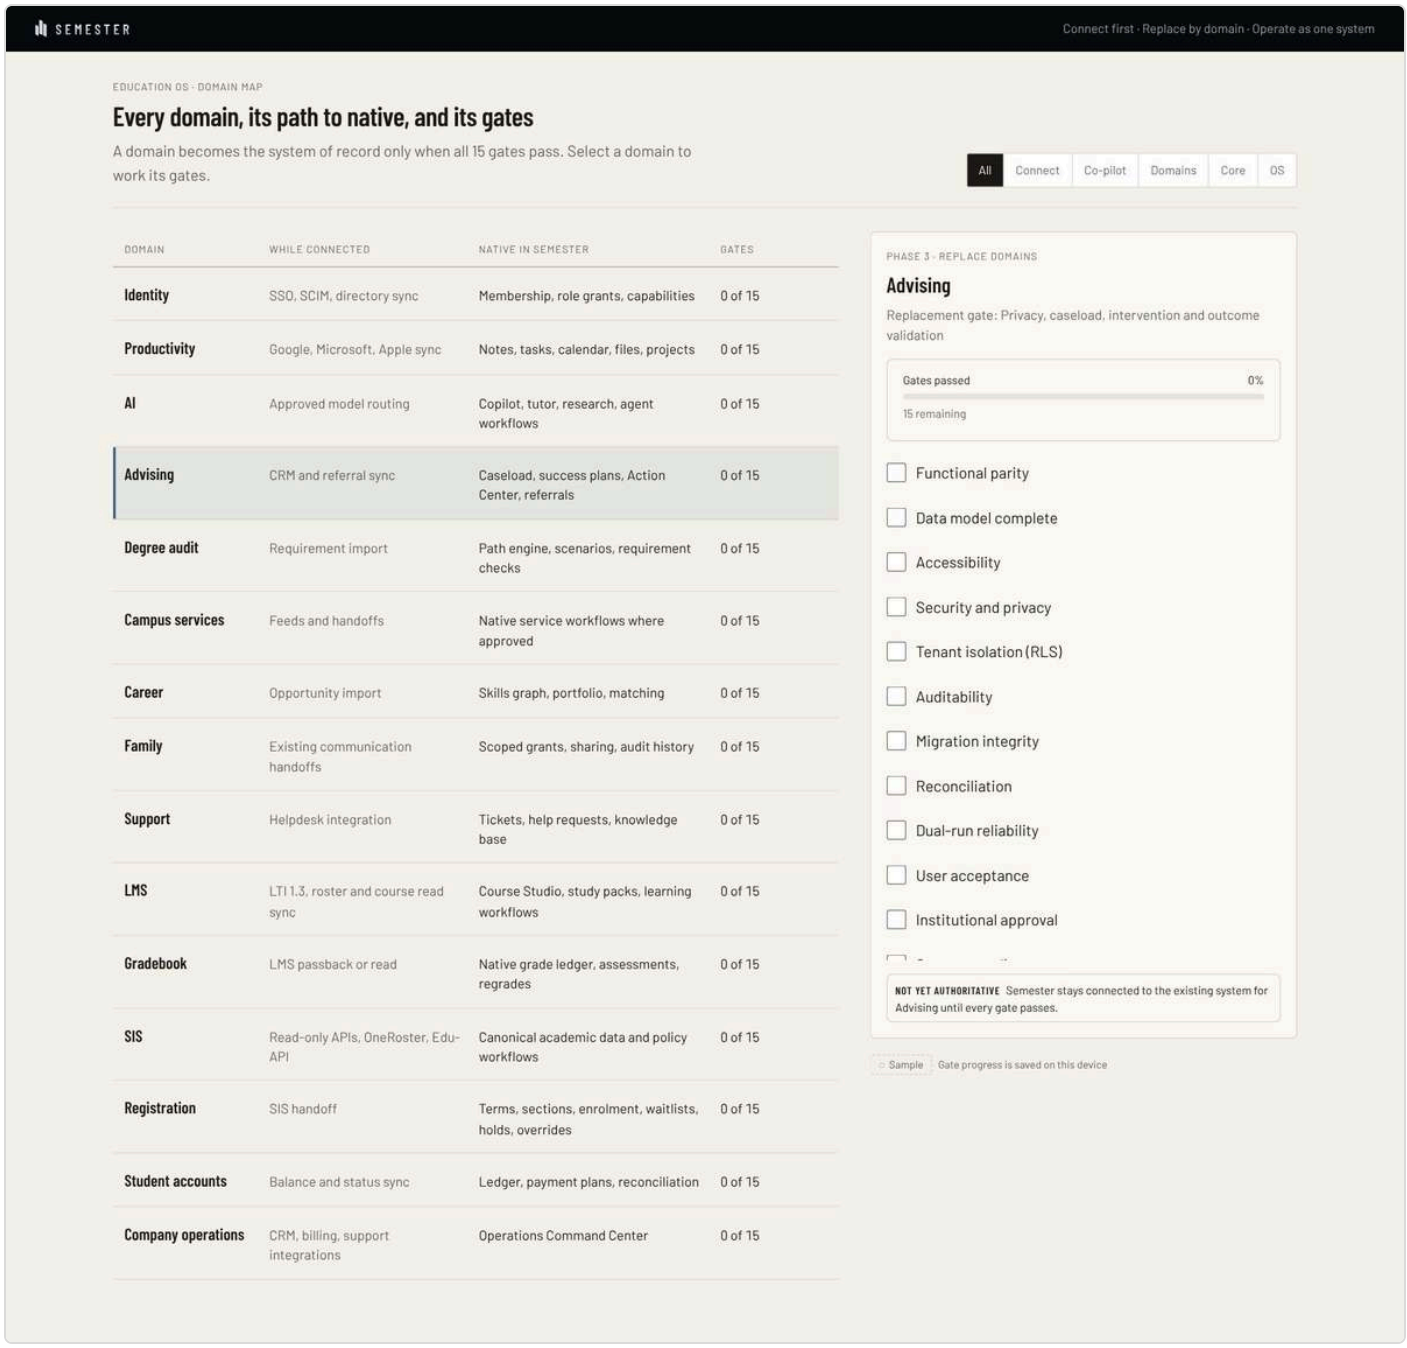
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 3 · REPLACE DOMAINS
Advising
Replacement gate: Privacy, caseload, intervention and outcome validation
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Advising until every gate passes.
Sample
Gate progress is saved on this device

Advising

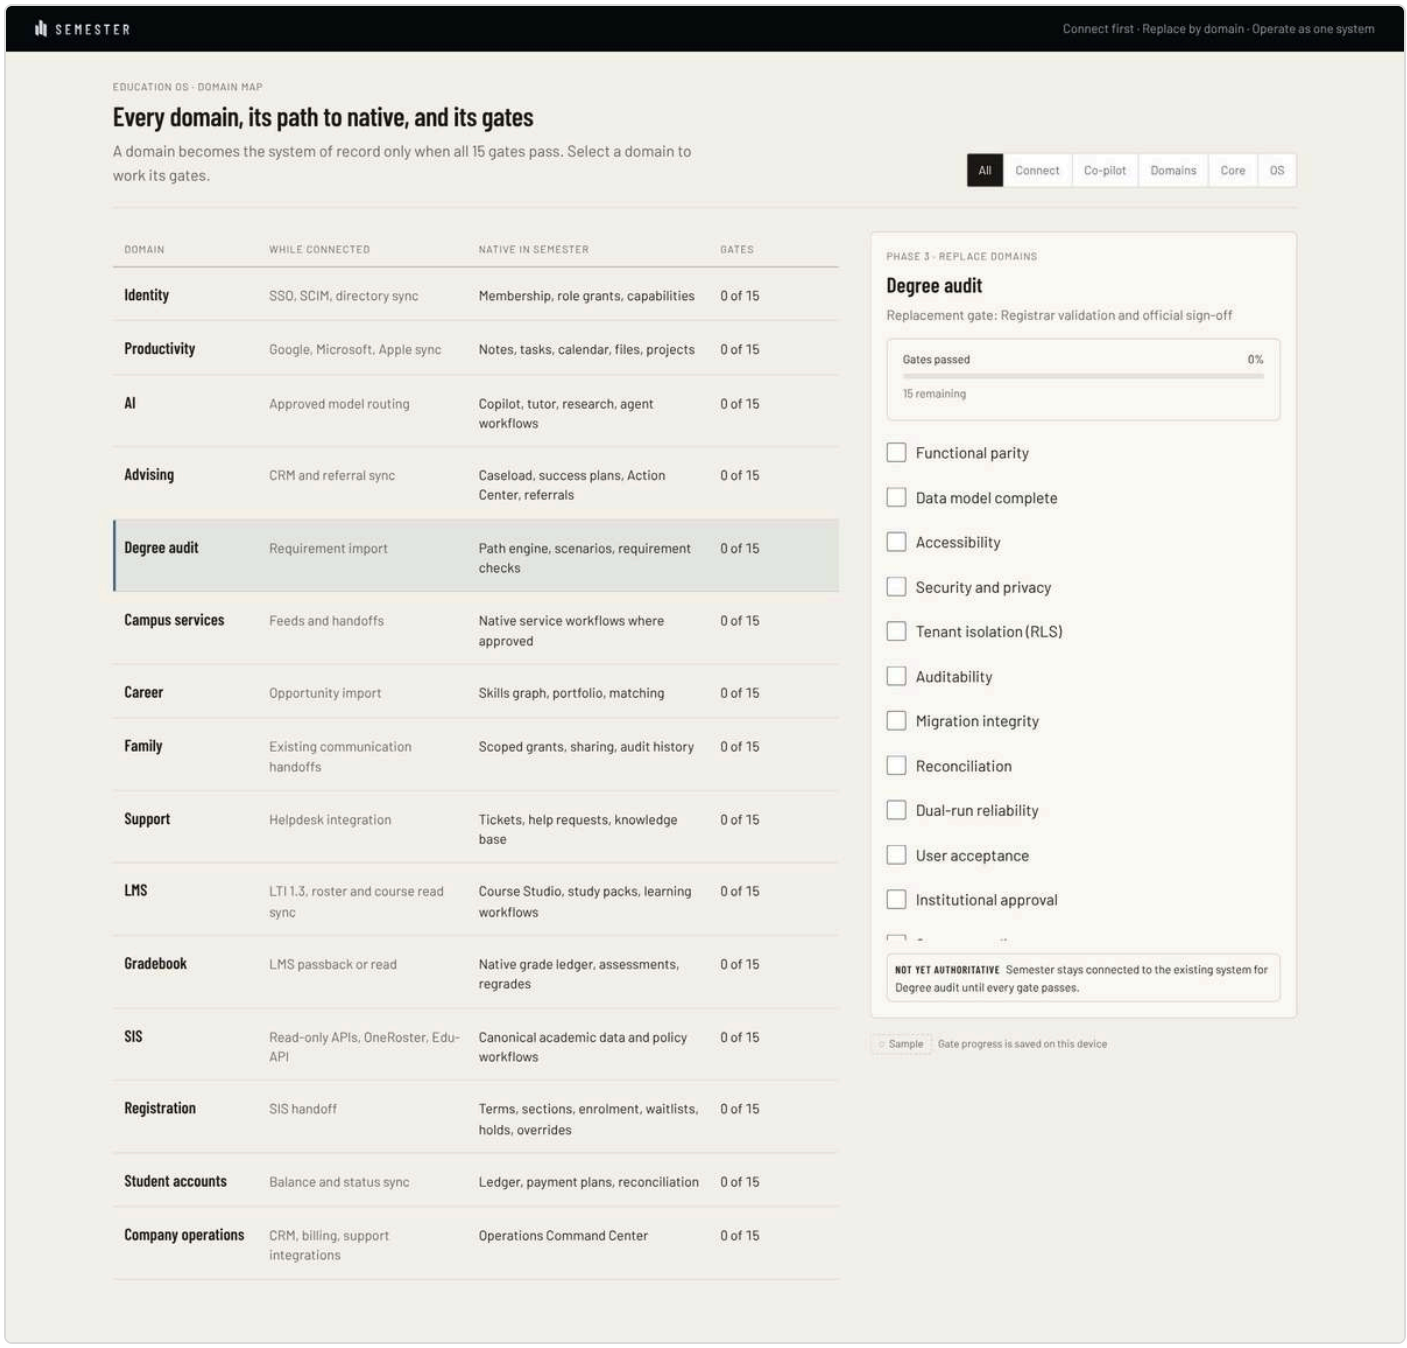

Degree audit

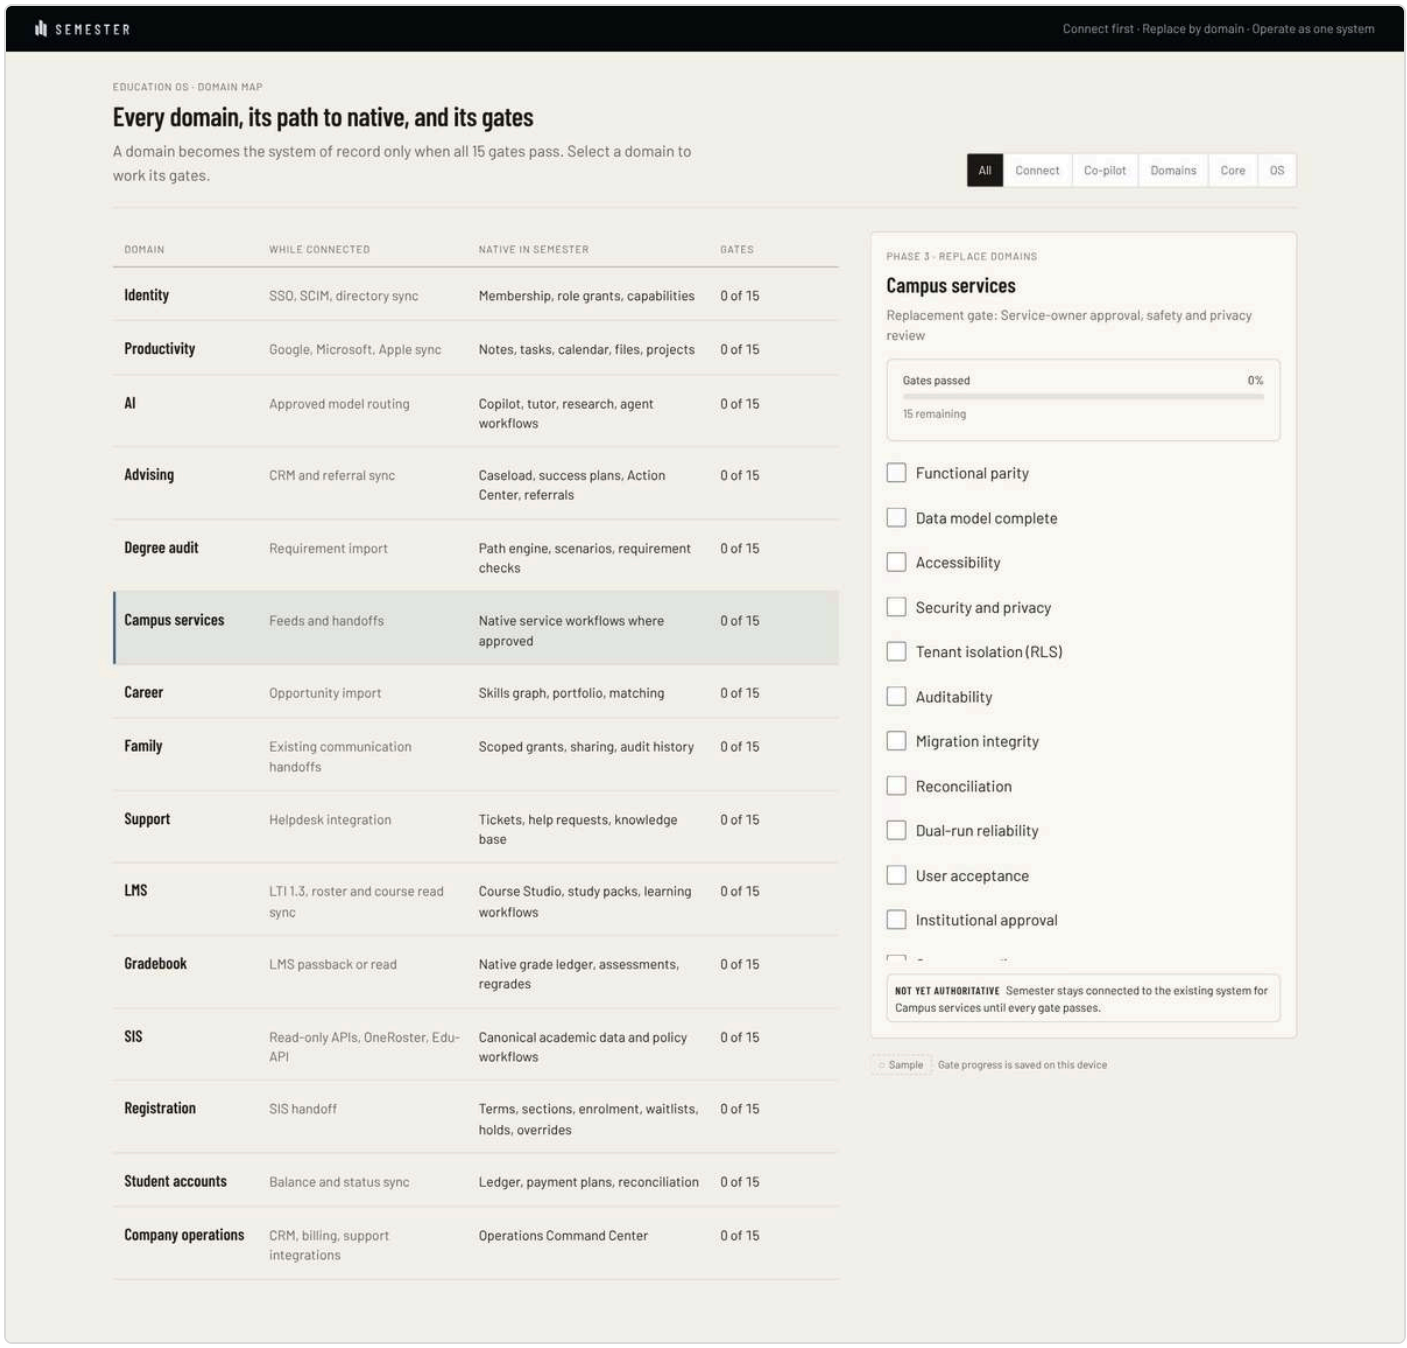

Campus services

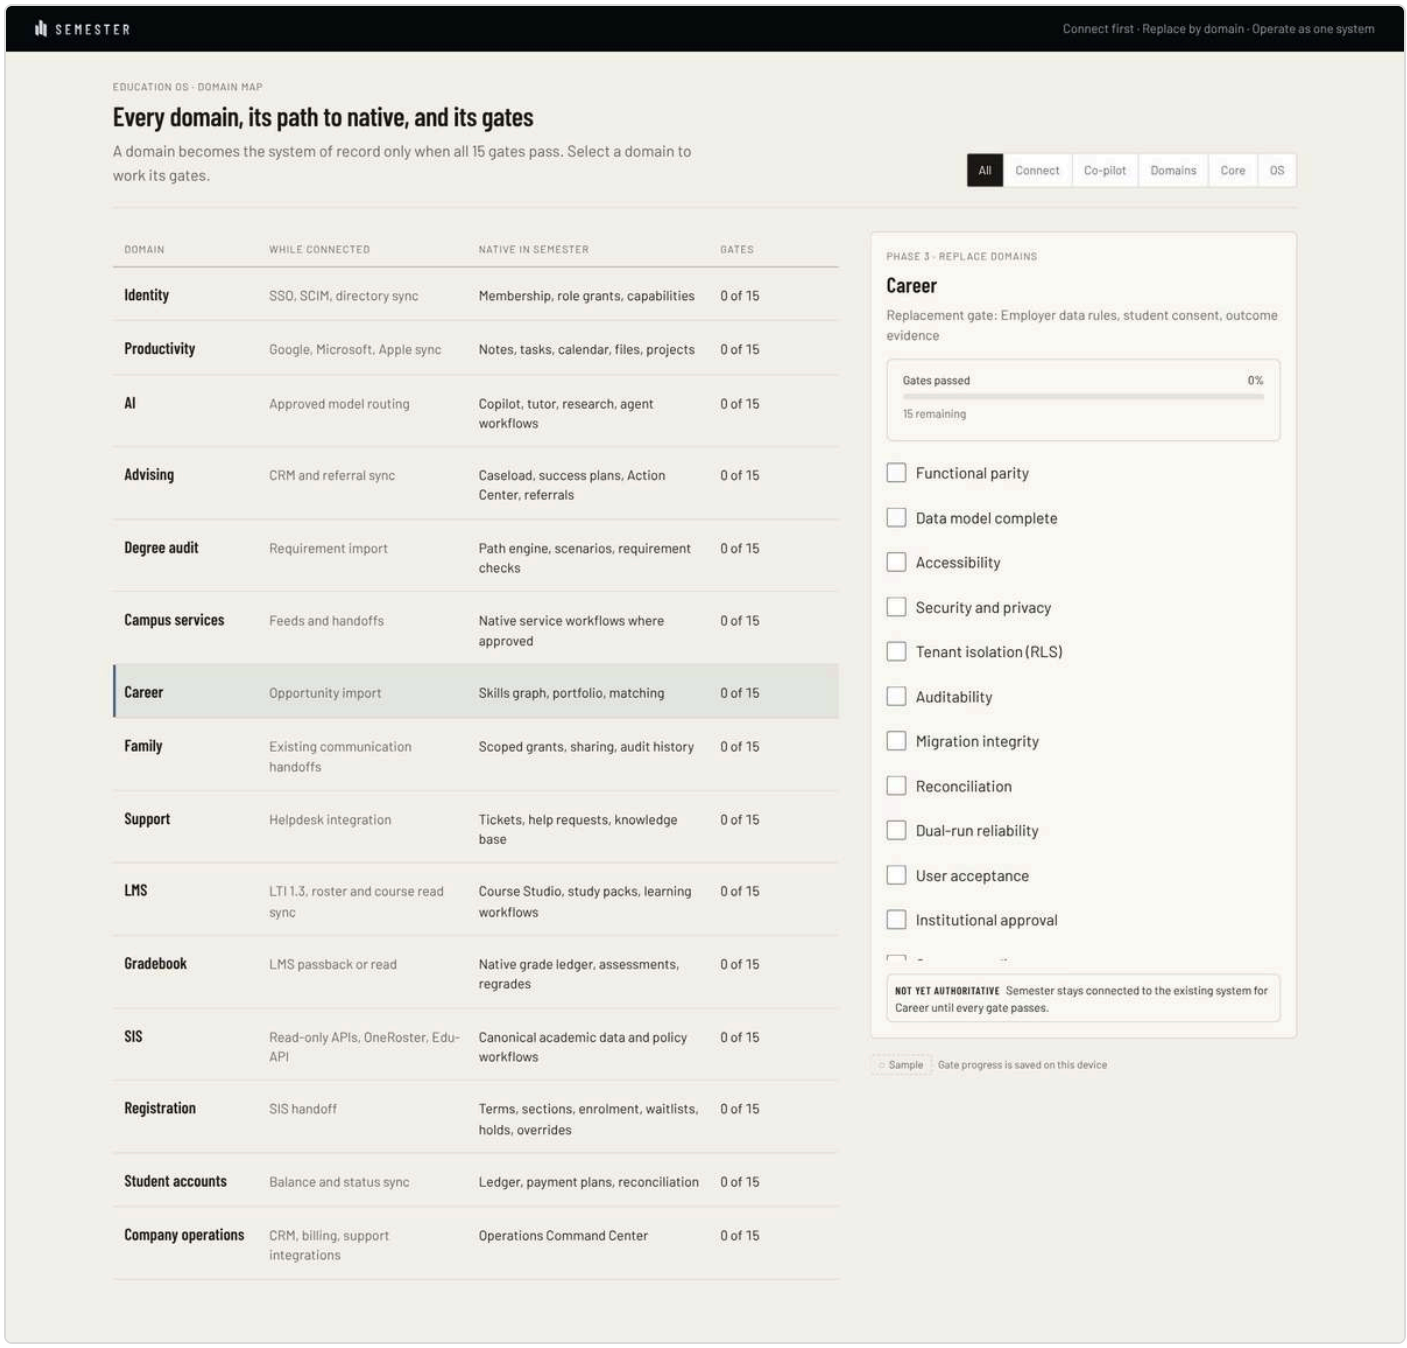
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 3 · REPLACE DOMAINS
Career
Replacement gate: Employer data rules, student consent, outcome evidence
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Career until every gate passes.
Sample
Gate progress is saved on this device

Career

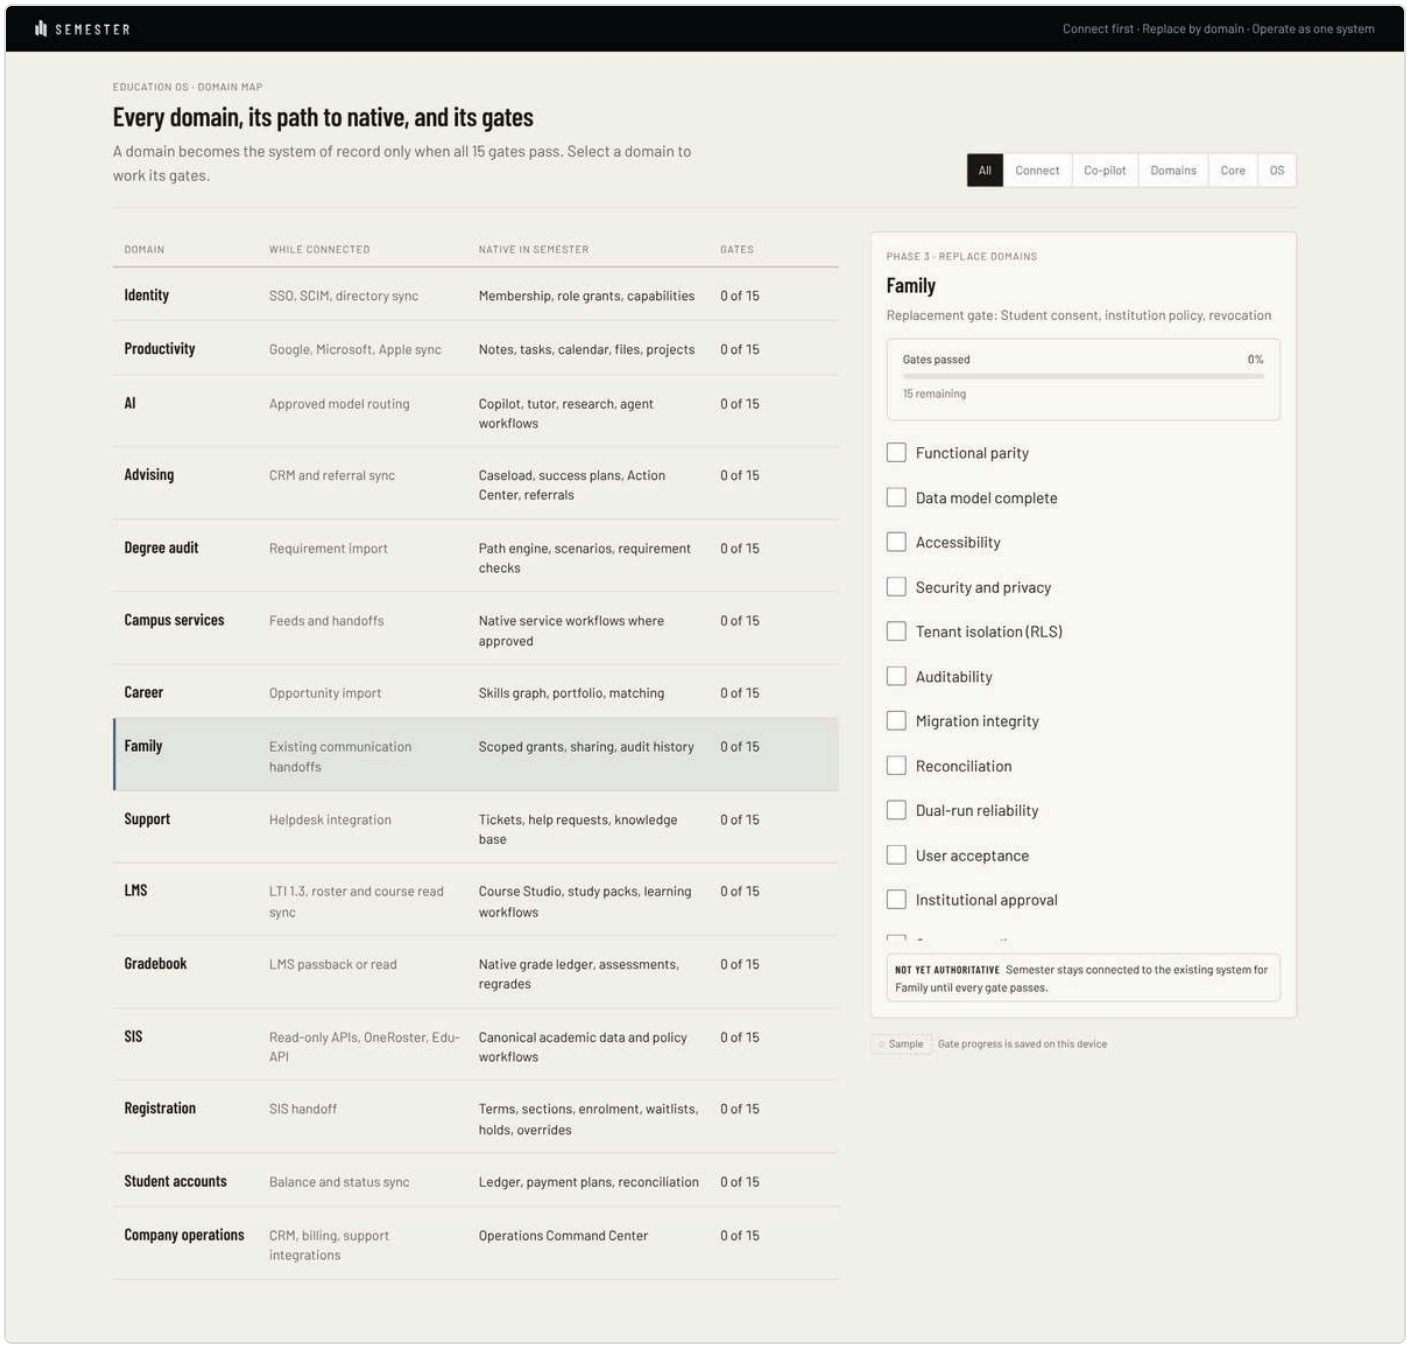
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 3 · REPLACE DOMAINS
Family
Replacement gate: Student consent, institution policy, revocation
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Family until every gate passes.
Sample
Gate progress is saved on this device

Family

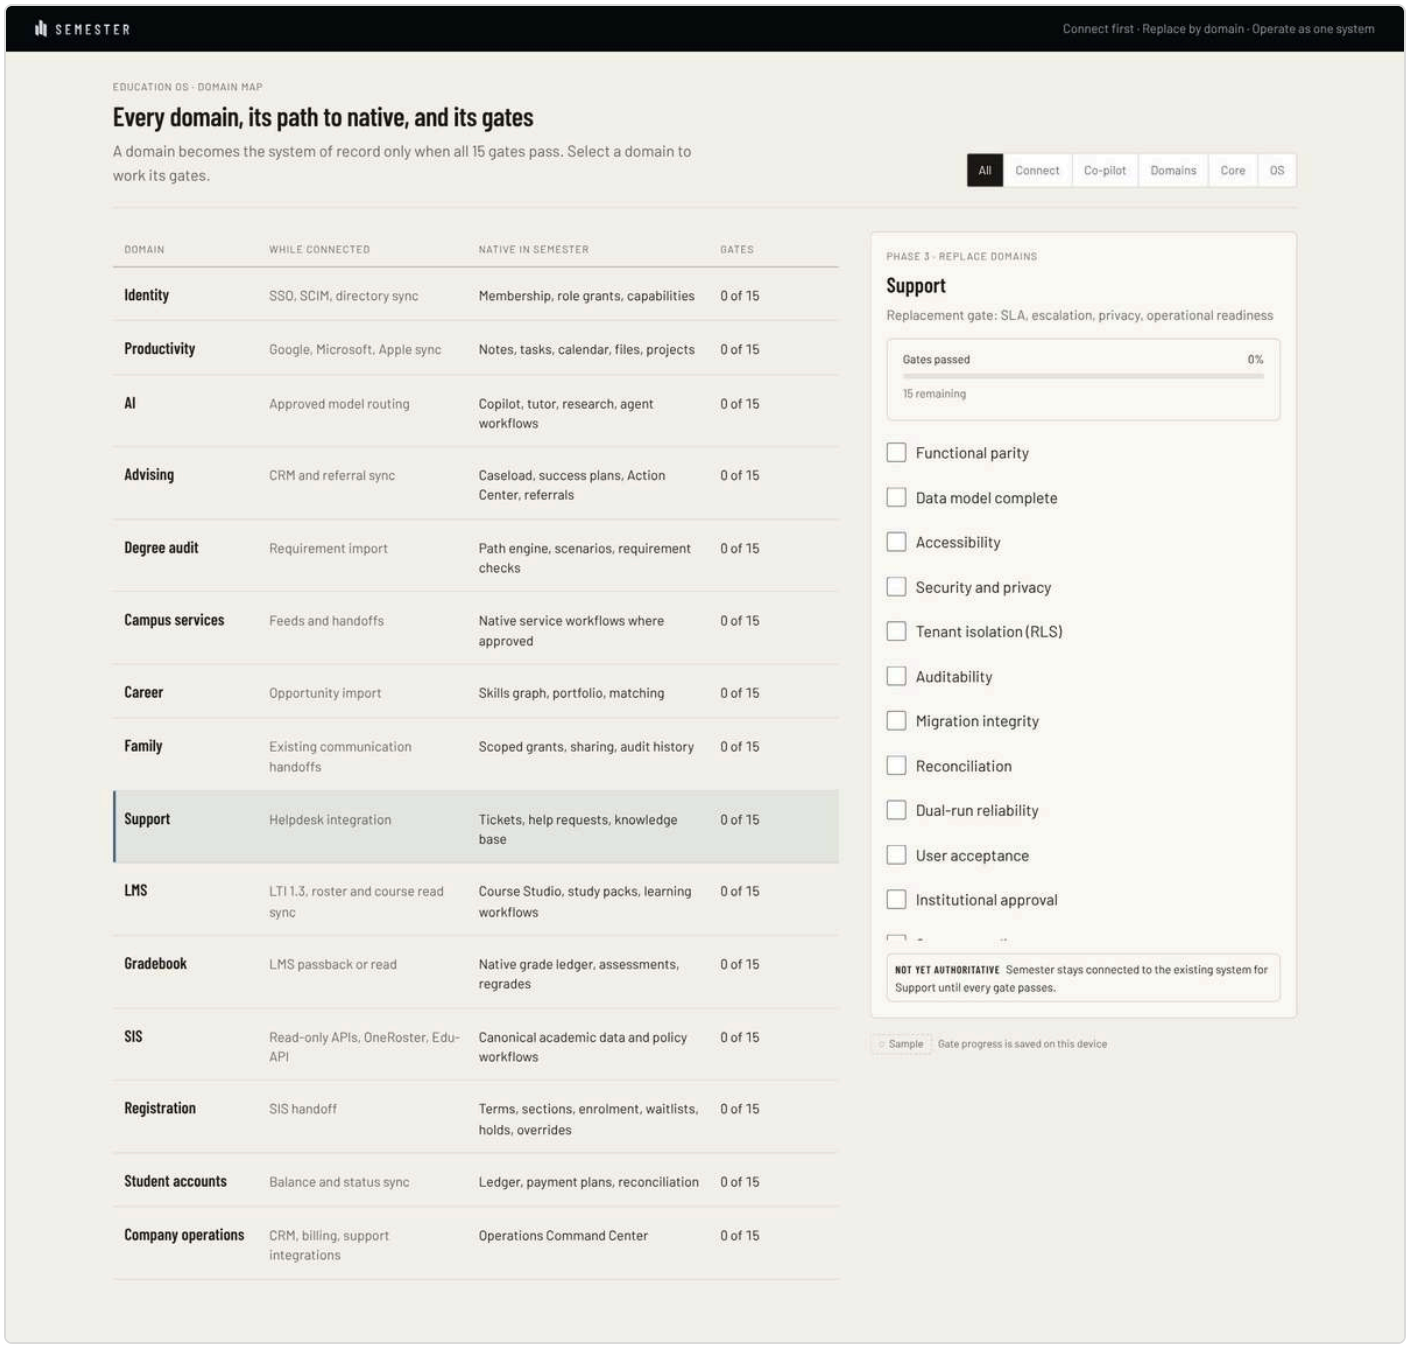
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 3 · REPLACE DOMAINS
Support
Replacement gate: SLA, escalation, privacy, operational readiness
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Support until every gate passes.
Sample
Gate progress is saved on this device

Support

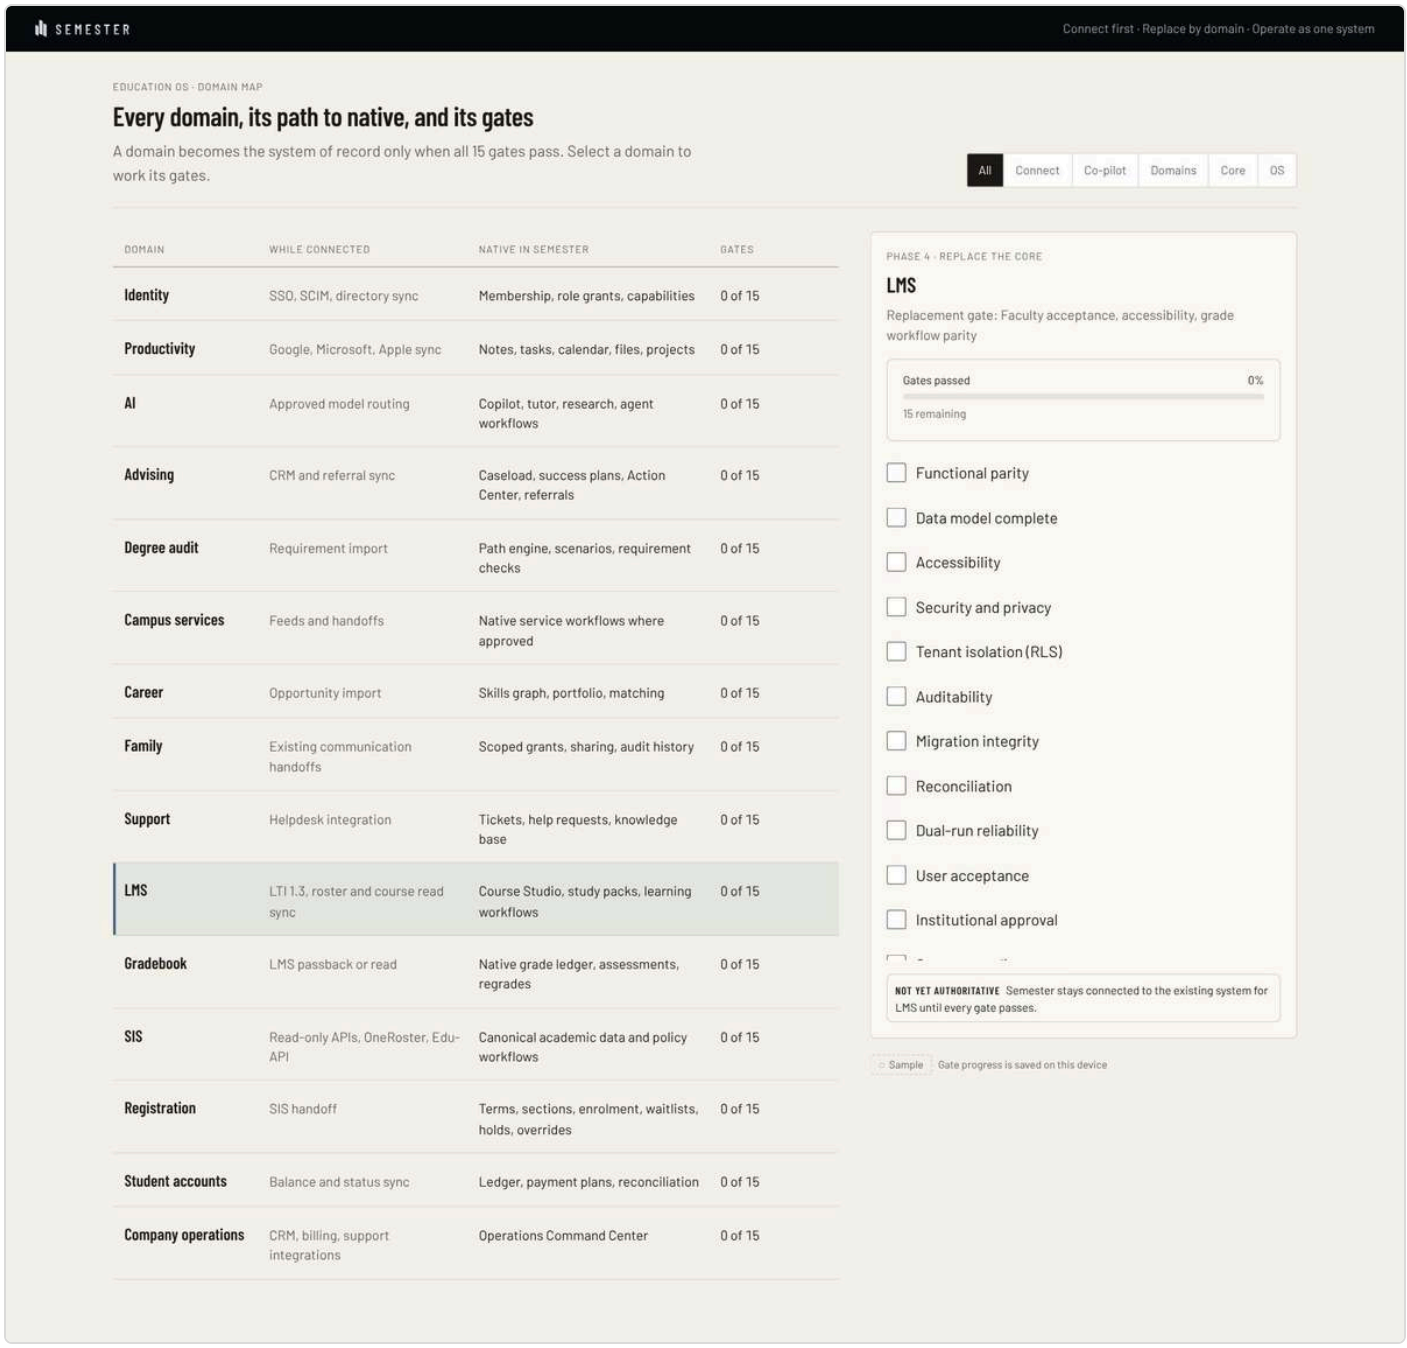
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 4 · REPLACE THE CORE
LMS
Replacement gate: Faculty acceptance, accessibility, grade workflow parity
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for LMS until every gate passes.
Sample
Gate progress is saved on this device

LMS

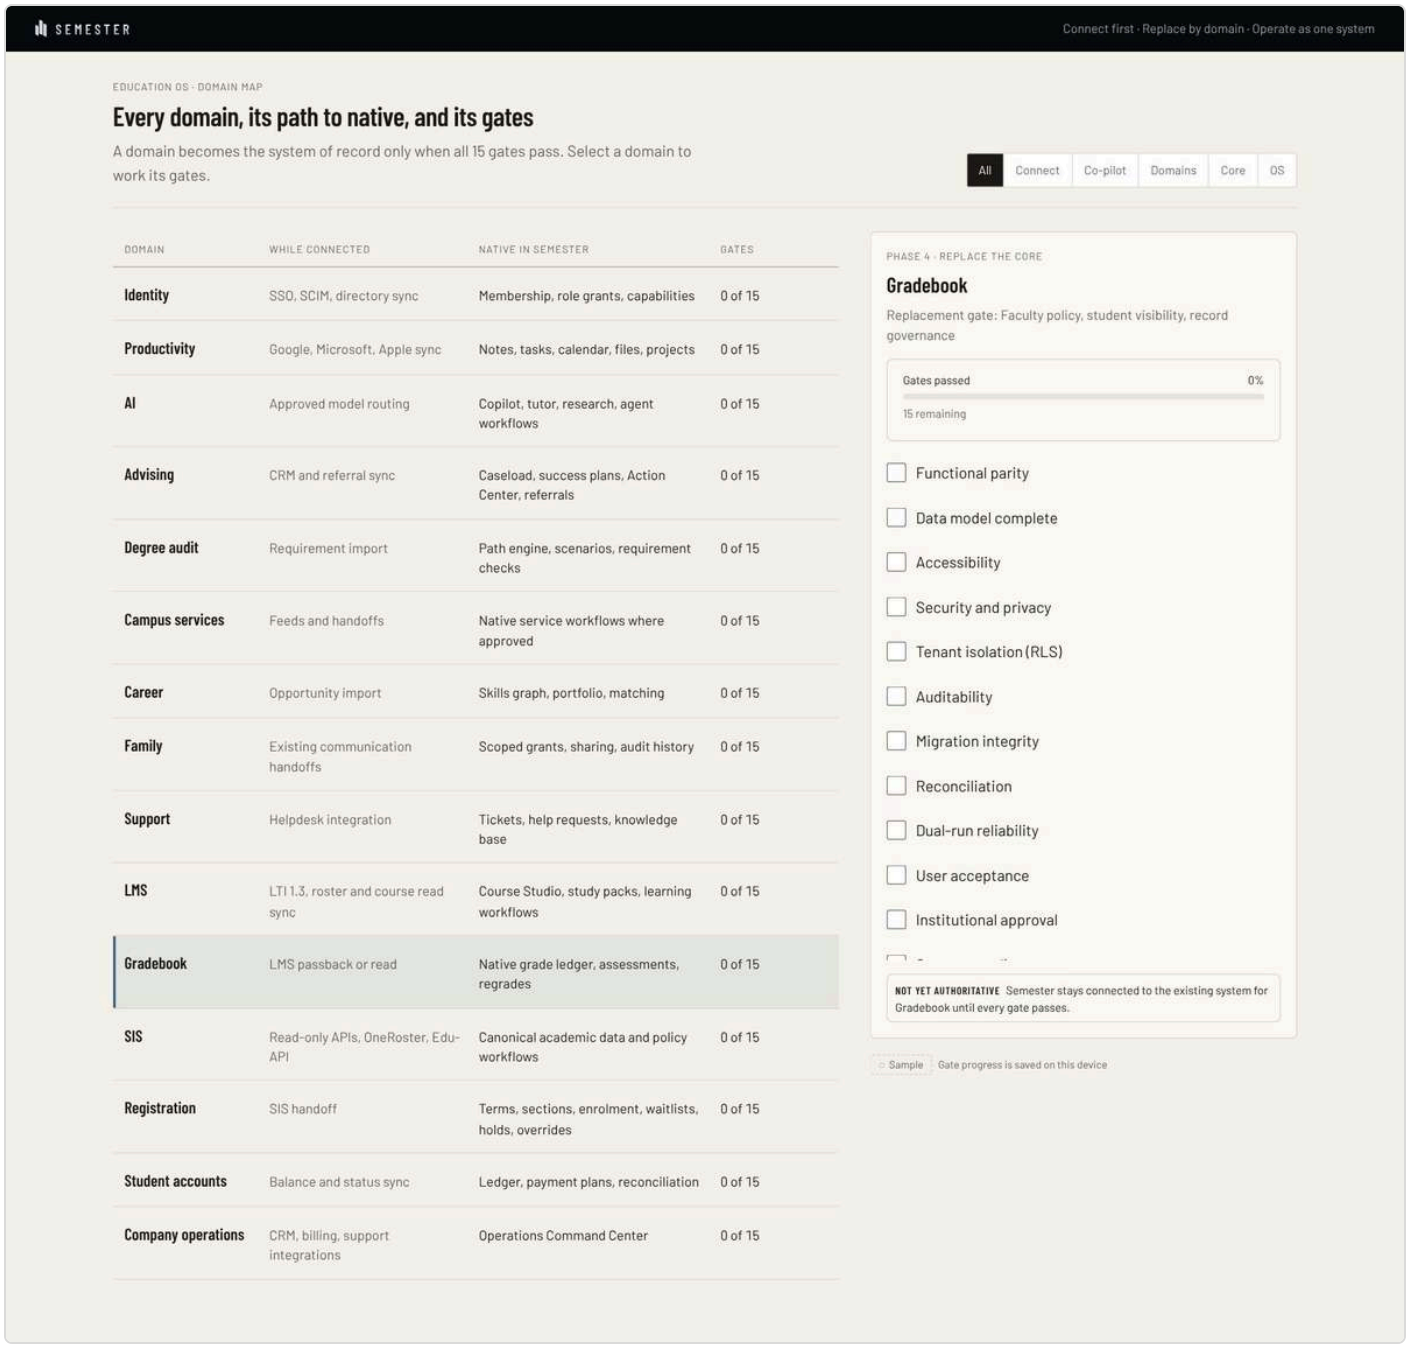
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 4 · REPLACE THE CORE
Gradebook
Replacement gate: Faculty policy, student visibility, record governance
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for Gradebook until every gate passes.
Sample
Gate progress is saved on this device

Gradebook

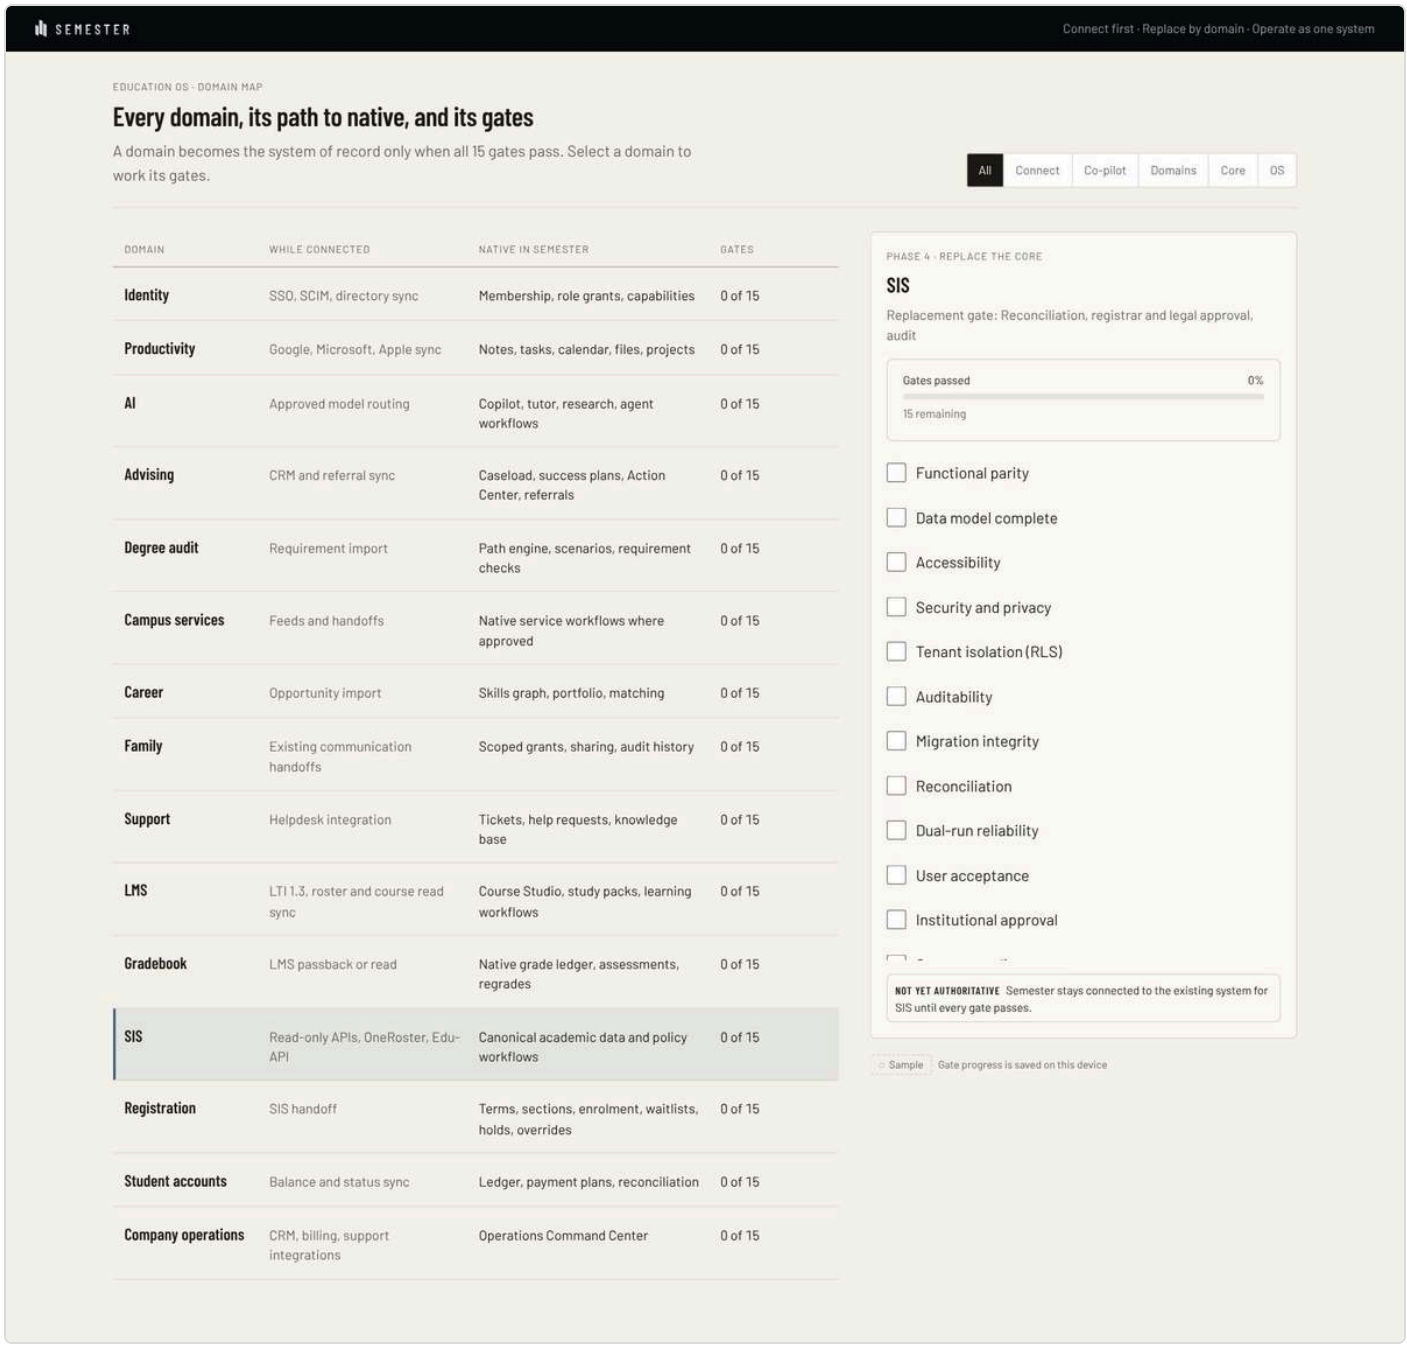
SEMESTER
Connect first · Replace by domain · Operate as one system
EDUCATION OS · DOMAIN MAP
Every domain, its path to native, and its gates
A domain becomes the system of record only when all 15 gates pass. Select a domain to work its gates.
All
Connect
Co-pilot
Domains
Core
OS
DOMAIN
WHILE CONNECTED
NATIVE IN SEMESTER
GATES
Identity
SSO, SCIM, directory sync
Membership, role grants, capabilities
0 of 15
Productivity
Google, Microsoft, Apple sync
Notes, tasks, calendar, files, projects
0 of 15
AI
Approved model routing
Copilot, tutor, research, agent workflows
0 of 15
Advising
CRM and referral sync
Caseload, success plans, Action Center, referrals
0 of 15
Degree audit
Requirement import
Path engine, scenarios, requirement checks
0 of 15
Campus services
Feeds and handoffs
Native service workflows where approved
0 of 15
Career
Opportunity import
Skills graph, portfolio, matching
0 of 15
Family
Existing communication handoffs
Scoped grants, sharing, audit history
0 of 15
Support
Helpdesk integration
Tickets, help requests, knowledge base
0 of 15
LMS
LTI 1.3, roster and course read sync
Course Studio, study packs, learning workflows
0 of 15
Gradebook
LMS passback or read
Native grade ledger, assessments, regrades
0 of 15
SIS
Read-only APIs, OneRoster, Edu-API
Canonical academic data and policy workflows
0 of 15
Registration
SIS handoff
Terms, sections, enrolment, waitlists, holds, overrides
0 of 15
Student accounts
Balance and status sync
Ledger, payment plans, reconciliation
0 of 15
Company operations
CRM, billing, support integrations
Operations Command Center
0 of 15
PHASE 4 · REPLACE THE CORE
SIS
Replacement gate: Reconciliation, registrar and legal approval, audit
Gates passed
0%
15 remaining
Functional parity
Data model complete
Accessibility
Security and privacy
Tenant isolation (RLS)
Auditability
Migration integrity
Reconciliation
Dual-run reliability
User acceptance
Institutional approval
NOT YET AUTHORITATIVE Semester stays connected to the existing system for SIS until every gate passes.
Sample
Gate progress is saved on this device

SIS

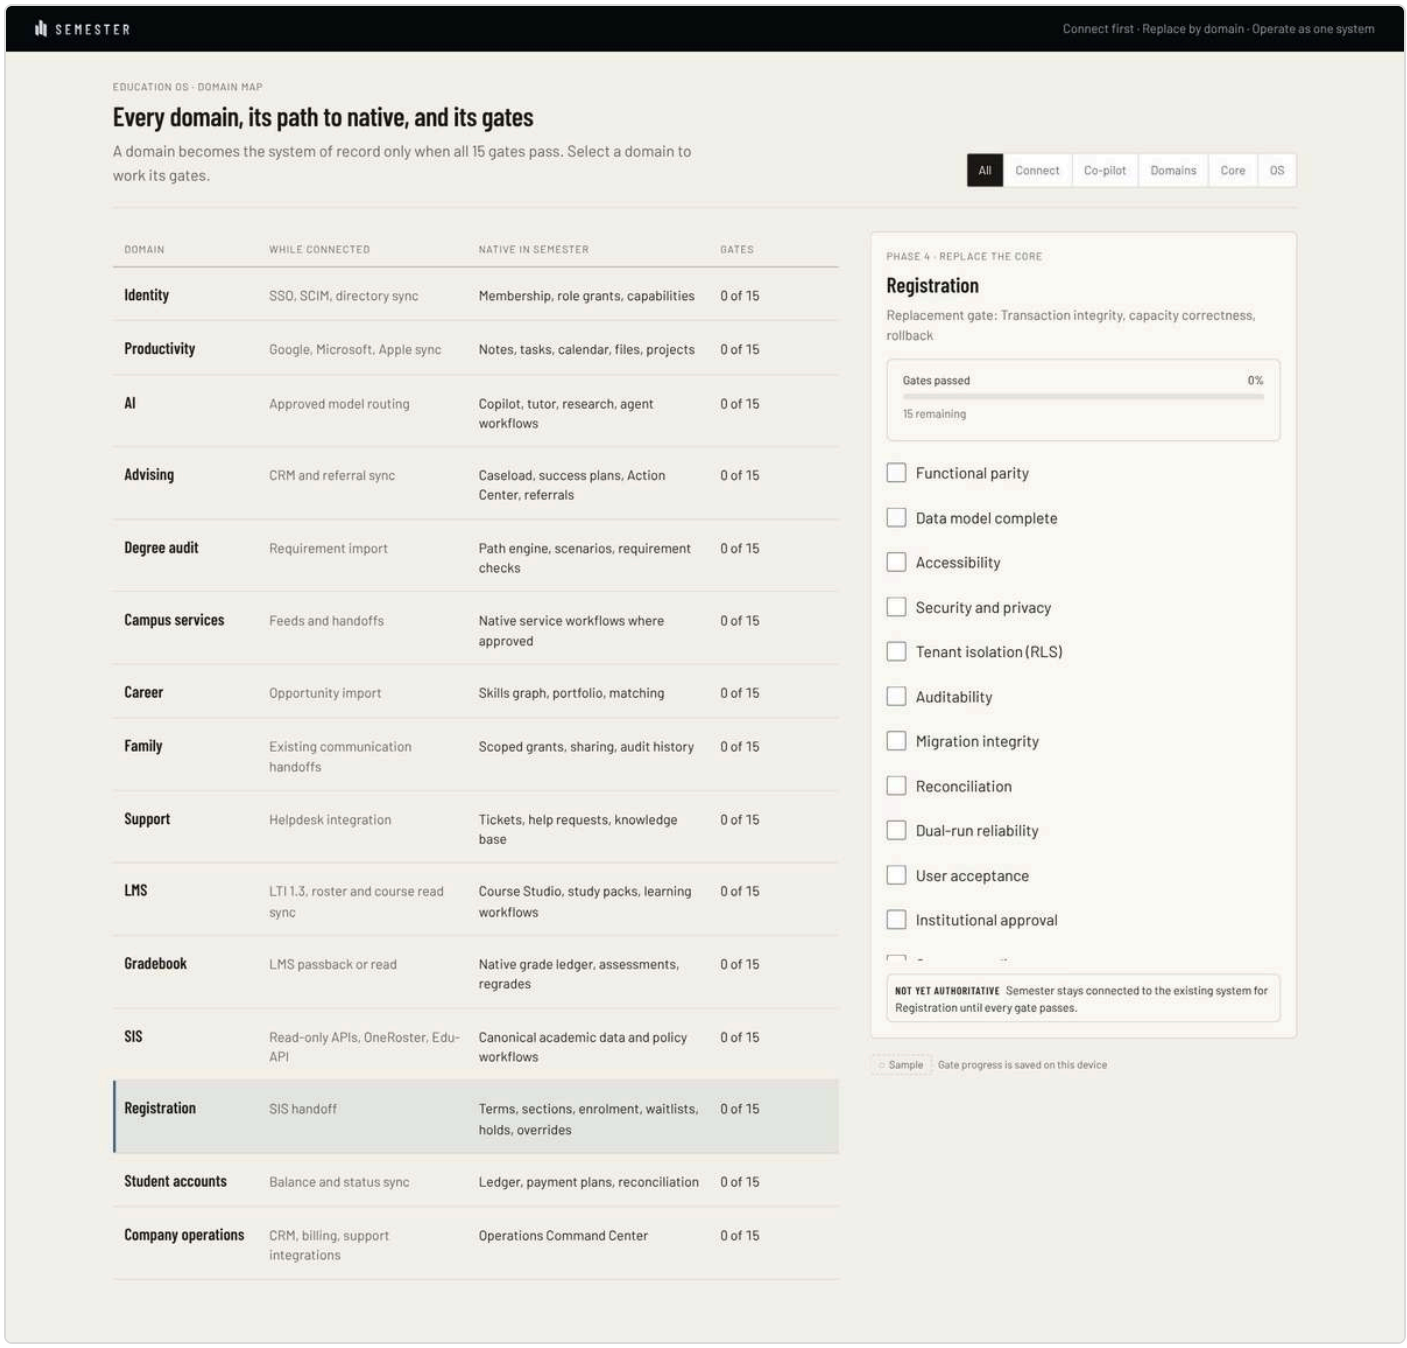

Registration

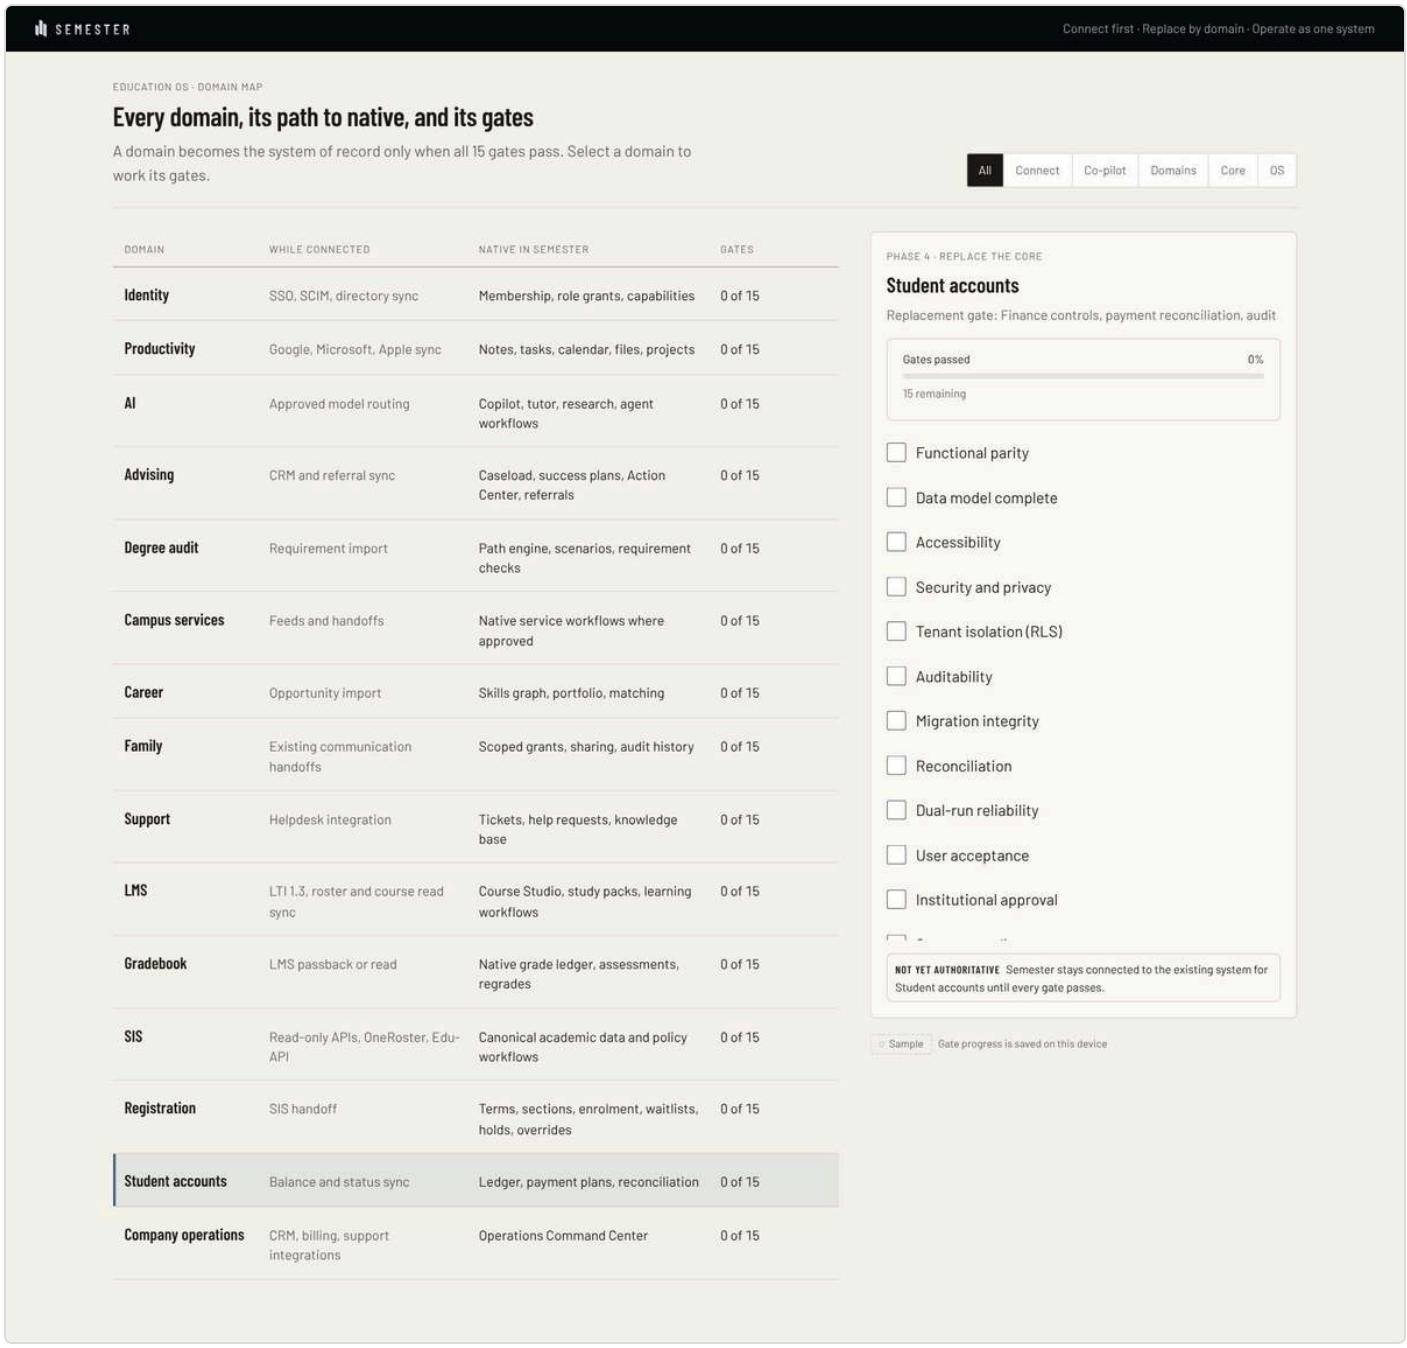

Student accounts

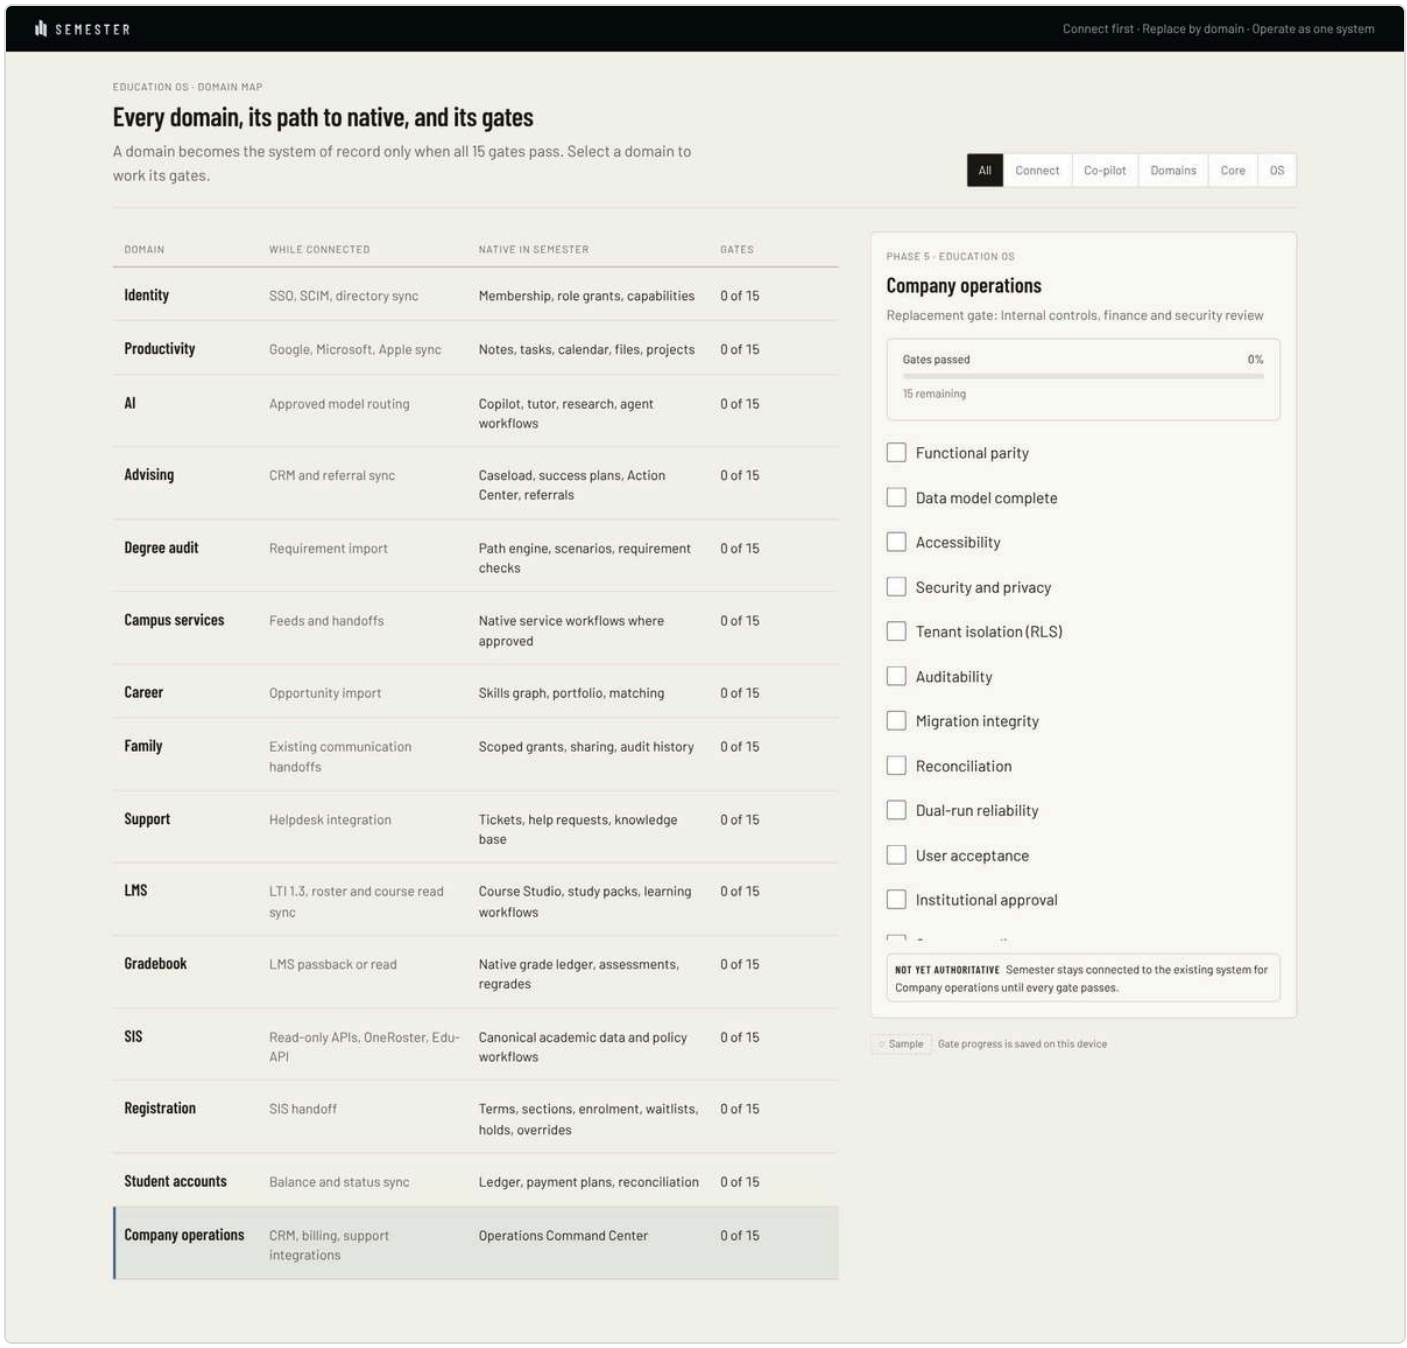

Company operations

PRODUCT · TEMPLATE

Master operating map

21 screens.

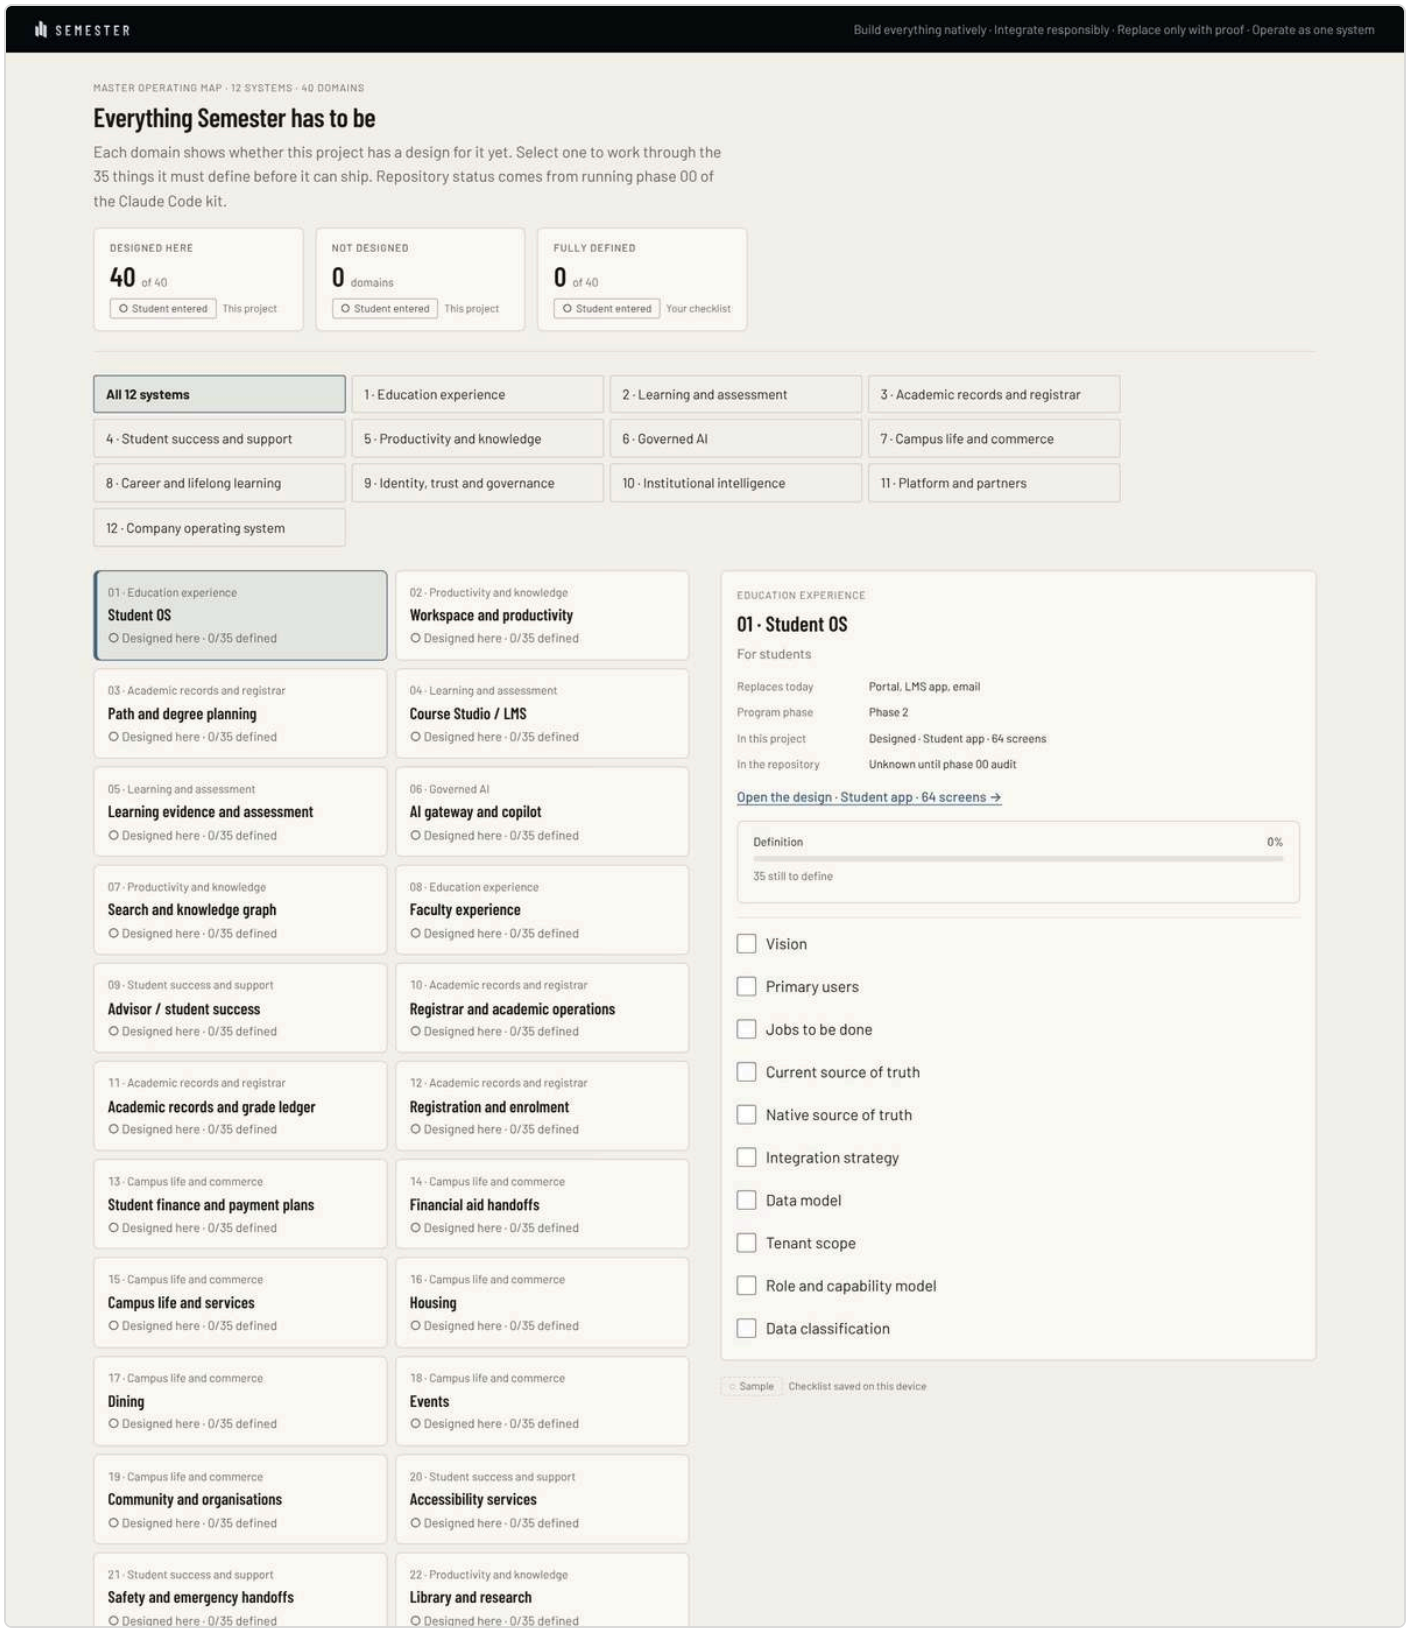

Opening view (1/2)

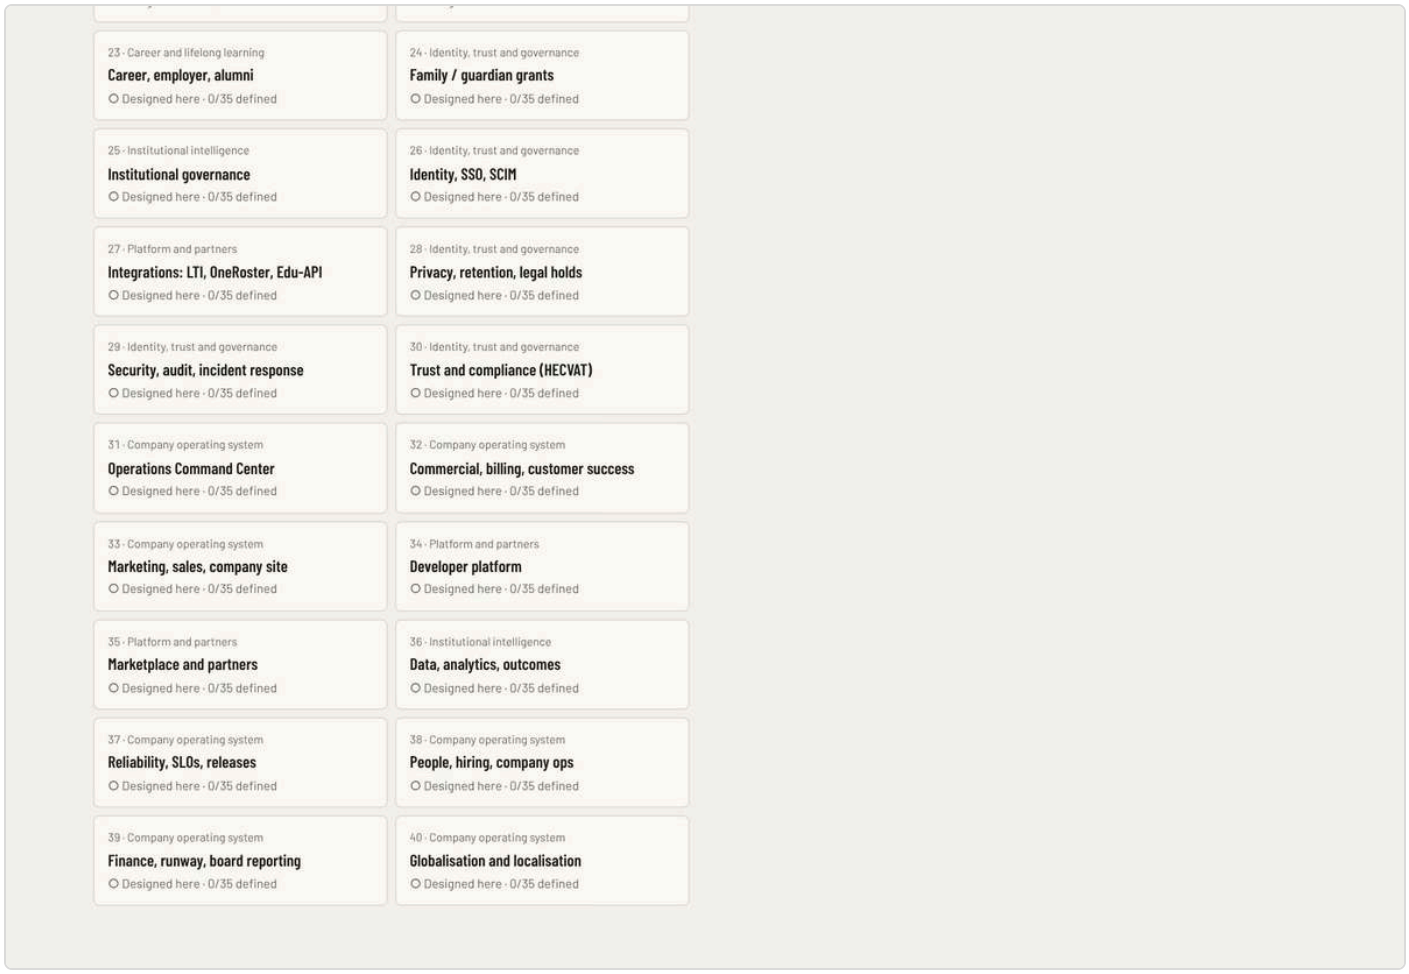

Opening view (2/2)

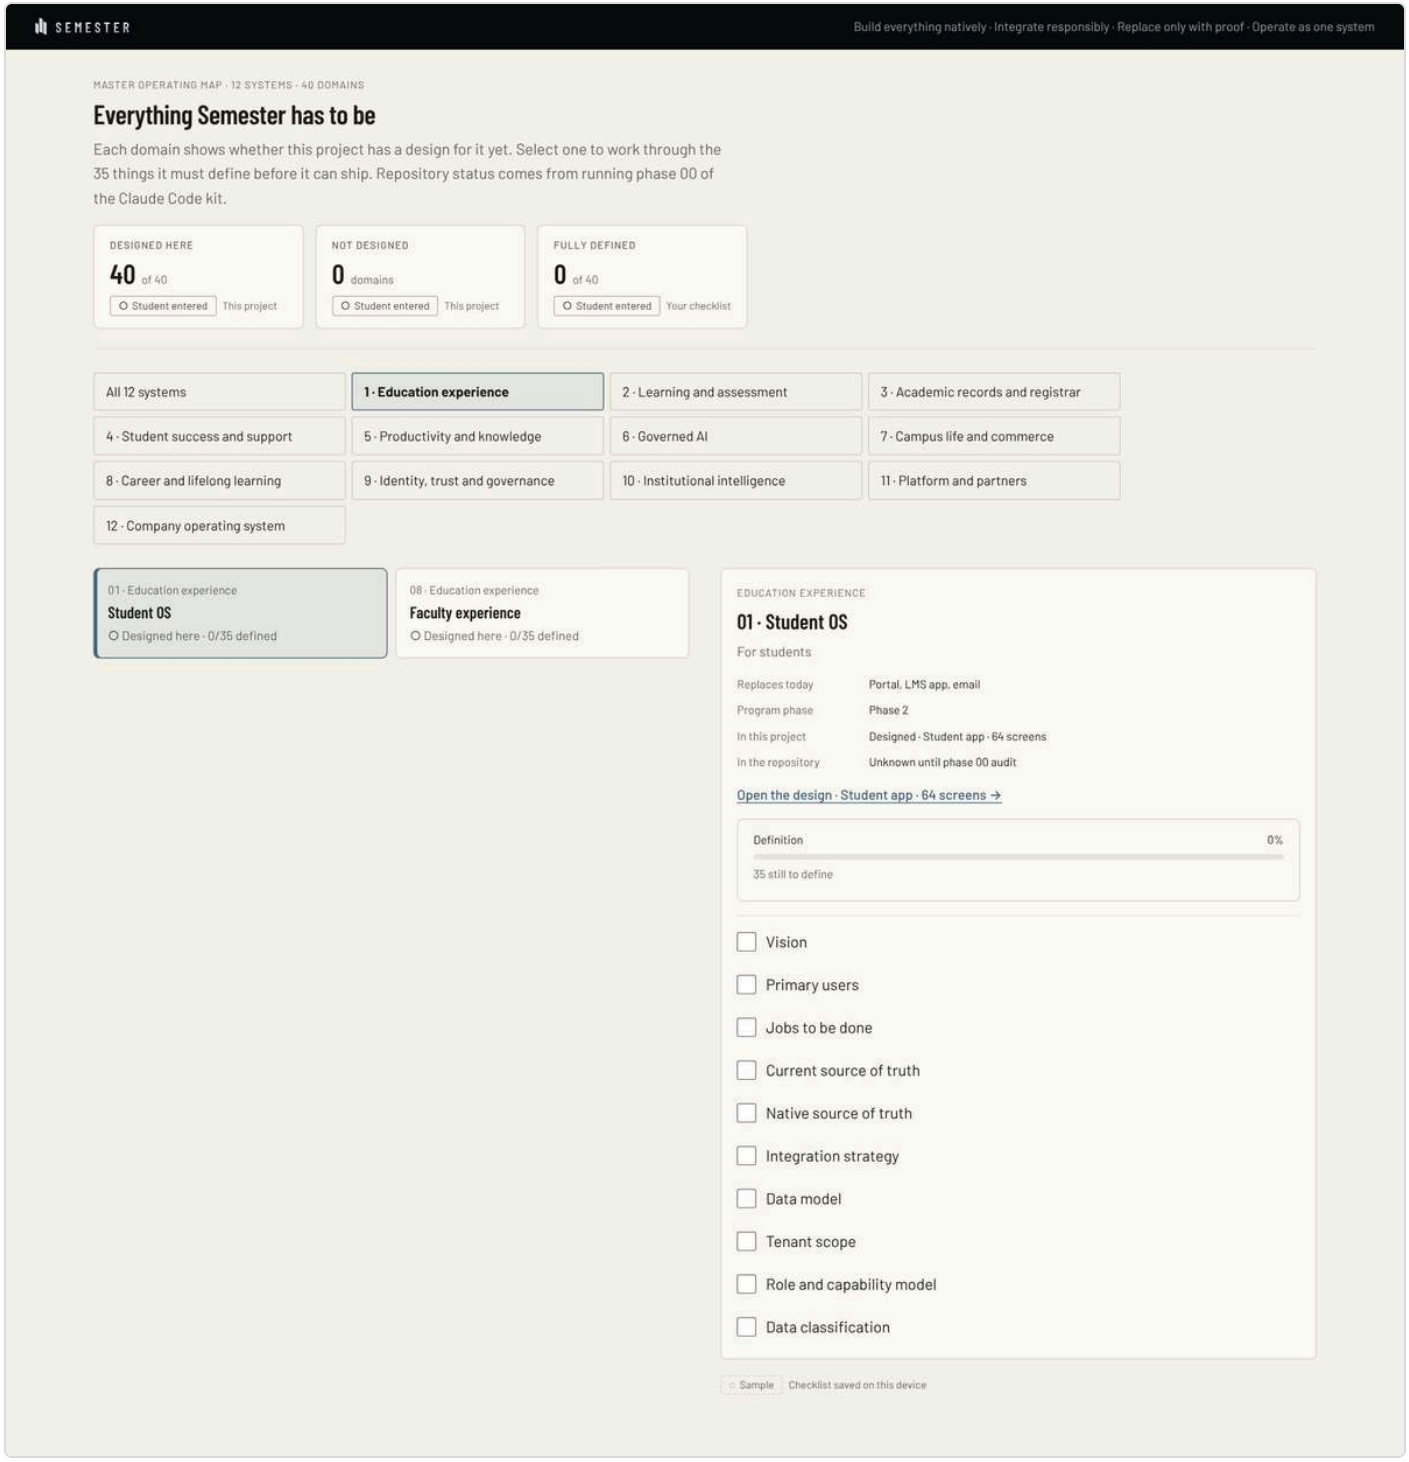

1 · Education experience

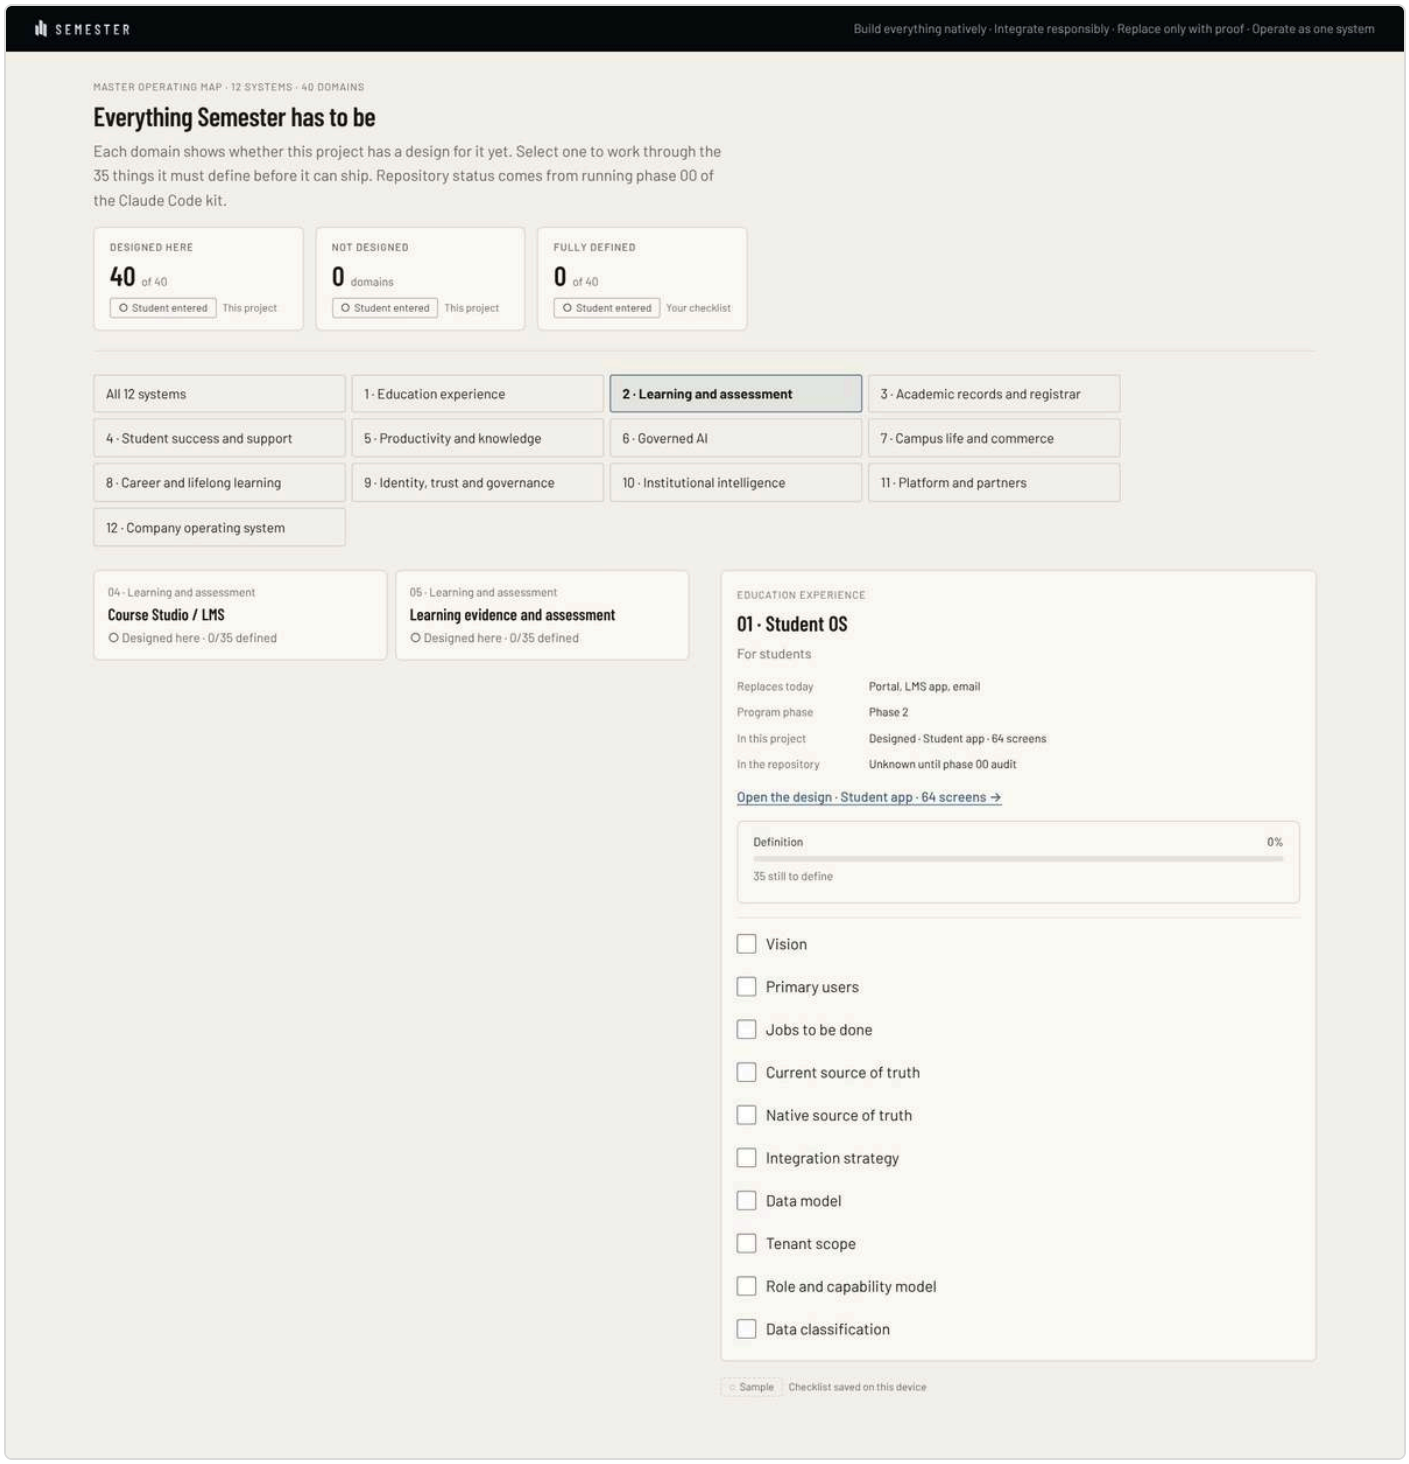

2 · Learning and assessment

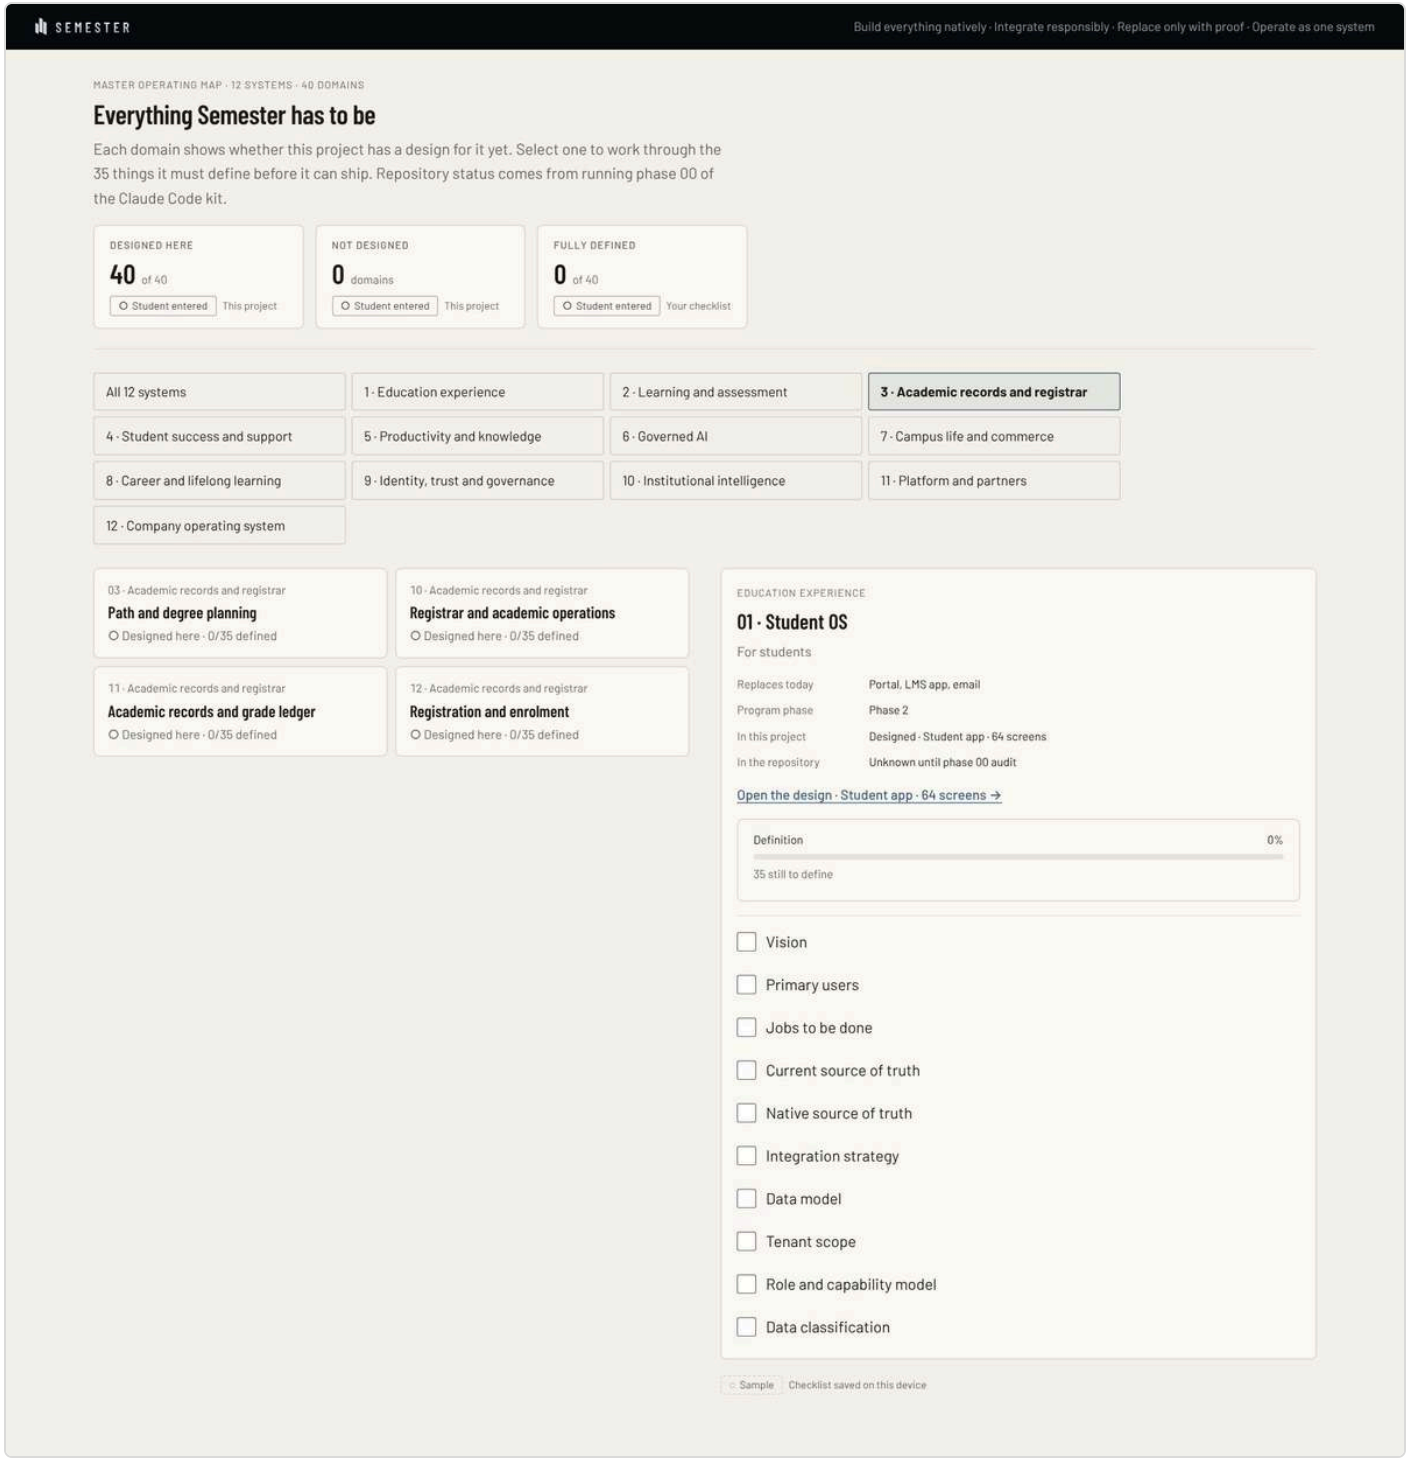

3 · Academic records and registrar

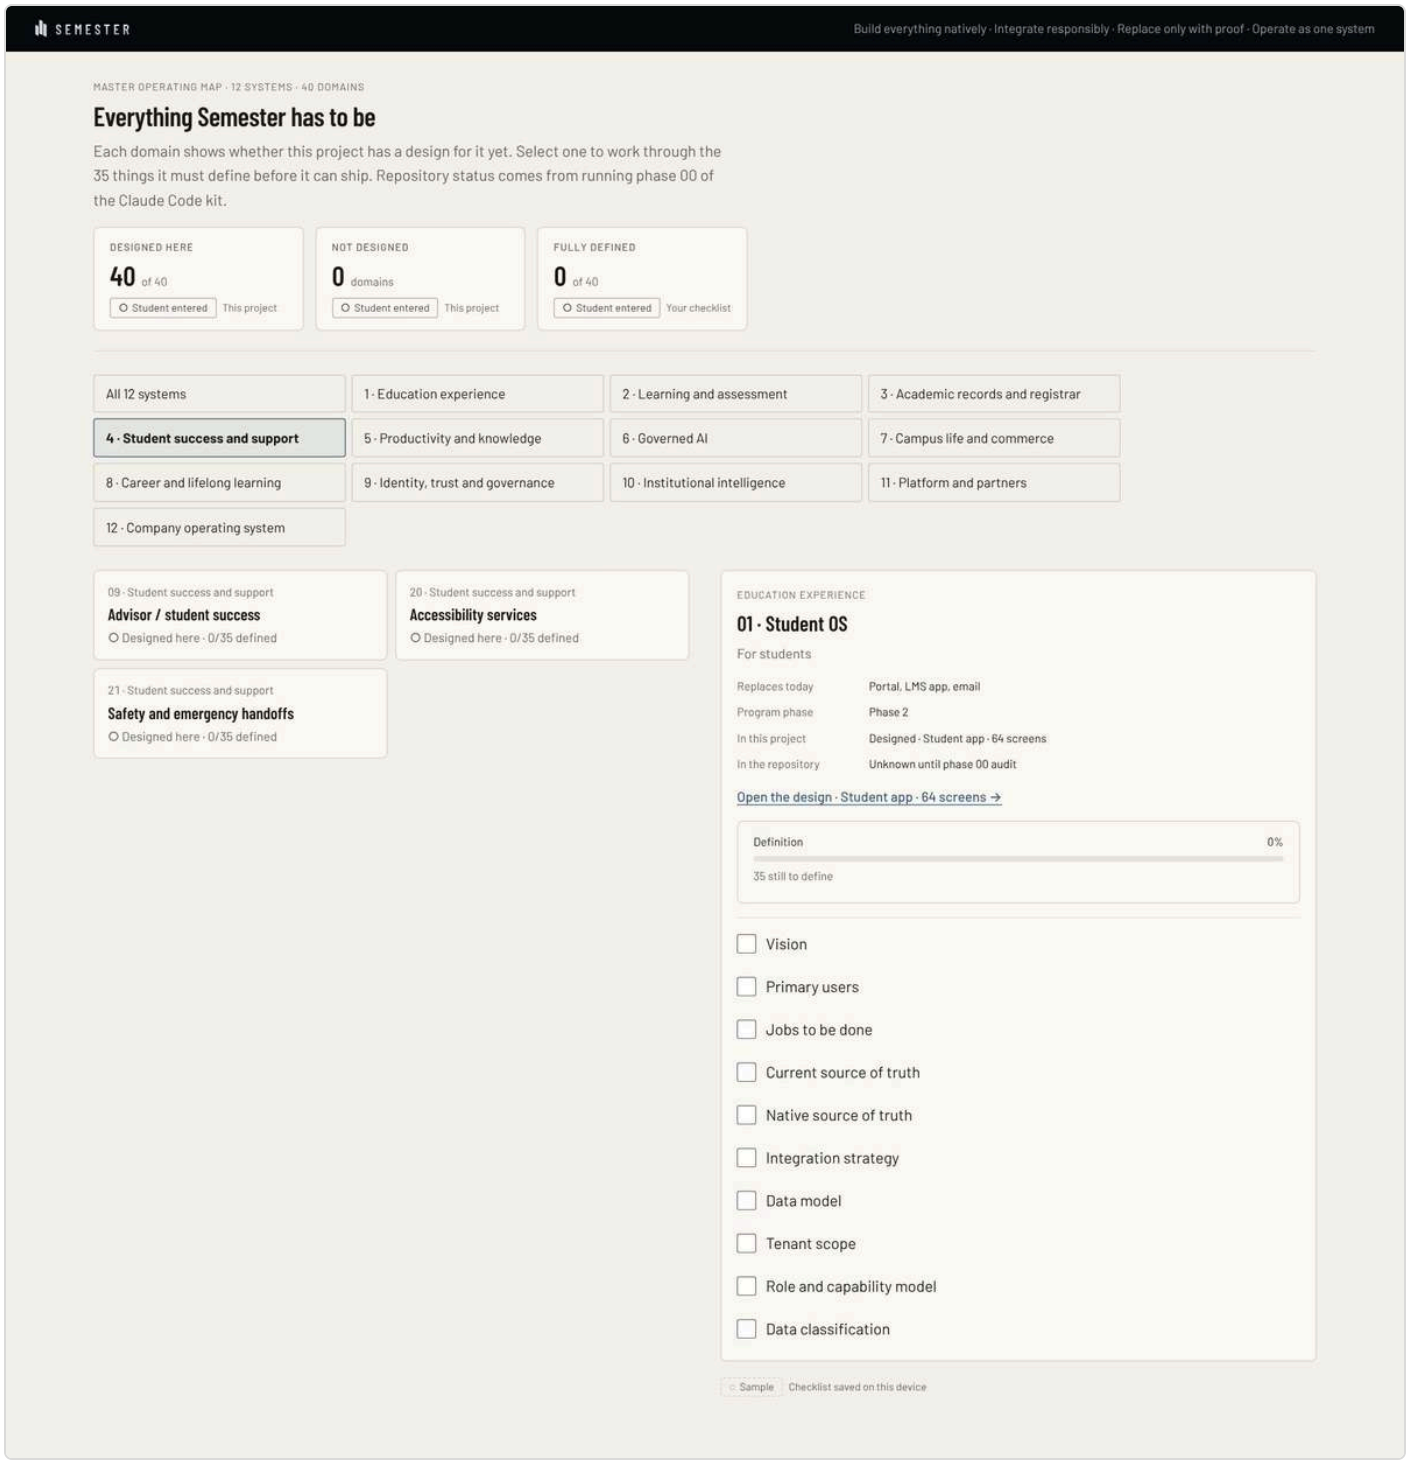

4 · Student success and support

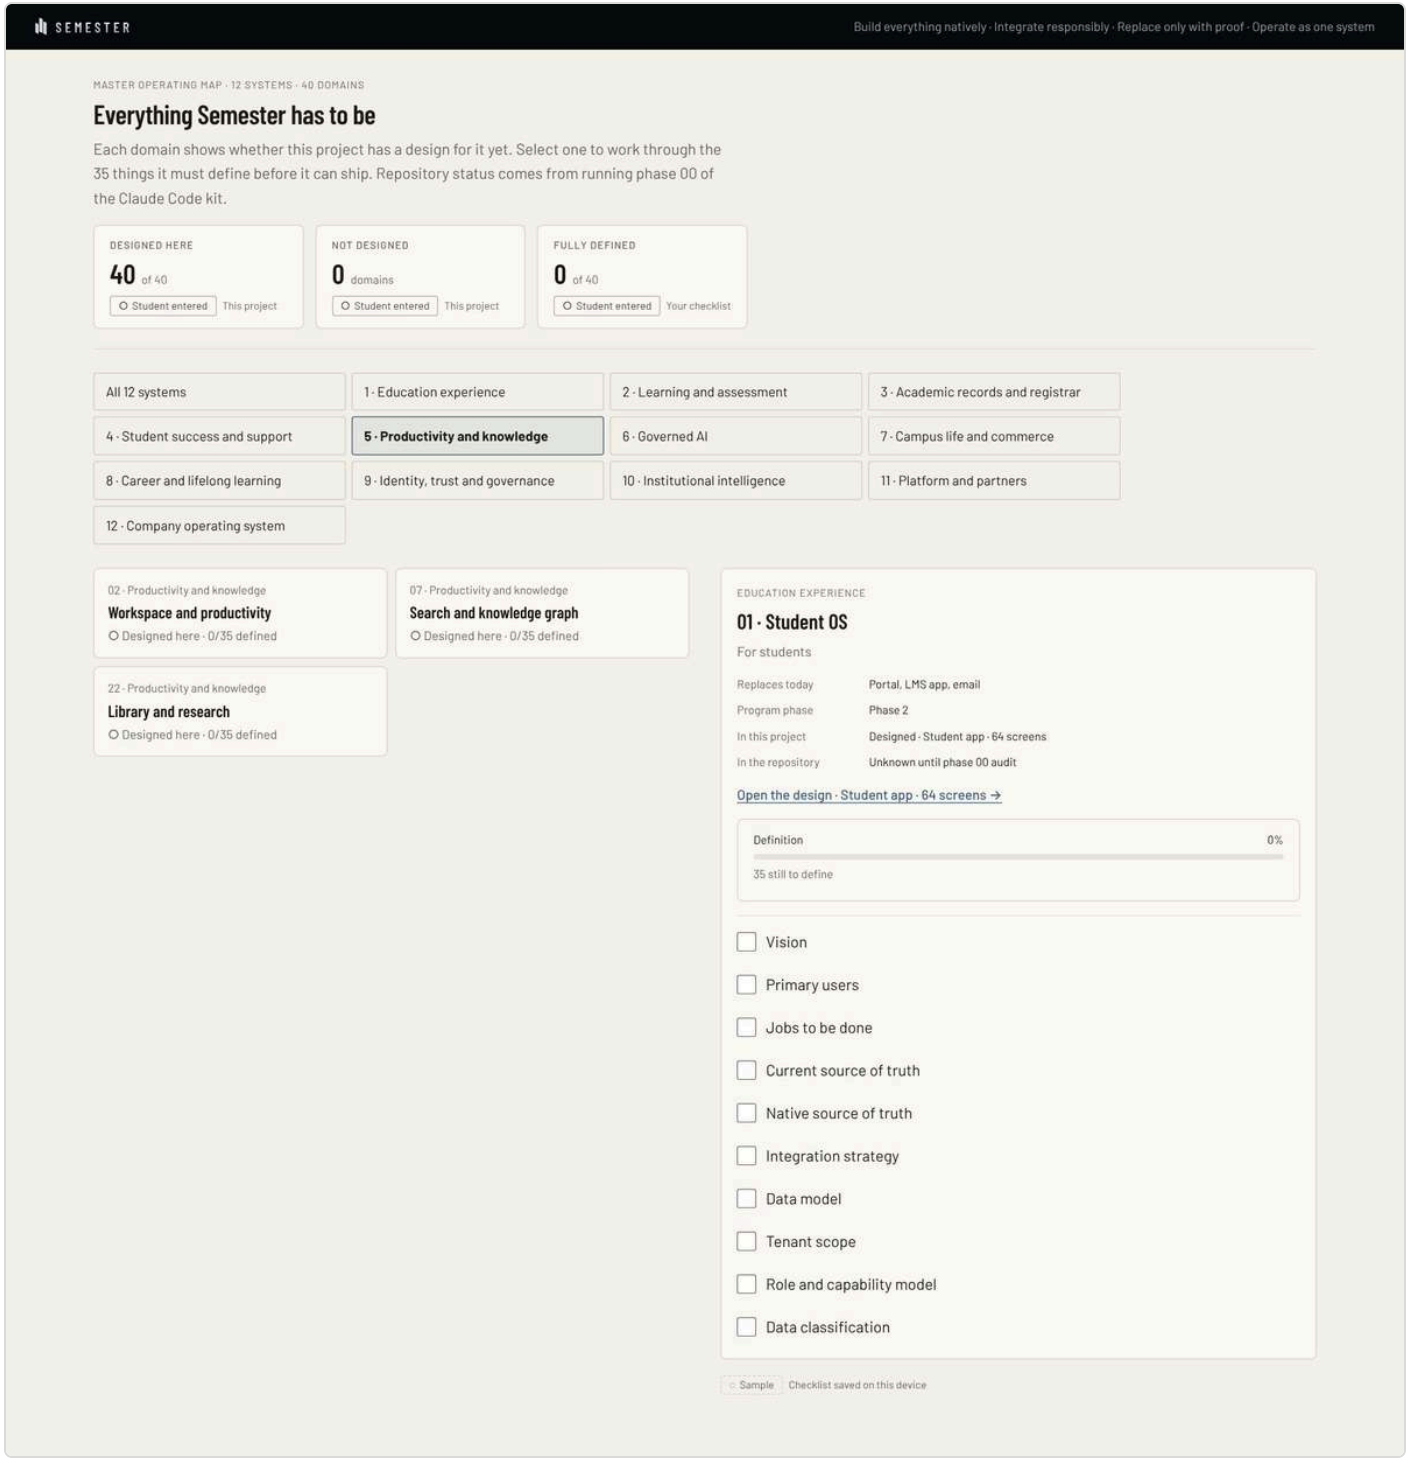

5 · Productivity and knowledge

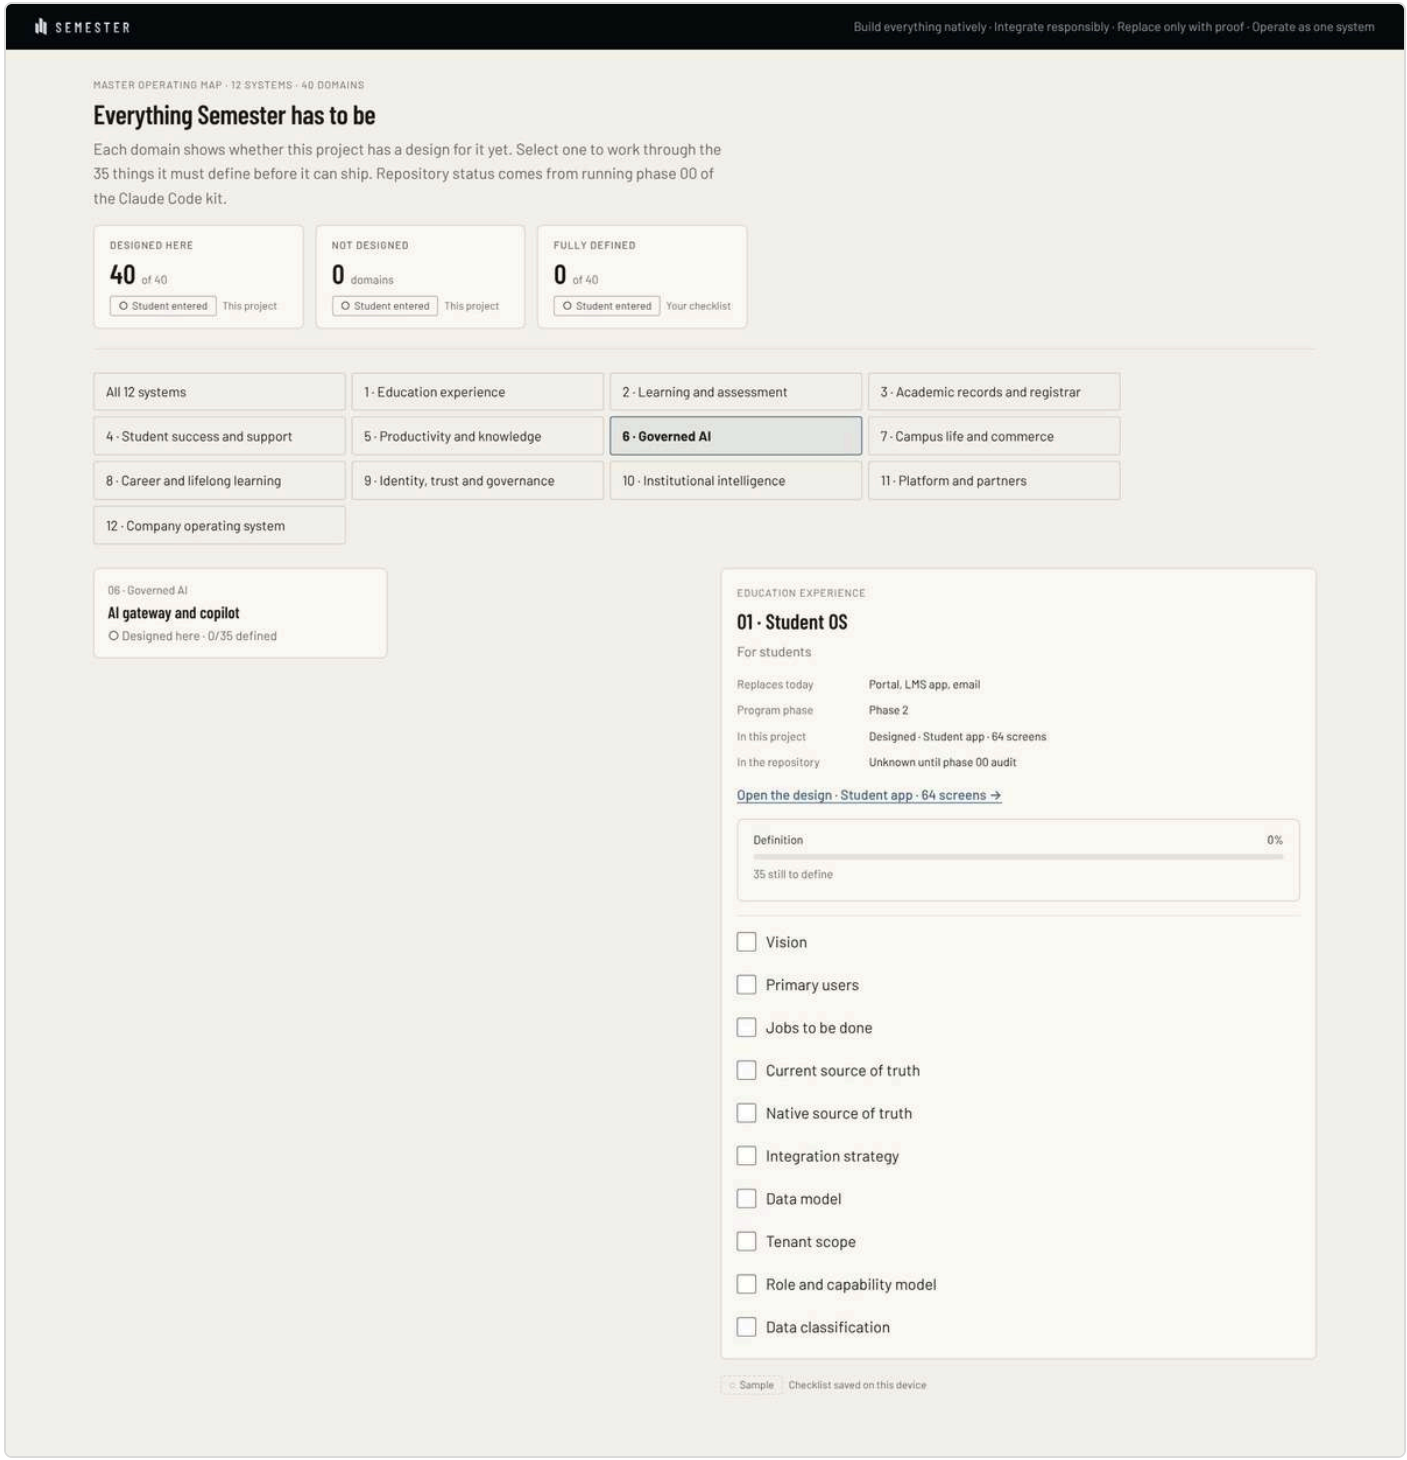

6 · Governed AI

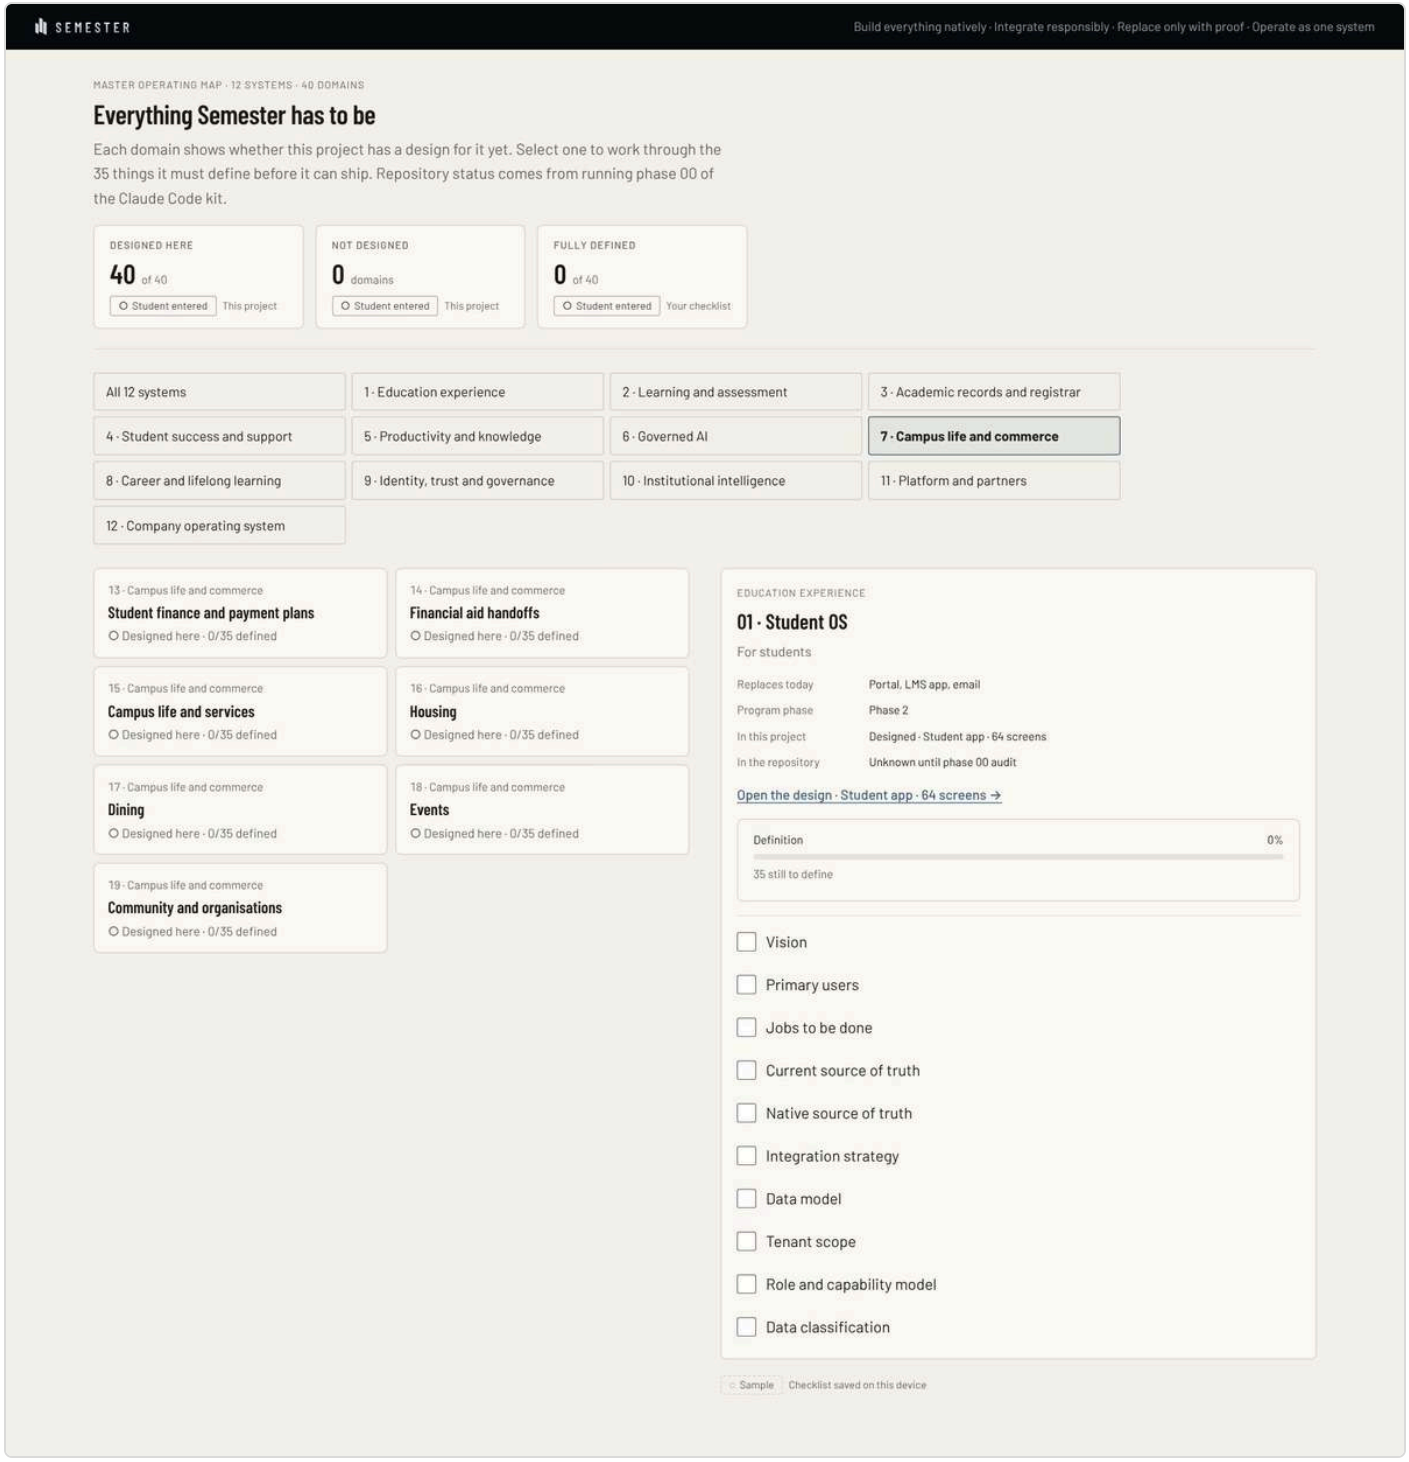

7 · Campus life and commerce

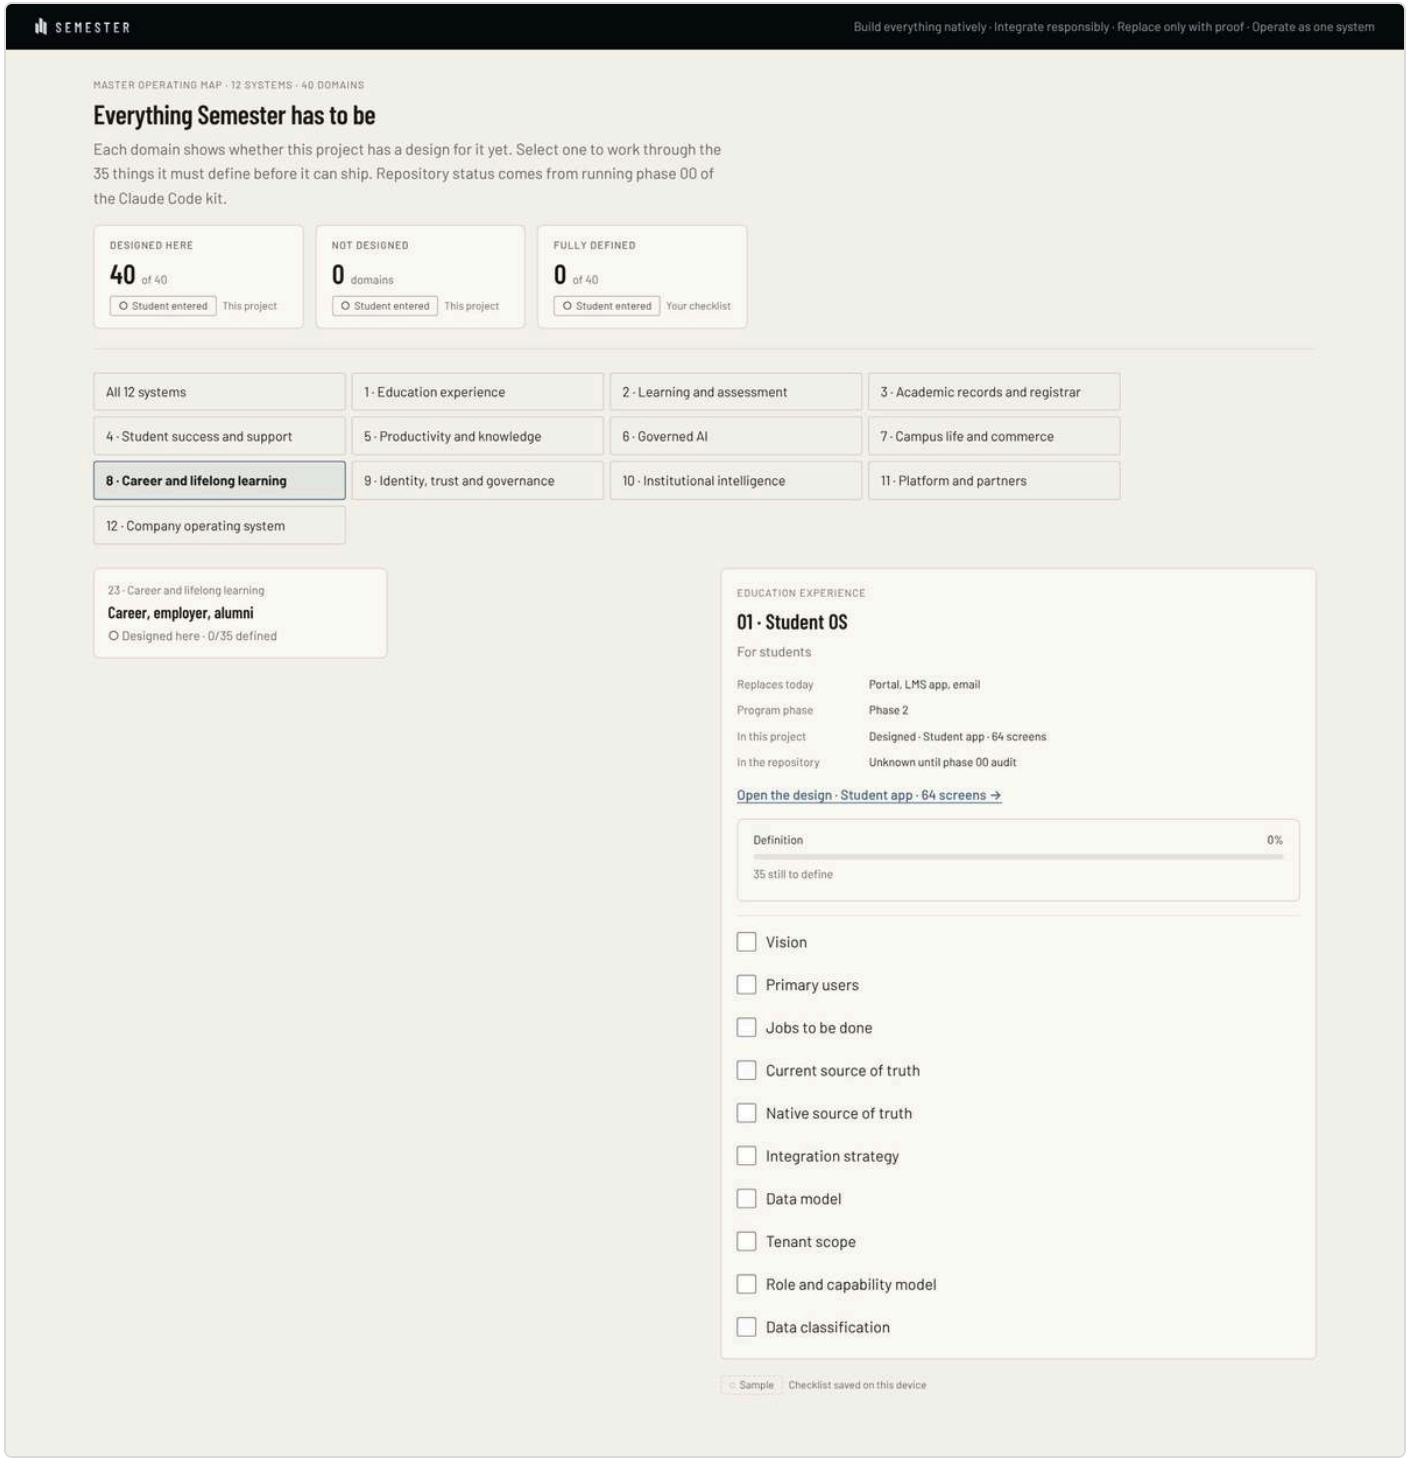

8 · Career and lifelong learning

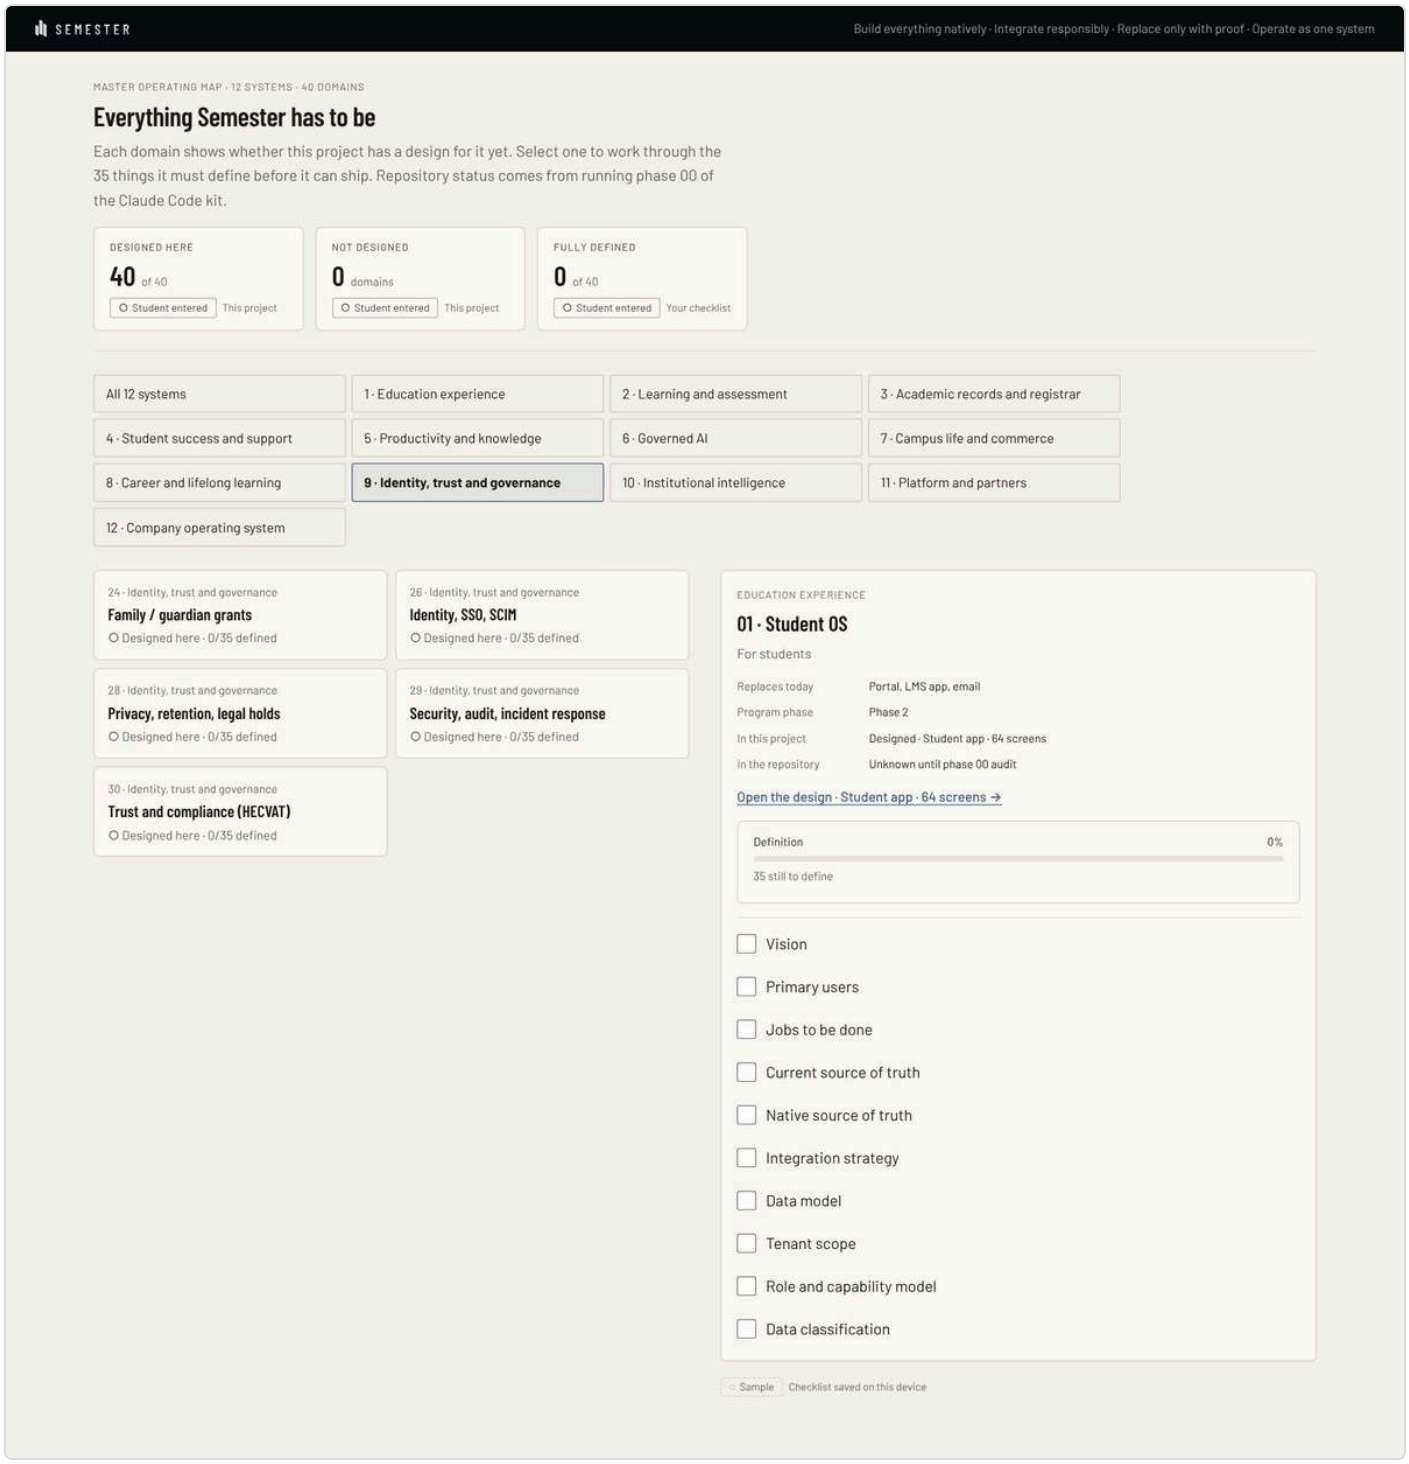

9 · Identity, trust and governance

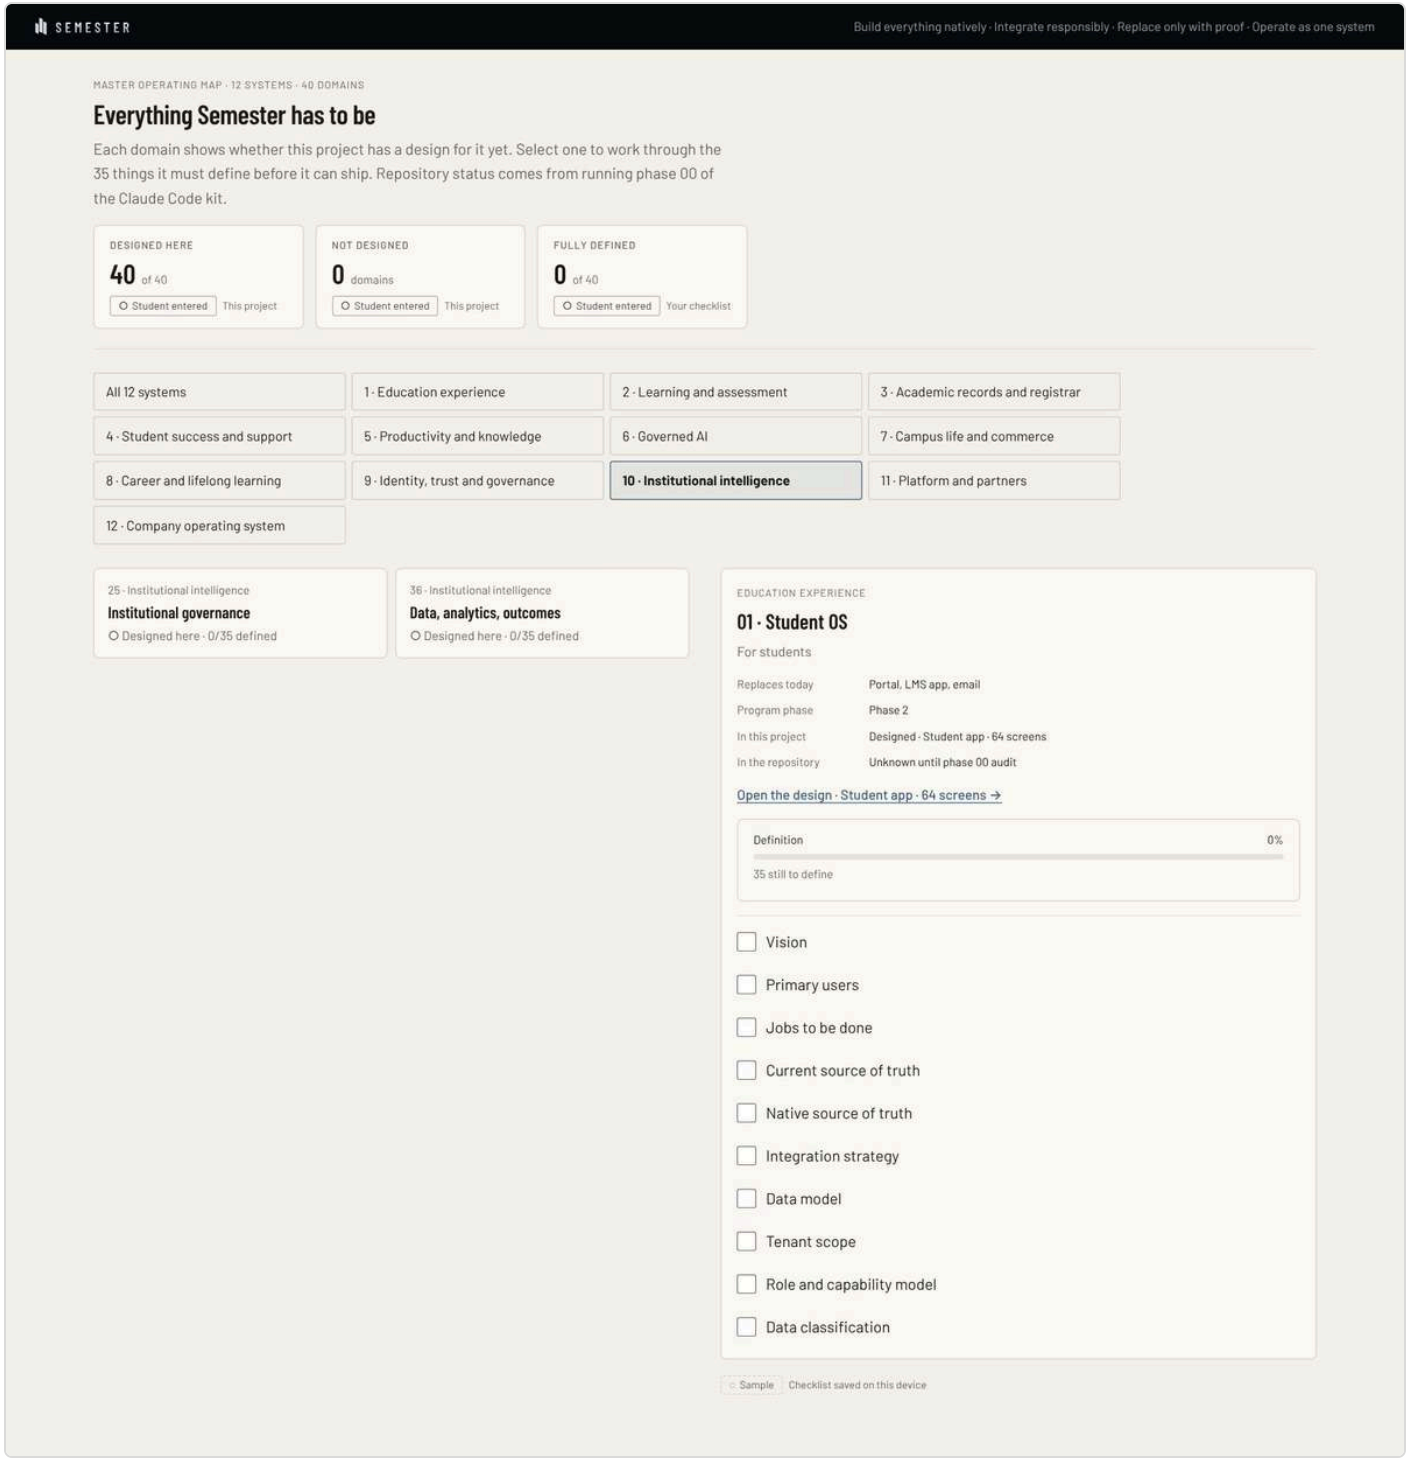

10 · Institutional intelligence

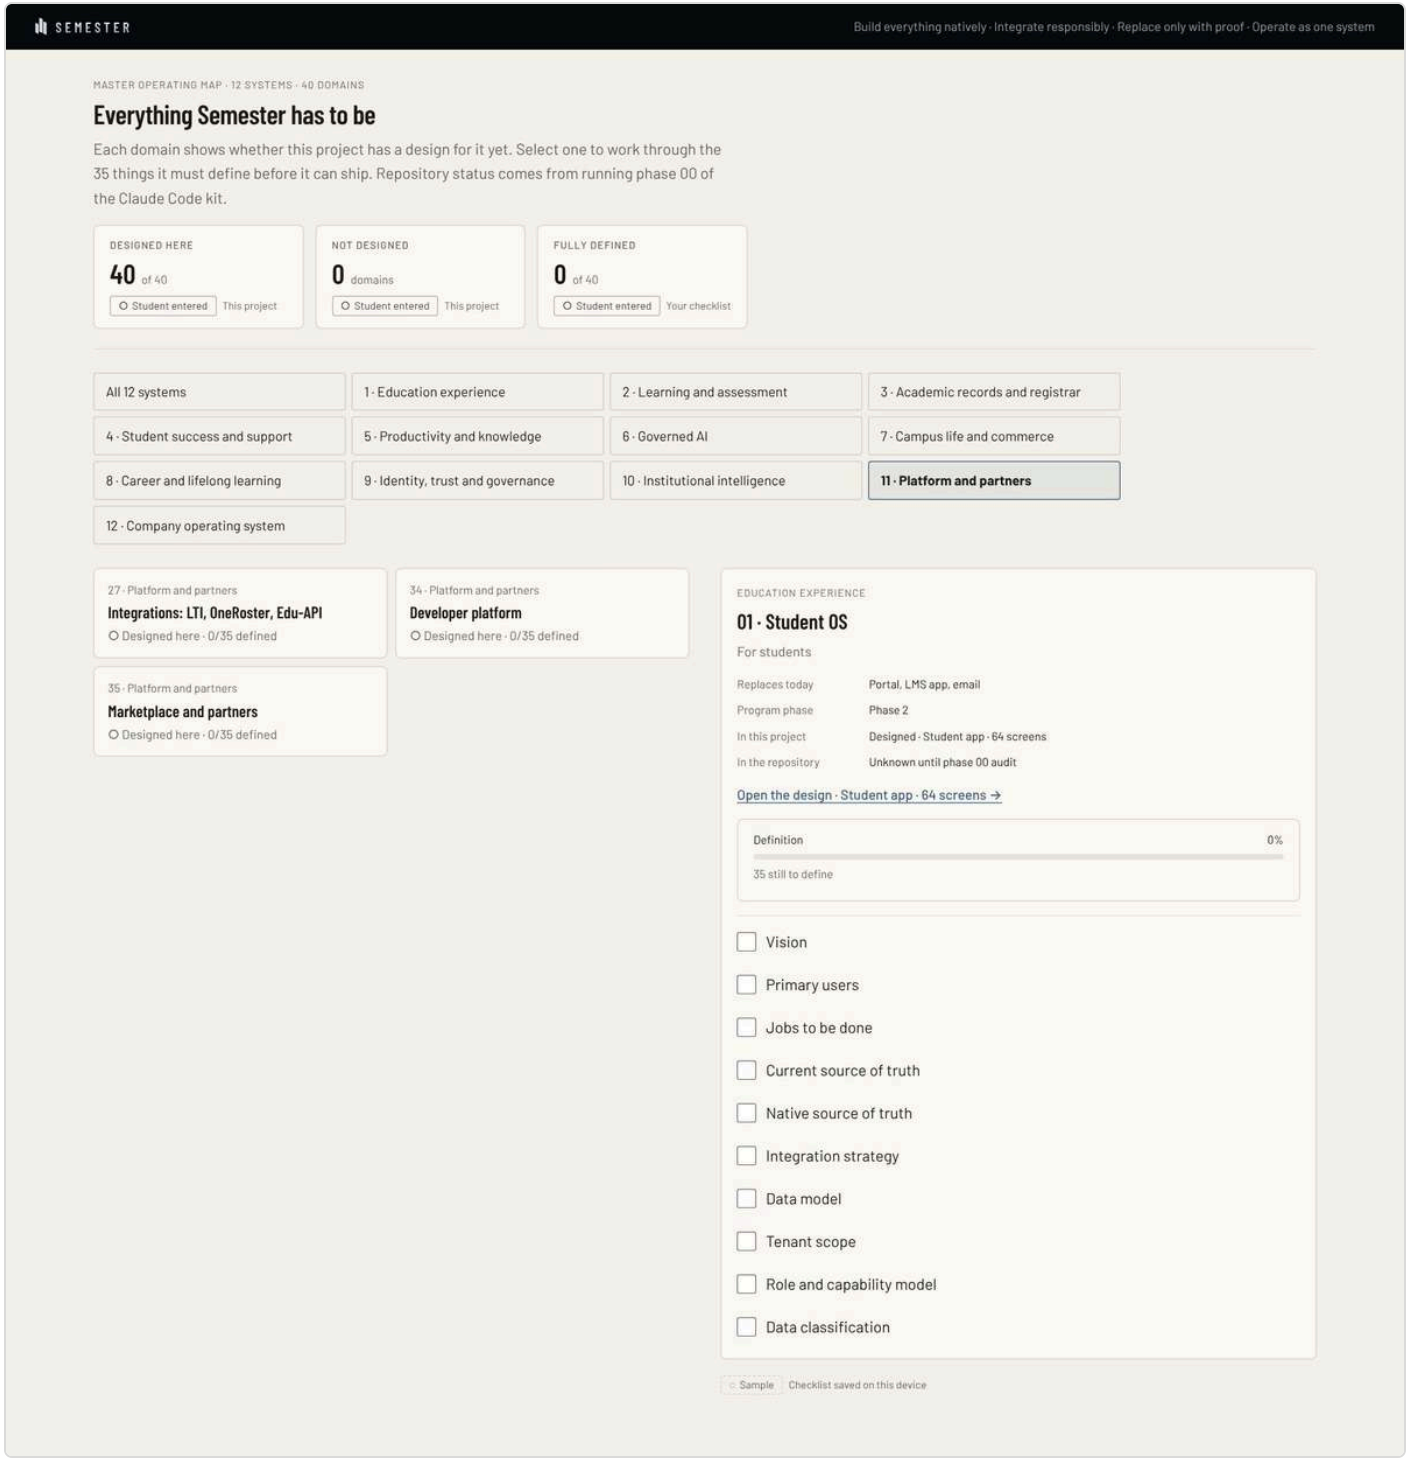

11 · Platform and partners

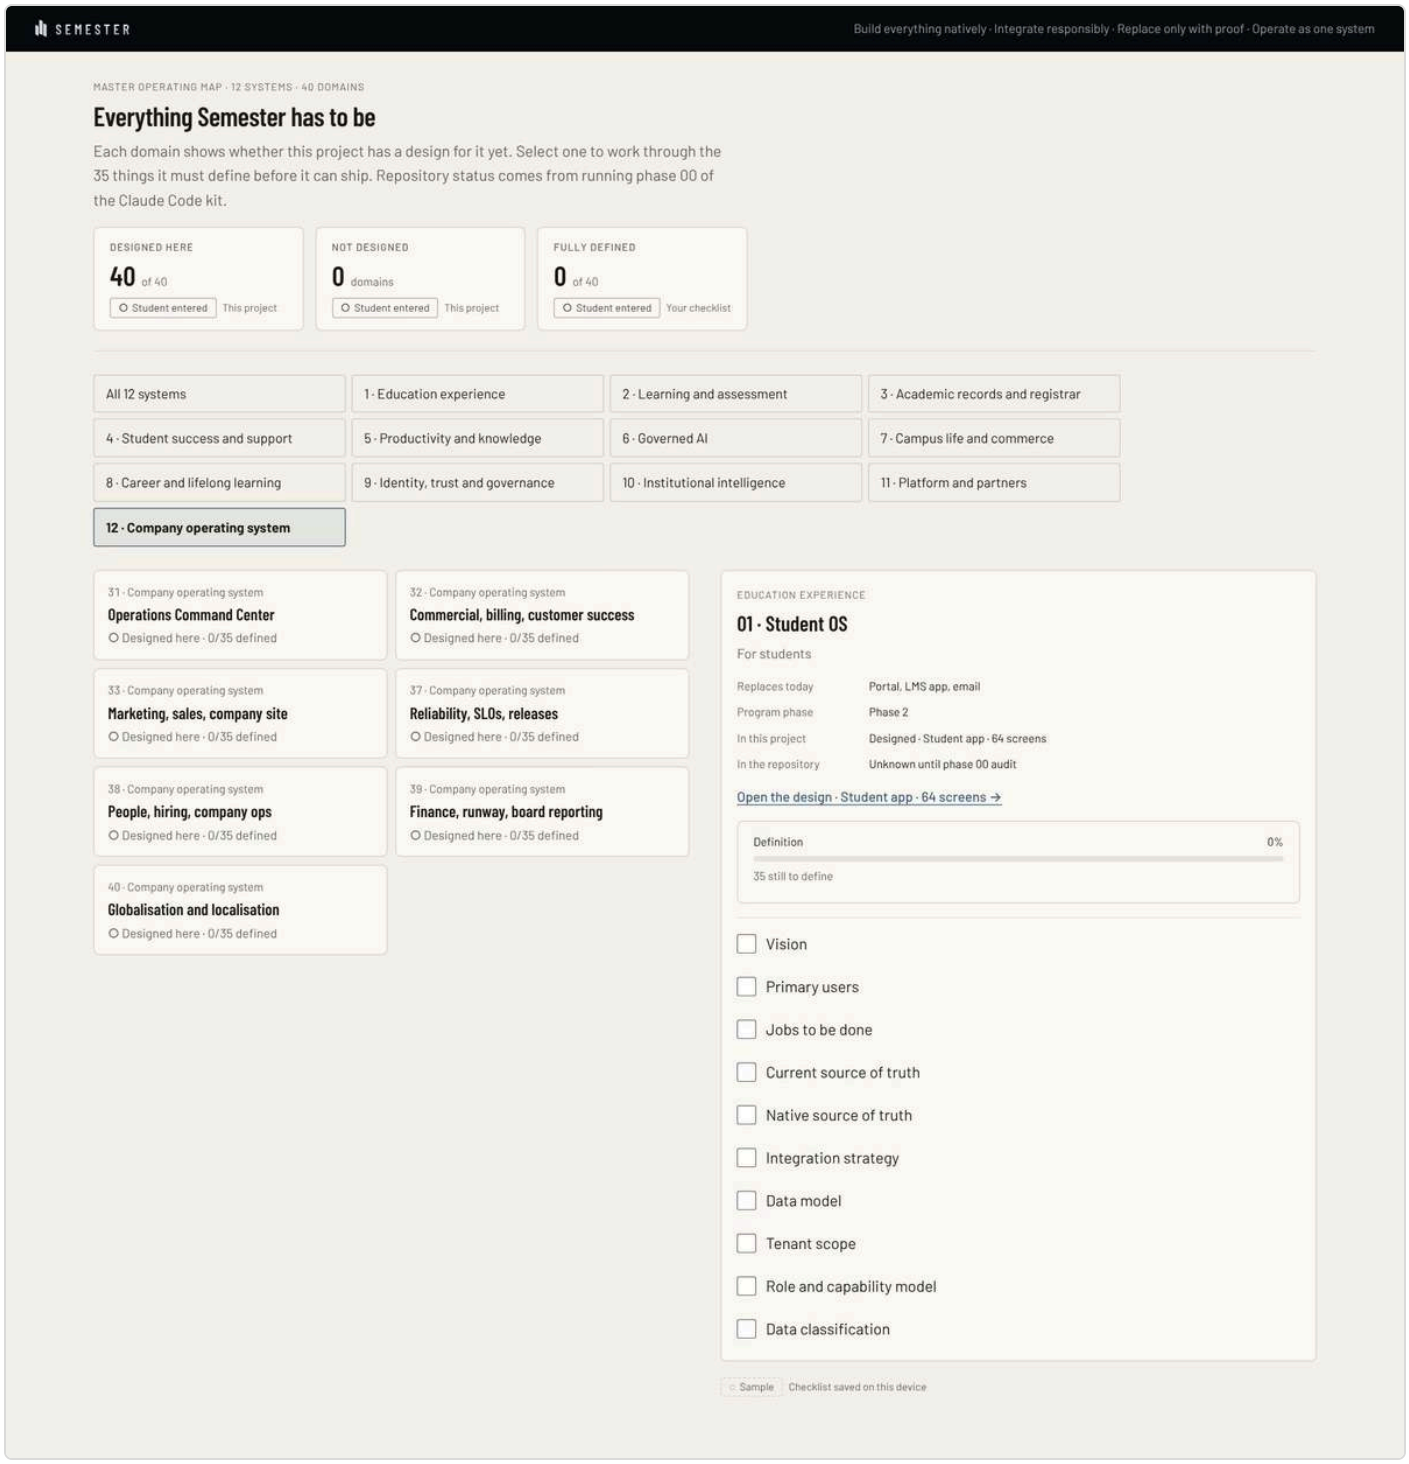

12 · Company operating system

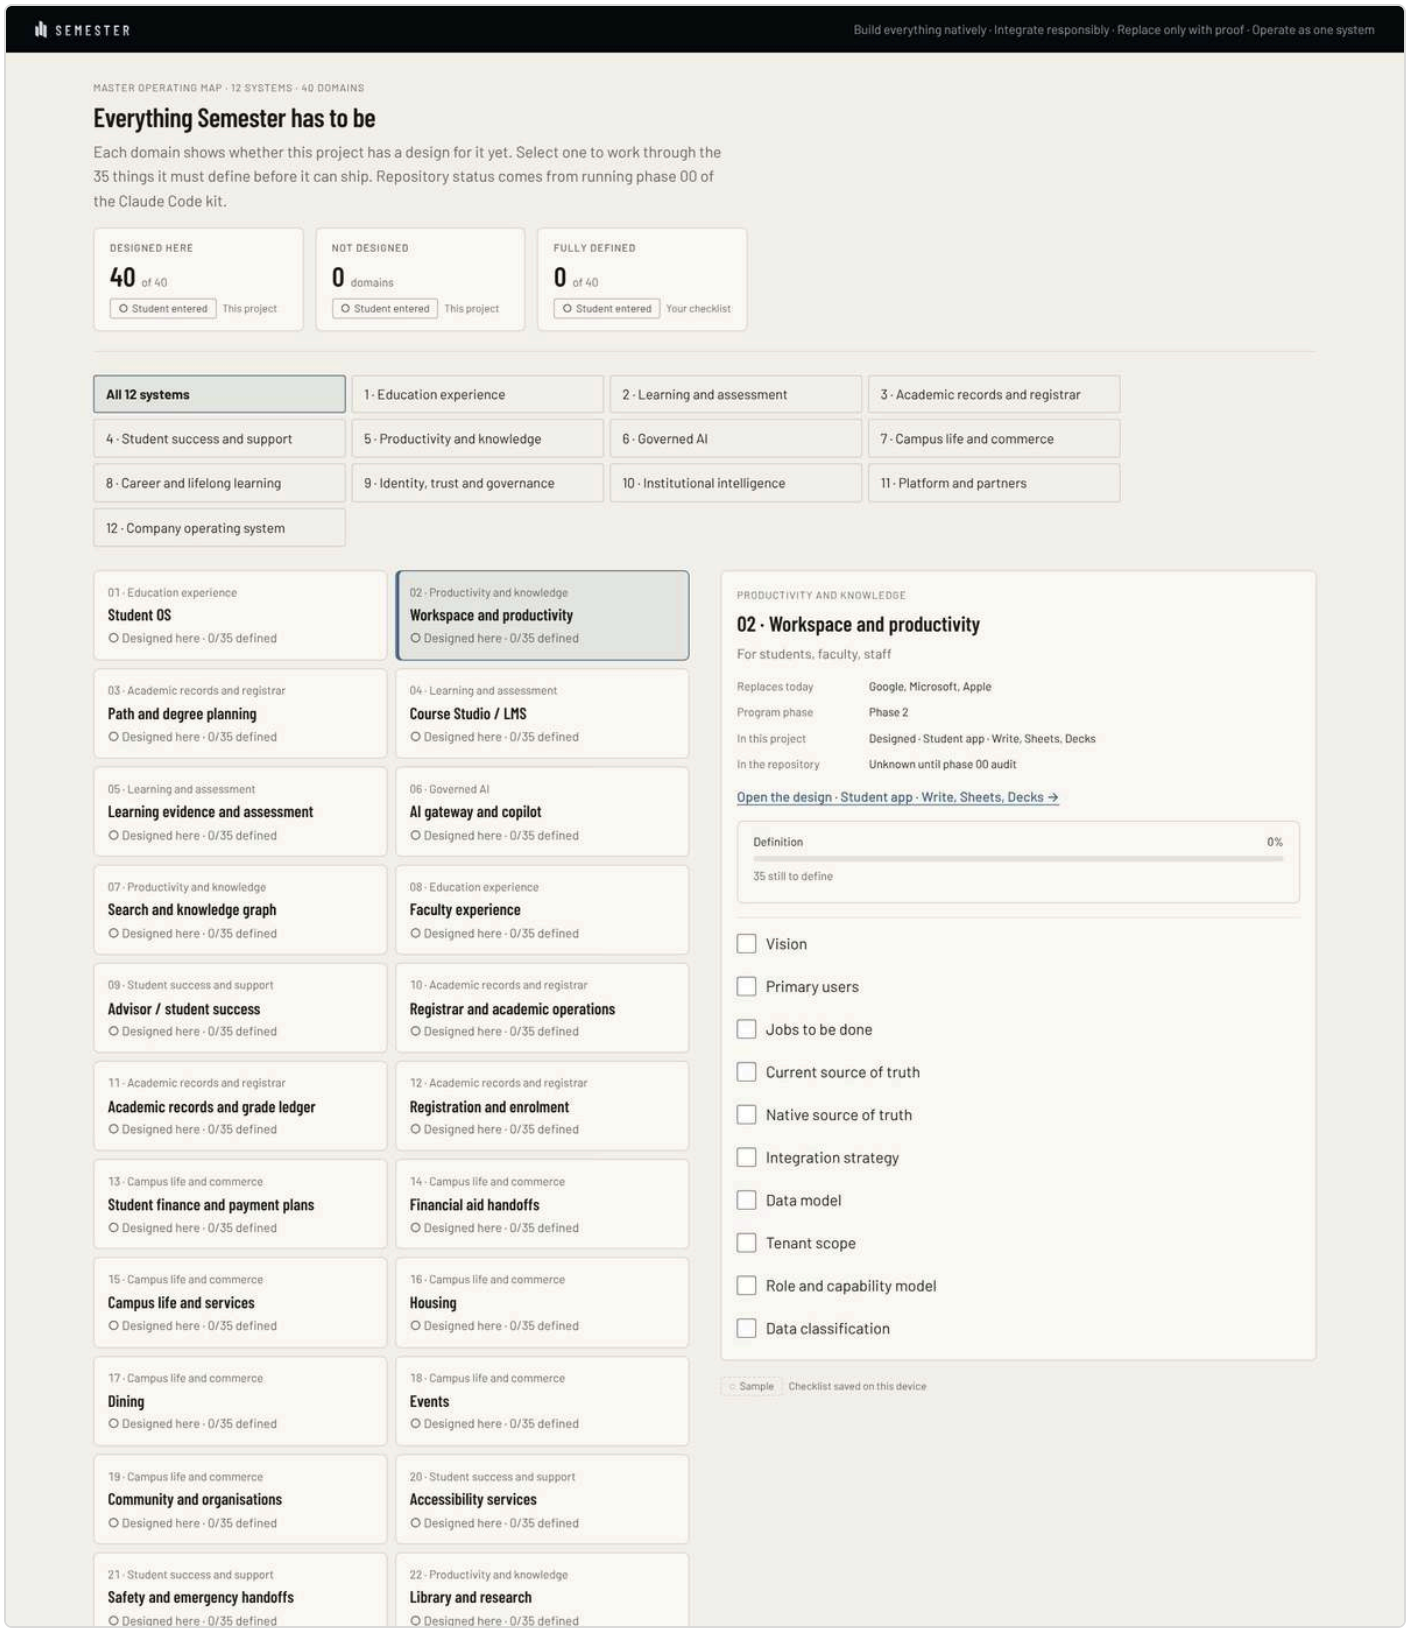

02 · Productivity and knowledge (1/2)

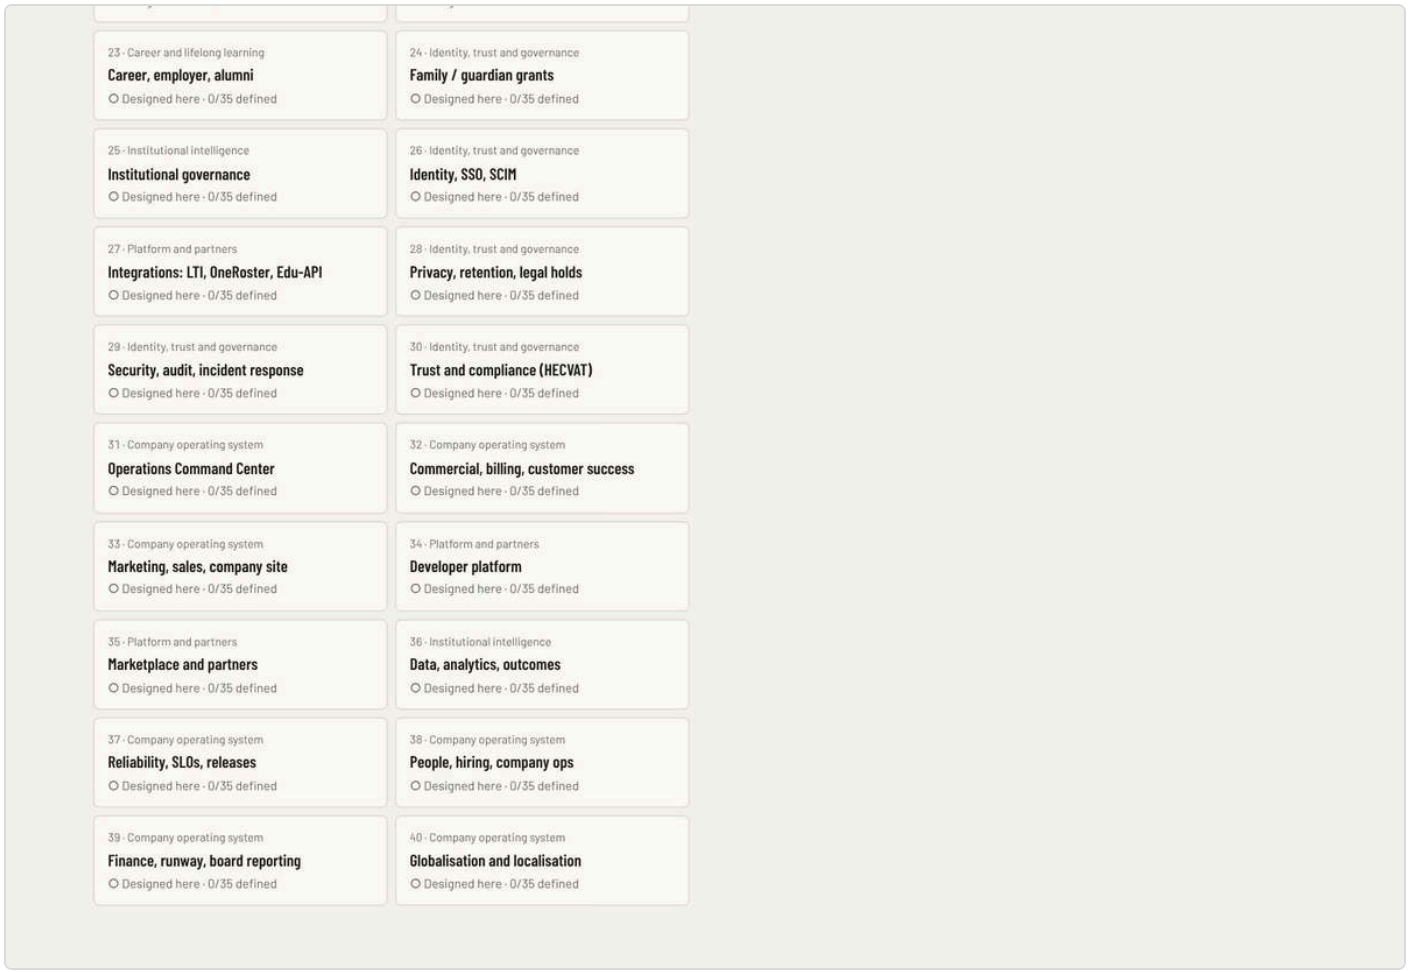

02 · Productivity and knowledge (2/2)

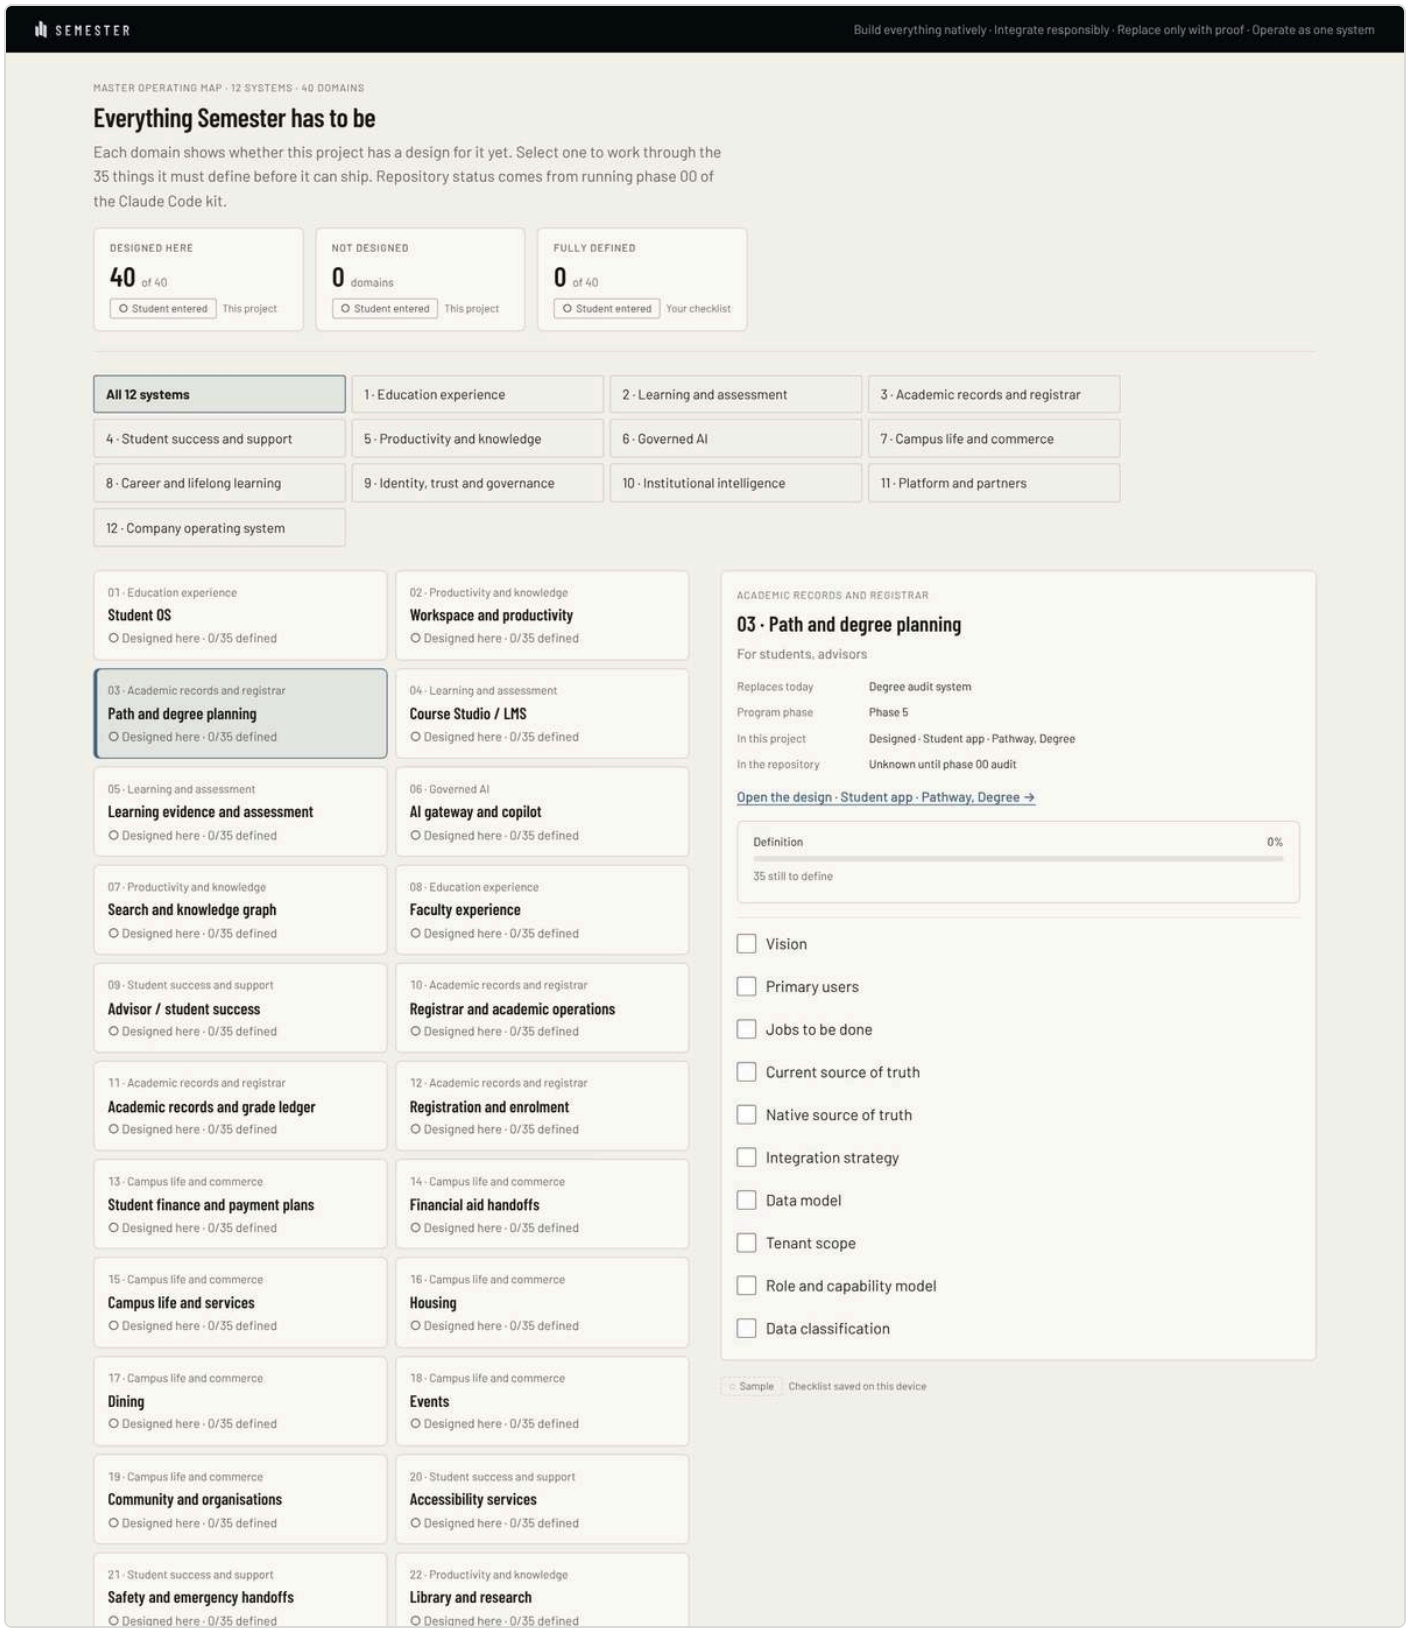

03 · Academic records and registrar (1/2)

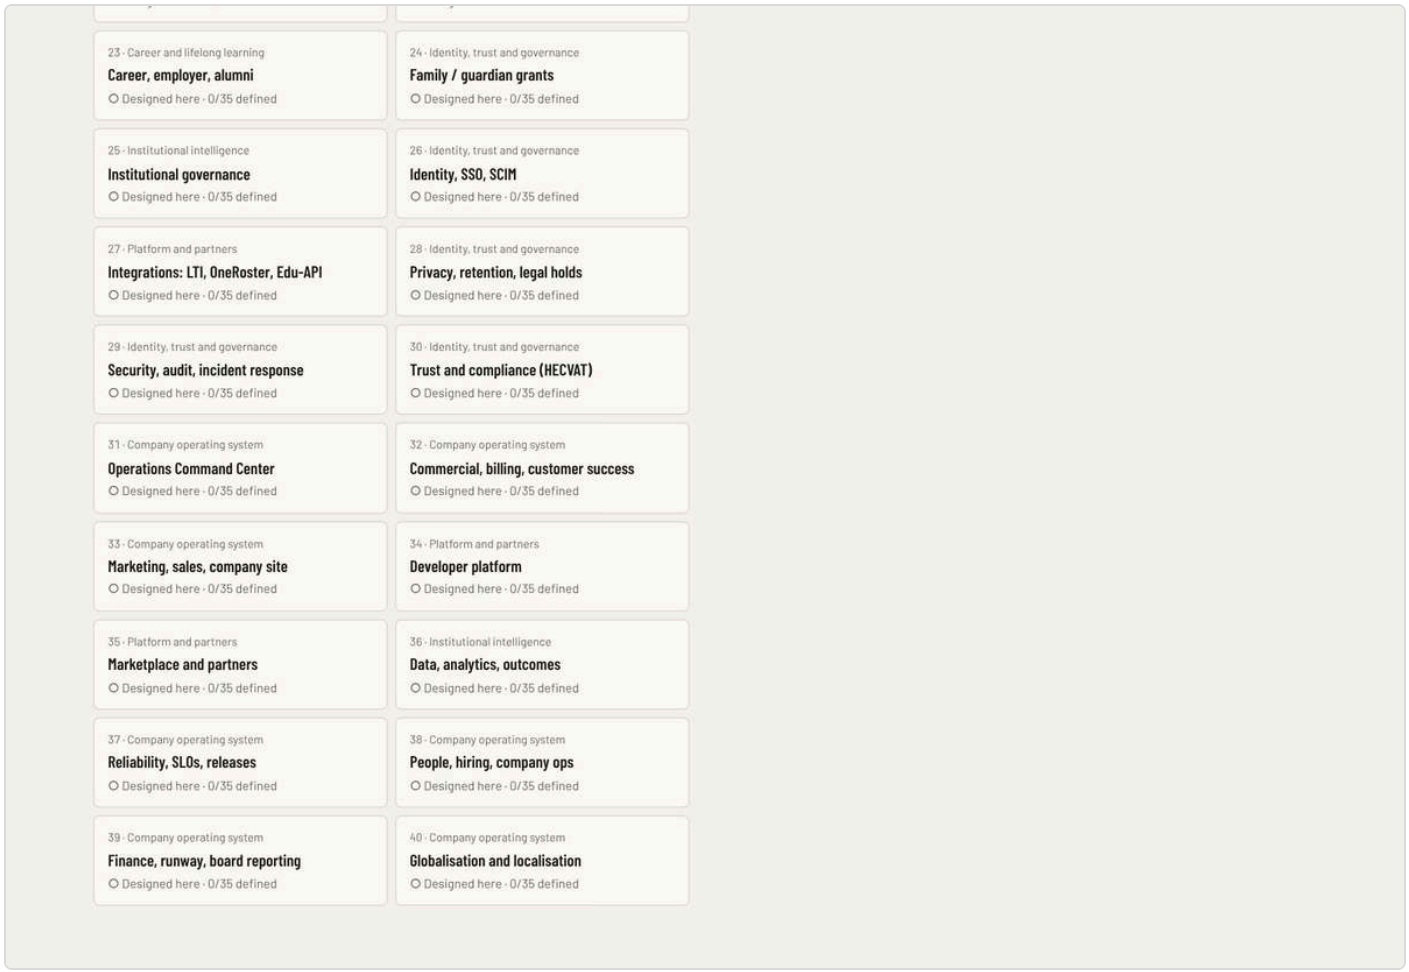

03 · Academic records and registrar (2/2)

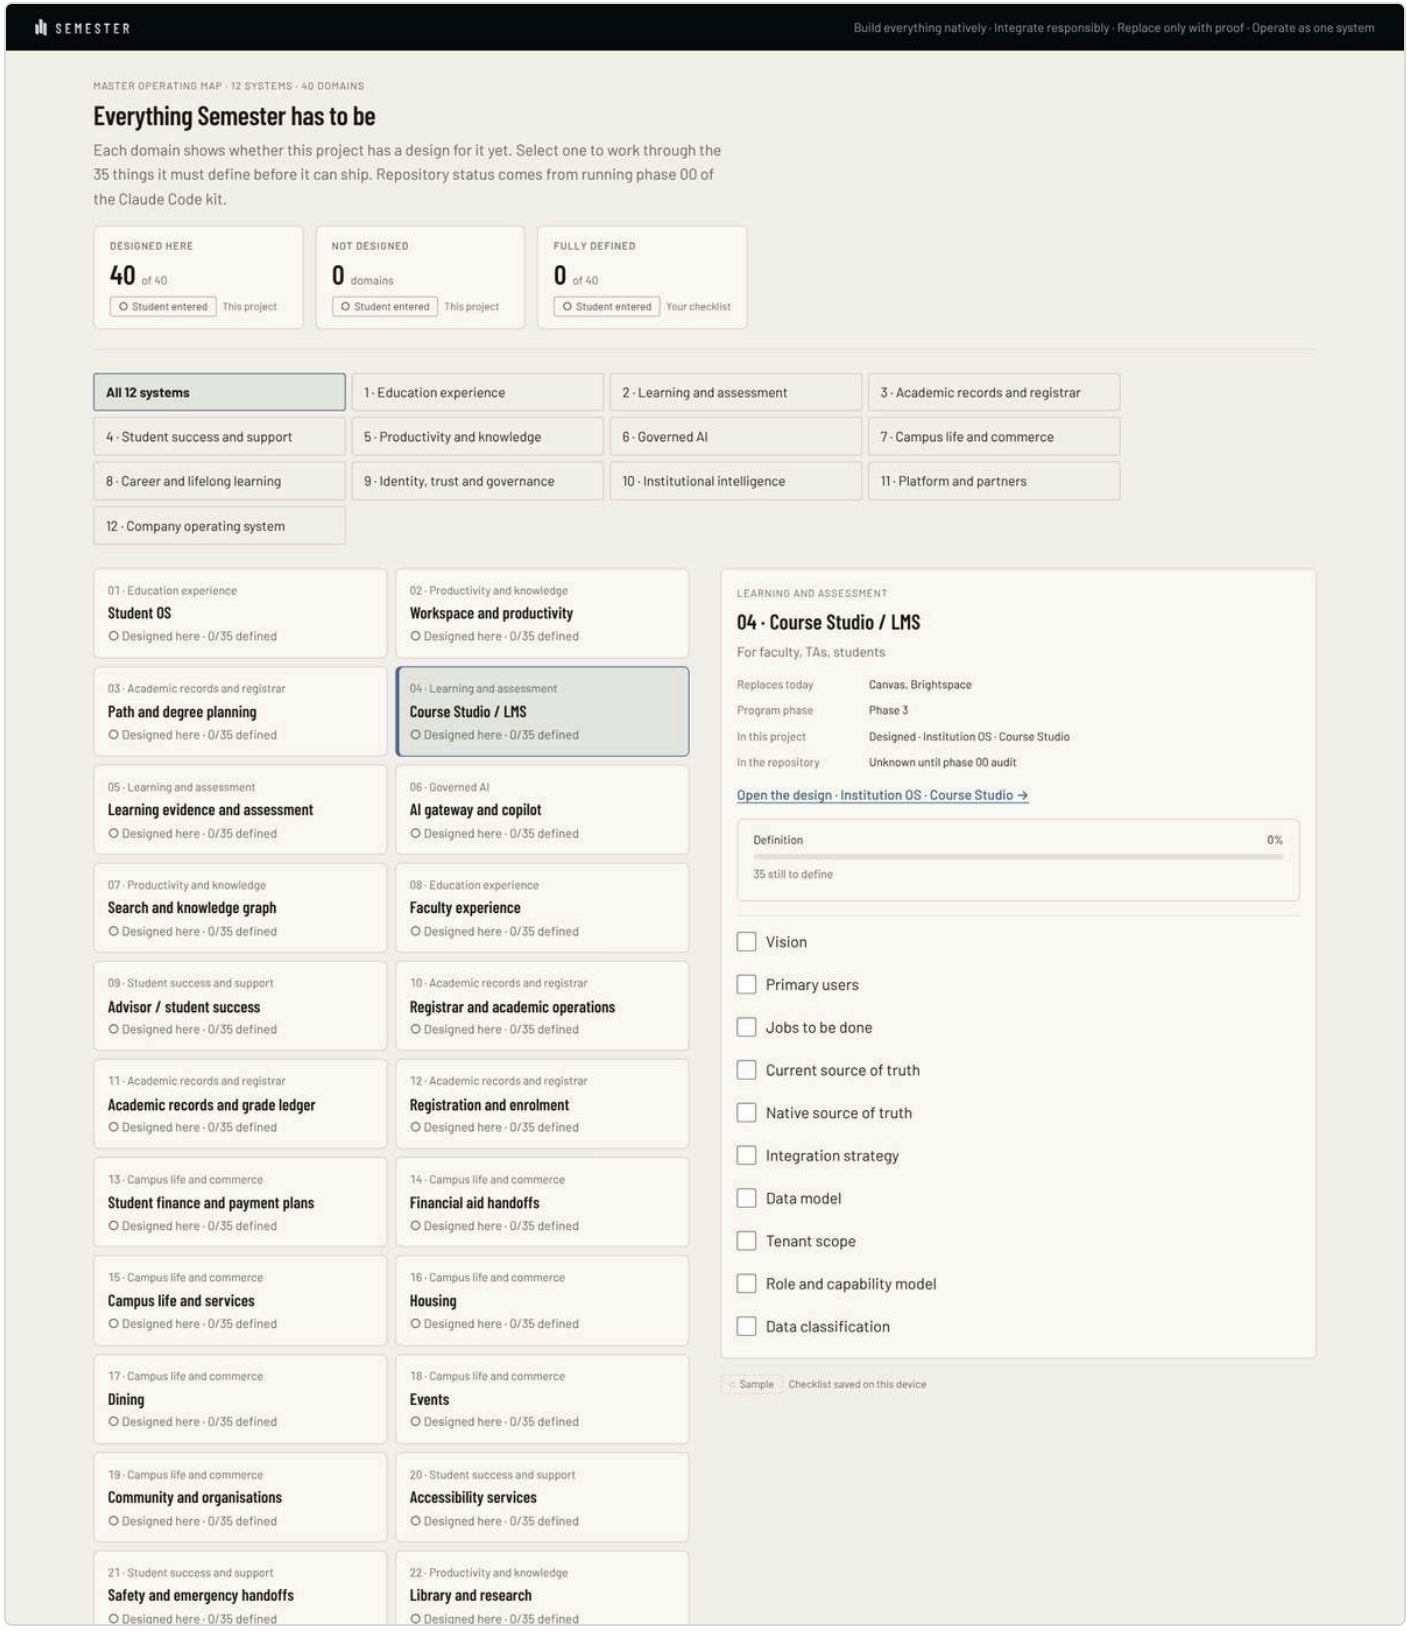

04 · Learning and assessment (1/2)

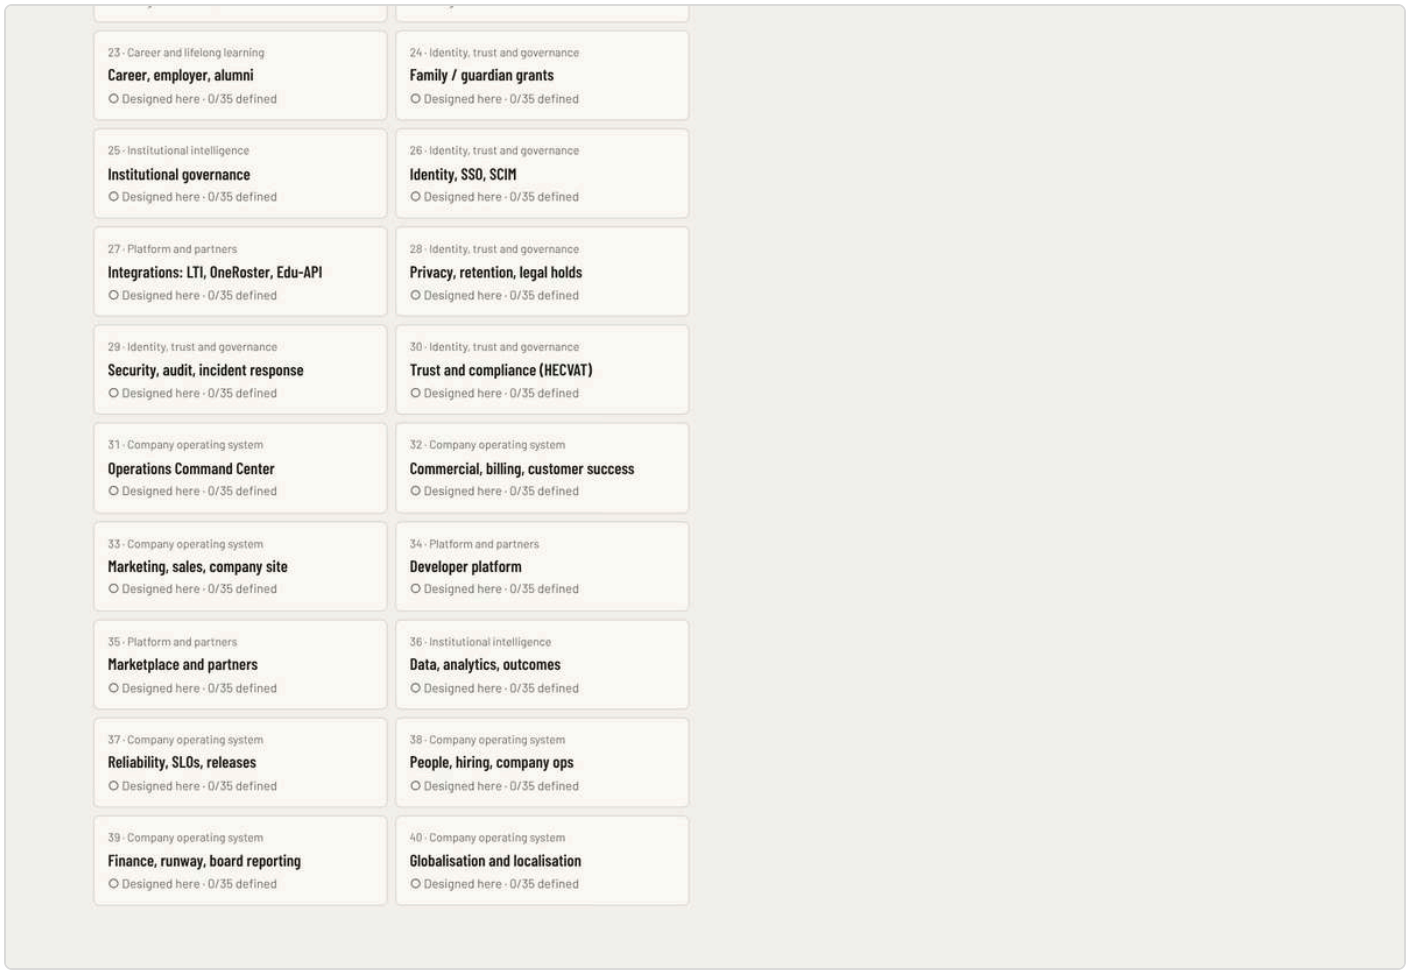

04 · Learning and assessment (2/2)

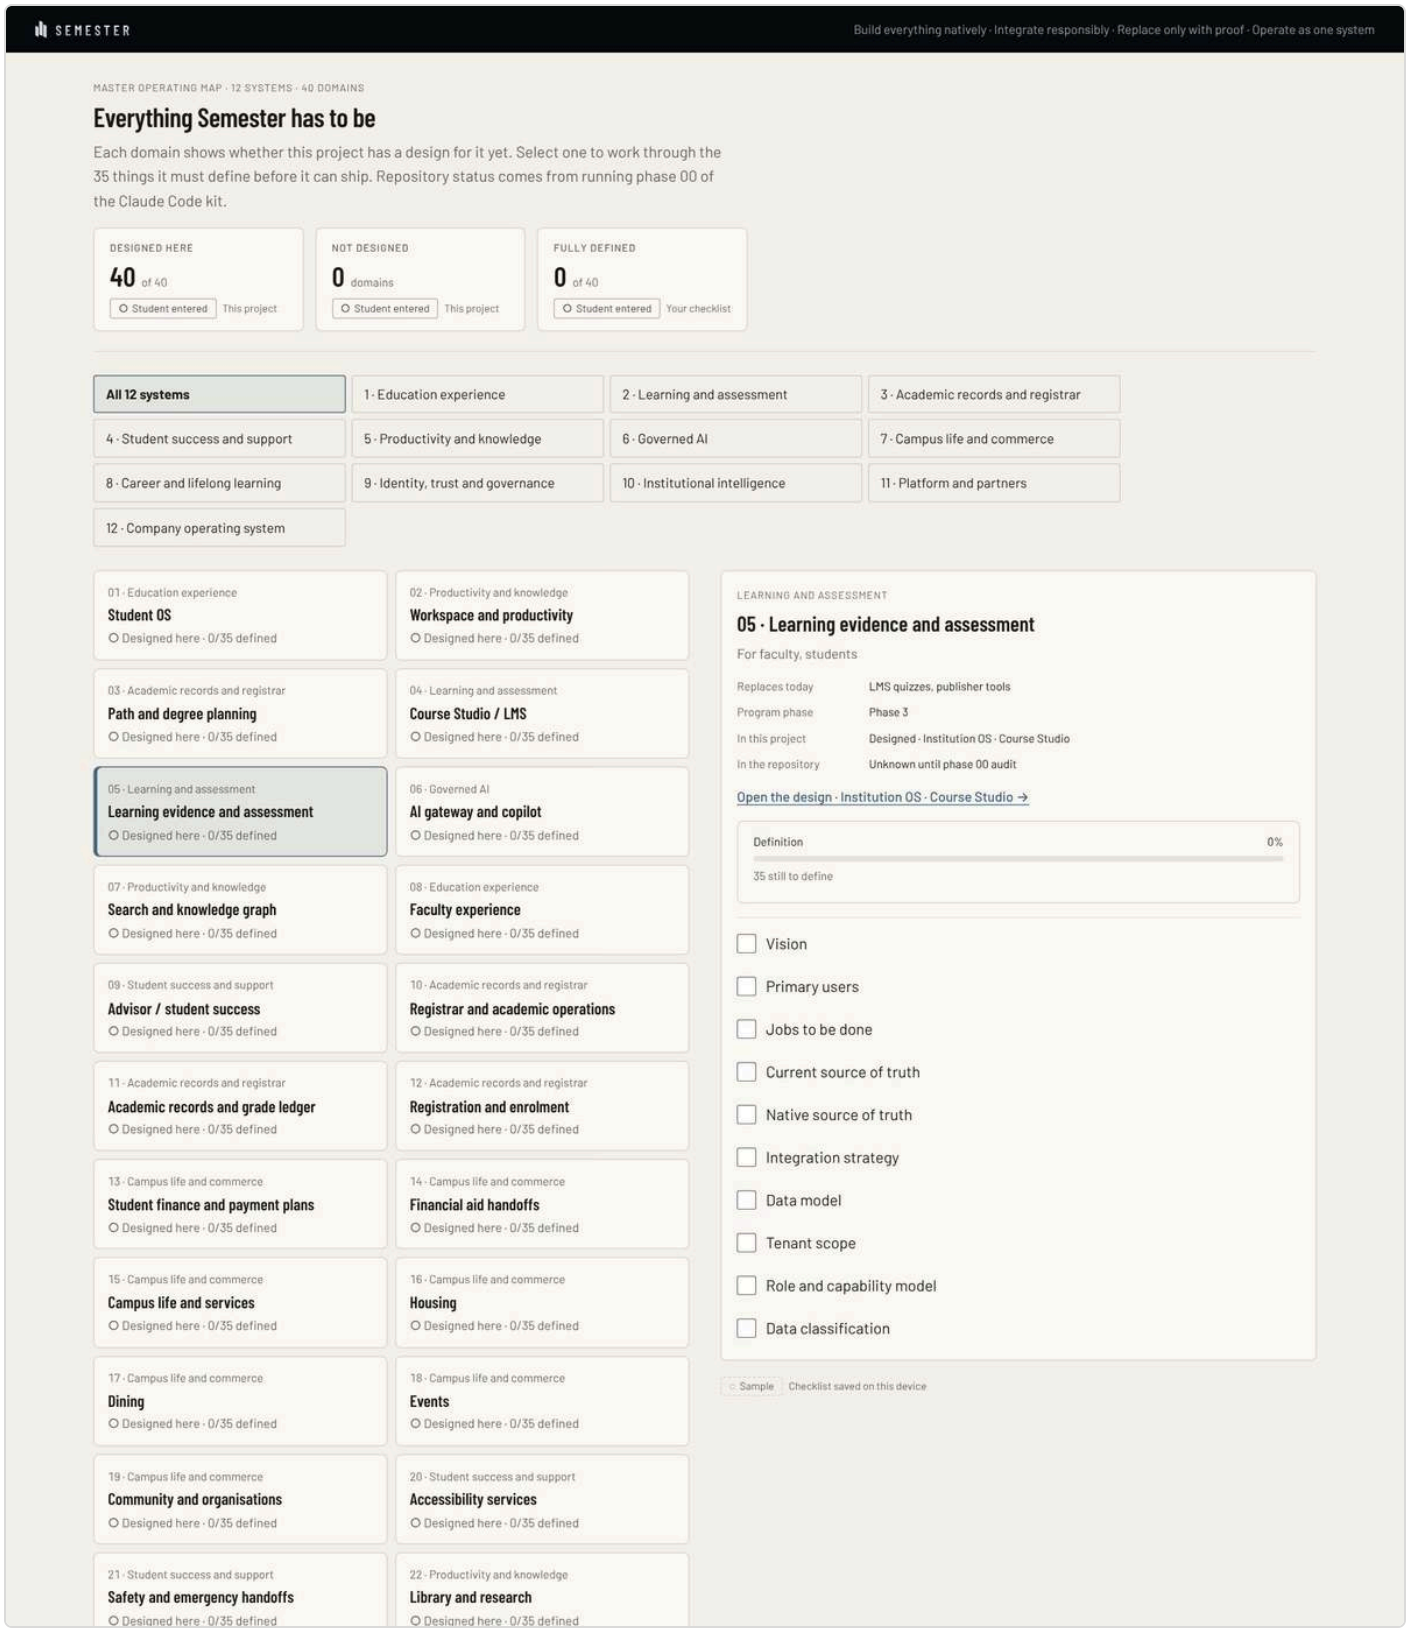

05 · Learning and assessment (1/2)

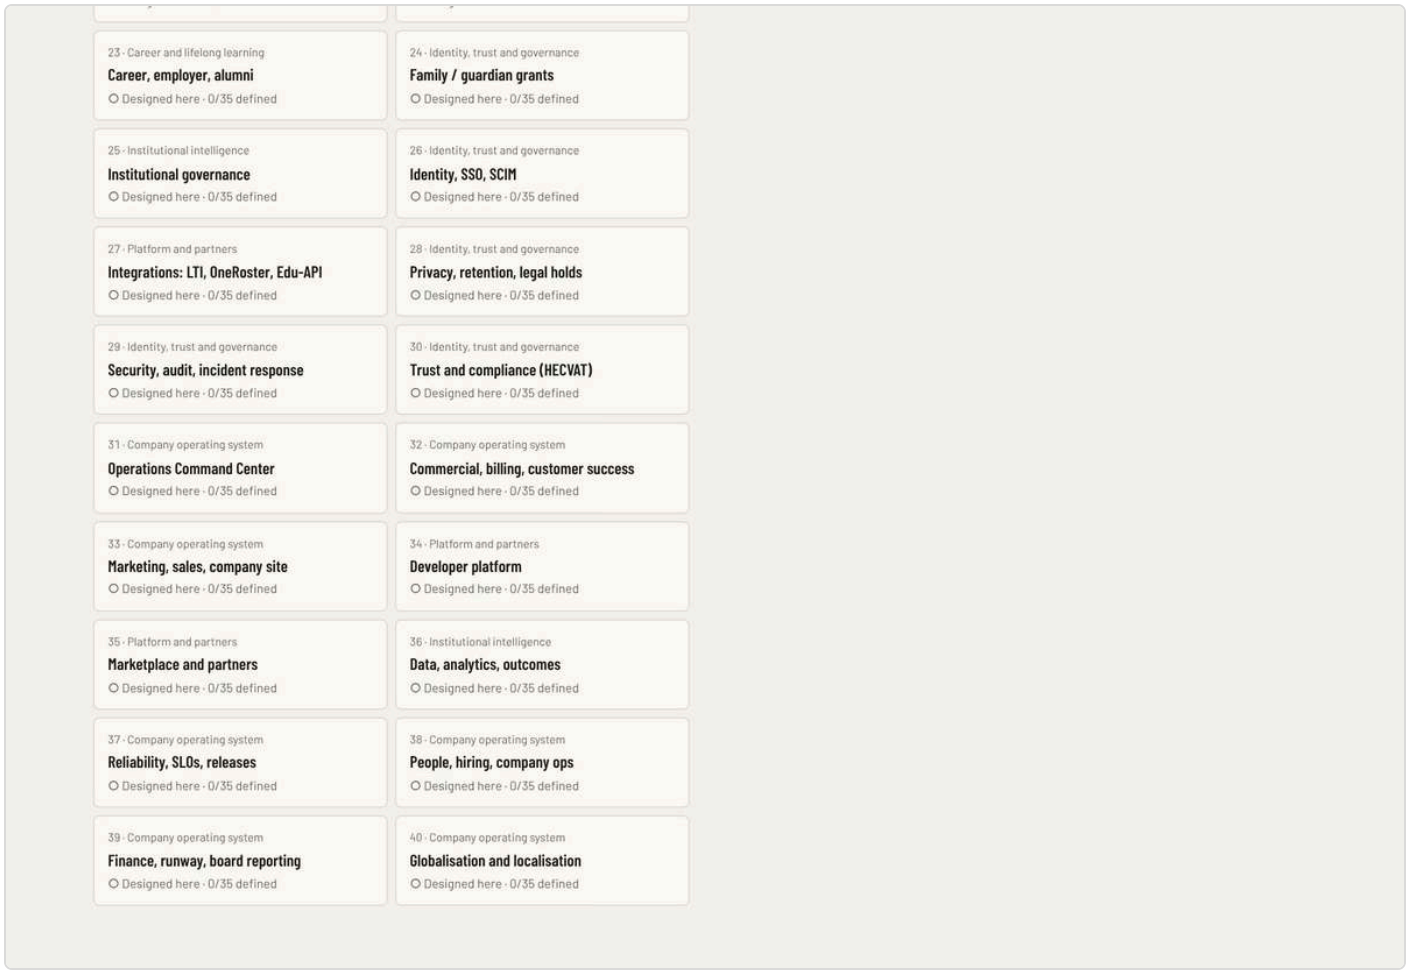

05 · Learning and assessment (2/2)

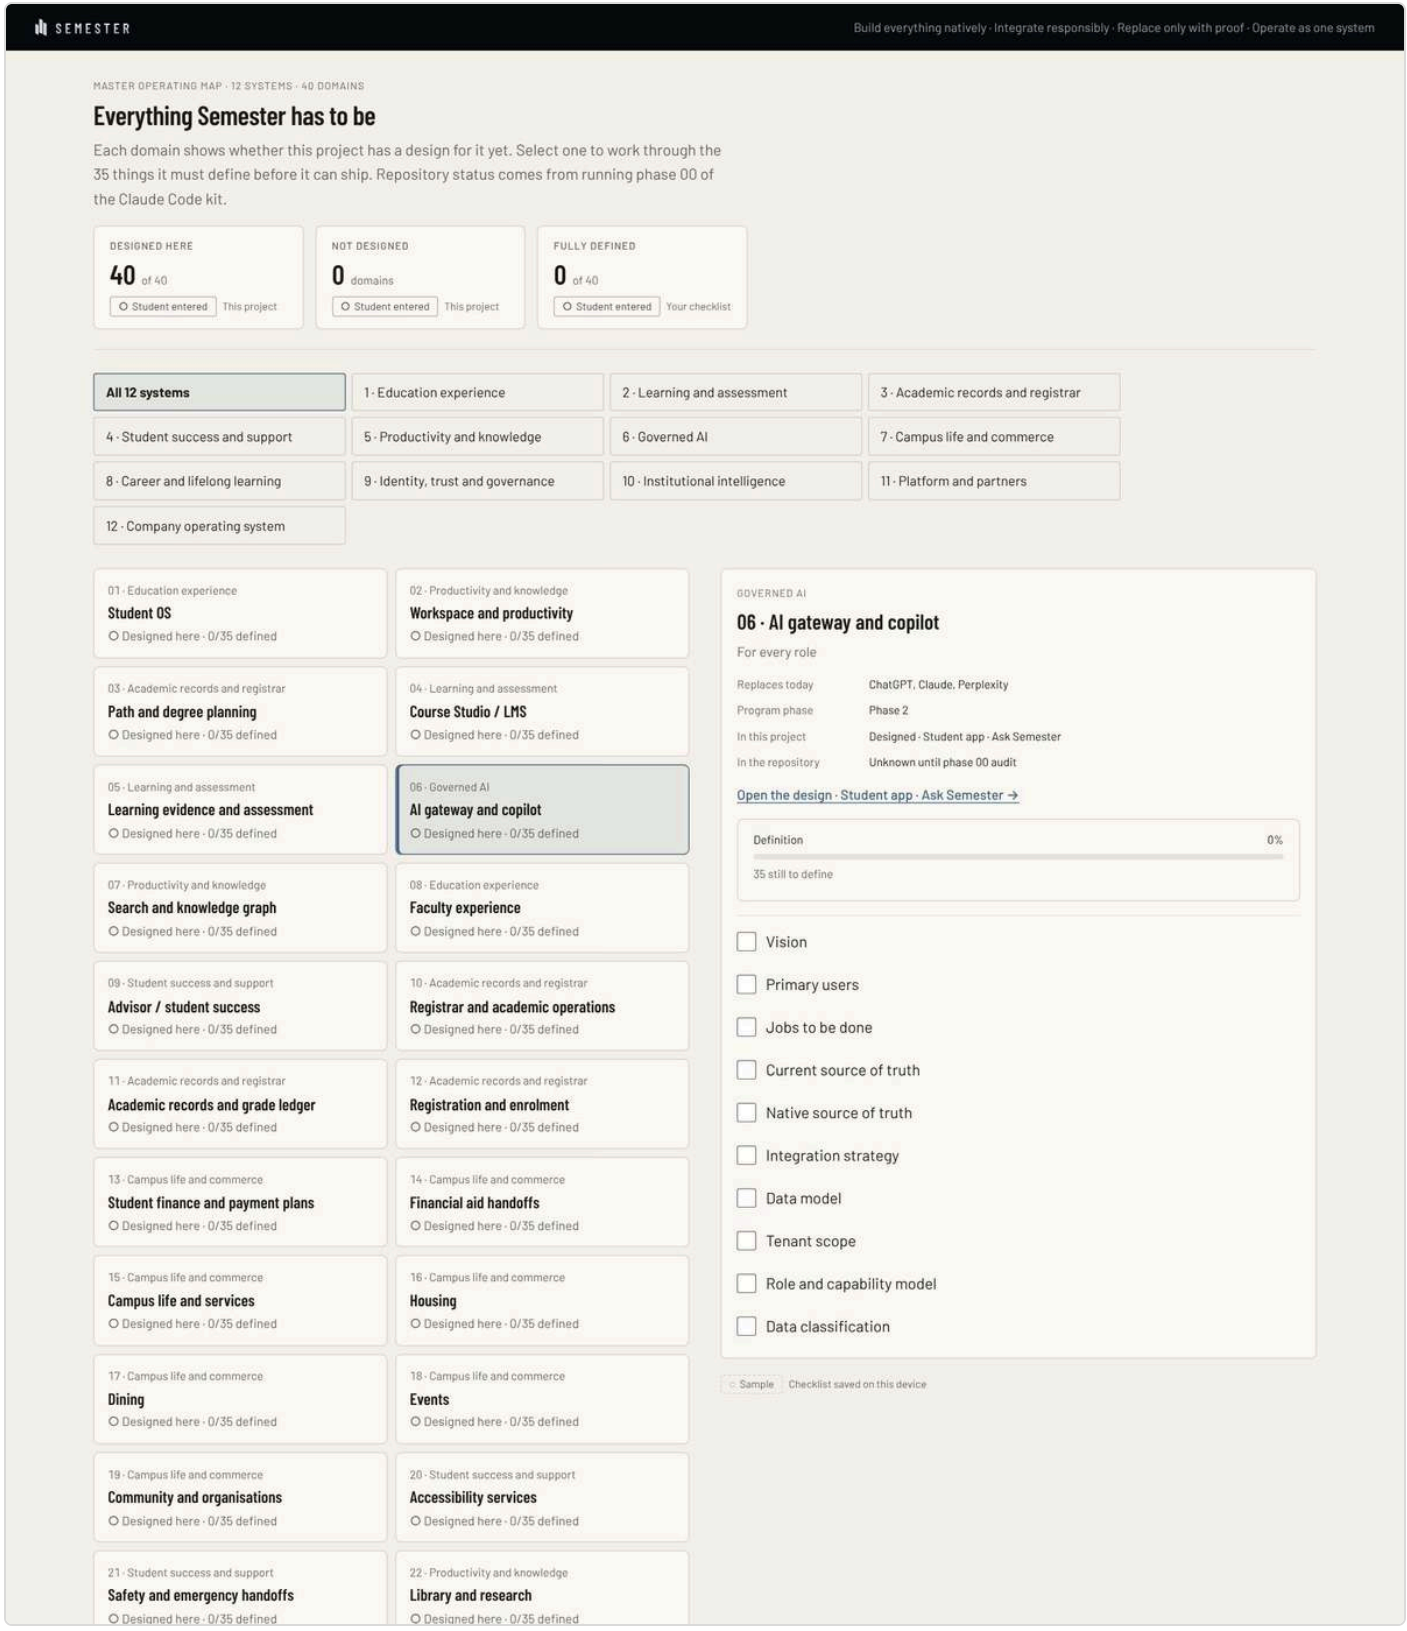

06 · Governed AI (1/2)

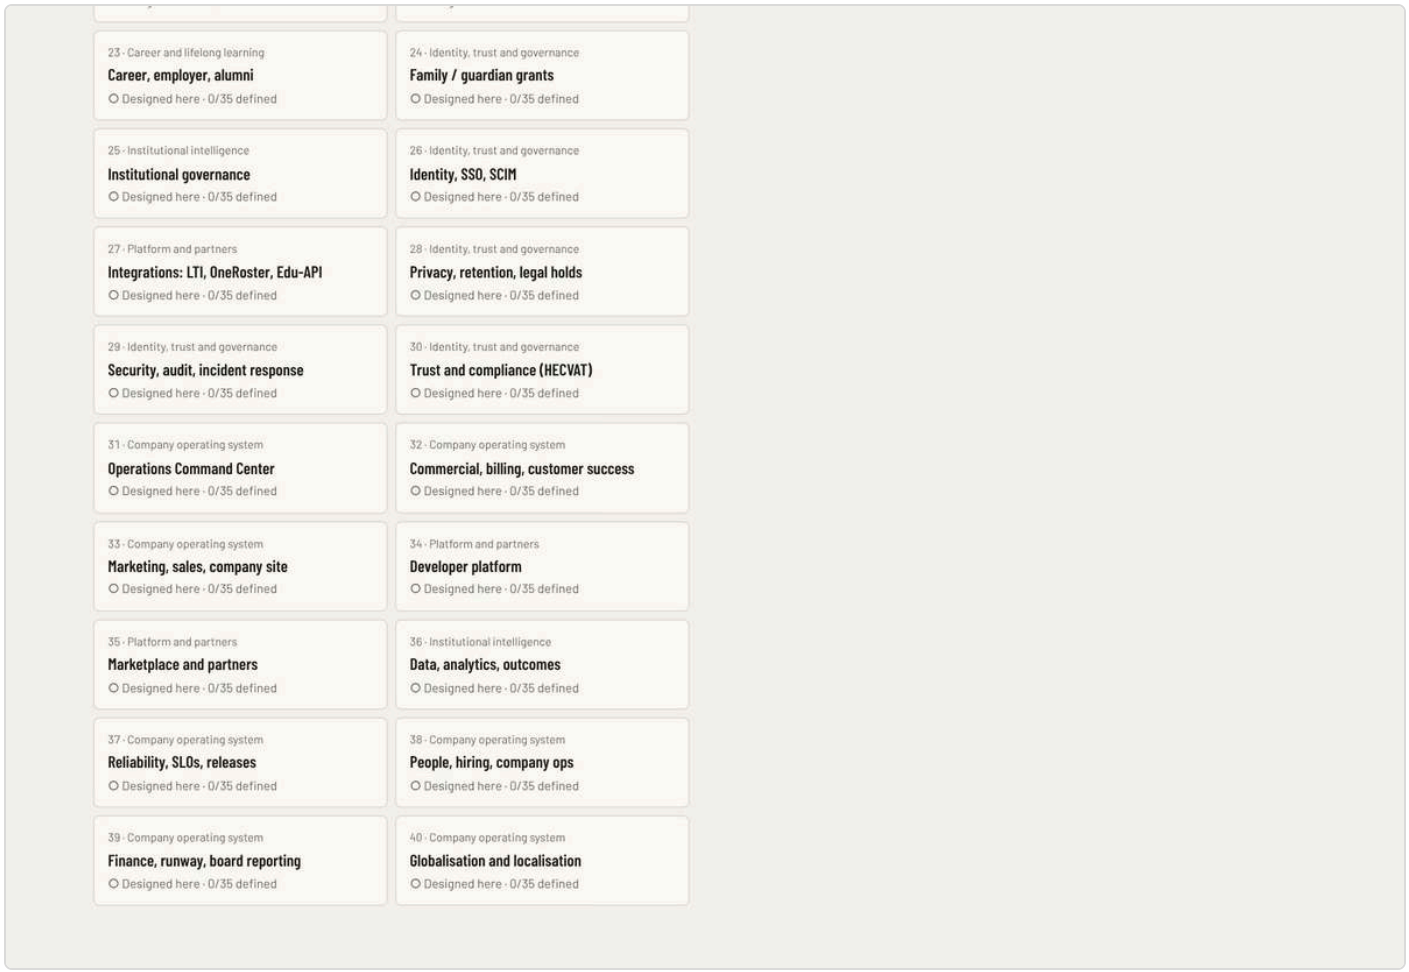

06 · Governed AI (2/2)

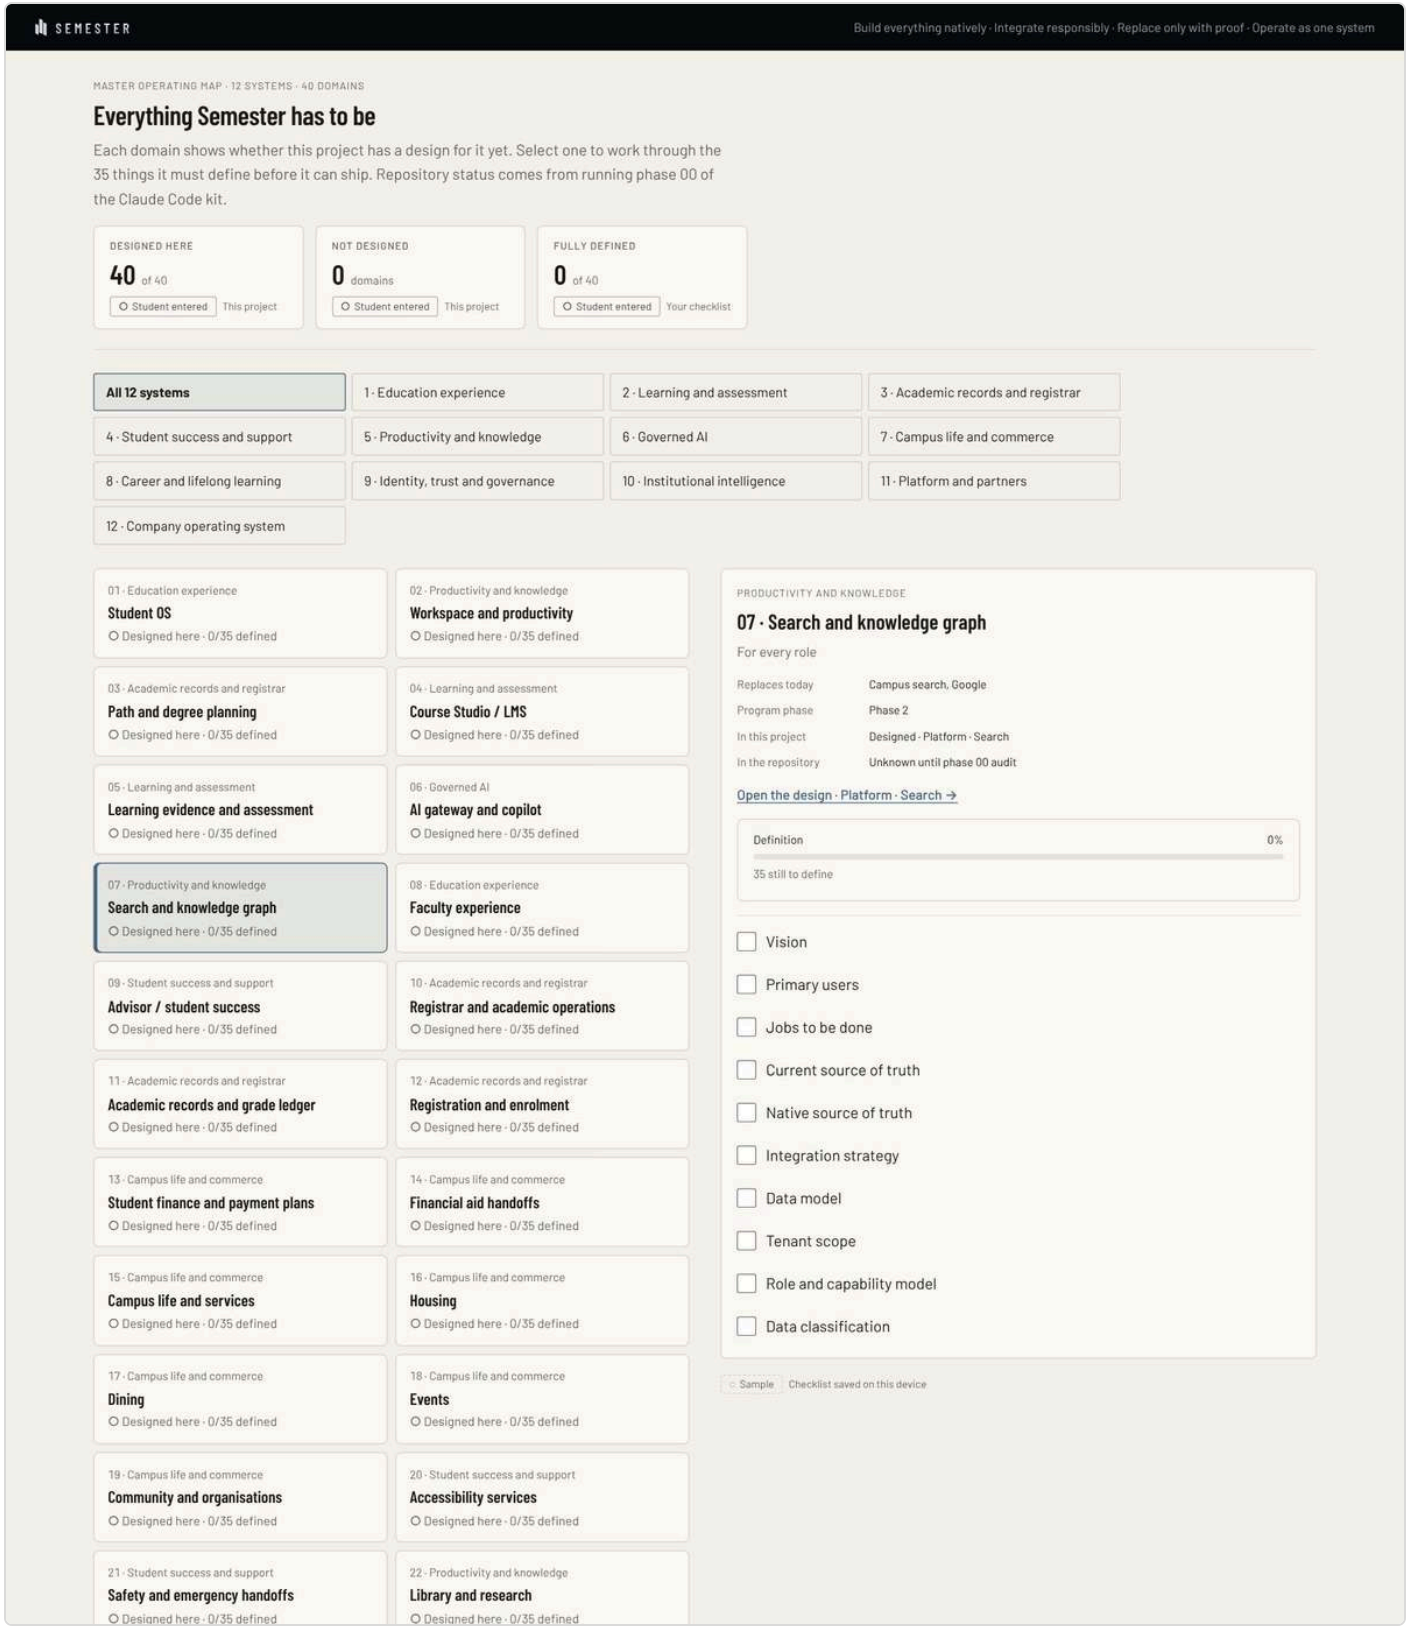

07 · Productivity and knowledge (1/2)

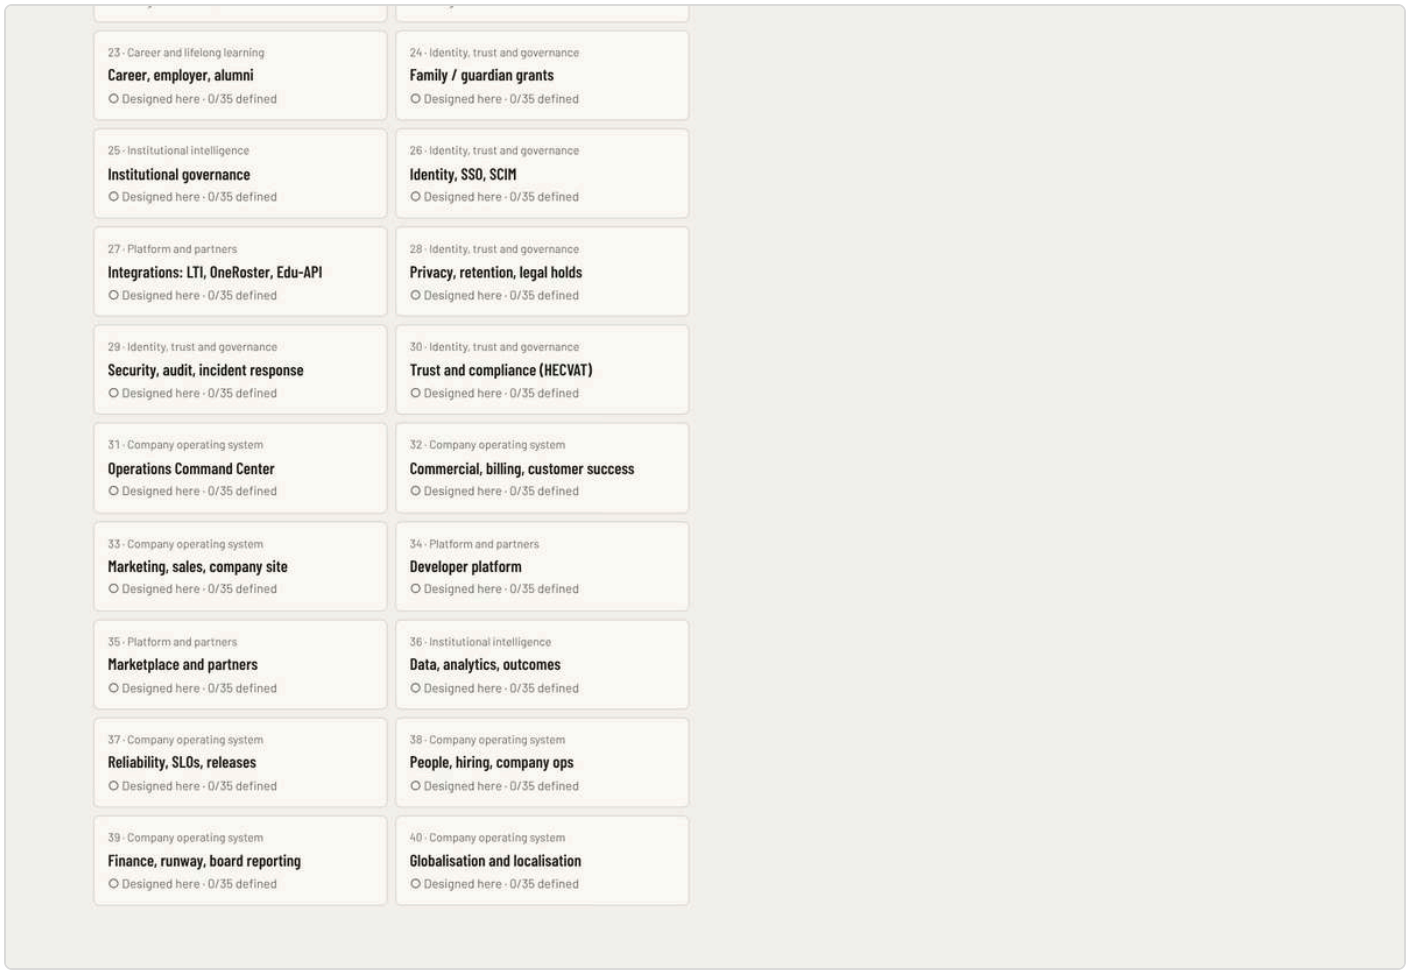

07 · Productivity and knowledge (2/2)

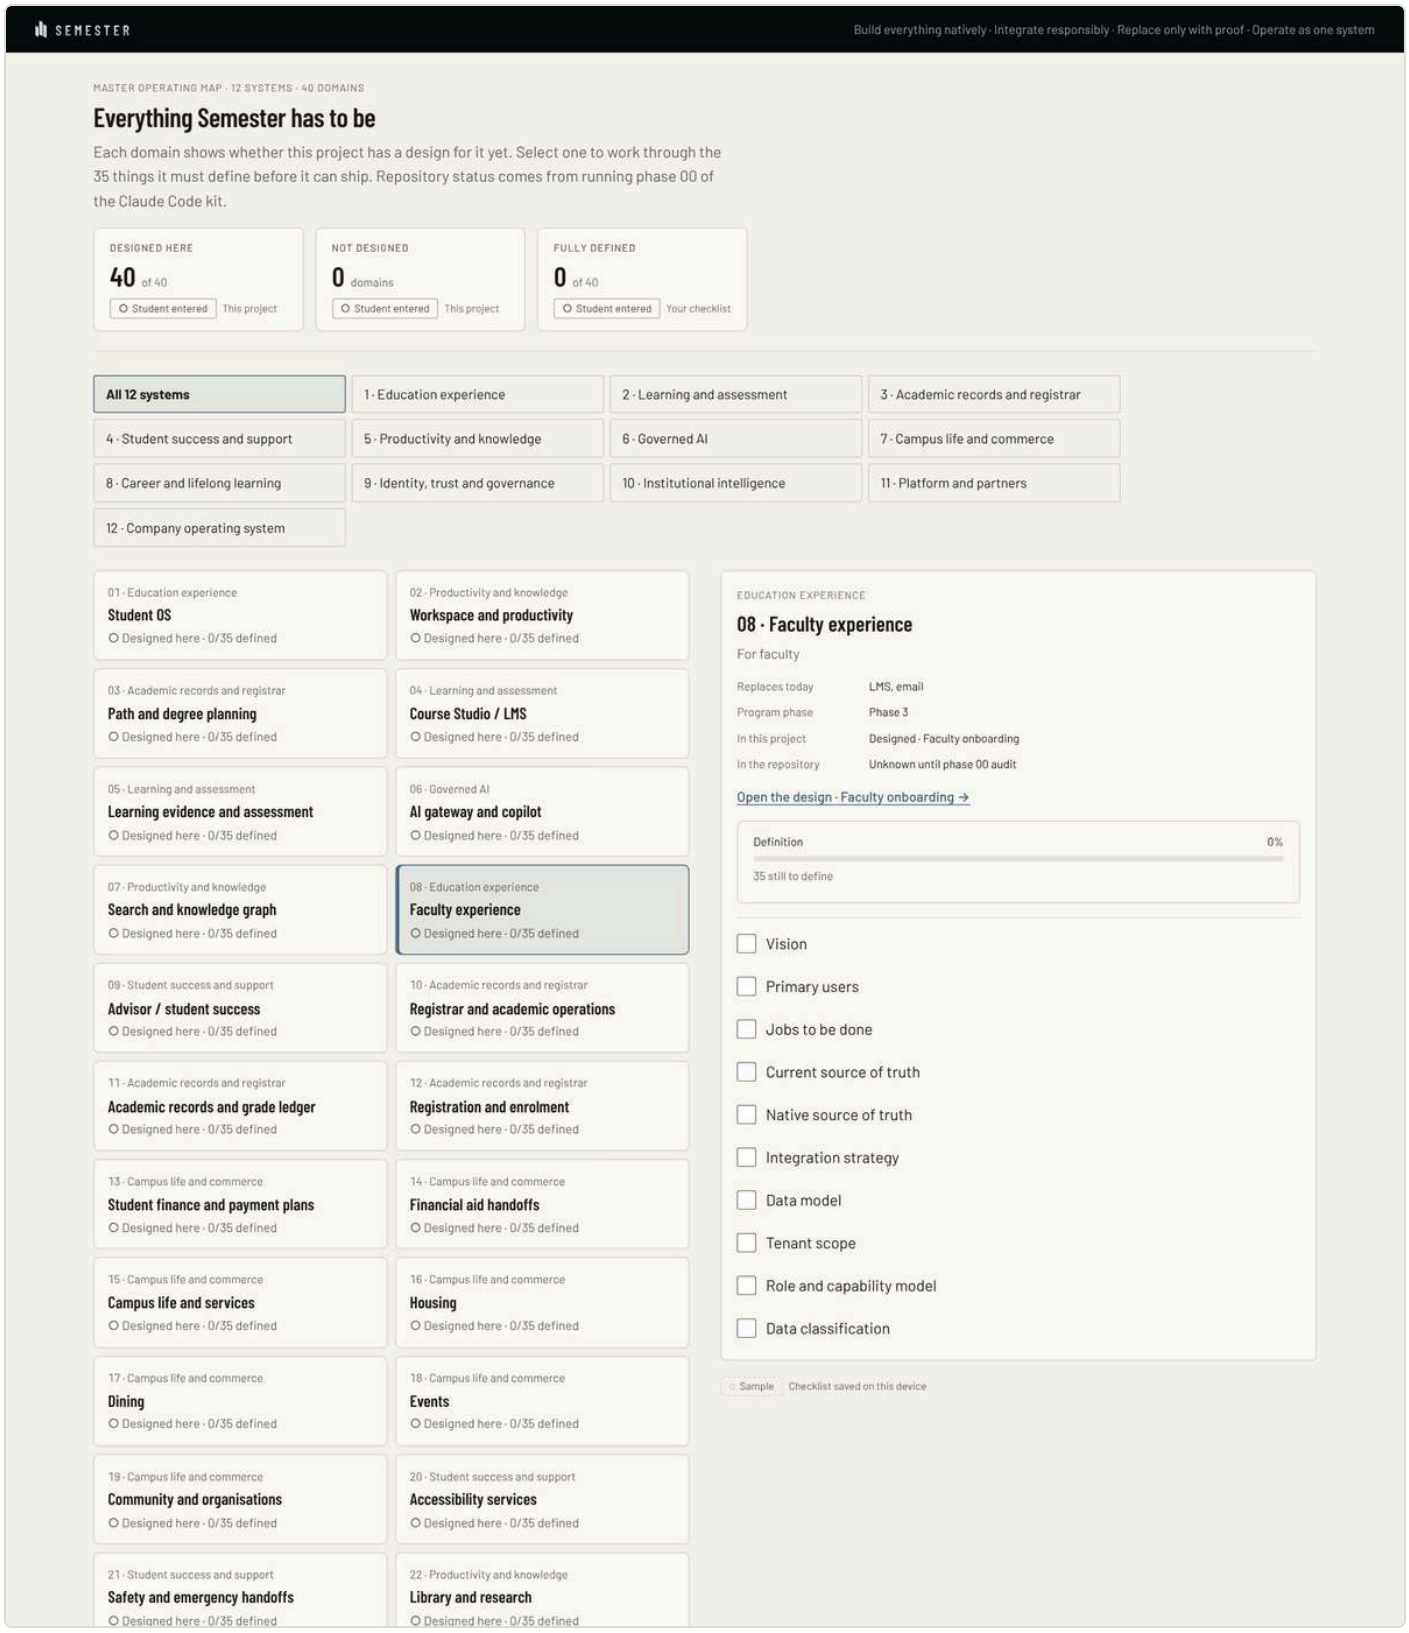

08 · Education experience (1/2)

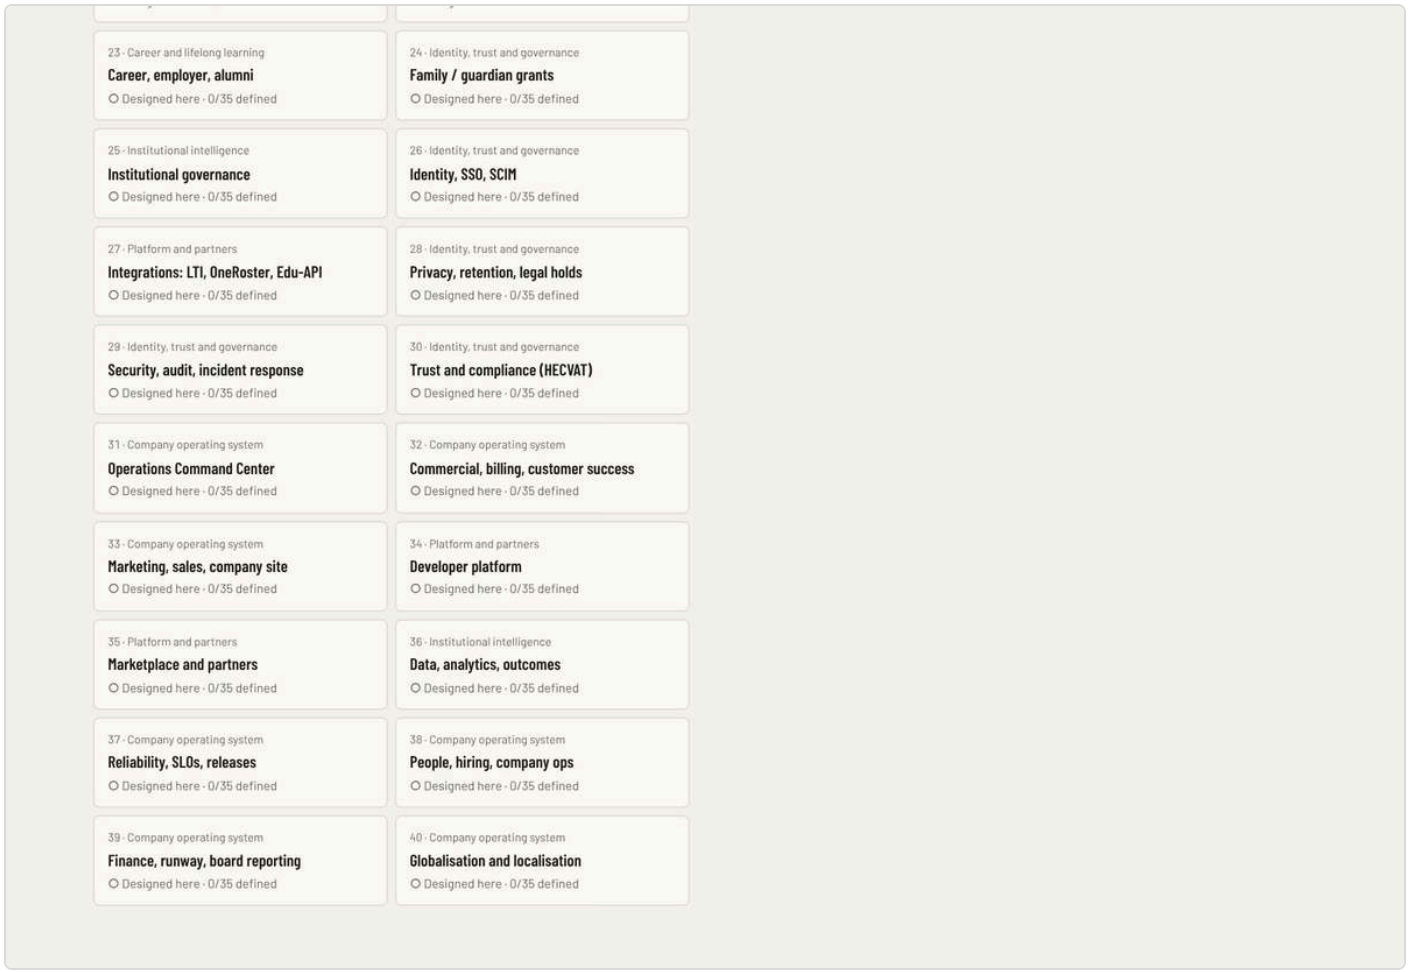

08 · Education experience (2/2)

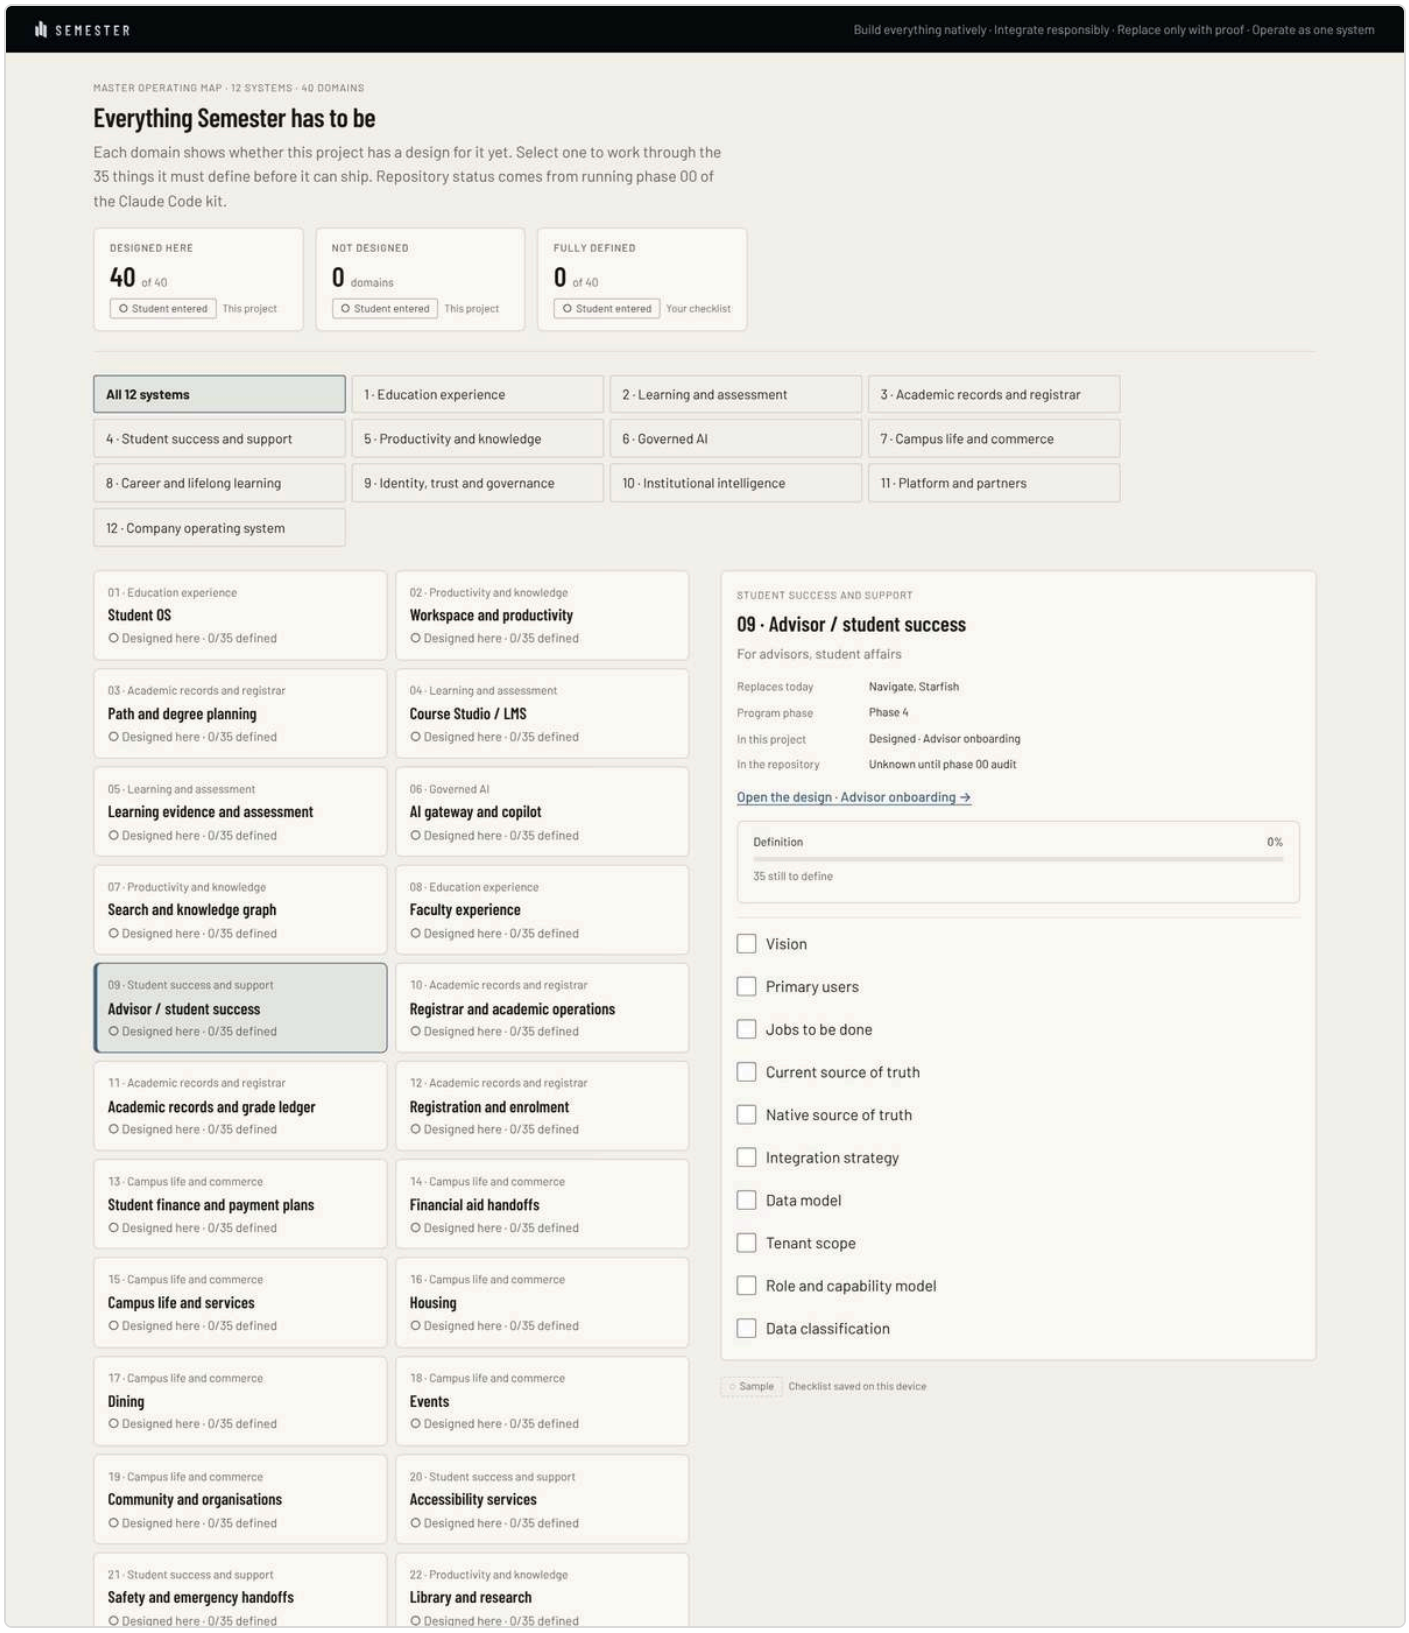

09 · Student success and support (1/2)

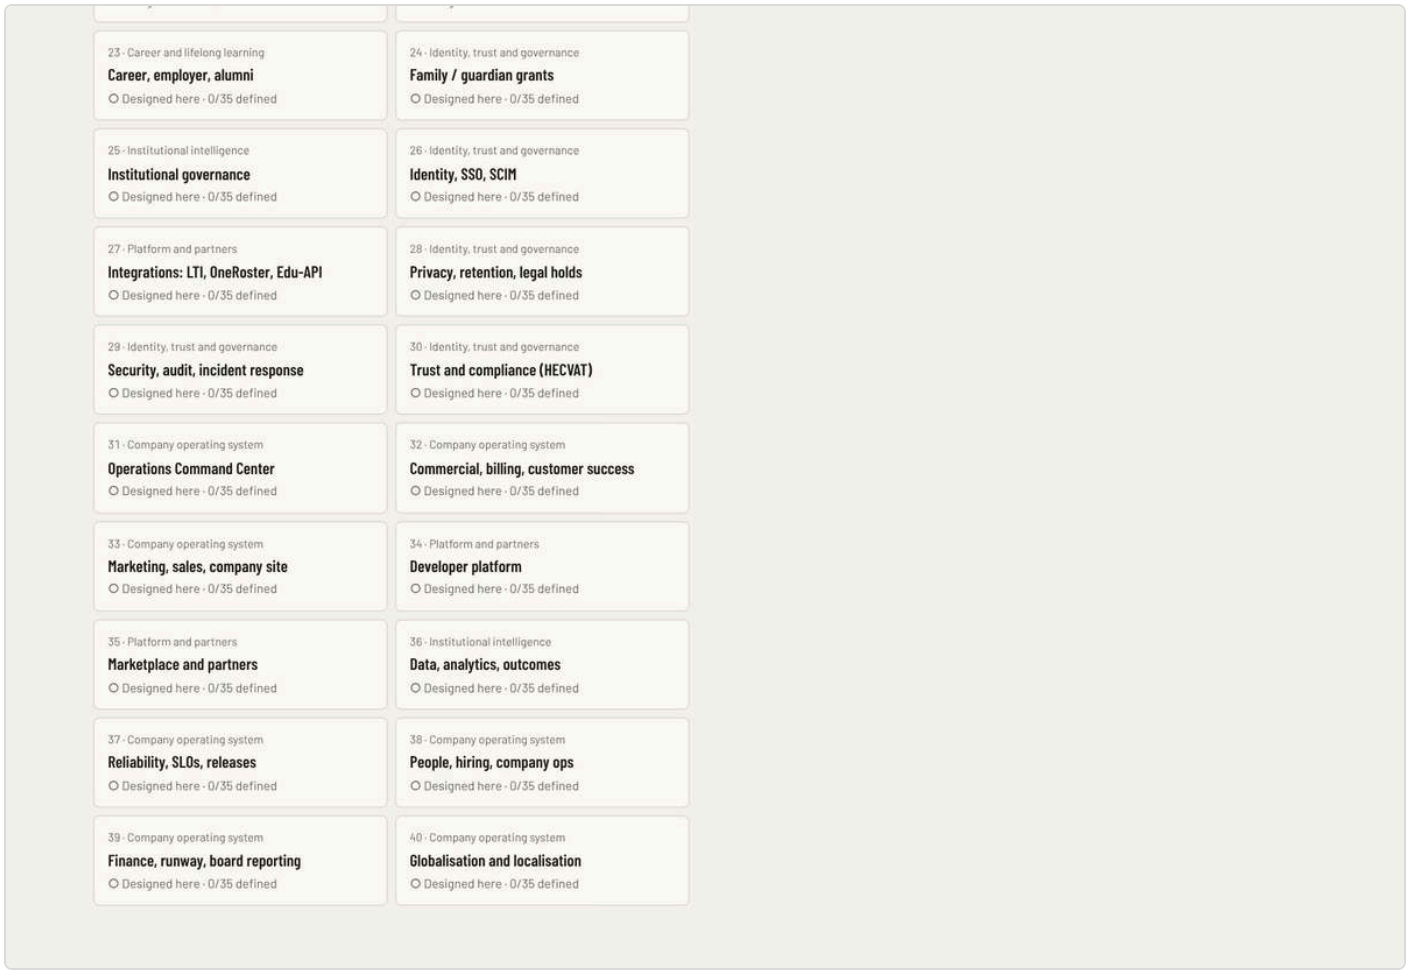

09 · Student success and support (2/2)

Finish line

21 screens.

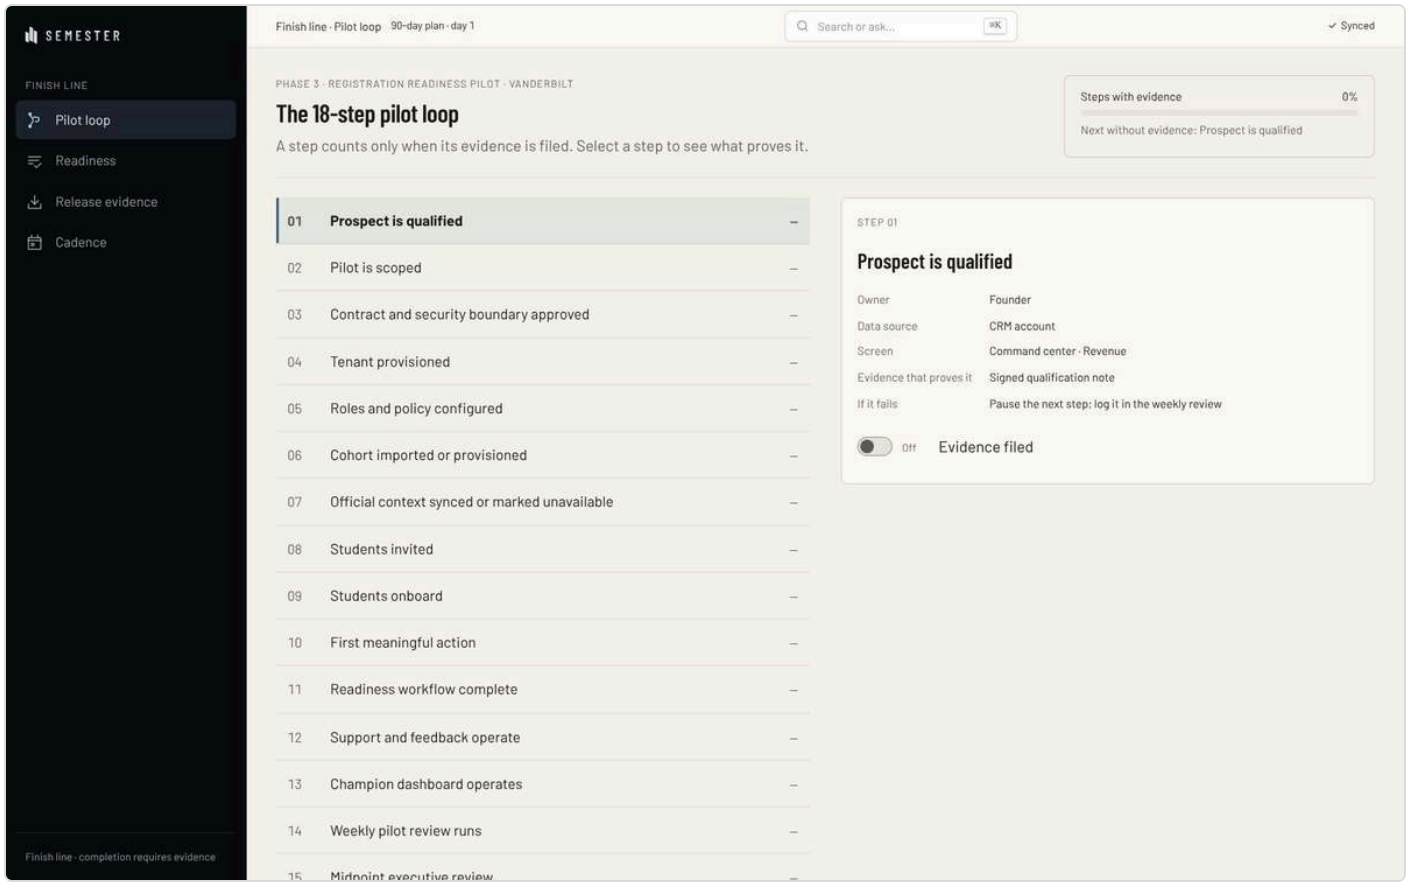

Opening view

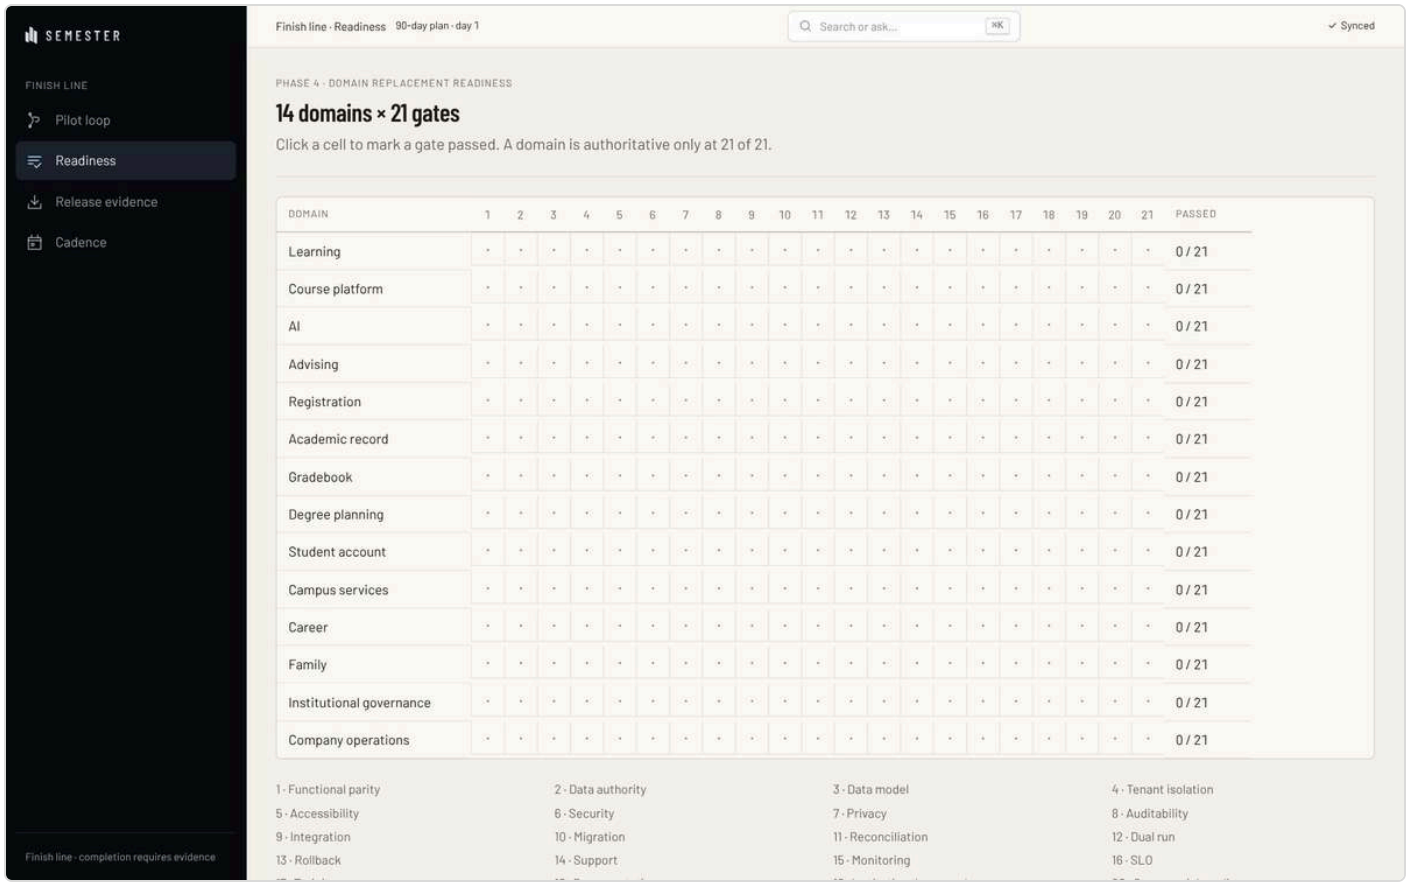
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Readiness
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 4 · DOMAIN REPLACEMENT READINESS
14 domains × 21 gates
Click a cell to mark a gate passed. A domain is authoritative only at 21 of 21.
DOMAIN
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
PASSED
Learning 0 / 21
Course platform 0 / 21
AI 0 / 21
Advising 0 / 21
Registration 0 / 21
Academic record 0 / 21
Gradebook 0 / 21
Degree planning 0 / 21
Student account 0 / 21
Campus services 0 / 21
Career 0 / 21
Family 0 / 21
Institutional governance 0 / 21
Company operations 0 / 21
1 · Functional parity
2 · Data authority
3 · Data model
4 · Tenant isolation
5 · Accessibility
6 · Security
7 · Privacy
8 · Auditability
9 · Integration
10 · Migration
11 · Reconciliation
12 · Dual run
13 · Rollback
14 · Support
15 · Monitoring
16 · SLO

Readiness

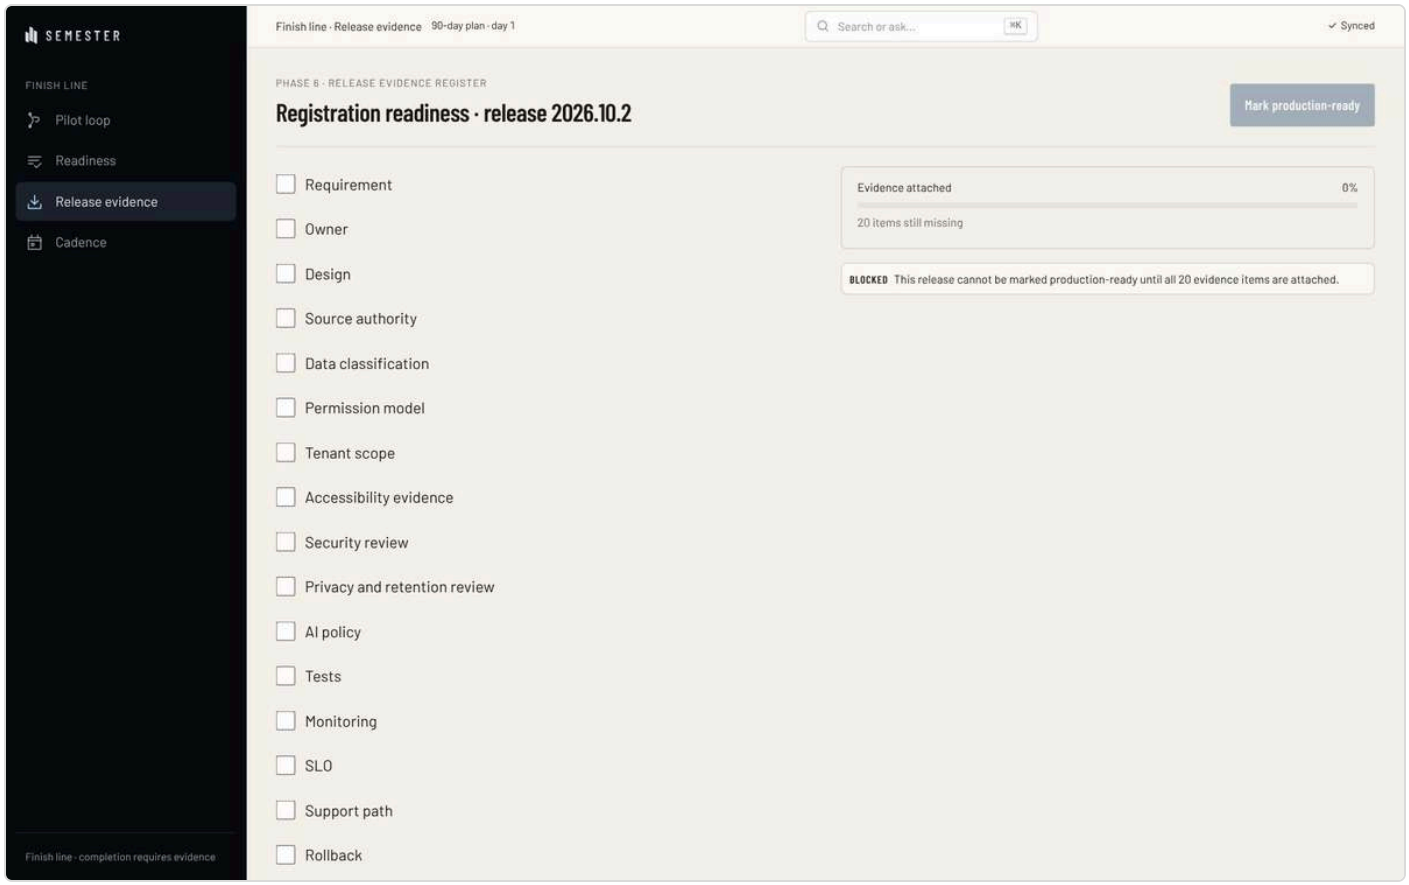

Release evidence

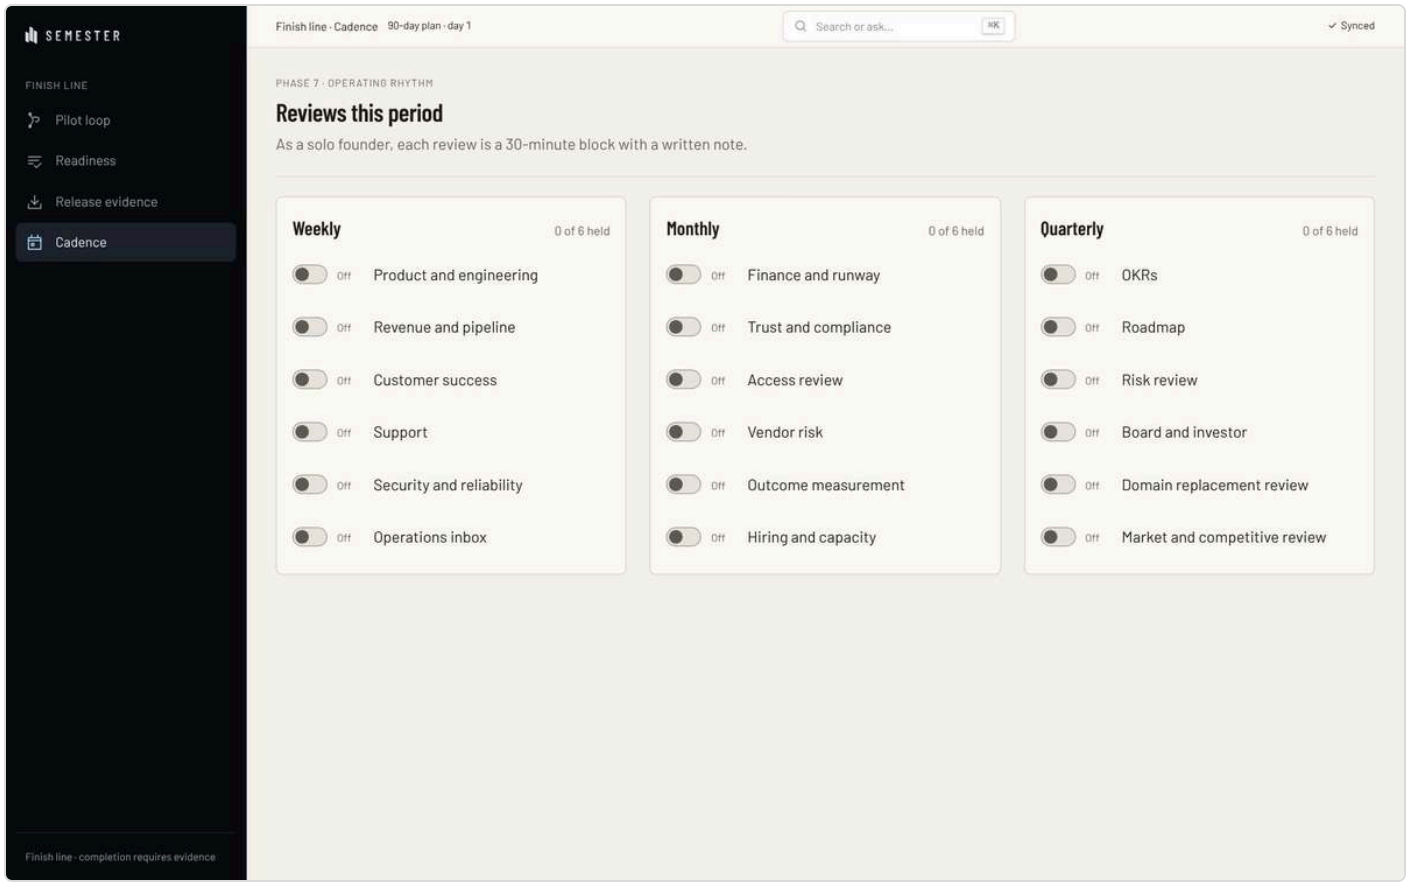
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Cadence
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 7 · OPERATING RHYTHM
Reviews this period
As a solo founder, each review is a 30-minute block with a written note.
Weekly
0 of 6 held
Off
Product and engineering
Off
Revenue and pipeline
Off
Customer success
Off
Support
Off
Security and reliability
Off
Operations inbox
Monthly
0 of 6 held
Off
Finance and runway
Off
Trust and compliance
Off
Access review
Off
Vendor risk
Off
Outcome measurement
Off
Hiring and capacity
Quarterly
0 of 6 held
Off
OKRs
Off
Roadmap
Off
Risk review
Off
Board and investor
Off
Domain replacement review
Off
Market and competitive review

Cadence

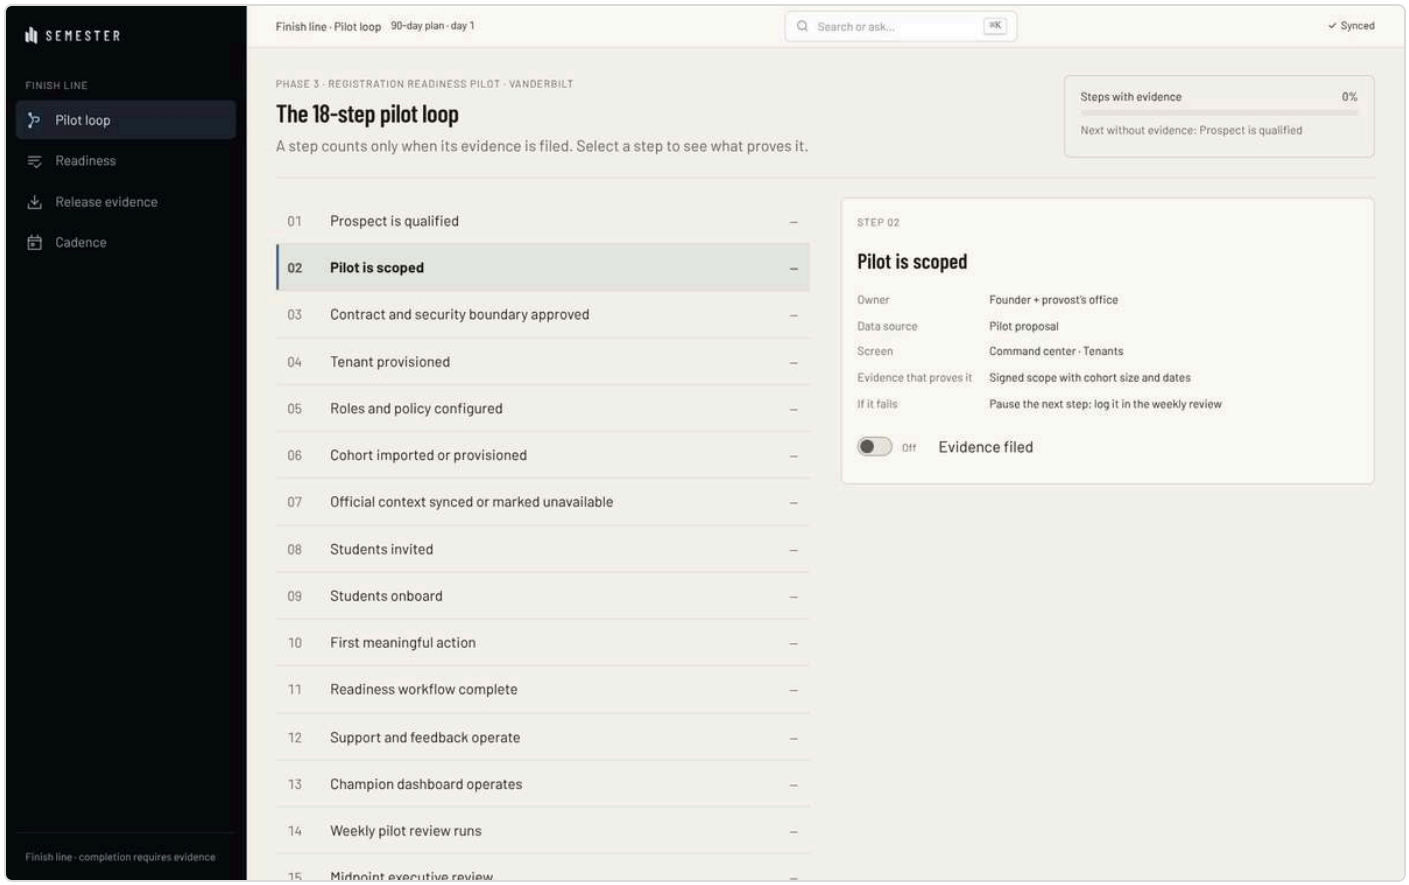
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 3 · REGISTRATION READINESS PILOT · VANDERBILT
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified –
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
STEP 02
Pilot is scoped
Owner
Founder + provost's office
Data source
Pilot proposal
Screen
Command center · Tenants
Evidence that proves it
Signed scope with cohort size and dates
If it fails
Pause the next step: log it in the weekly review
Off
Evidence filed

02

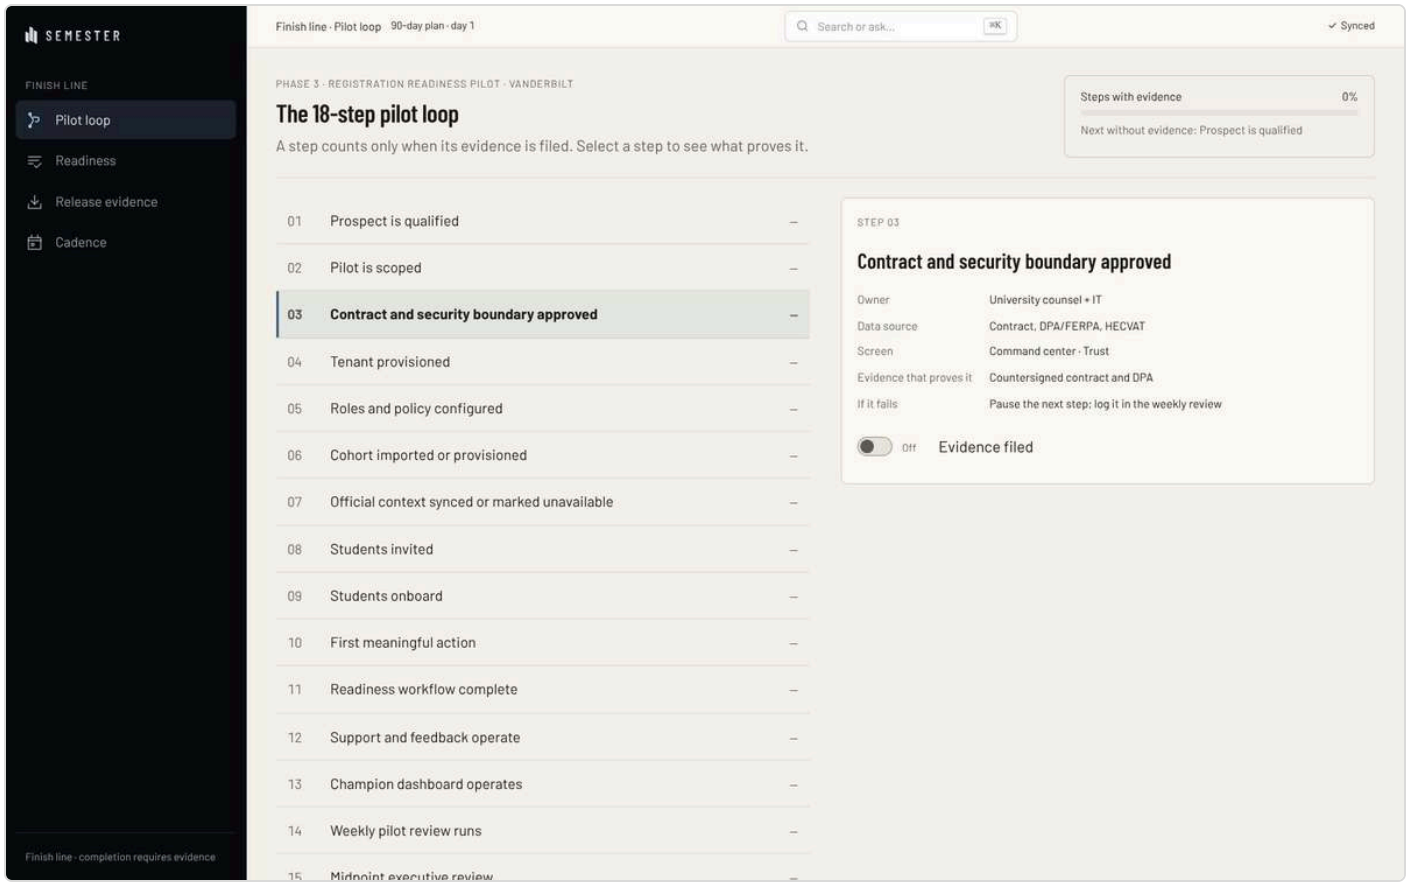
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 3 · REGISTRATION READINESS PILOT · VANDERBILT
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified –
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
STEP 03
Contract and security boundary approved
Owner University counsel + IT
Data source Contract, DPA/FERPA, HECVAT
Screen Command center · Trust
Evidence that proves it Countersigned contract and DPA
If it fails Pause the next step: log it in the weekly review
Off
Evidence filed

03

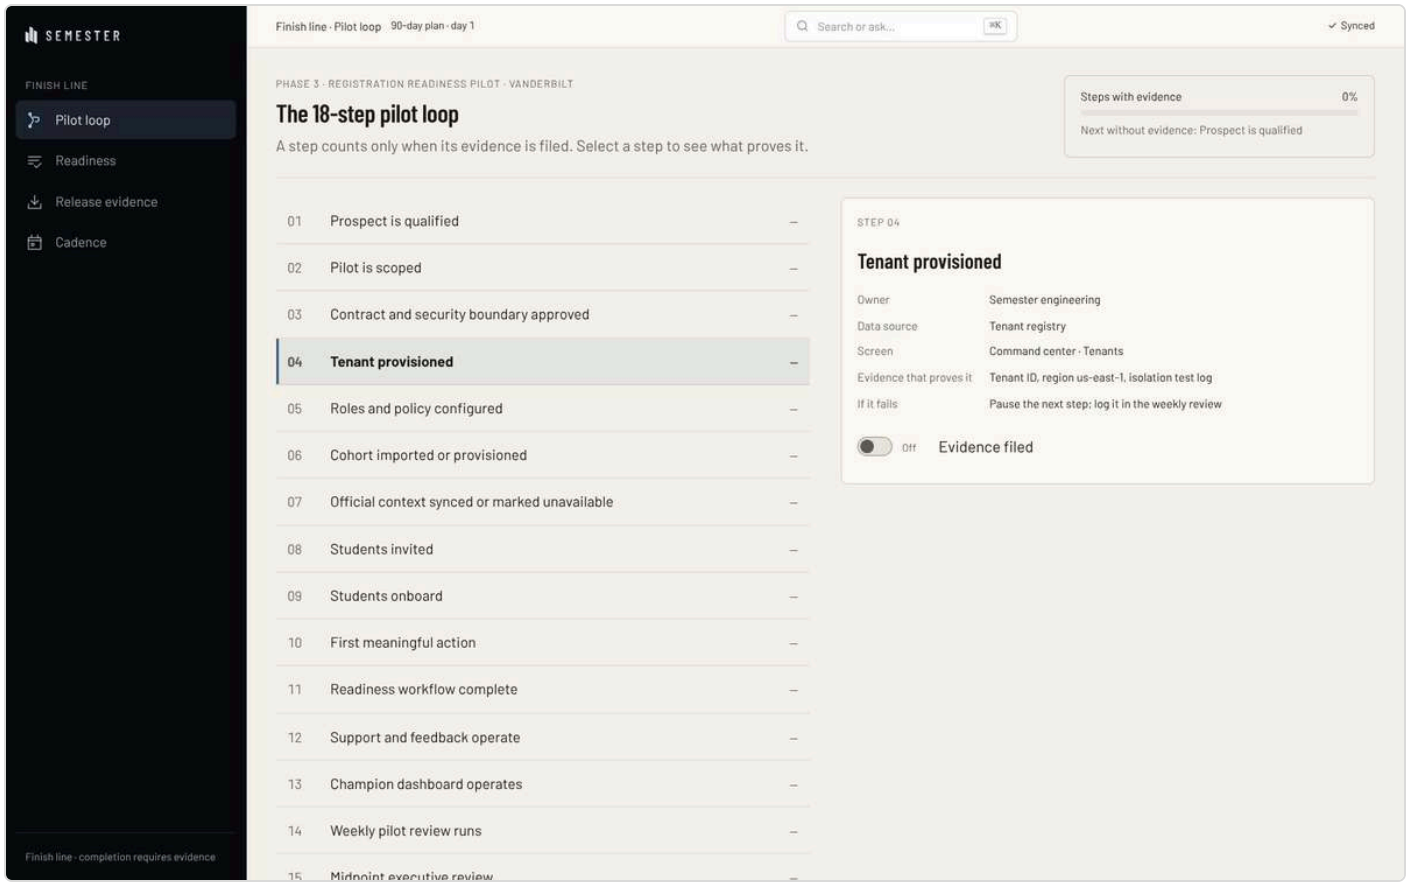
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 3 · REGISTRATION READINESS PILOT · VANDERBILT
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified
02 Pilot is scoped
03 Contract and security boundary approved
04 Tenant provisioned
05 Roles and policy configured
06 Cohort imported or provisioned
07 Official context synced or marked unavailable
08 Students invited
09 Students onboard
10 First meaningful action
11 Readiness workflow complete
12 Support and feedback operate
13 Champion dashboard operates
14 Weekly pilot review runs
15 Midpoint executive review
STEP 04
Tenant provisioned
Owner
Semester engineering
Data source
Tenant registry
Screen
Command center · Tenants
Evidence that proves it
Tenant ID, region us-east-1, isolation test log
If it fails
Pause the next step: log it in the weekly review
Off
Evidence filed

04

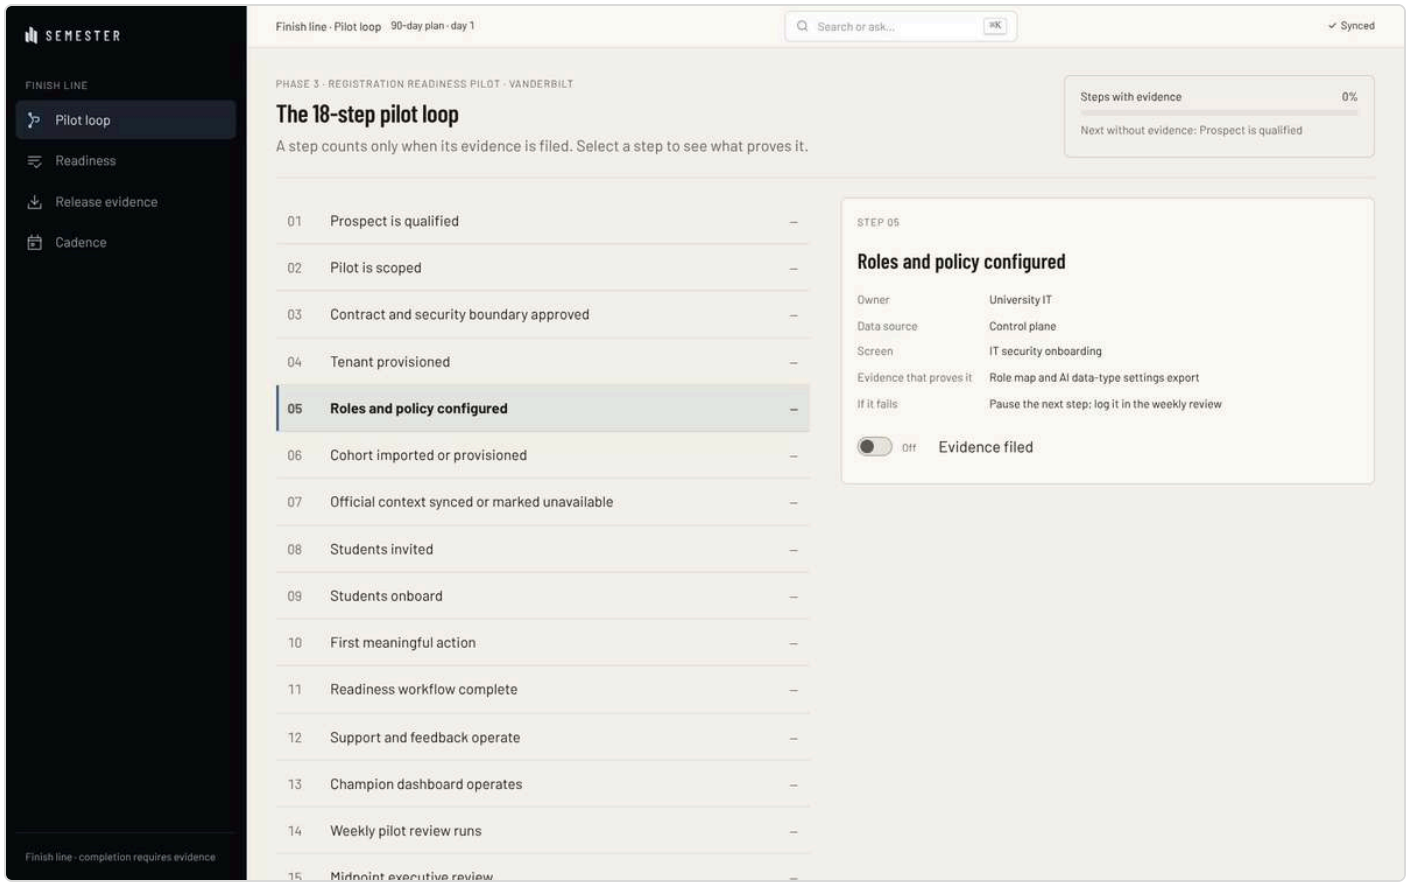
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 3 · REGISTRATION READINESS PILOT · VANDERBILT
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified
02 Pilot is scoped
03 Contract and security boundary approved
04 Tenant provisioned
05 Roles and policy configured
06 Cohort imported or provisioned
07 Official context synced or marked unavailable
08 Students invited
09 Students onboard
10 First meaningful action
11 Readiness workflow complete
12 Support and feedback operate
13 Champion dashboard operates
14 Weekly pilot review runs
15 Midpoint executive review
STEP 05
Roles and policy configured
Owner
University IT
Data source
Control plane
Screen
IT security onboarding
Evidence that proves it
Role map and AI data-type settings export
If it fails
Pause the next step: log it in the weekly review
Off
Evidence filed

05

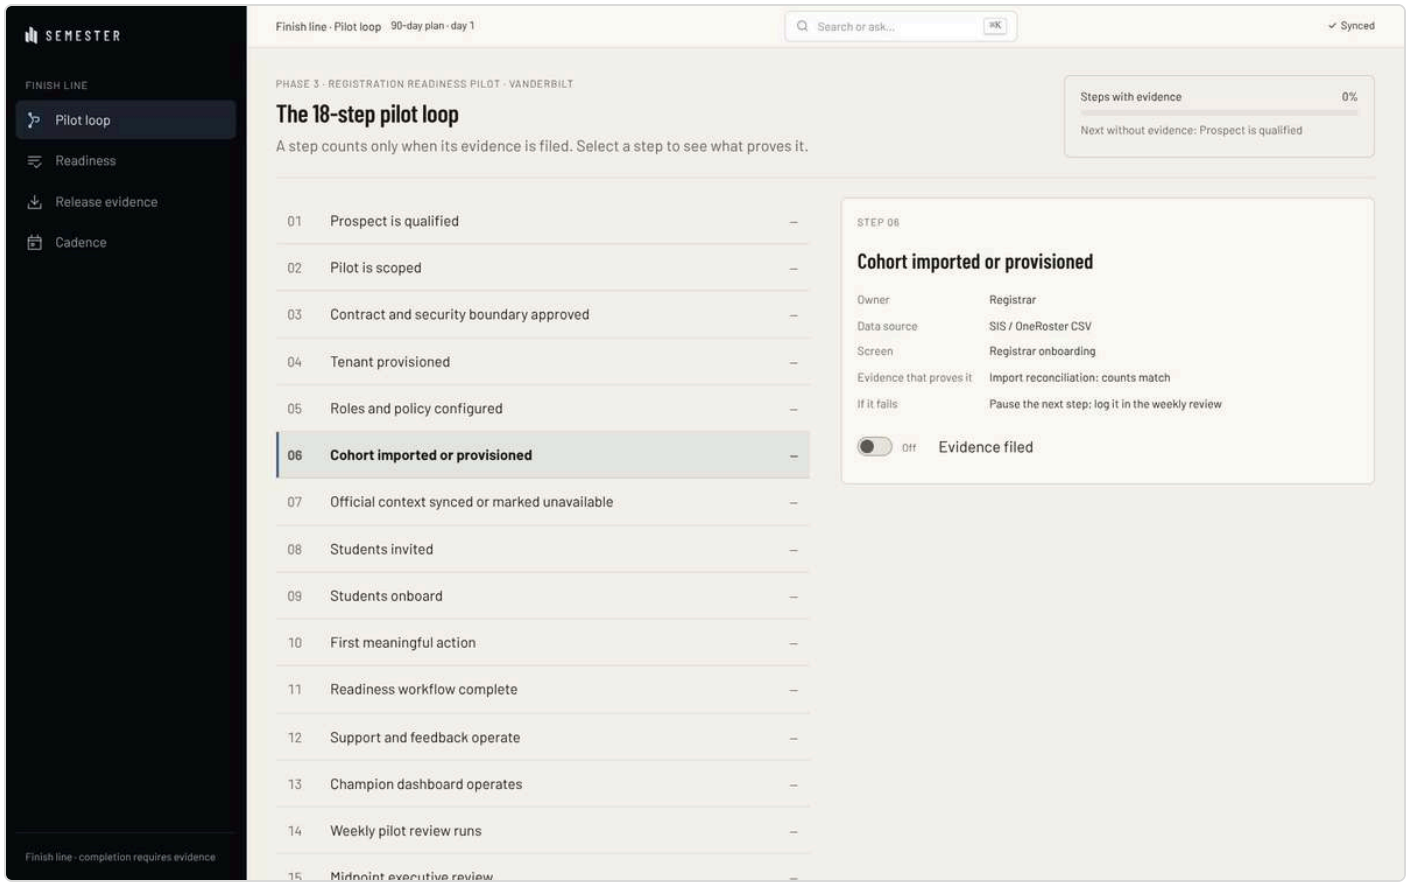
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
PHASE 3 · REGISTRATION READINESS PILOT · VANDERBILT
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified
02 Pilot is scoped
03 Contract and security boundary approved
04 Tenant provisioned
05 Roles and policy configured
06 Cohort imported or provisioned
07 Official context synced or marked unavailable
08 Students invited
09 Students onboard
10 First meaningful action
11 Readiness workflow complete
12 Support and feedback operate
13 Champion dashboard operates
14 Weekly pilot review runs
15 Midpoint executive review
STEP 06
Cohort imported or provisioned
Owner
Registrar
Data source
SIS / OneRoster CSV
Screen
Registrar onboarding
Evidence that proves it
Import reconciliation: counts match
If it fails
Pause the next step: log it in the weekly review
Off
Evidence filed

06

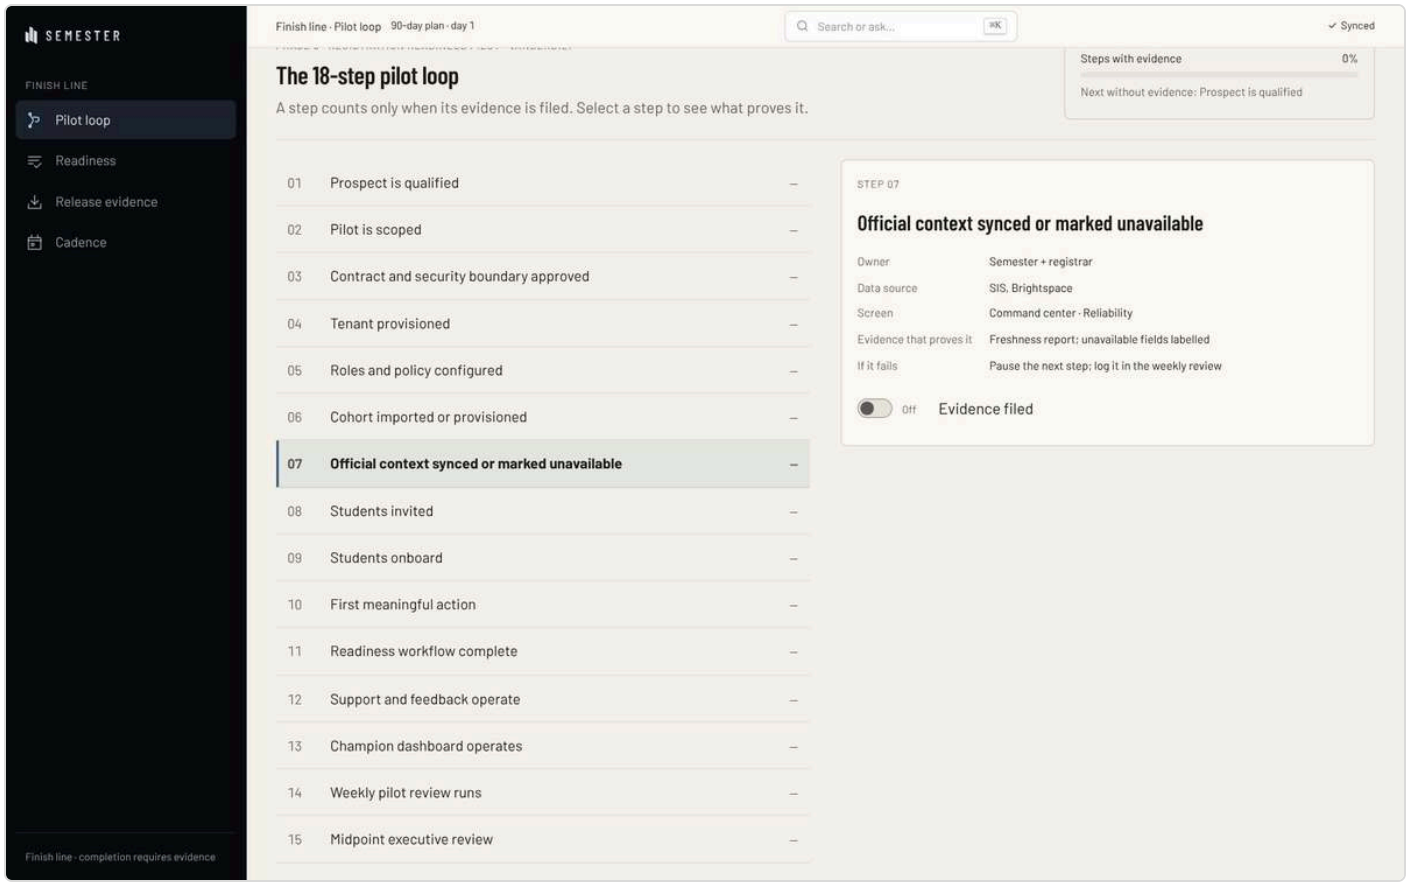
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
The 18-step pilot loop
A step counts only when its evidence is filed. Select a step to see what proves it.
Steps with evidence
0%
Next without evidence: Prospect is qualified
01 Prospect is qualified –
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
STEP 07
Official context synced or marked unavailable
Owner
Semester + registrar
Data source
SIS, Brightspace
Screen
Command center · Reliability
Evidence that proves it
Freshness report; unavailable fields labelled
If it fails
Pause the next step; log it in the weekly review
Off
Evidence filed

07

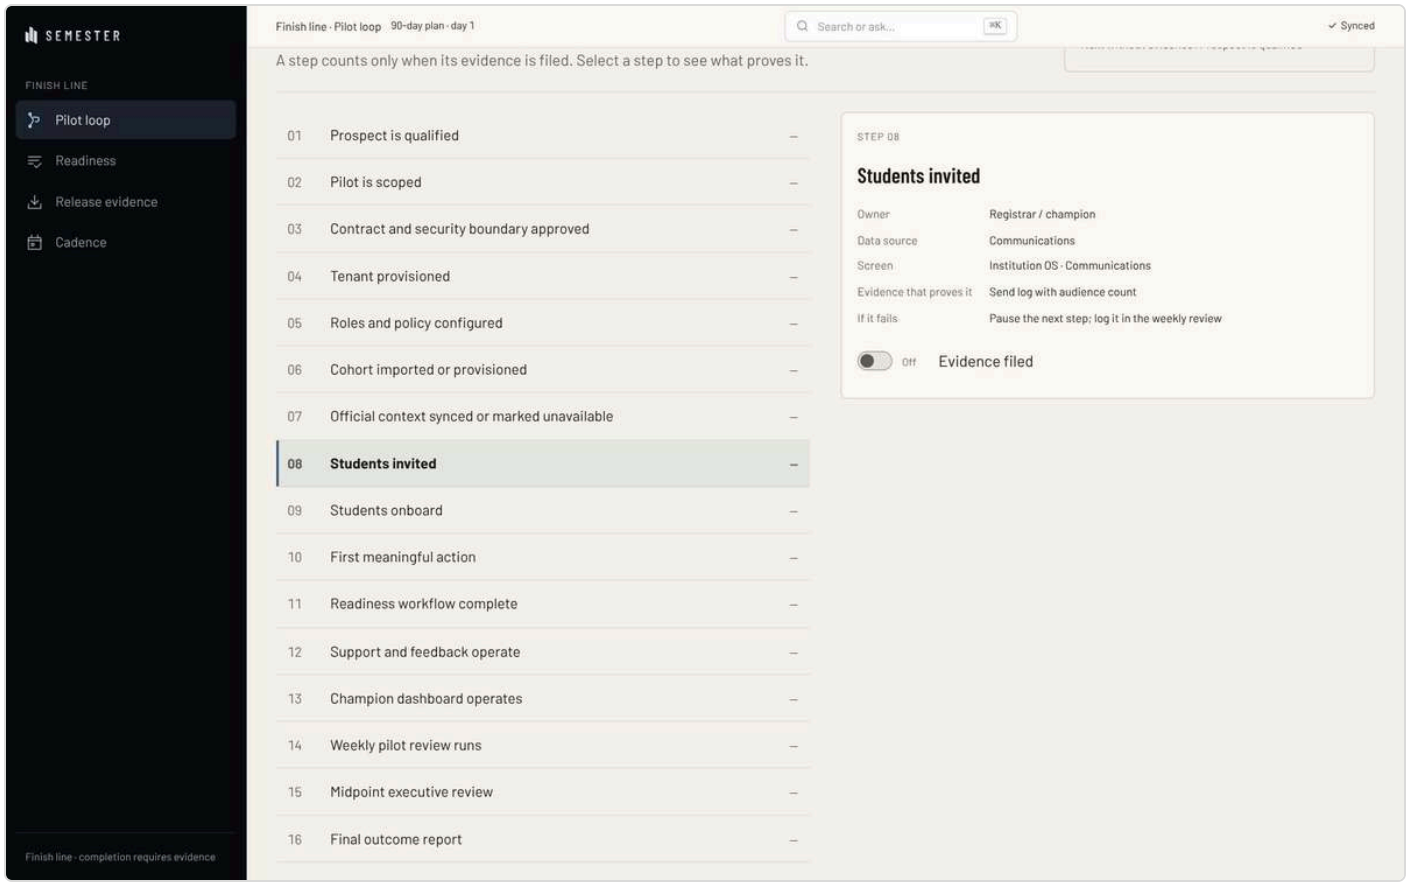
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop 90-day plan · day 1
Search or ask...
⌘K
Synced
A step counts only when its evidence is filed. Select a step to see what proves it.
01 Prospect is qualified –
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
STEP 08
Students invited
Owner Registrar / champion
Data source Communications
Screen Institution OS · Communications
Evidence that proves it Send log with audience count
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

08

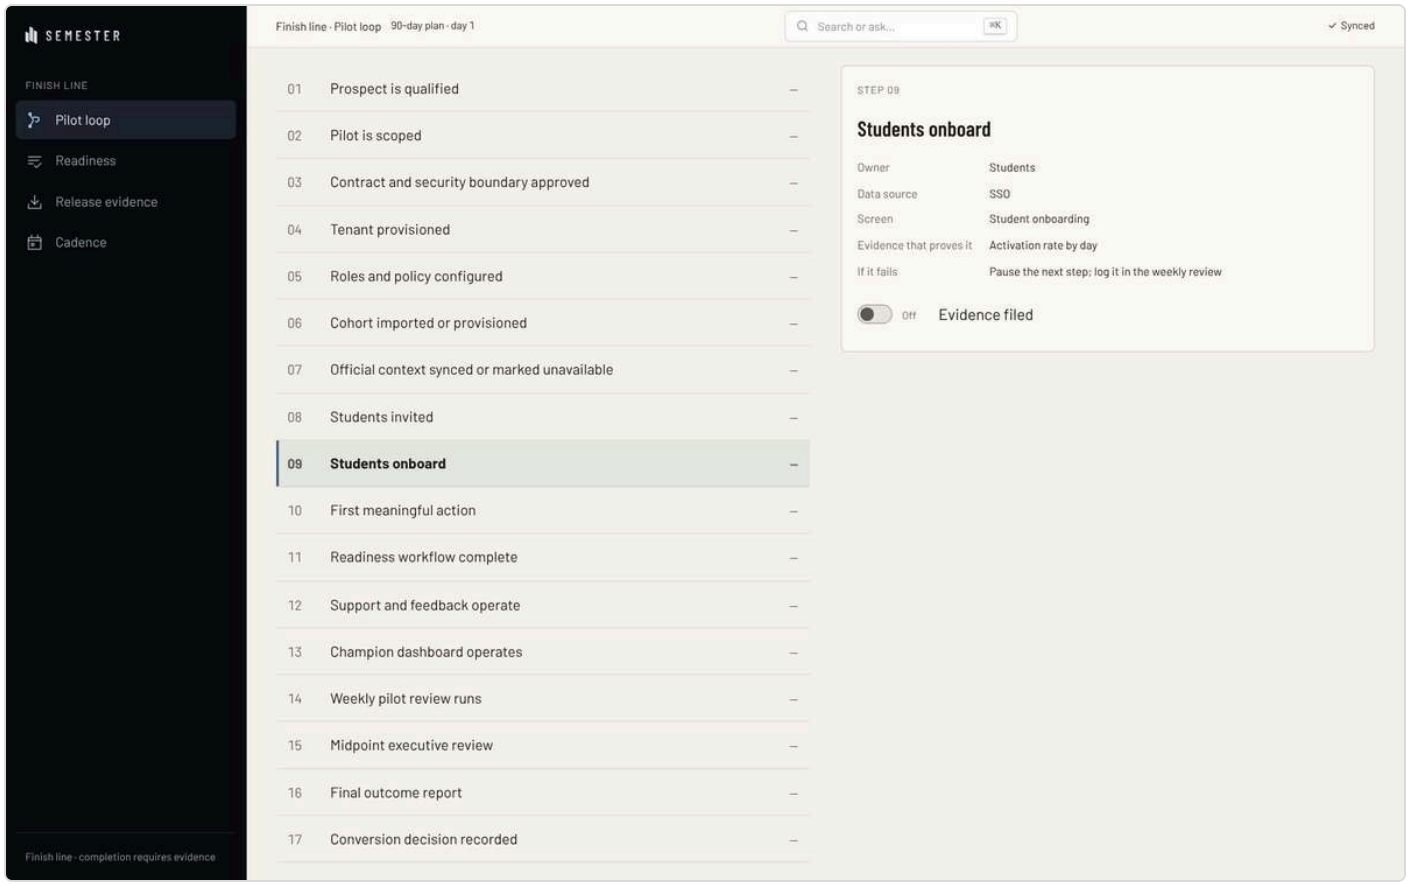
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
01 Prospect is qualified –
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
STEP 09
Students onboard
Owner Students
Data source SSO
Screen Student onboarding
Evidence that proves it Activation rate by day
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

09

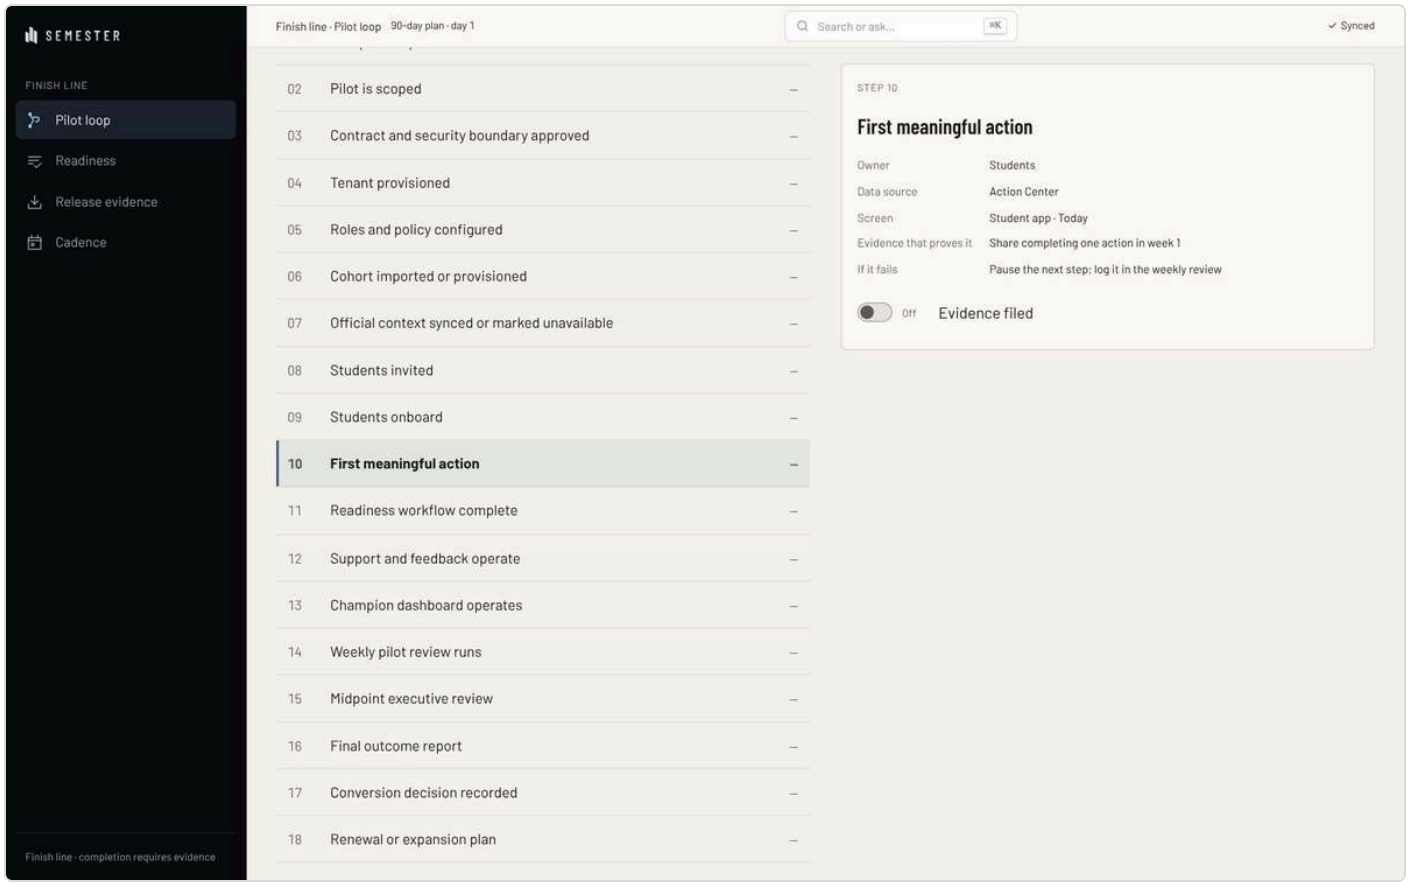
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
02 Pilot is scoped –
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 10
First meaningful action
Owner Students
Data source Action Center
Screen Student app · Today
Evidence that proves it Share completing one action in week 1
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

10

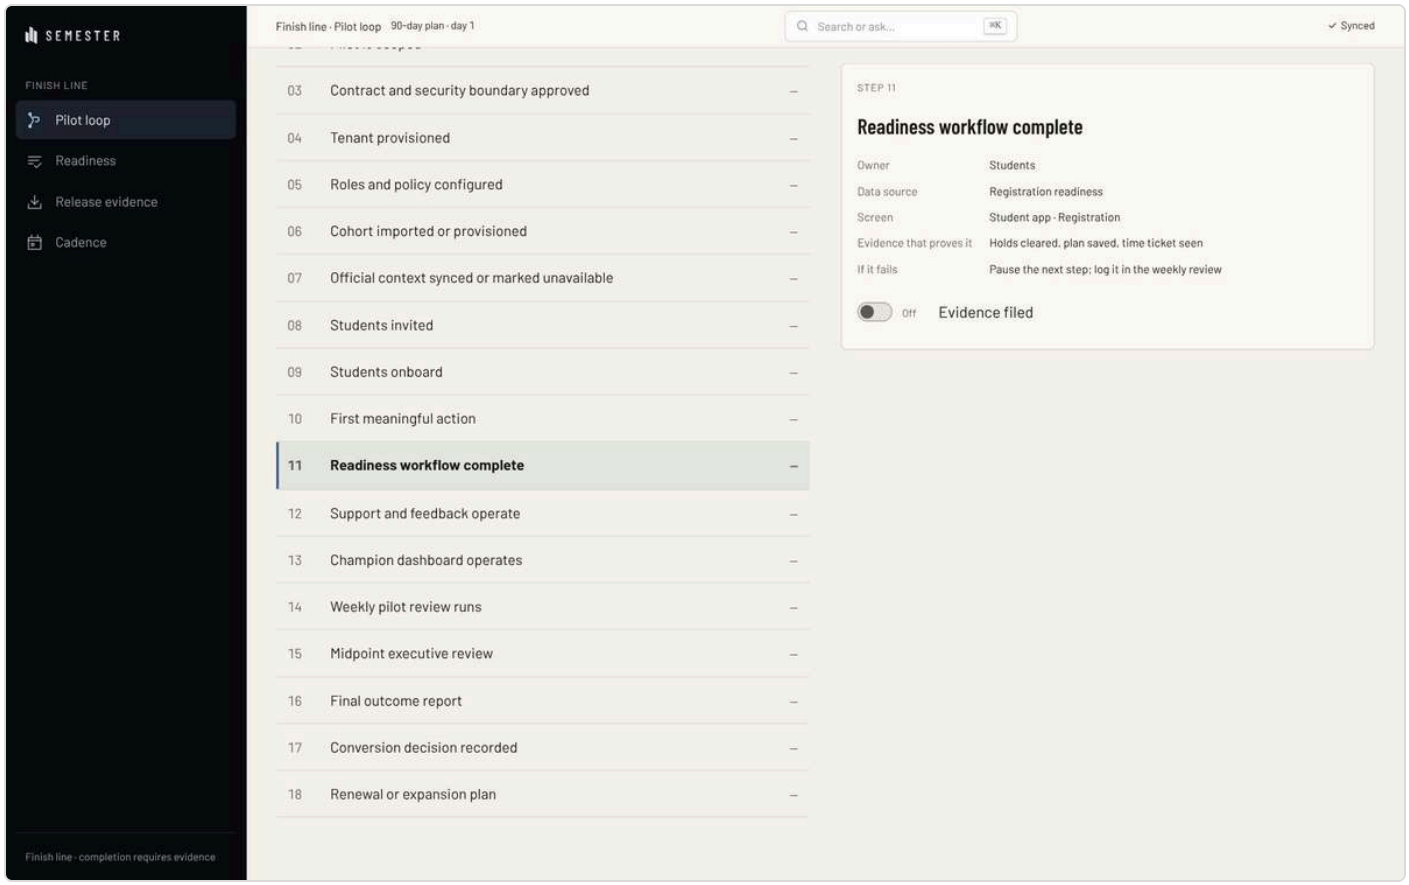
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 11
Readiness workflow complete
Owner Students
Data source Registration readiness
Screen Student app · Registration
Evidence that proves it Holds cleared, plan saved, time ticket seen
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

11

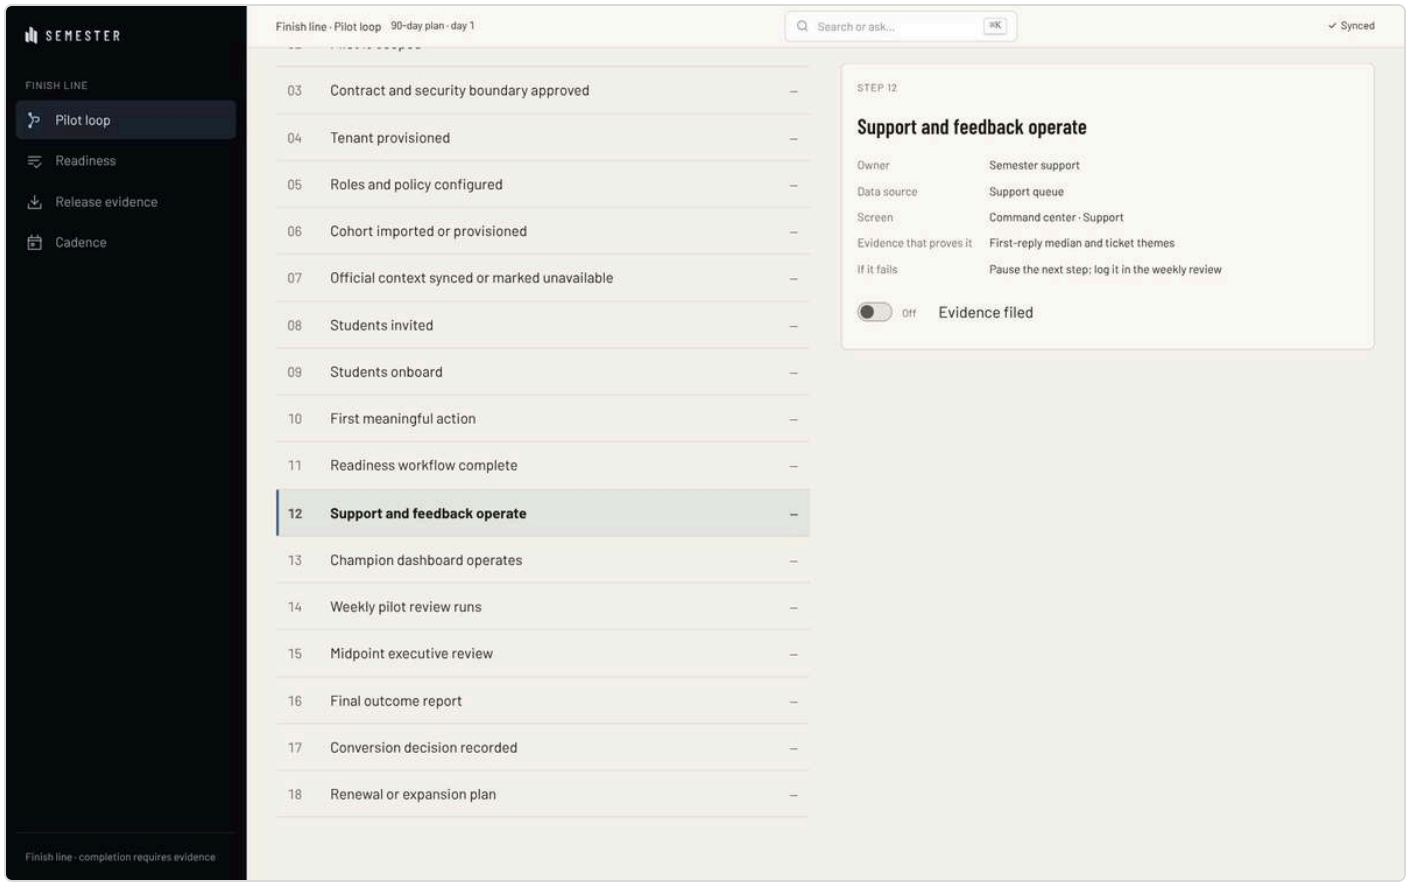
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop 90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 12
Support and feedback operate
Owner Semester support
Data source Support queue
Screen Command center · Support
Evidence that proves it First-reply median and ticket themes
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

12

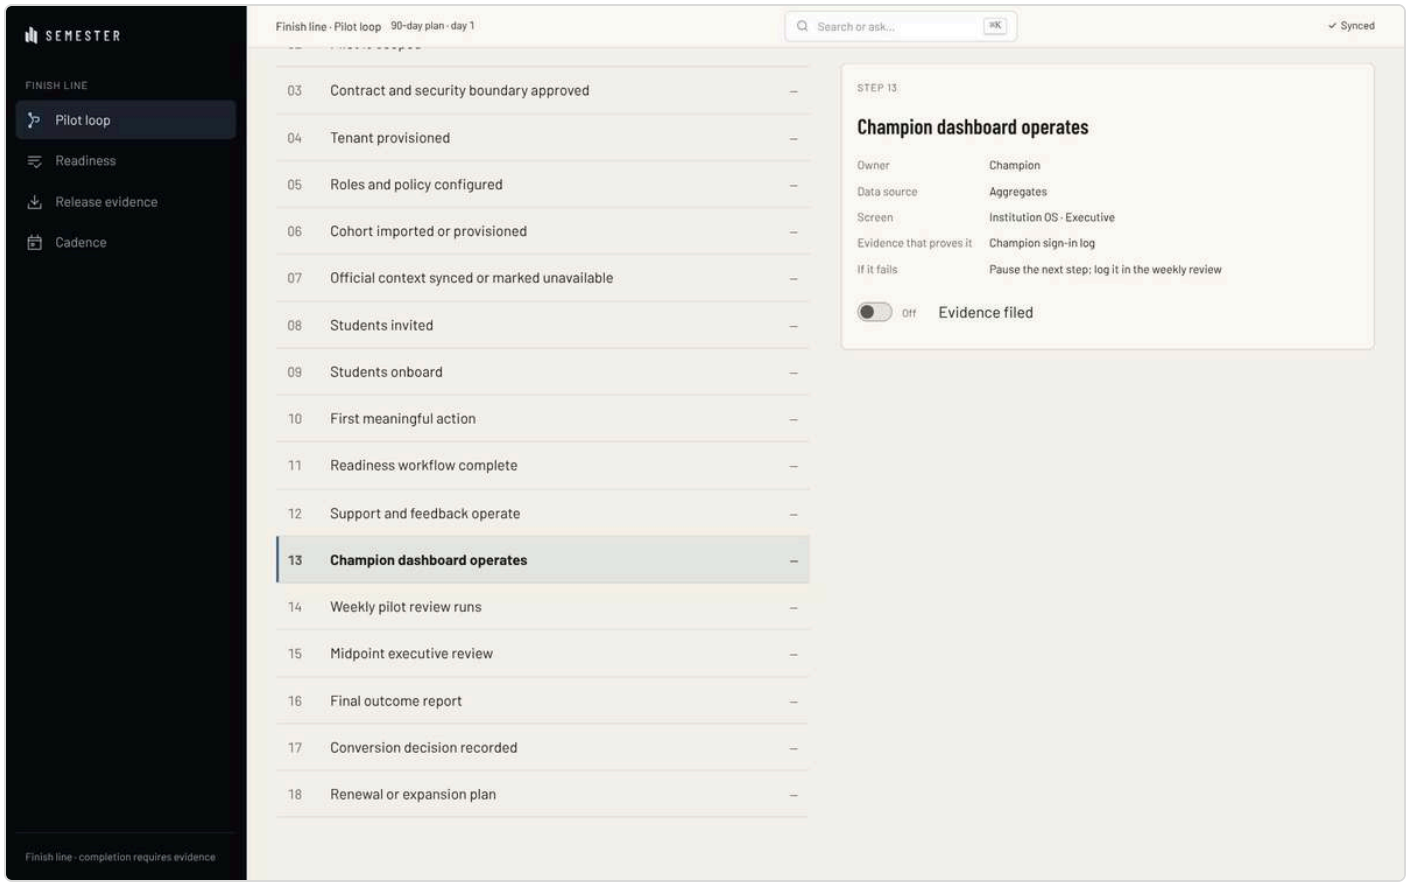
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop 90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 13
Champion dashboard operates
Owner Champion
Data source Aggregates
Screen Institution OS · Executive
Evidence that proves it Champion sign-in log
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

13

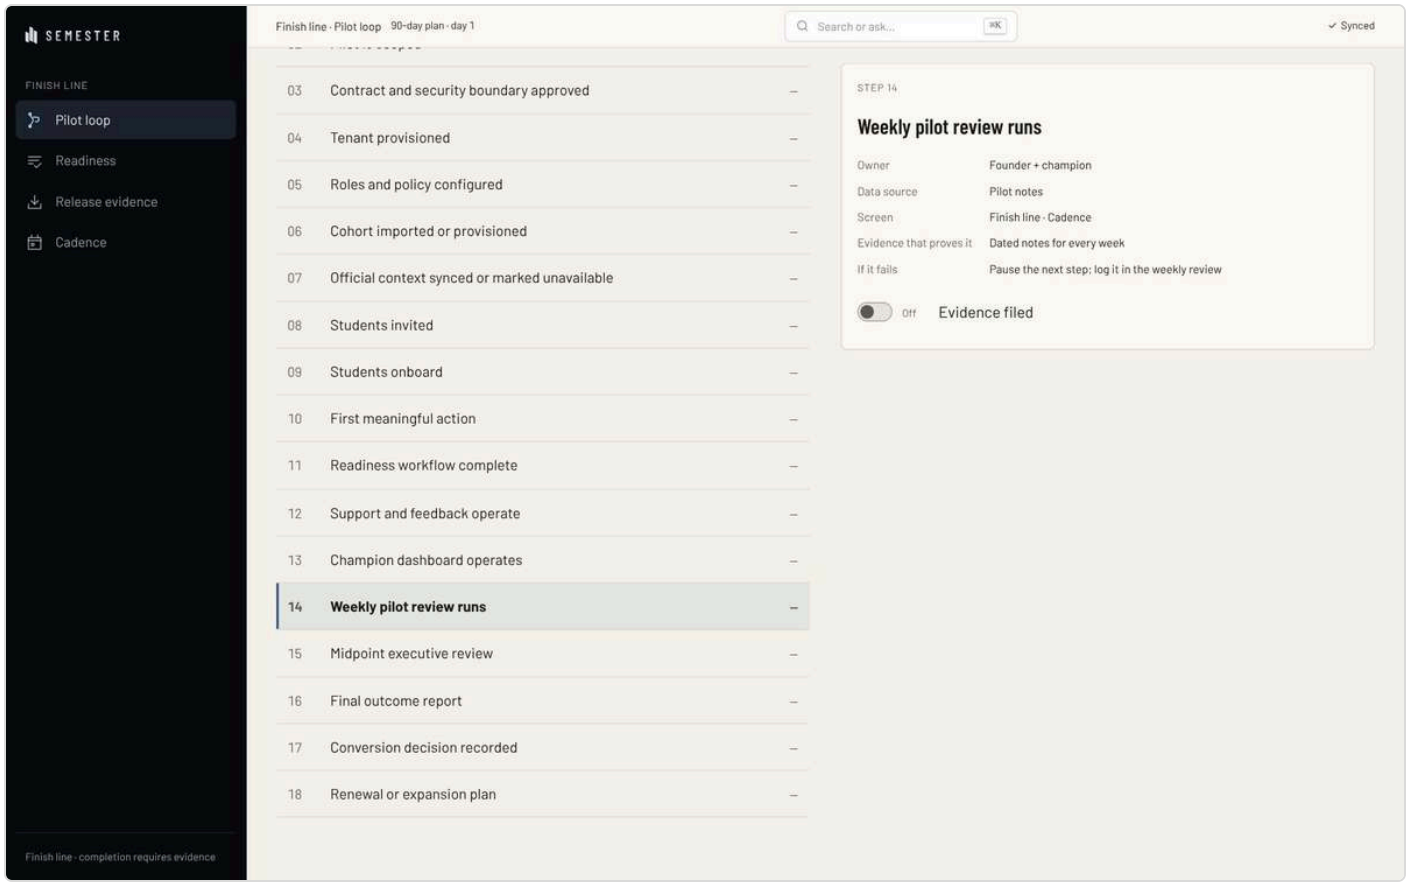
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 14
Weekly pilot review runs
Owner Founder + champion
Data source Pilot notes
Screen Finish line · Cadence
Evidence that proves it Dated notes for every week
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

14

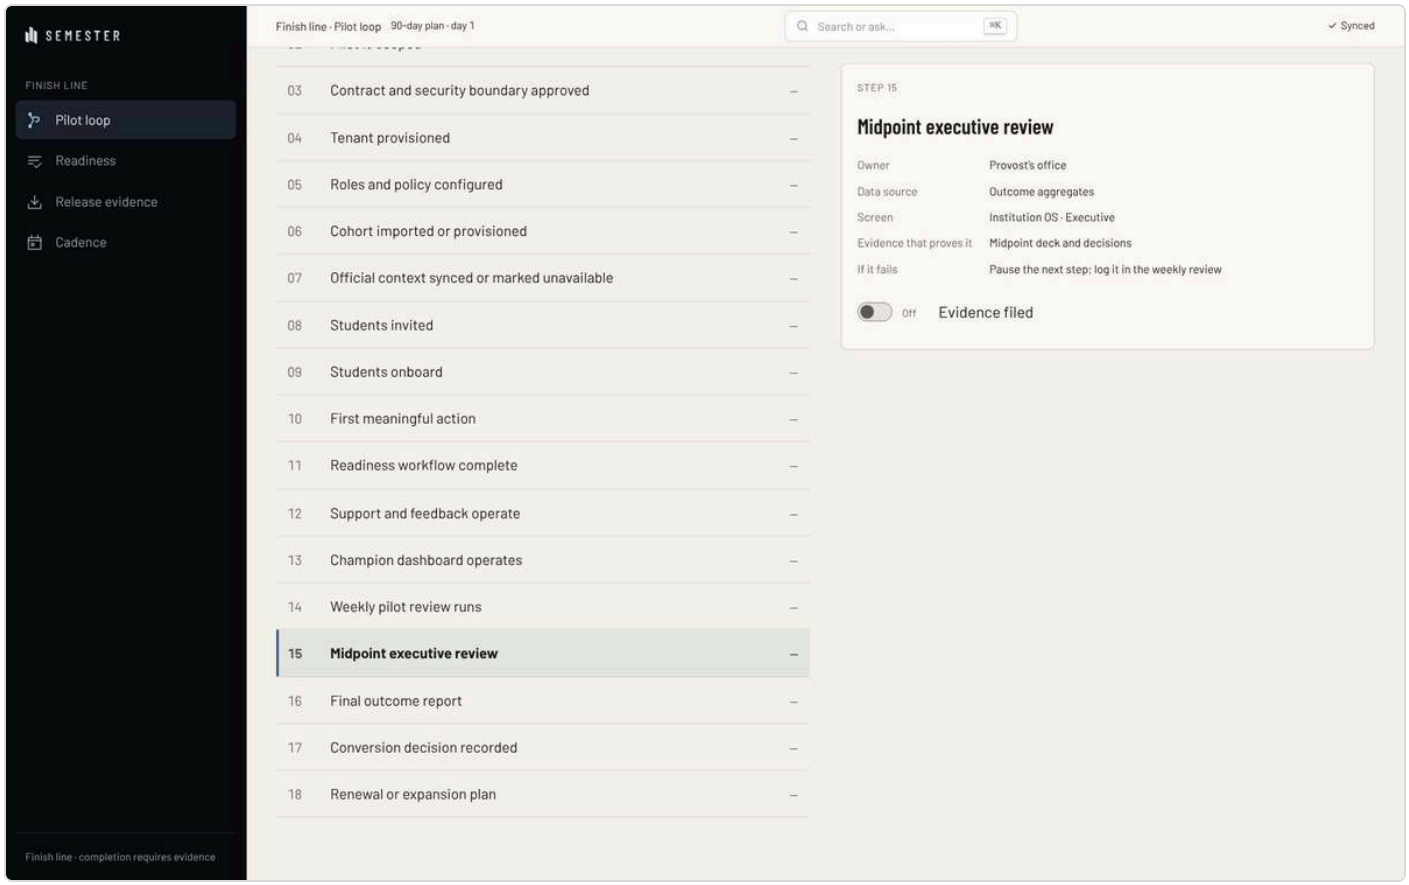
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop 90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 15
Midpoint executive review
Owner Provost's office
Data source Outcome aggregates
Screen Institution OS · Executive
Evidence that proves it Midpoint deck and decisions
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

15

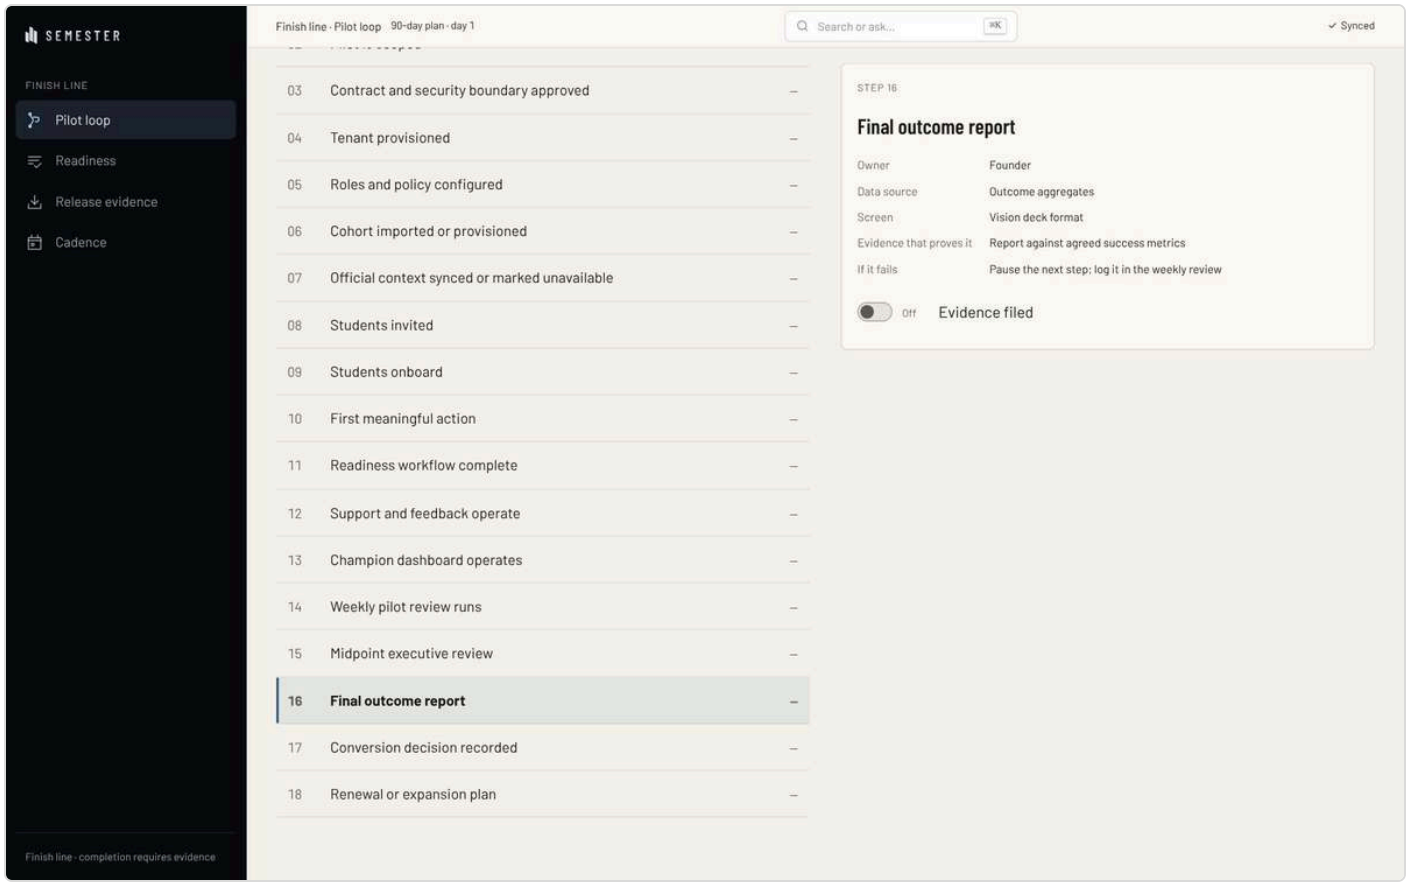
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 16
Final outcome report
Owner Founder
Data source Outcome aggregates
Screen Vision deck format
Evidence that proves it Report against agreed success metrics
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

16

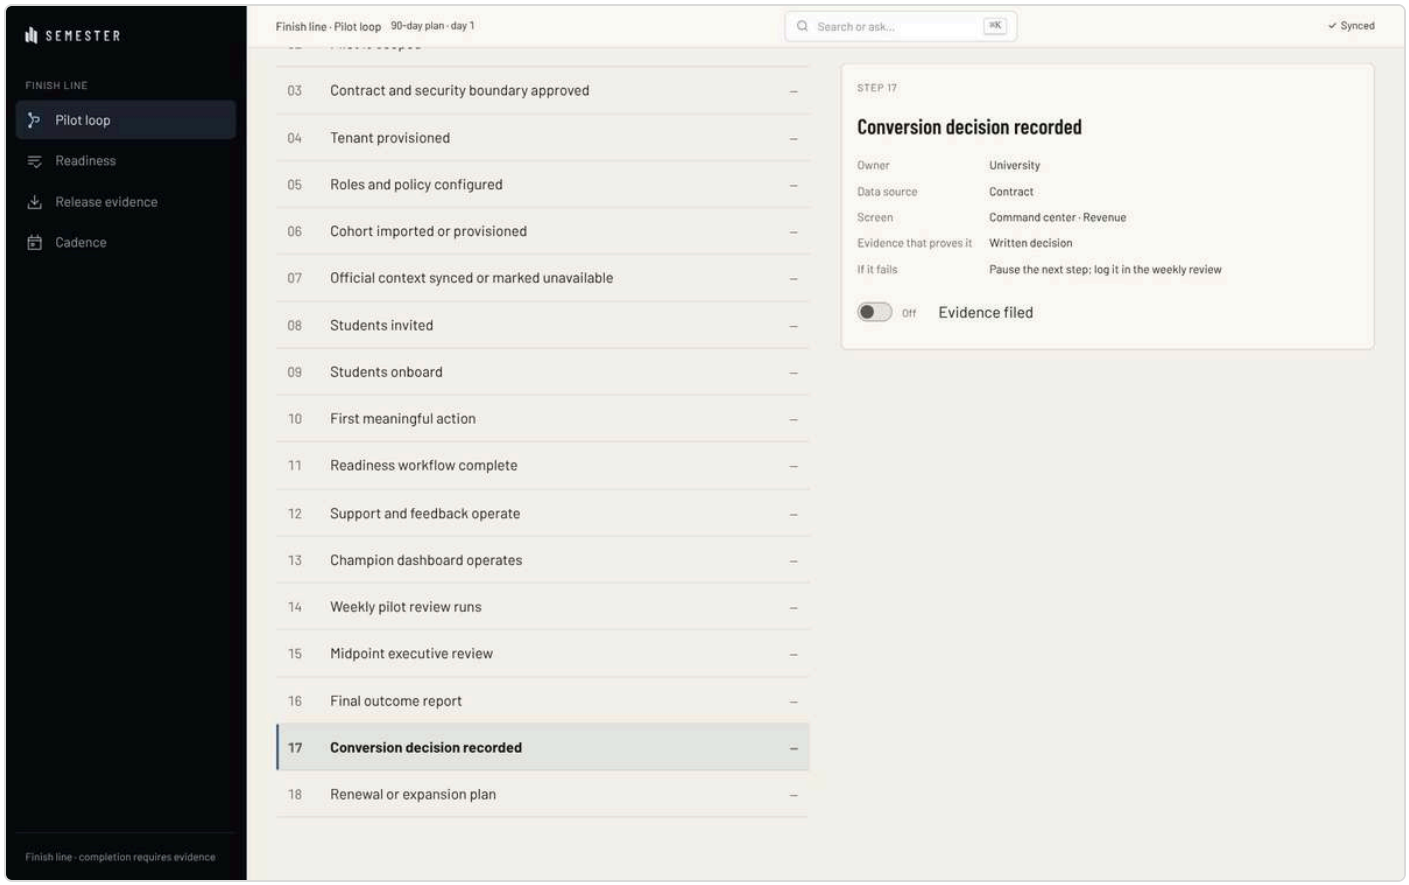
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop
90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved
04 Tenant provisioned
05 Roles and policy configured
06 Cohort imported or provisioned
07 Official context synced or marked unavailable
08 Students invited
09 Students onboard
10 First meaningful action
11 Readiness workflow complete
12 Support and feedback operate
13 Champion dashboard operates
14 Weekly pilot review runs
15 Midpoint executive review
16 Final outcome report
17 Conversion decision recorded
18 Renewal or expansion plan
STEP 17
Conversion decision recorded
Owner
University
Data source
Contract
Screen
Command center · Revenue
Evidence that proves it
Written decision
If it fails
Pause the next step; log it in the weekly review
Off
Evidence filed

17

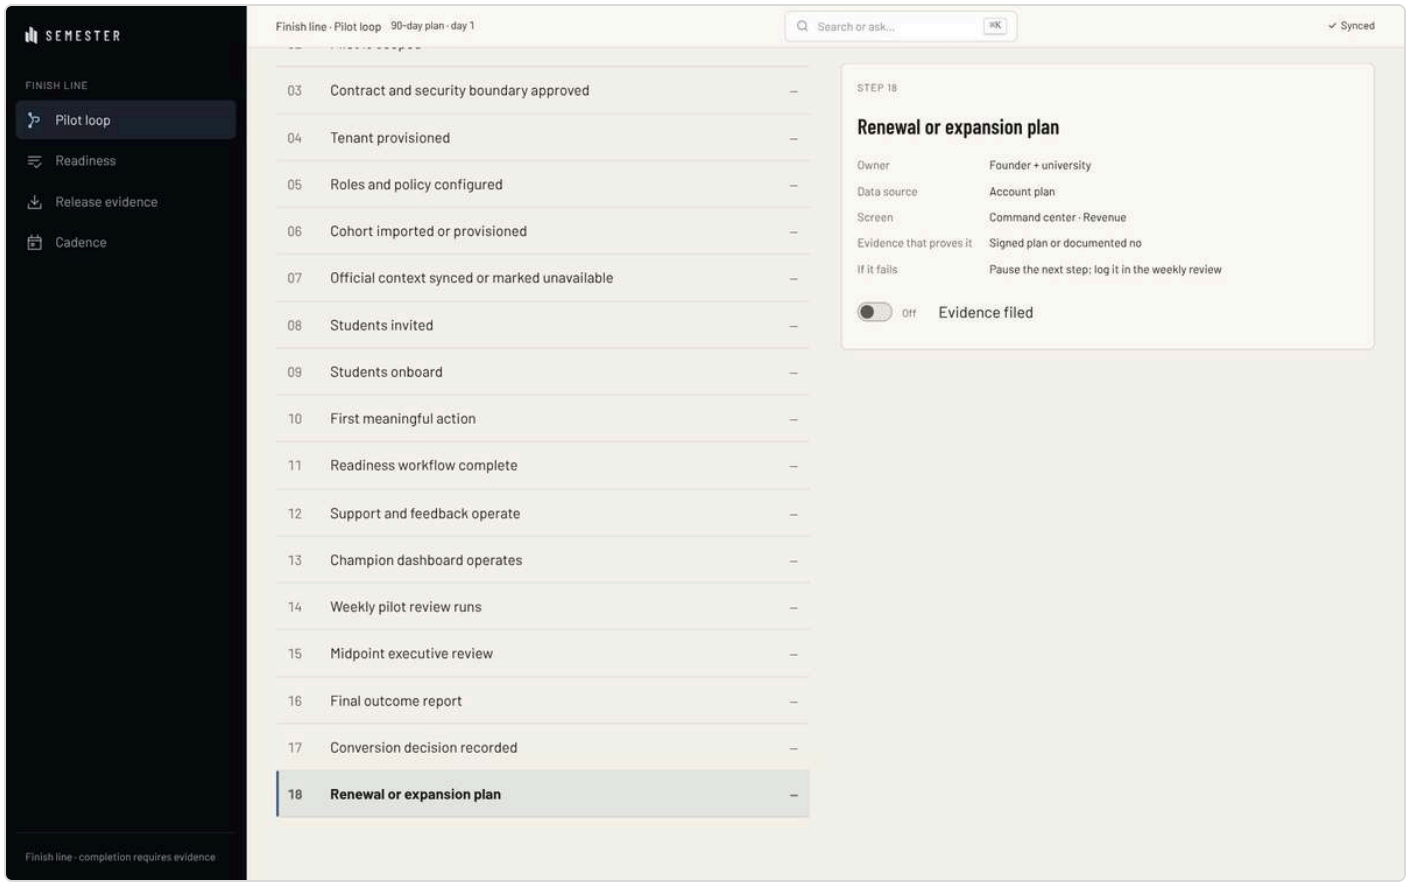
SEMESTER
FINISH LINE
Pilot loop
Readiness
Release evidence
Cadence
Finish line · completion requires evidence
Finish line · Pilot loop 90-day plan · day 1
Search or ask...
⌘K
Synced
03 Contract and security boundary approved –
04 Tenant provisioned –
05 Roles and policy configured –
06 Cohort imported or provisioned –
07 Official context synced or marked unavailable –
08 Students invited –
09 Students onboard –
10 First meaningful action –
11 Readiness workflow complete –
12 Support and feedback operate –
13 Champion dashboard operates –
14 Weekly pilot review runs –
15 Midpoint executive review –
16 Final outcome report –
17 Conversion decision recorded –
18 Renewal or expansion plan –
STEP 18
Renewal or expansion plan
Owner Founder + university
Data source Account plan
Screen Command center · Revenue
Evidence that proves it Signed plan or documented no
If it fails Pause the next step; log it in the weekly review
Off
Evidence filed

18

PRODUCT · TEMPLATE

Product overview deck

10 screens.

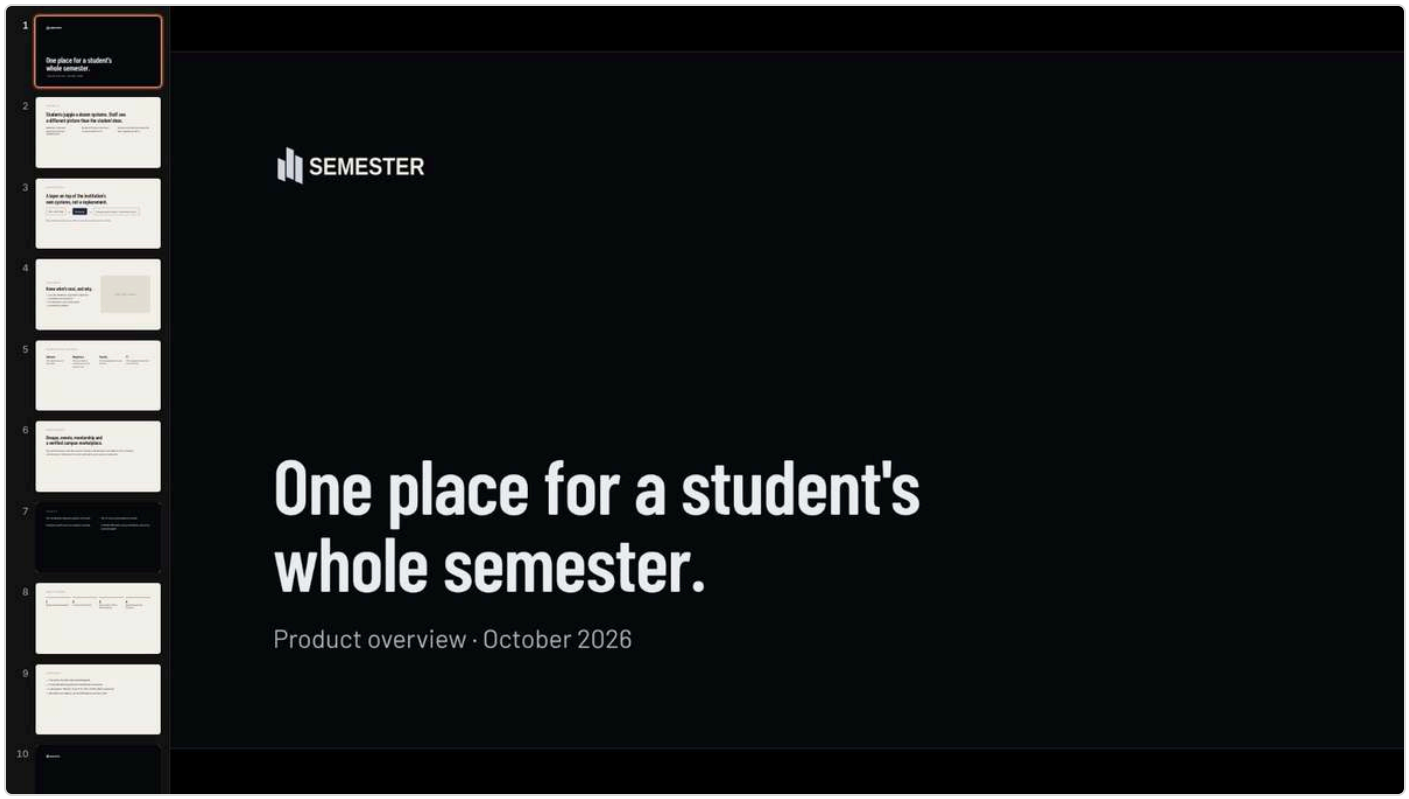

Slide 1

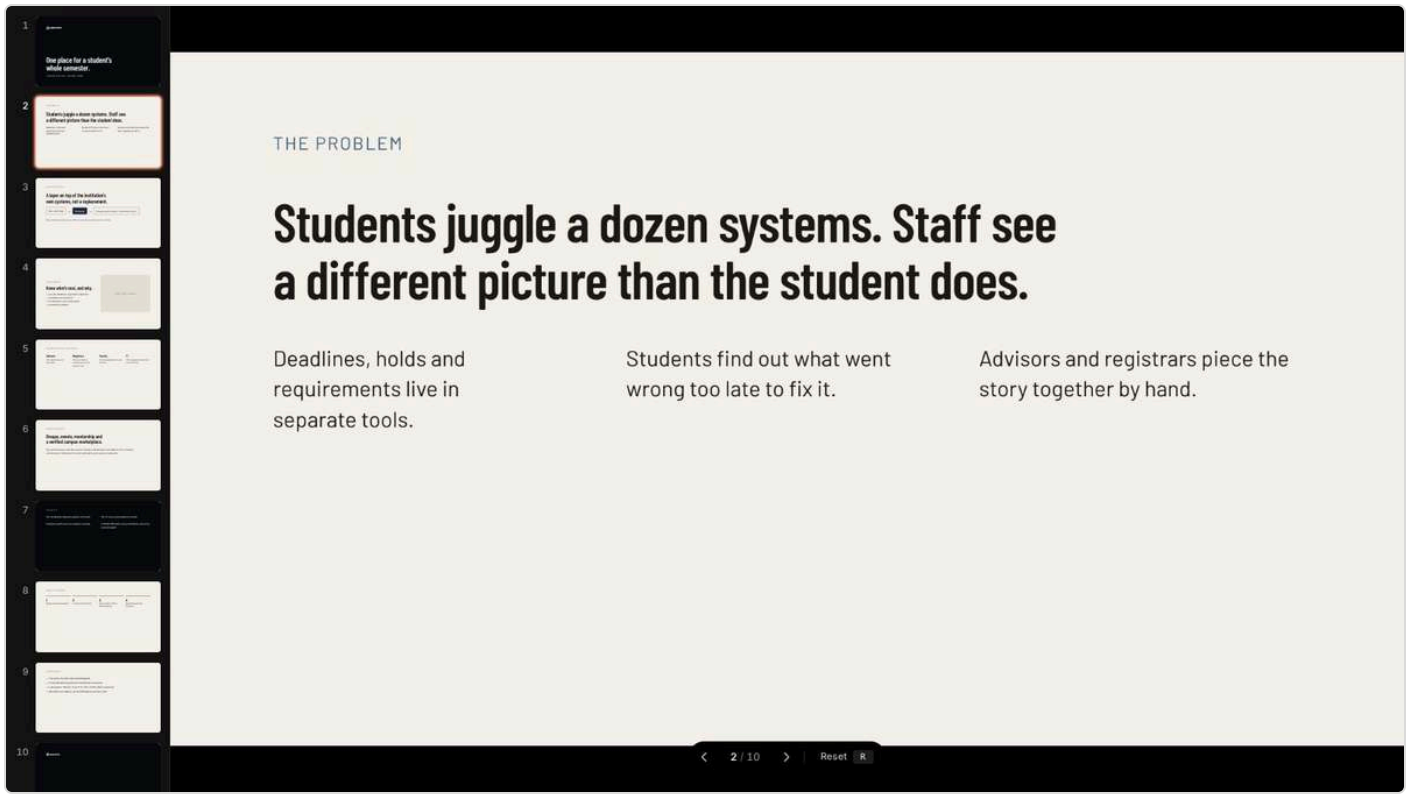

Slide 2

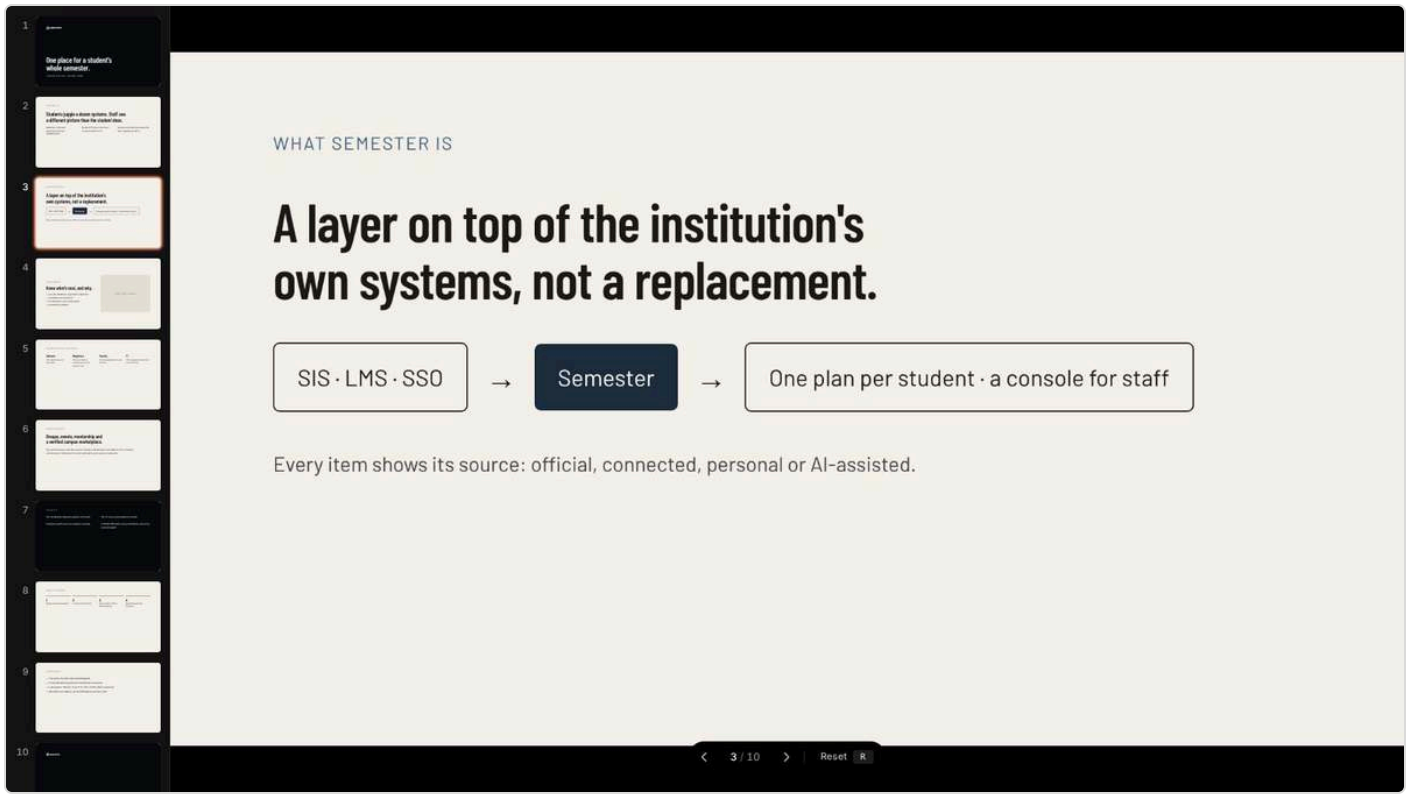

Slide 3

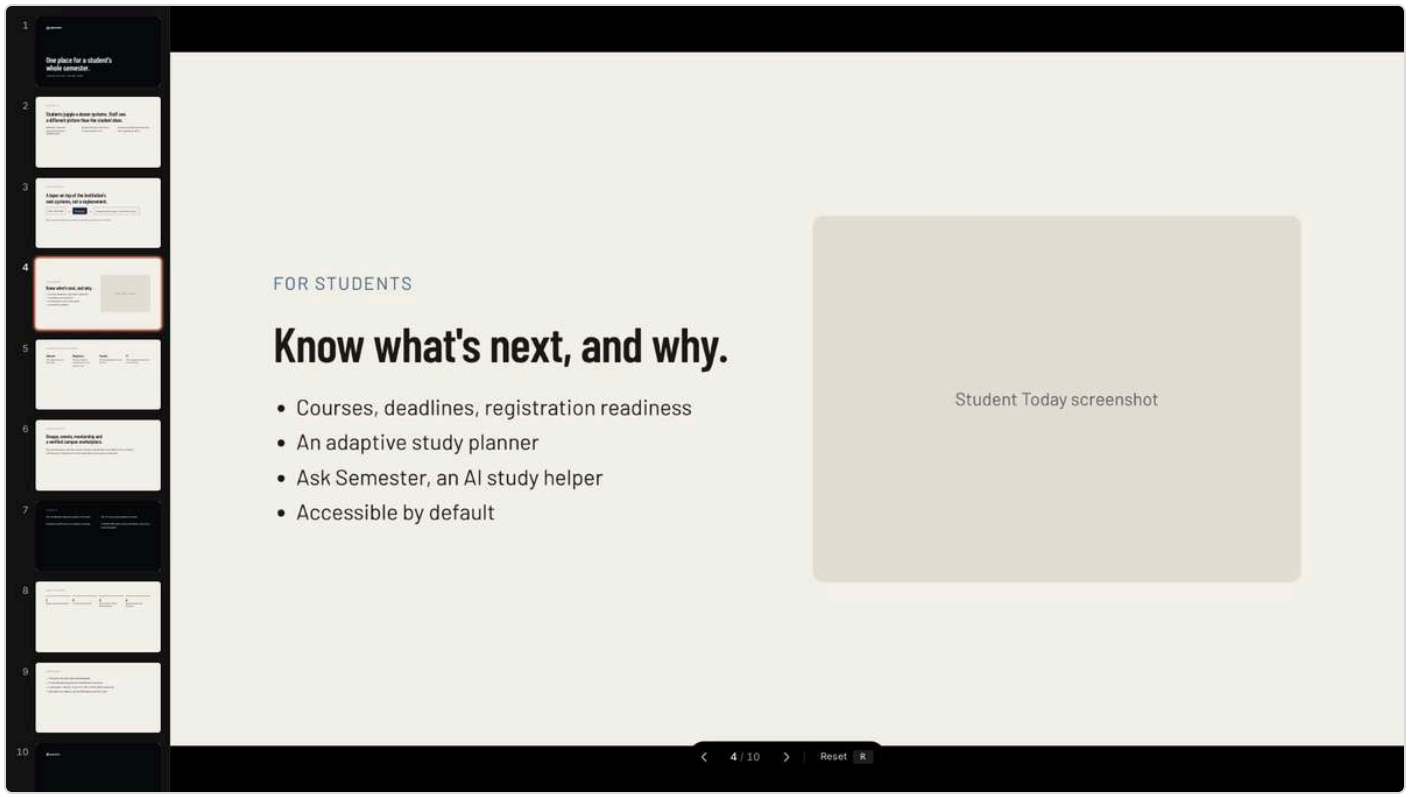

Slide 4

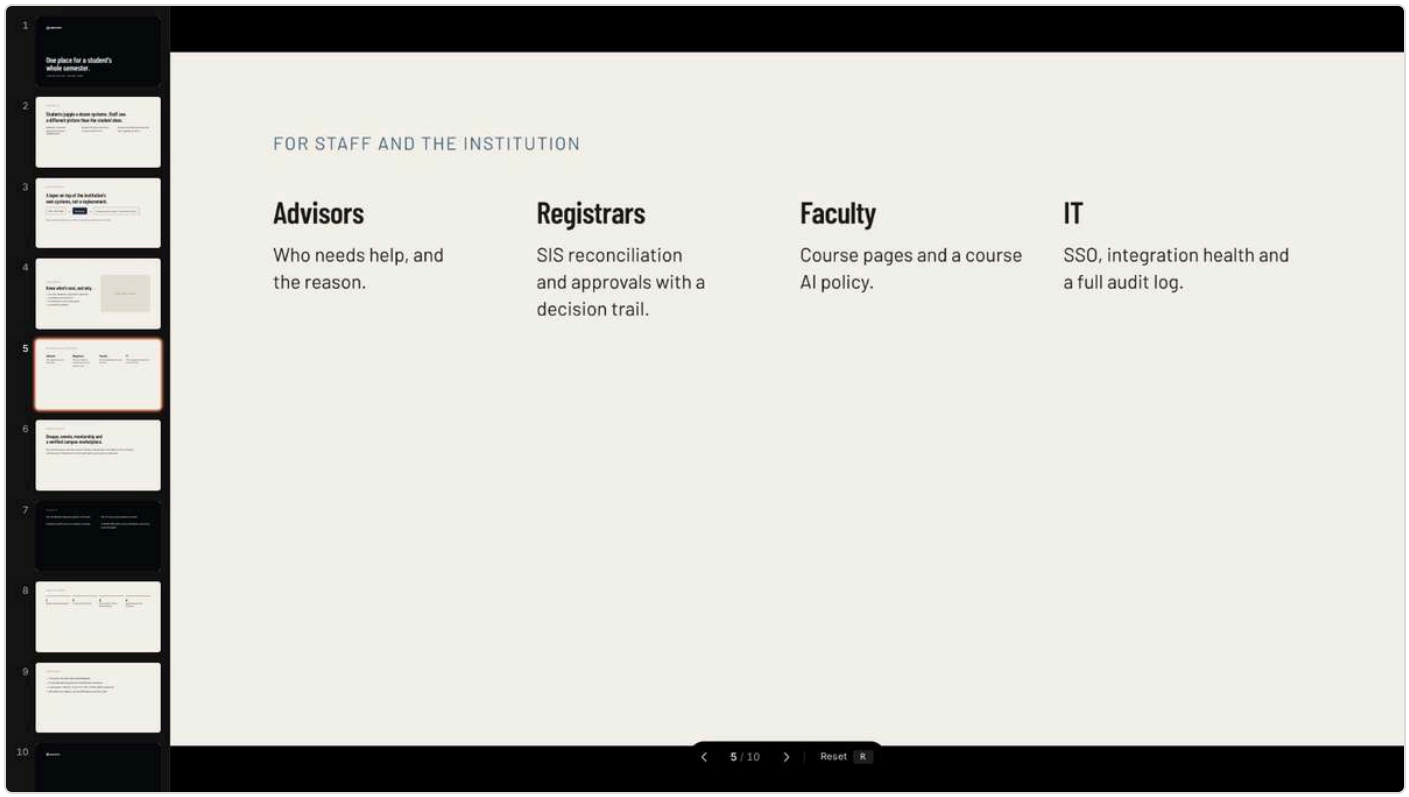

Slide 5

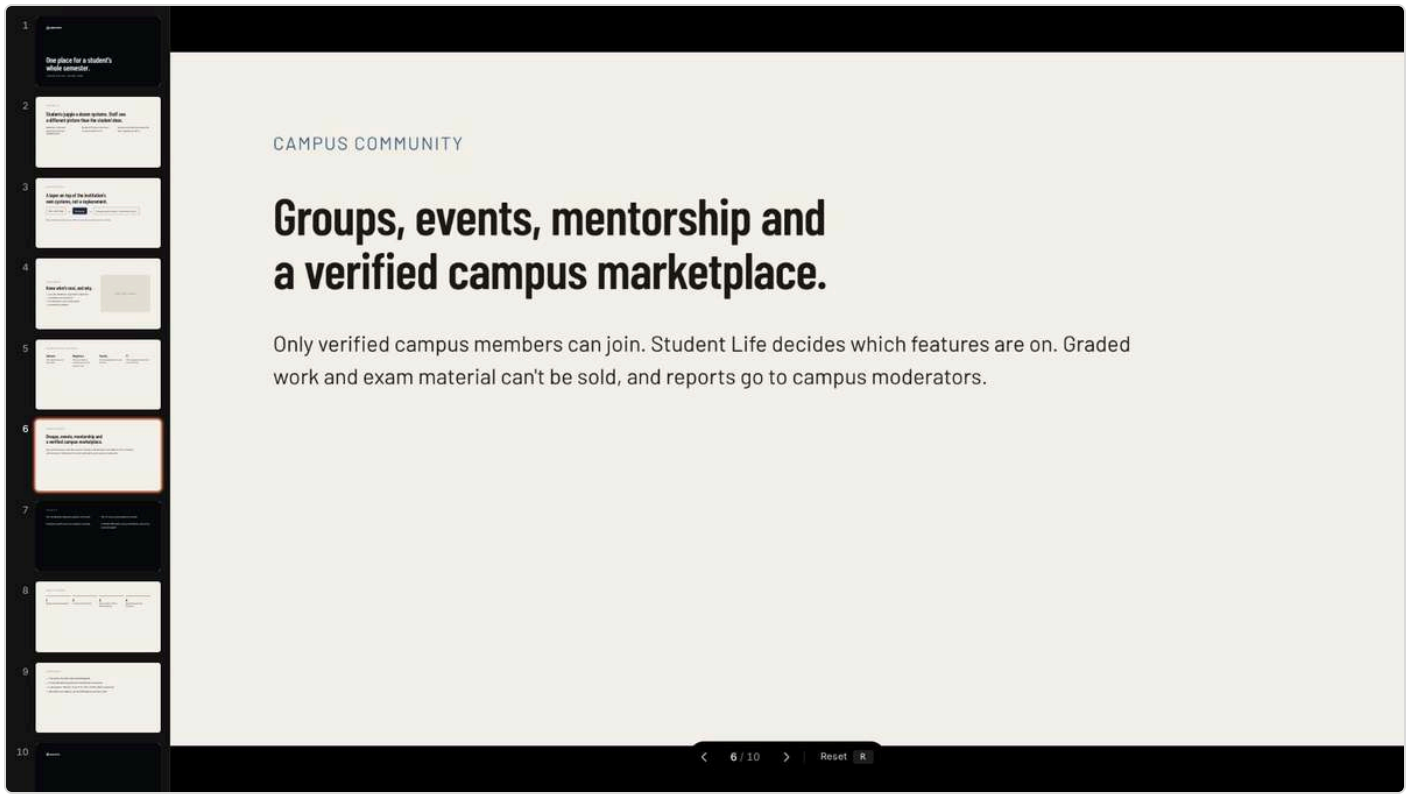

Slide 6

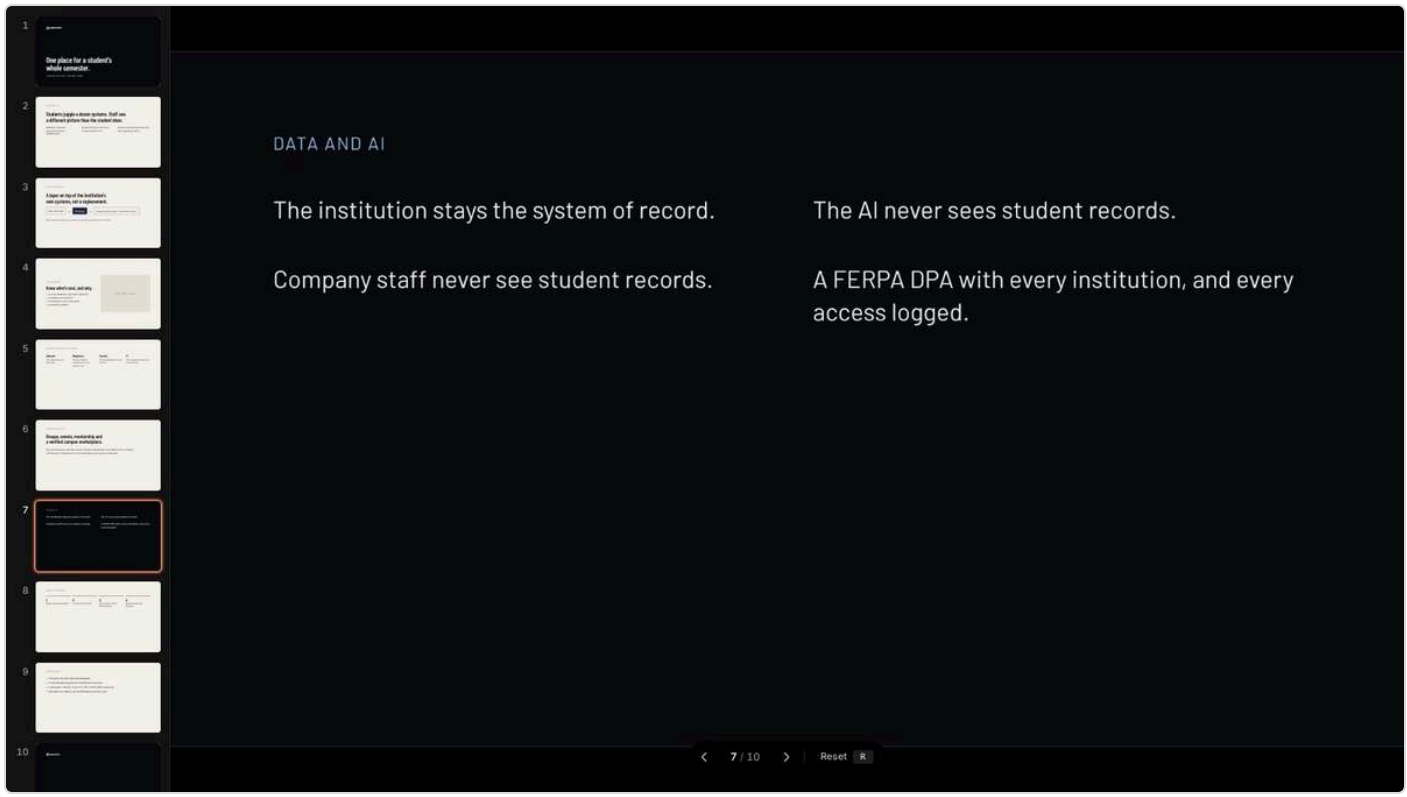

Slide 7

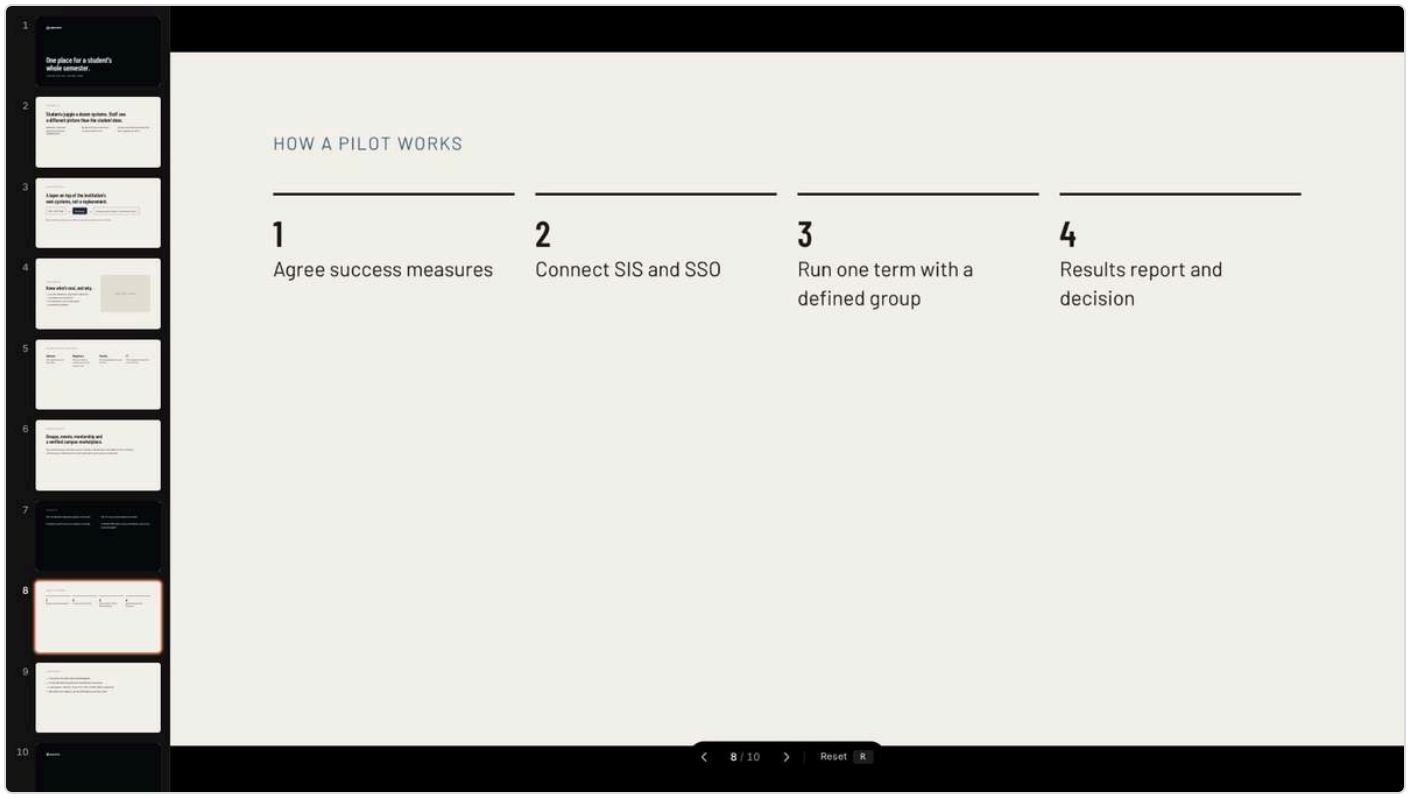

Slide 8

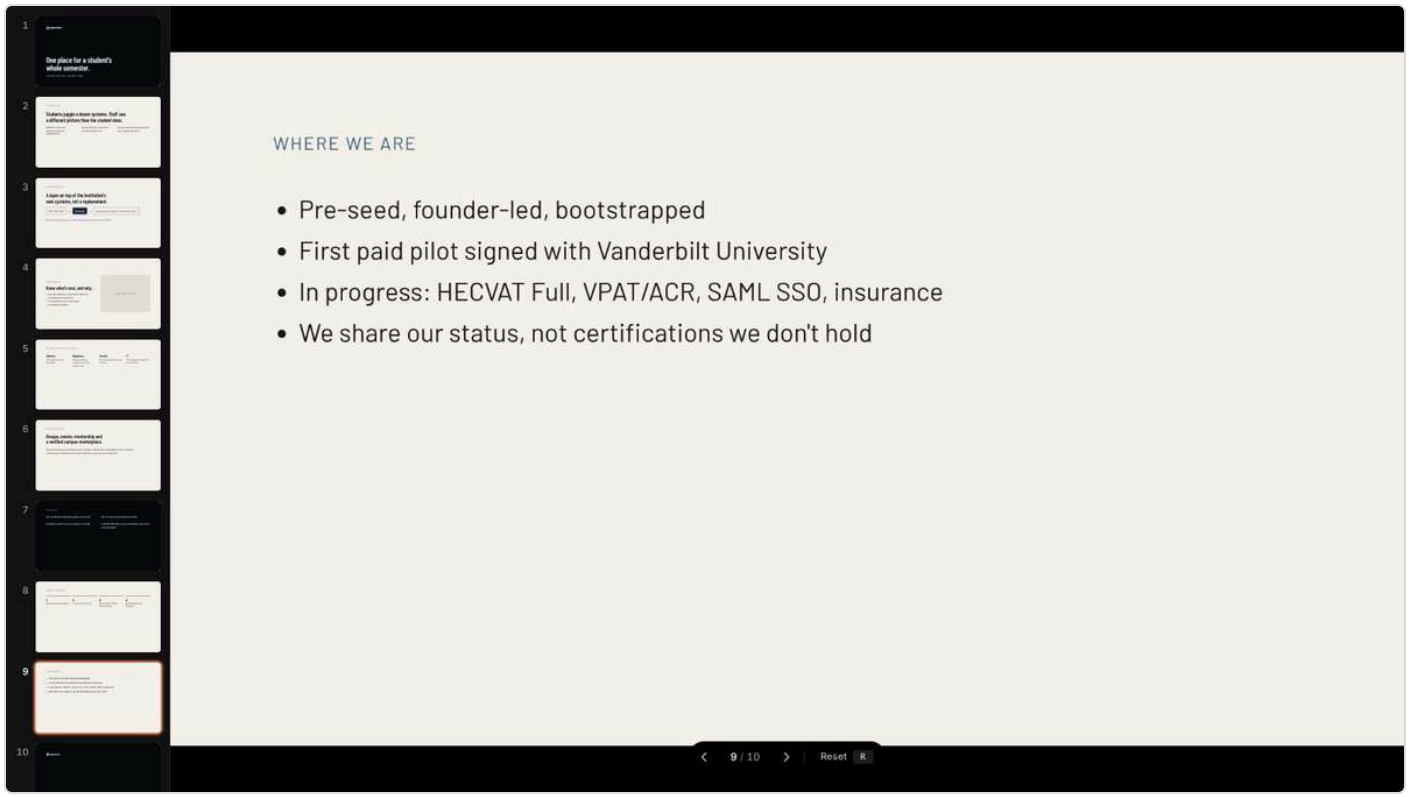

Slide 9

SEMESTER
Let's talk about a pilot.
Founder · add email · semester.app (placeholder)
10 / 10
Reset R

Slide 10

PRODUCT · TEMPLATE

Institution buyer deck

5 screens.

Slide 1

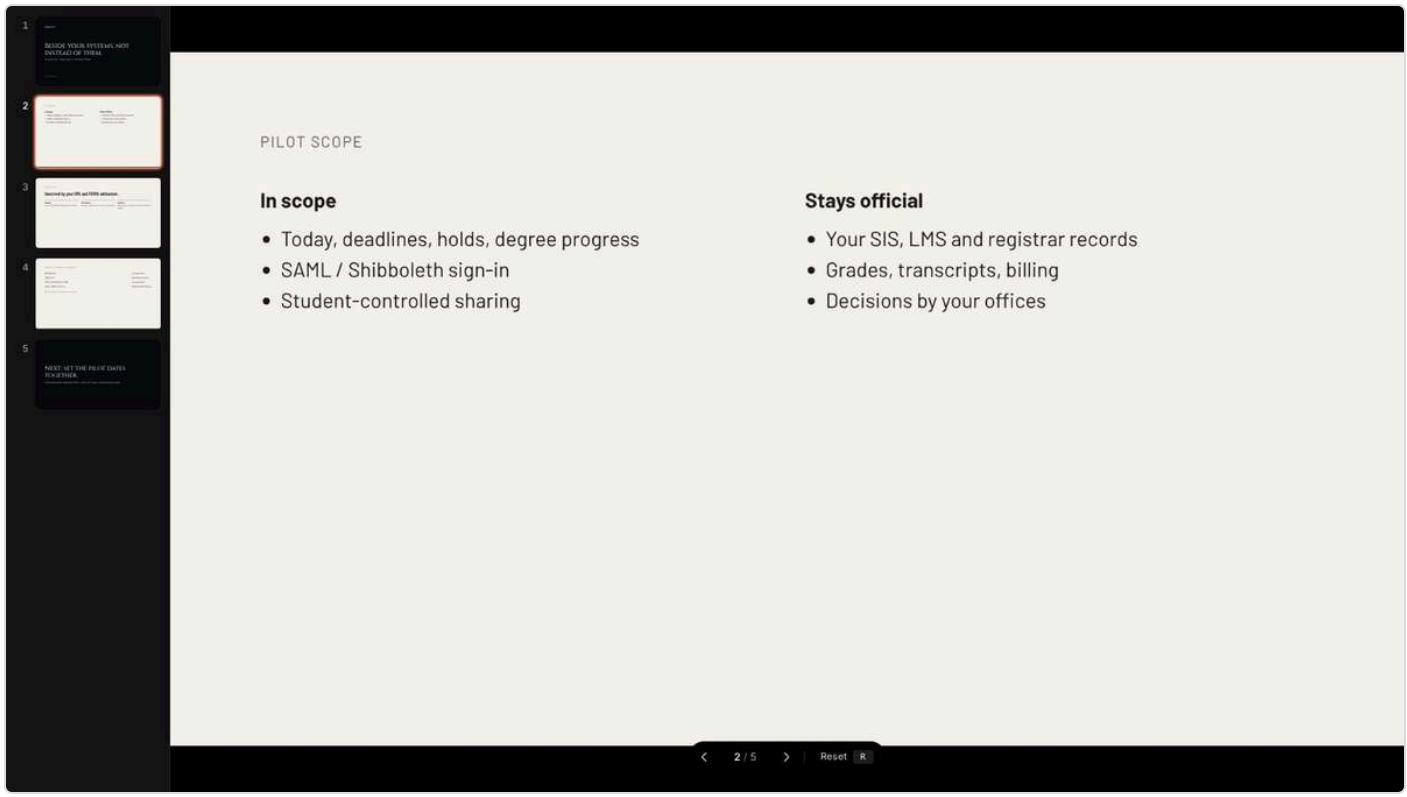

Slide 2

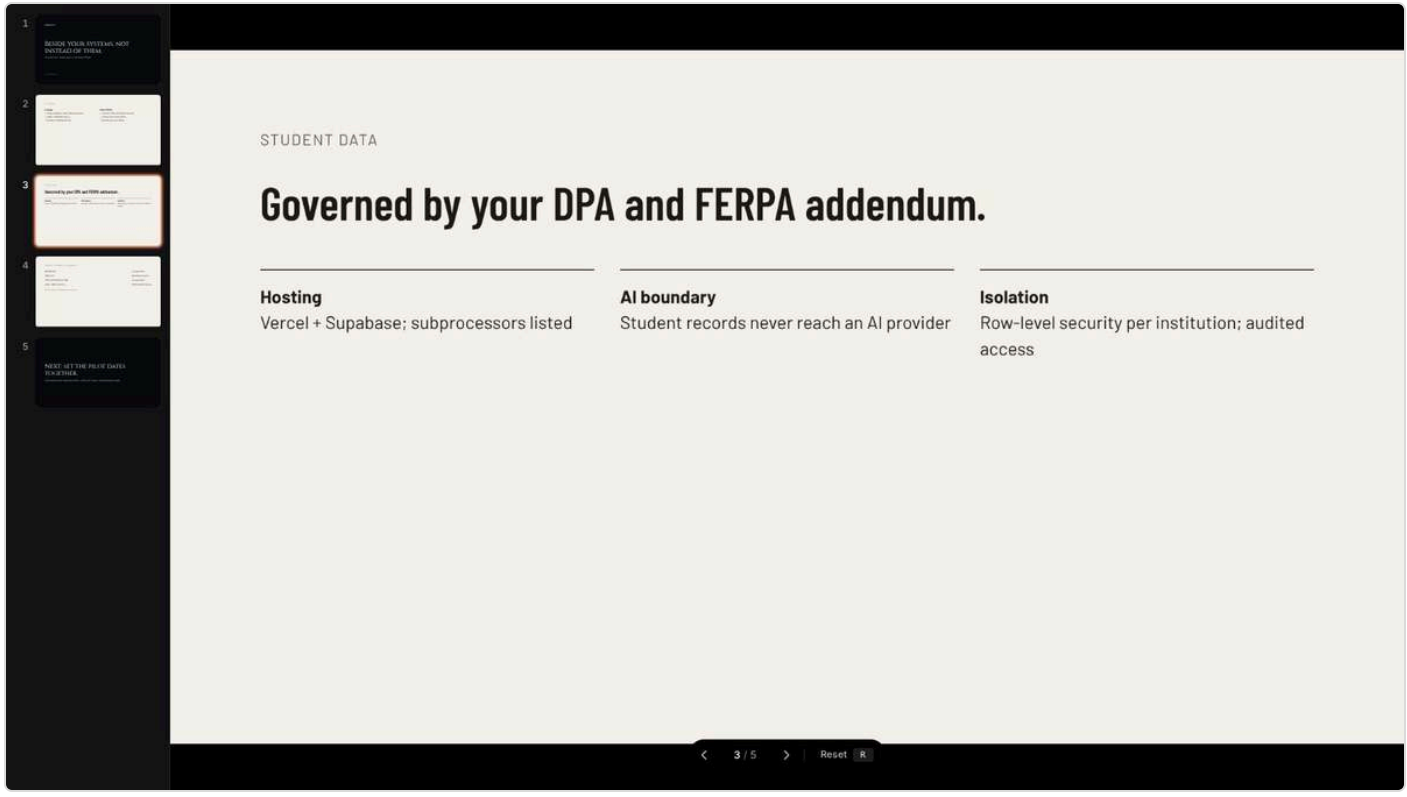

Slide 3

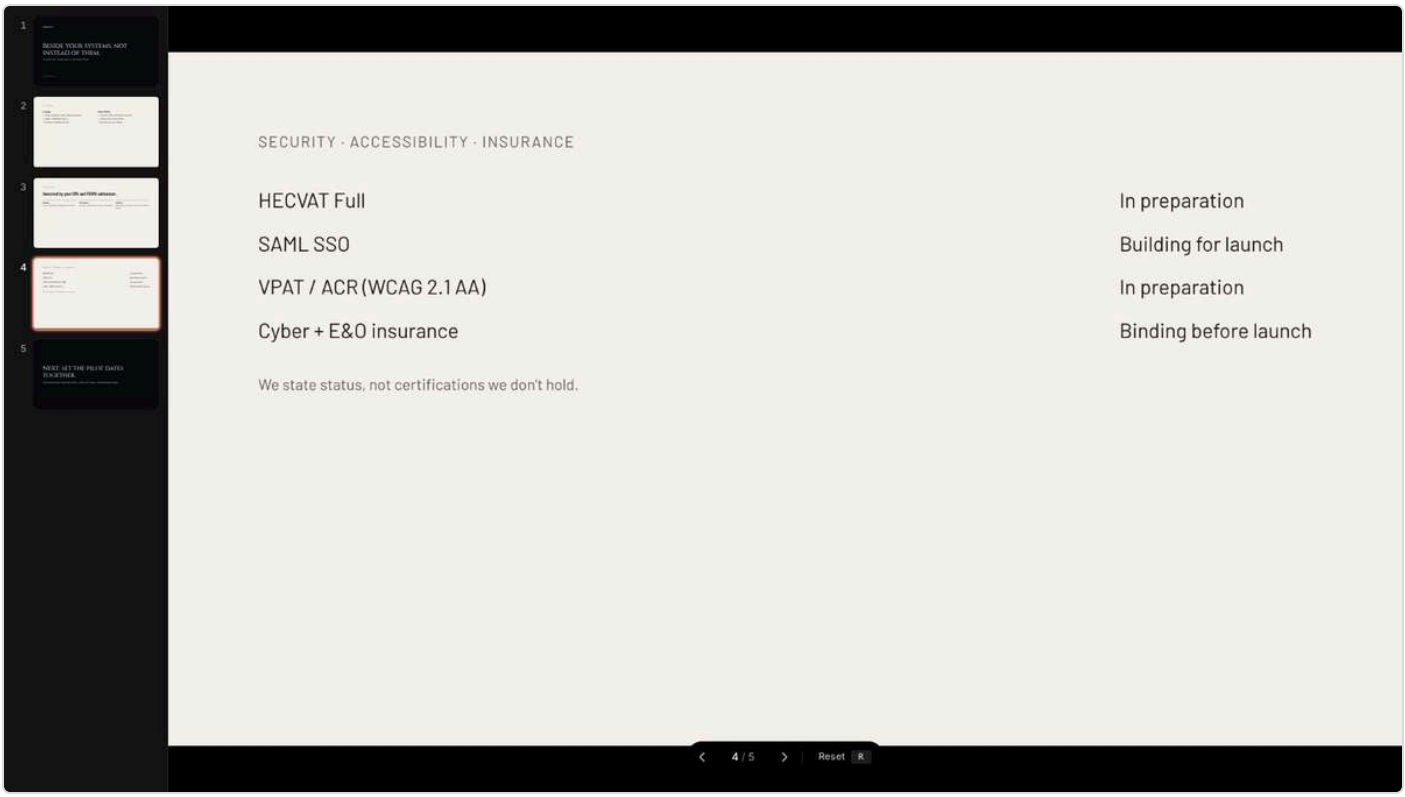

Slide 4

Slide 5

Research brief

SEMESTER RESEARCH BRIEF · OCTOBER 2026

What a university checks before we touch a student record

Five forces shaping the Vanderbilt pilot and every deal after it: accessibility law, the security questionnaire, a major LMS breach, vendor instability and an unsettled AI picture.

TAKEAWAYS

1. **Build to WCAG 2.2 AA now.** The federal deadline for public universities moved to April 2027, but the standard didn't change, and some campuses already require 2.2.
2. **HECVAT 4 is the gate.** 321 questions, now including privacy and AI. Every "No" needs a written explanation.
3. **The Canvas breach changed the questions buyers ask.** They will want proof that one weak account can't reach every tenant.
4. **Vendor survival is a buying criterion.** After Anthology's bankruptcy, expect a solo-founder company to be asked for an exit and data-return plan.
5. **No new federal AI rule for student records exists.** Institutions are reading FERPA for themselves, so a per-data-type switch they control is the safest default.

1 · Accessibility: a deadline moved, the bar didn't

On 20 April 2026 the Justice Department extended the ADA Title II web rule by a year. Public entities serving 50,000 or more people now have until **26 April 2027**; smaller ones until 26 April 2028 (EDUCAUSE Review, June 2026). The standard remains WCAG 2.1 Level AA, and the rule covers course content and mobile apps as well as websites (EdTech Magazine).

Universities are telling staff not to slow down. UNC says expectations are unchanged and is holding to its own **WCAG 2.2 AA** standard, and tells staff who buy software to check accessibility during procurement (UNC Digital Accessibility).

Vanderbilt is private, so Title II doesn't apply; private institutions fall under Title III and still face legal risk (Archer). *Our read:* public-university deals will ask for a VPAT against 2.1 AA; aiming at 2.2 AA covers both.

2 · Security review: HECVAT 4

EDUCAUSE released HECVAT 4 on 10 February 2025 and lists 4.1.6 as current (EDUCAUSE). It combines the old Full, Lite and On-Premise versions into one workbook and adds privacy and AI questions (EDUCAUSE Review). One guide counts 321 questions across seven sections, and says a "No" answer must explain the compensating safeguard (SaltyCloud).

Large universities are sharing assessments. UT Austin, UVA and Duke presented on running HECVAT 4 reviews at scale in April 2026 (EDUCAUSE CPP 2026). *Our read:* a complete, honest HECVAT is reusable sales material, not a one-off. Answer "planned" controls as planned, with a date.

8,809 institutions found in the leaked Canvas data, across 50 countries, by Trend Micro's analysis.

3 · The Canvas breach

Instructure disclosed a breach on 1 May 2026, after detecting unauthorized activity on 29 April (Tech Insider). Instructure says the stolen data included names, email addresses, student ID numbers and messages between users, but no passwords or financial data (Wikipedia summary). The attackers came back on 7 May and defaced login pages. Instructure later confirmed both intrusions used a Free-For-Teacher account (ClassAction.org).

The scale figures disagree. The attackers claimed 3.65 TB and about 275 million users (UMD IT). Other reporting cites 231 million unique email addresses (Reed Smith). Both are attacker claims, not confirmed by Instructure. Trend Micro notes Canvas holds sensitive material such as accommodation requests, which makes targeted phishing the main risk.

Our read: expect questions on tenant isolation, free or self-serve accounts, and how fast we'd notify. Our rule that accommodations show without the reason, and that Marketplace apps never get records, is

Opening view (1/2)

directly relevant evidence.

4 · Vendor instability: Anthology

Anthology, Blackboard's parent, filed for Chapter 11 on 29 September 2025 (Davis Polk) with about $1.6 billion of debt, much of it from the 2021 Blackboard merger (ElevenFlo). Its SIS/ERP unit went to Ellucian and its student-success unit to Encoura. The sales closed on 31 December 2025 and 31 January 2026, and the remaining business now trades as Blackboard (Davis Polk).

Our read: institutions have just watched a major vendor break apart. A one-founder company should offer, before being asked, a documented data export, an escrow or exit clause, and a US-only hosting map.

5 · Market shape: connect first, replace later

The LMS market is concentrated, but the numbers depend on who counts and how:

Source	Canvas	Others
ListEdTech, institutions	~43%	Moodle, Brightspace, Blackboard each 12–16%
Edutechnica via Cubite, 2025	39% institutions · 50% enrollment	Brightspace 20% by enrollment

The SIS market is more fragmented. Ellucian Banner leads with 24% and Workday holds 3% (ListEdTech, January 2025). Workday says it has more than 200 institutions under contract for Workday Student, a vendor figure (Full Fabric). Ellucian launched an "AI-native" Ellucian Student in April 2026 (MarketsandMarkets release).

Our read: incumbents are adding AI to the system of record. Semester's edge is the student-facing layer across all of them, which supports the phased plan: connect read-only first, become authoritative only once proven.

6 · AI and FERPA: thin evidence

These searches found no new federal rule on AI and student records. AACRAO is preparing a 2026 FERPA publication that will cover AI and student privacy (AACRAO). The NEA notes that institutions must interpret FERPA themselves for how AI accesses, uses and stores data (NEA). HECVAT 4's AI section is now the most concrete checklist buyers will use.

Gap: this is the weakest-sourced section. Before the pilot, ask Vanderbilt's privacy office for its current AI-vendor guidance directly.

Sources

1. EDUCAUSE Review: DOJ and HHS extend web accessibility deadlines (2 June 2026)
2. EdTech Magazine: Guide to the ADA Title II rule
3. UNC: ADA Title II info and FAQ
4. Archer: DOJ extends ADA web deadline
5. EDUCAUSE: HECVAT
6. EDUCAUSE Review: HECVAT 4 (10 Feb 2025)
7. SaltyCloud: HECVAT 4 guide
8. EDUCAUSE CPP 2026: HECVAT 4 at scale
9. Trend Micro: Instructure Canvas breach
10. Wikipedia: 2026 Canvas data breach
11. ClassAction.org: Instructure May 2026
12. UMD IT: Canvas breach, what we know
13. Reed Smith: Canvas/Instructure cyberattack
14. Tech Insider: Canvas breach timeline
15. Davis Polk: Anthology Chapter 11
16. ElevenFlo: Anthology restructuring
17. ListEdTech: LMS competitive compass
18. Cubite: LMS market share 2026
19. ListEdTech: SIS market share, Jan 2025
20. Full Fabric: Ellucian alternatives 2026
21. MarketsandMarkets: SIS market release
22. AACRAO: Student privacy in the age of AI
23. NEA: Federal regulations related to AI

Opening view (2/2)

Pilot results report

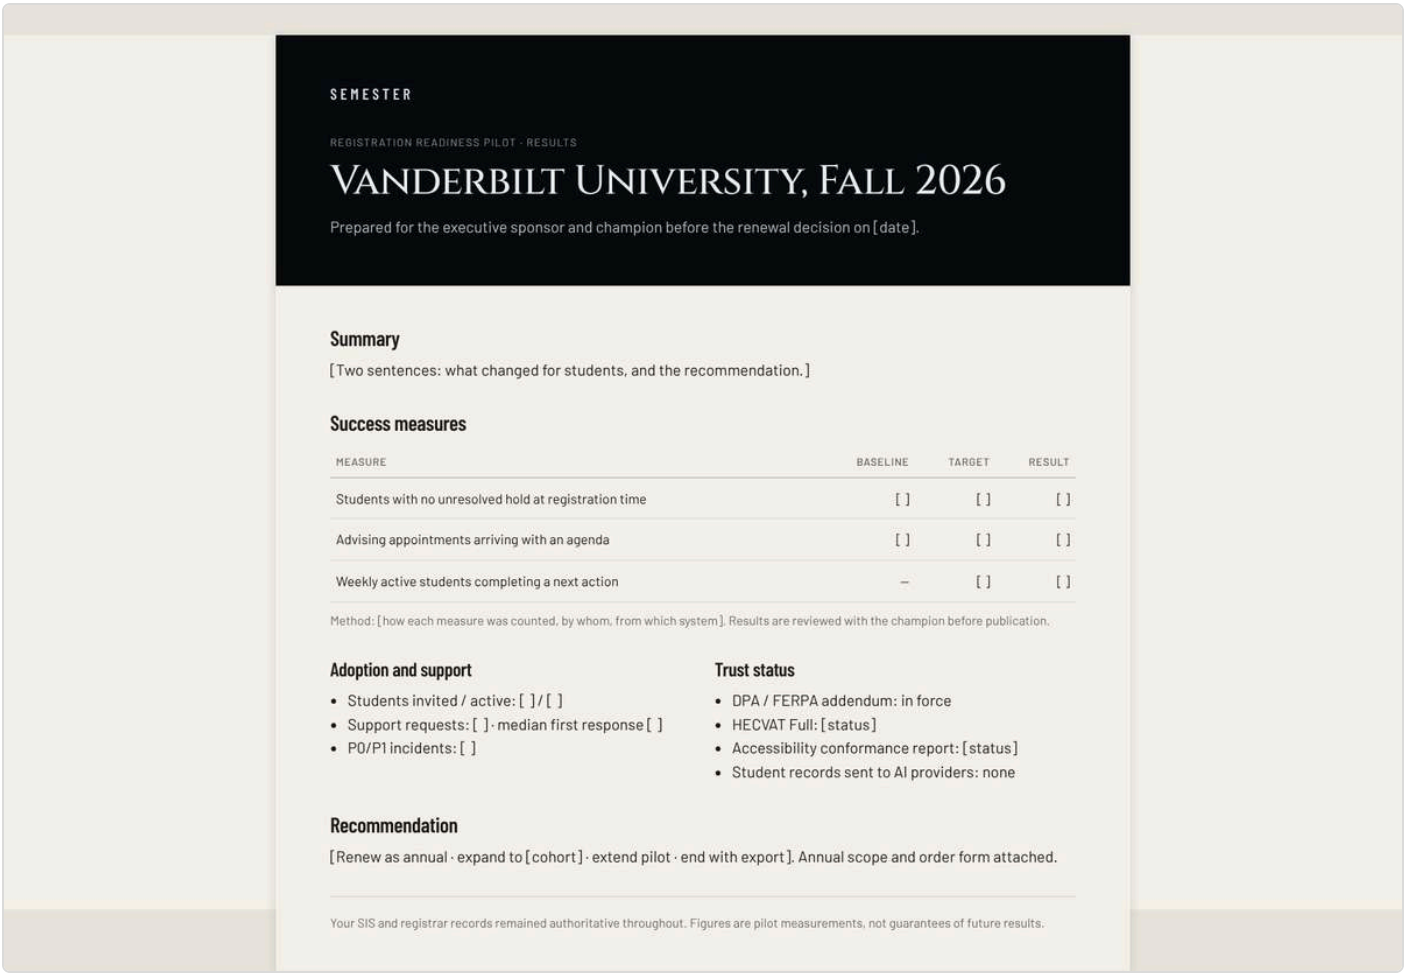

SEMESTER

REGISTRATION READINESS PILOT · RESULTS

Vanderbilt University, Fall 2026

Prepared for the executive sponsor and champion before the renewal decision on [date].

Summary

[Two sentences: what changed for students, and the recommendation.]

Success measures

MEASURE	BASELINE	TARGET	RESULT
Students with no unresolved hold at registration time	[ ]	[ ]	[ ]
Advising appointments arriving with an agenda	[ ]	[ ]	[ ]
Weekly active students completing a next action	–	[ ]	[ ]

Method: [how each measure was counted, by whom, from which system]. Results are reviewed with the champion before publication.

Adoption and support

- Students invited / active: [ ] / [ ]
- Support requests: [ ] · median first response [ ]
- P0/P1 incidents: [ ]

Trust status

- DPA / FERPA addendum: in force
- HECVAT Full: [status]
- Accessibility conformance report: [status]
- Student records sent to AI providers: none

Recommendation

[Renew as annual · expand to [cohort] · extend pilot · end with export]. Annual scope and order form attached.

Your SIS and registrar records remained authoritative throughout. Figures are pilot measurements, not guarantees of future results.

Opening view

Product teaser

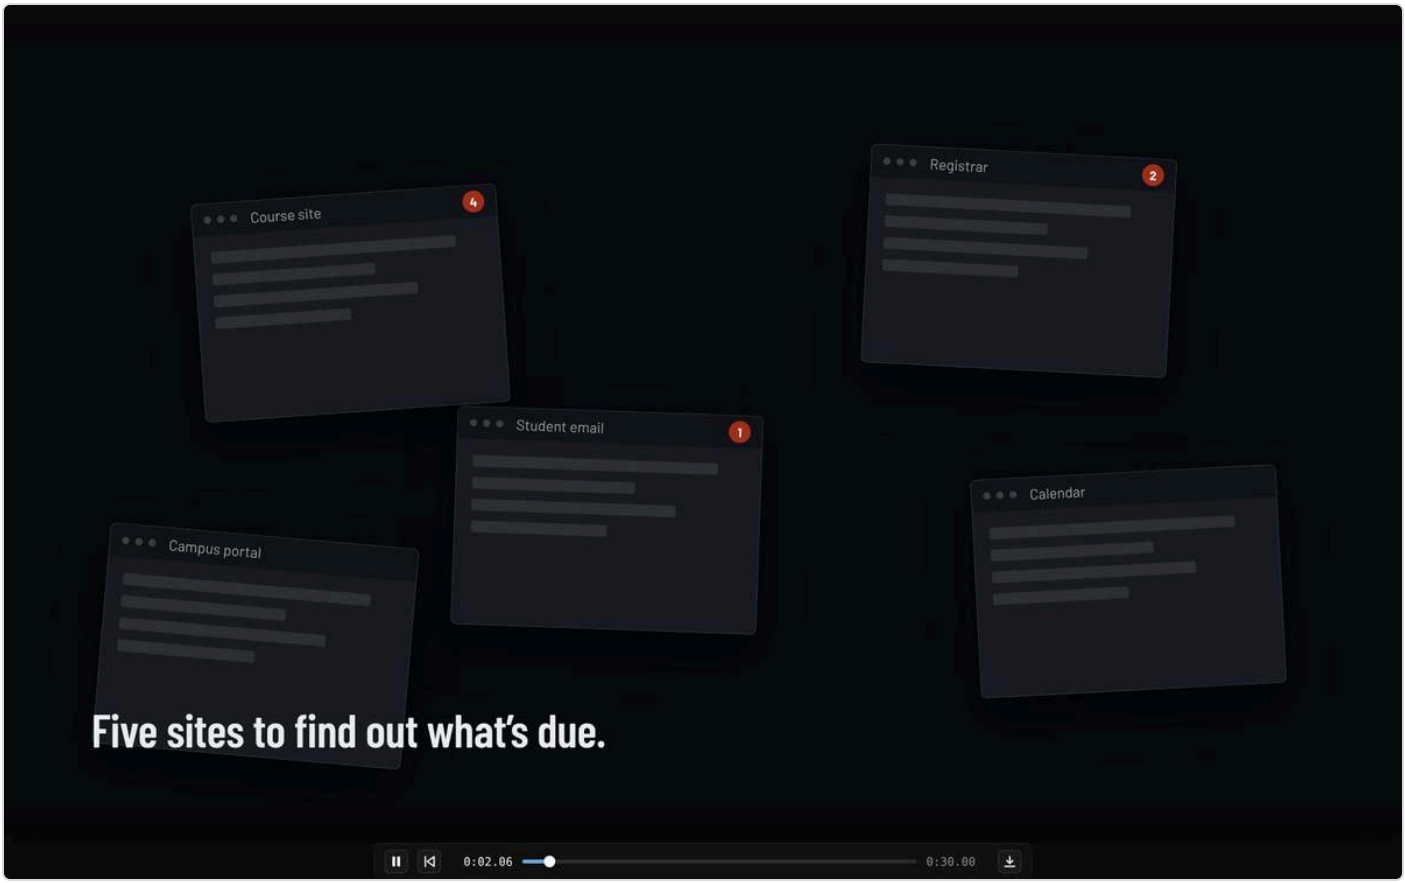

Opening view

Role onboarding — every role

First-run onboarding for each of the 13 roles. **14 screens.**

OnboardingAdvisor.dc.html

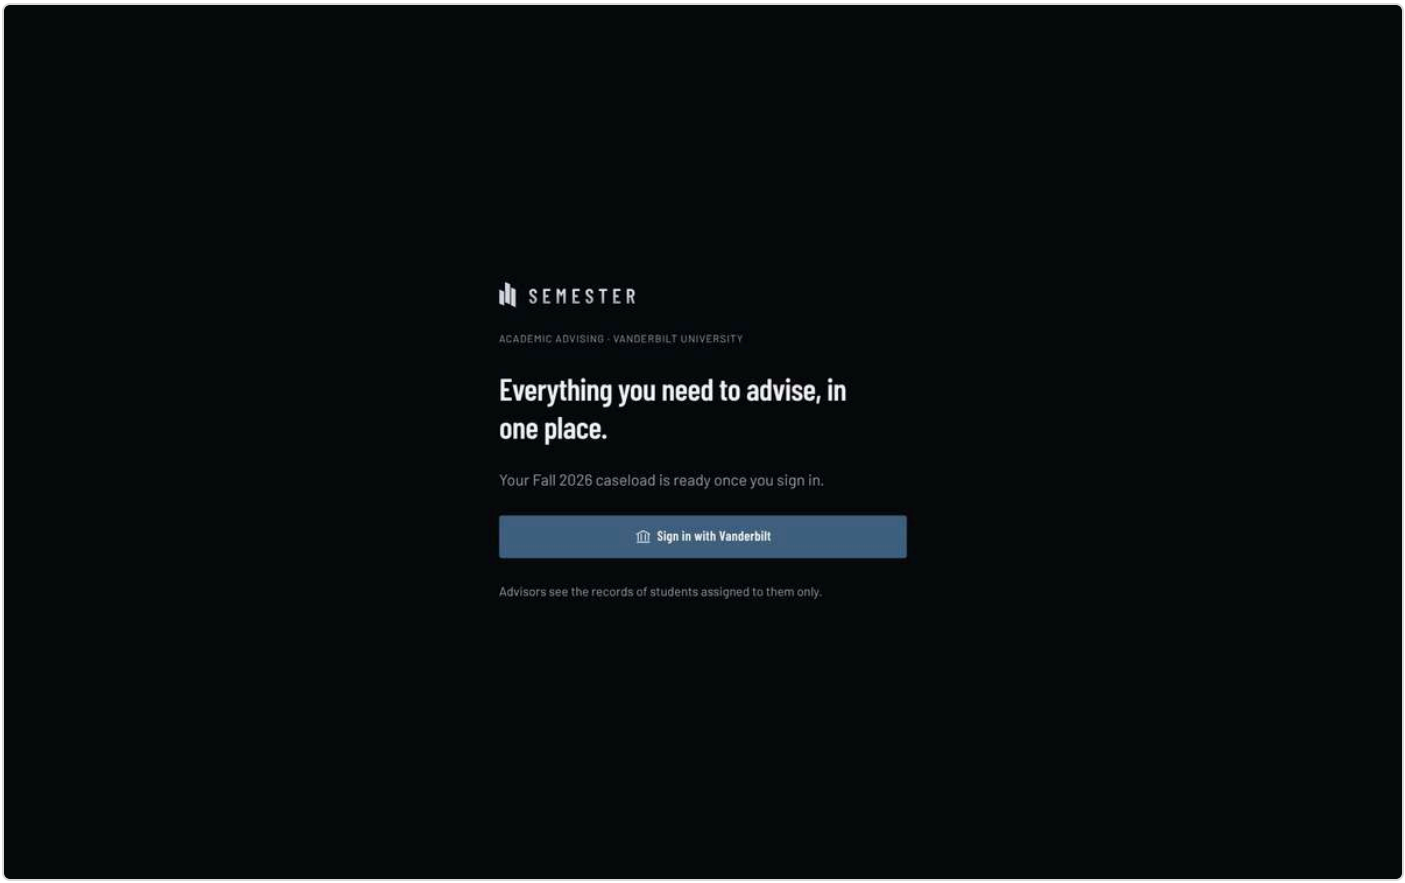

Opening view

OnboardingAlumni.dc.html

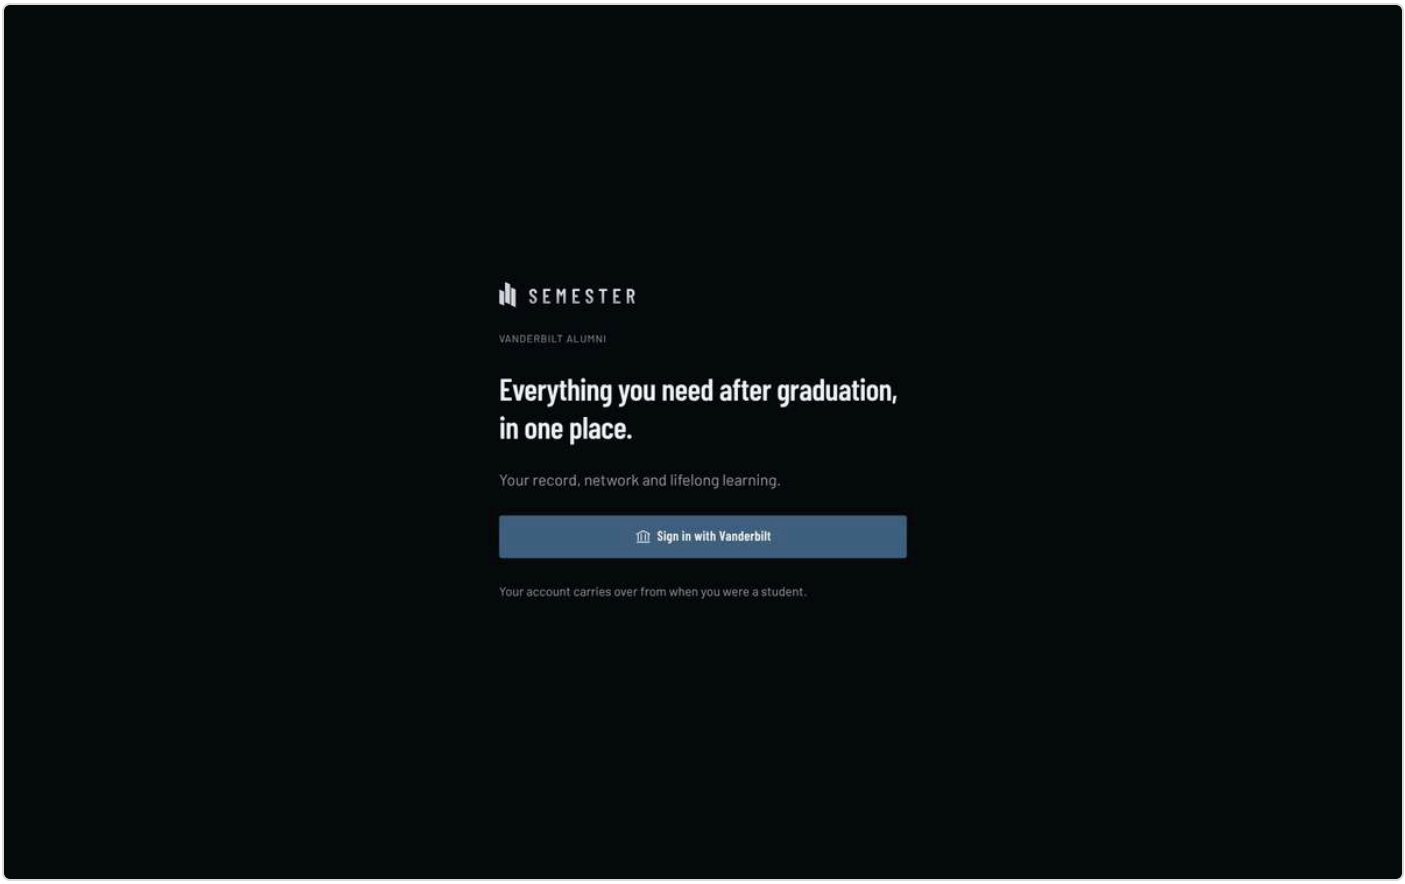

Opening view

OnboardingApplicant.dc.html

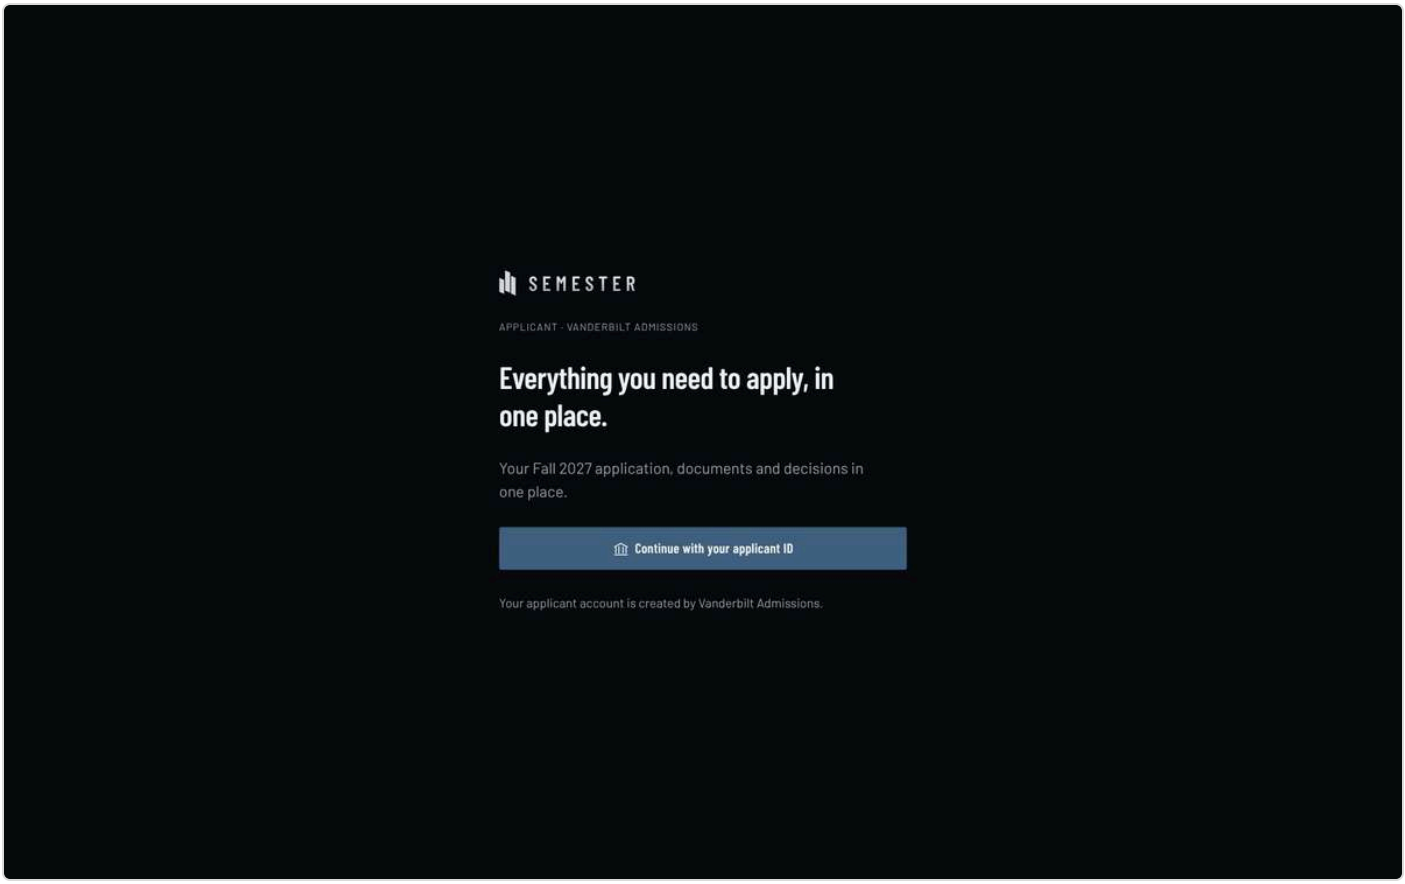

Opening view

OnboardingEmployer.dc.html

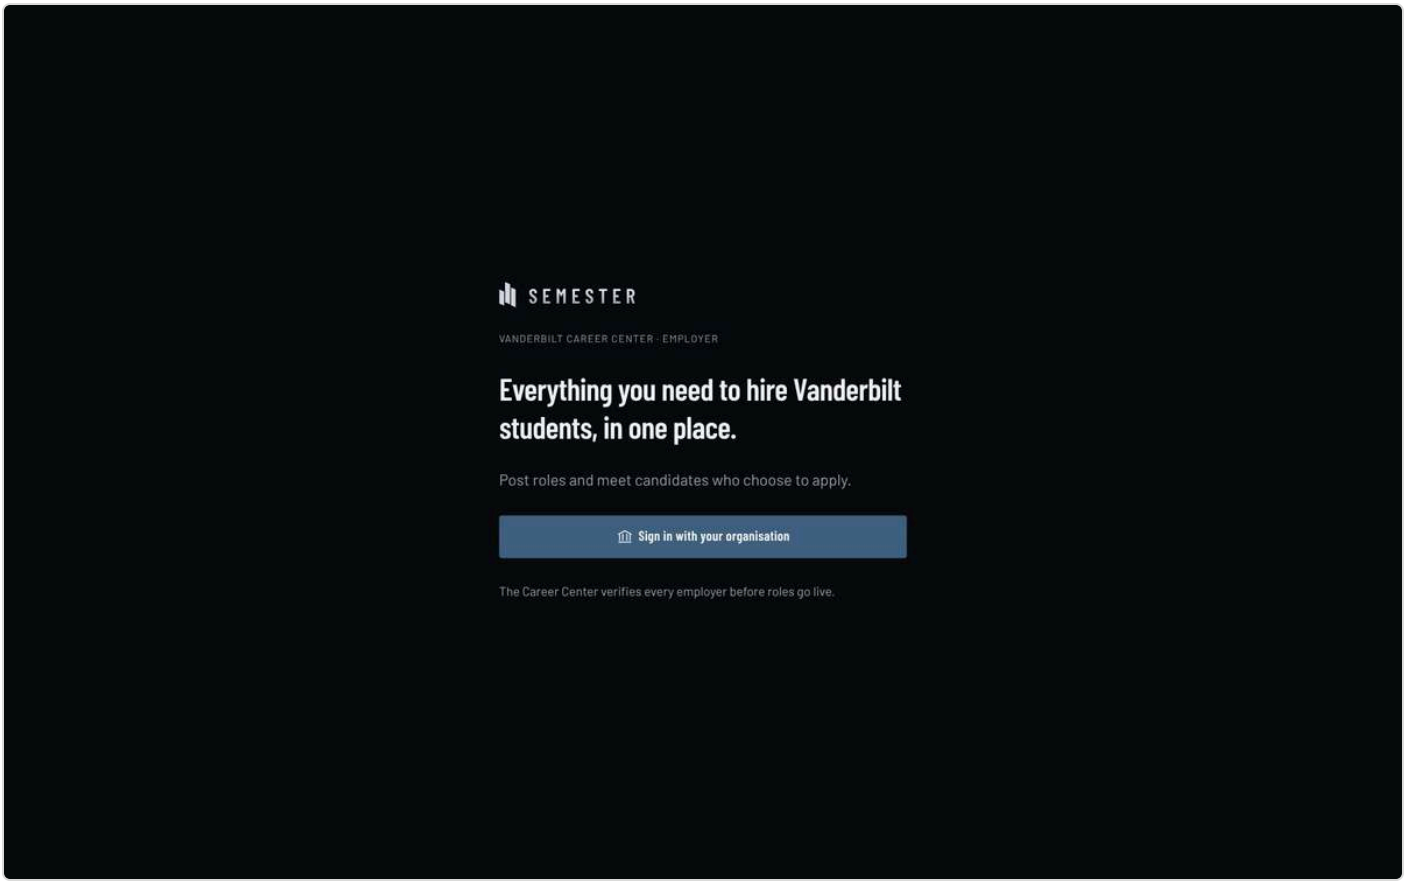

Opening view

OnboardingFaculty.dc.html

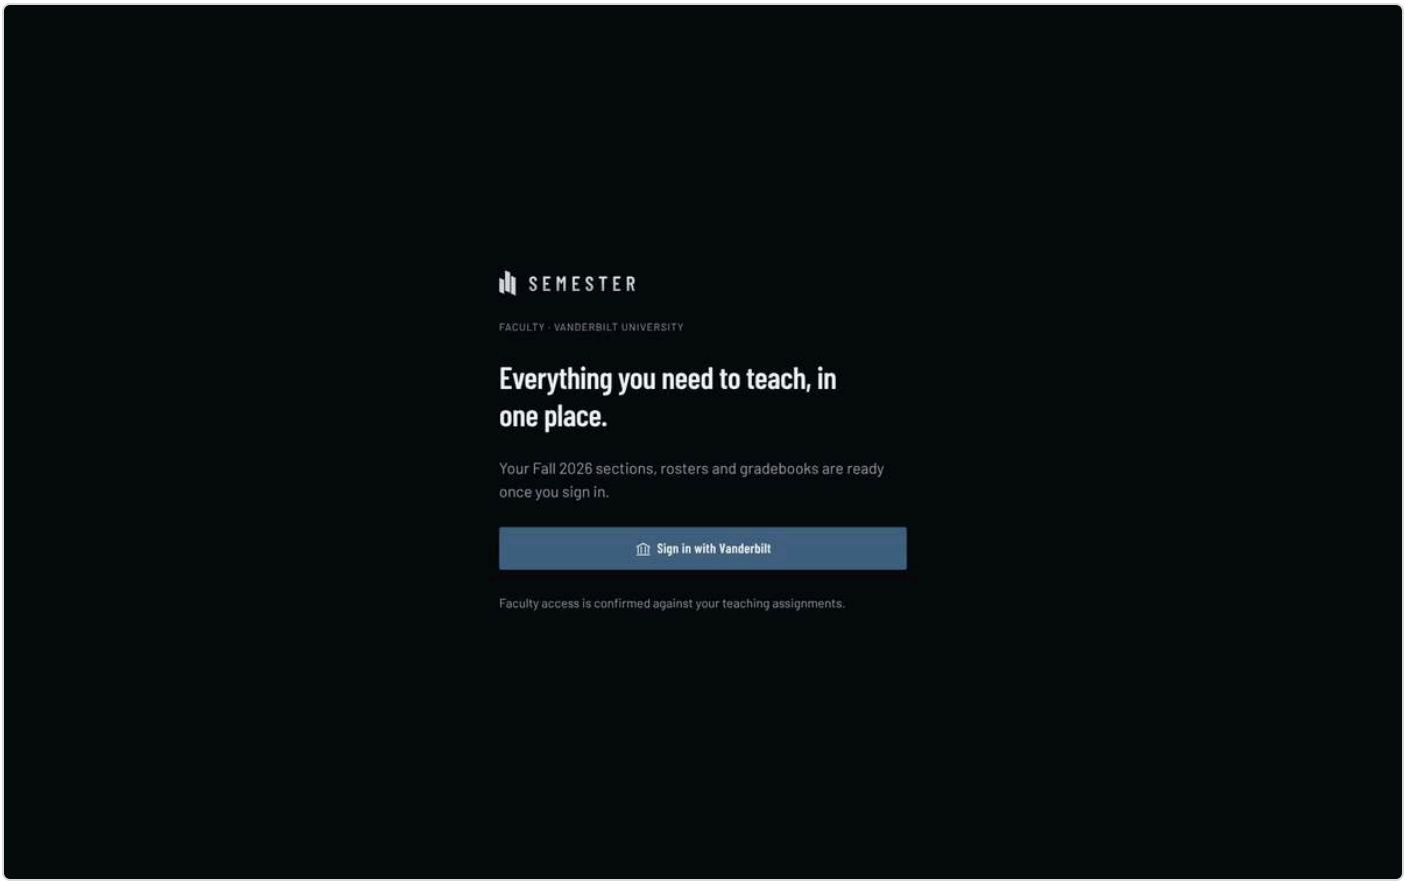

Opening view

OnboardingFinance.dc.html

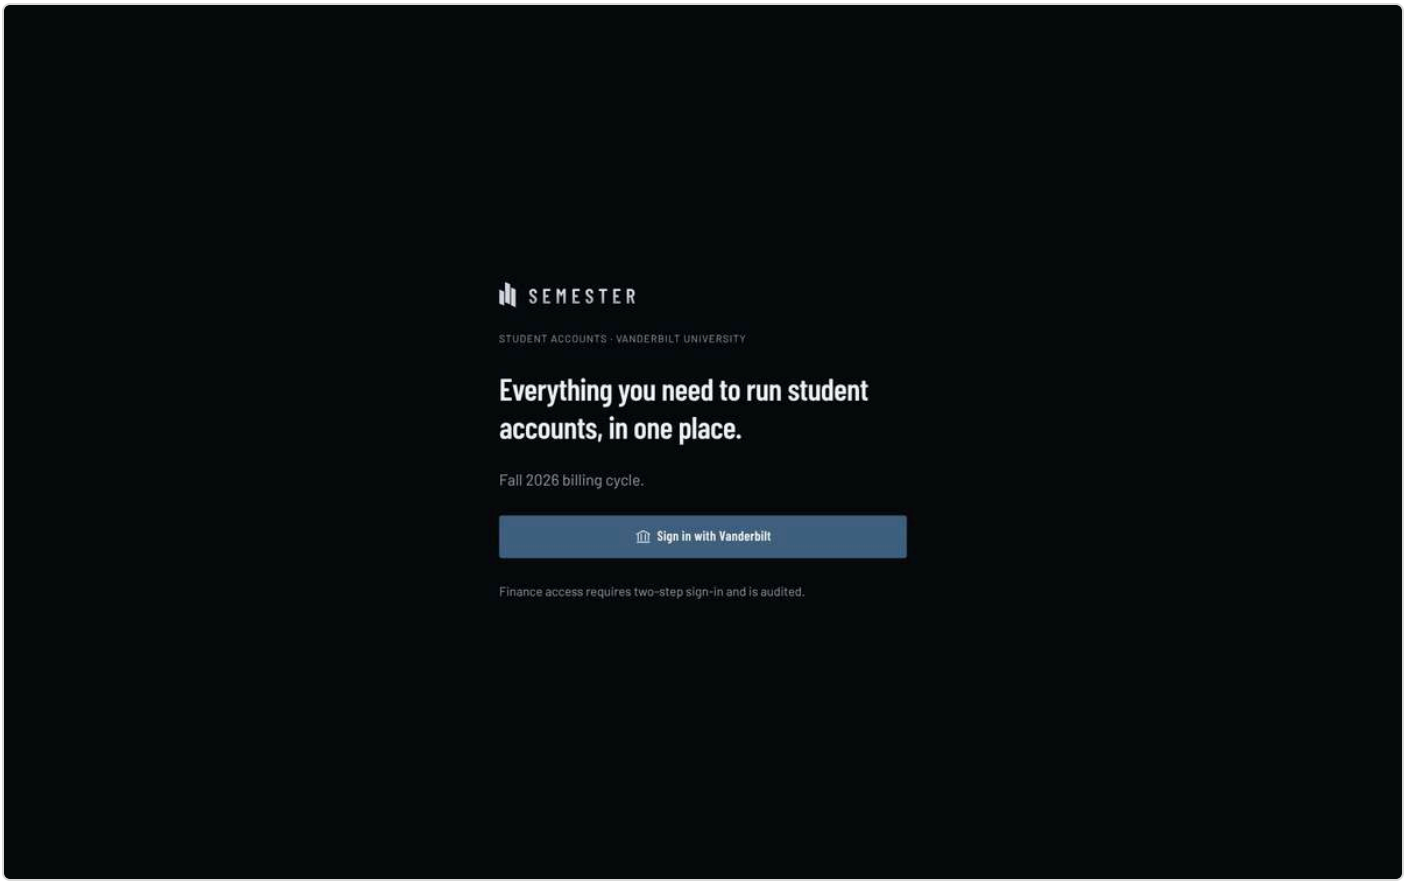

Opening view

OnboardingGuardian.dc.html

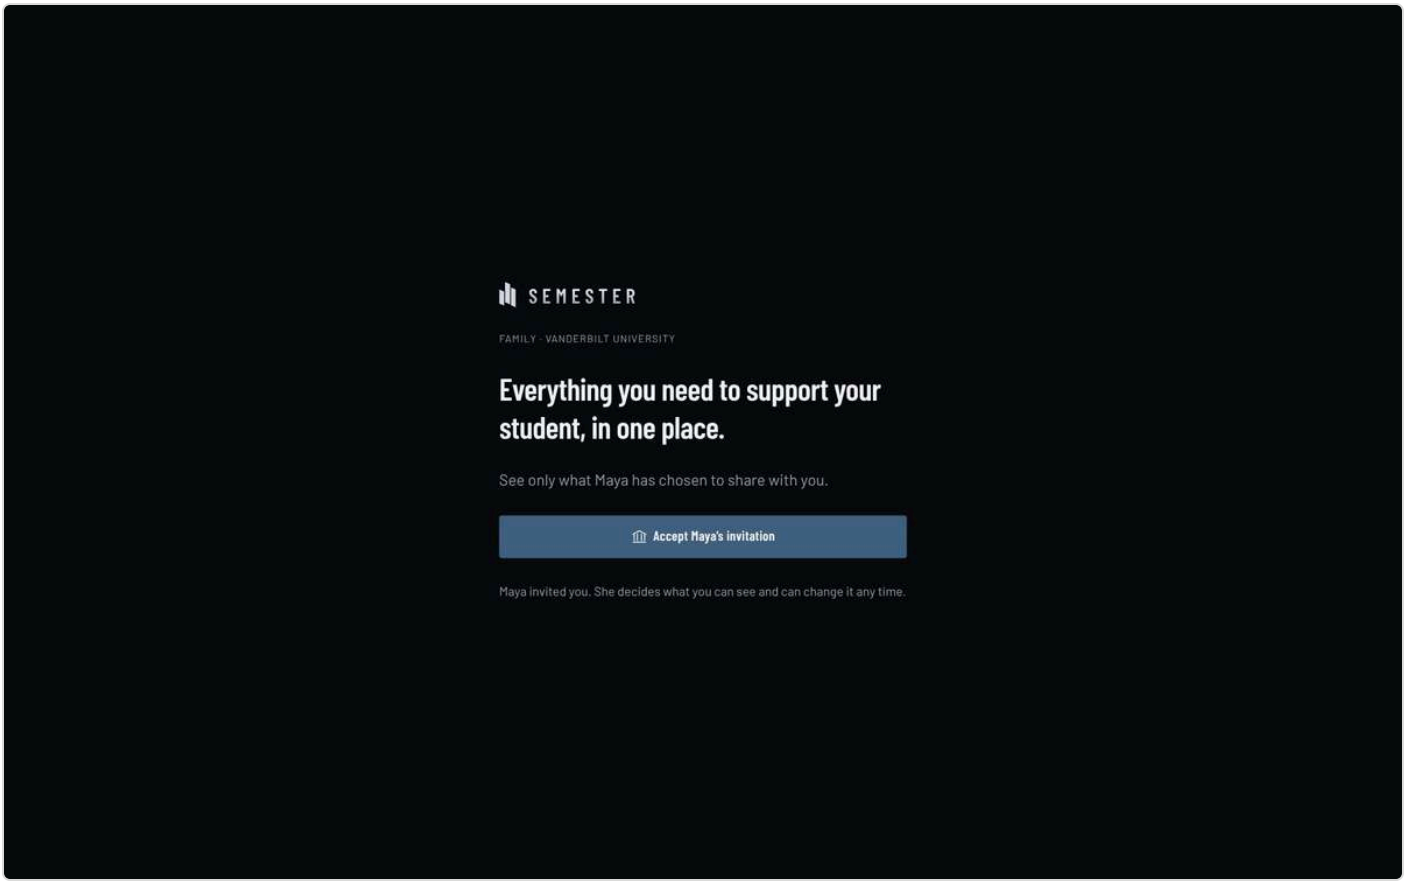

Opening view

OnboardingITSecurity.dc.html

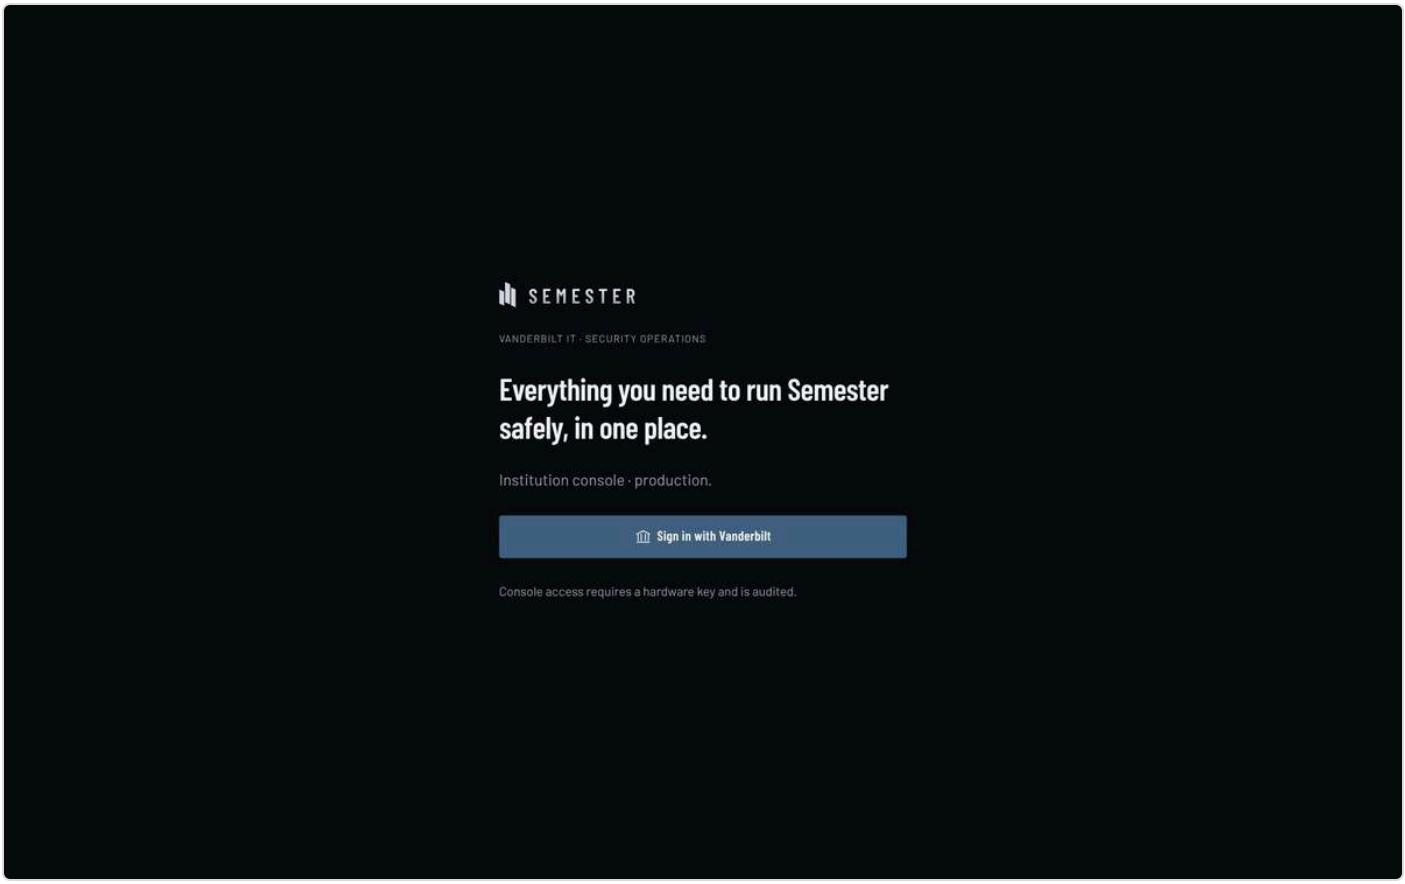

Opening view

OnboardingRegistrar.dc.html

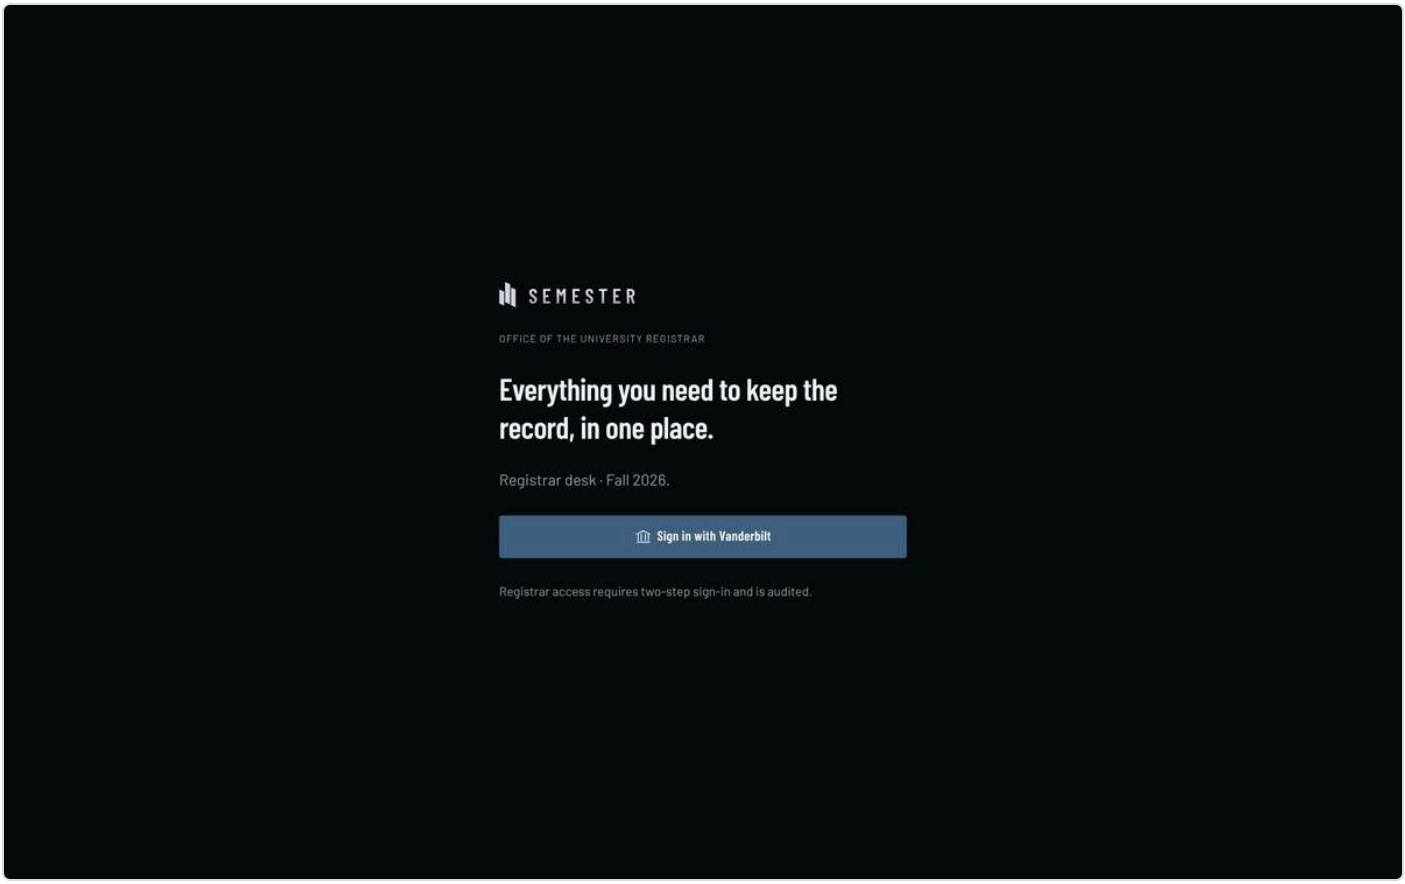

Opening view

OnboardingStudent.dc.html

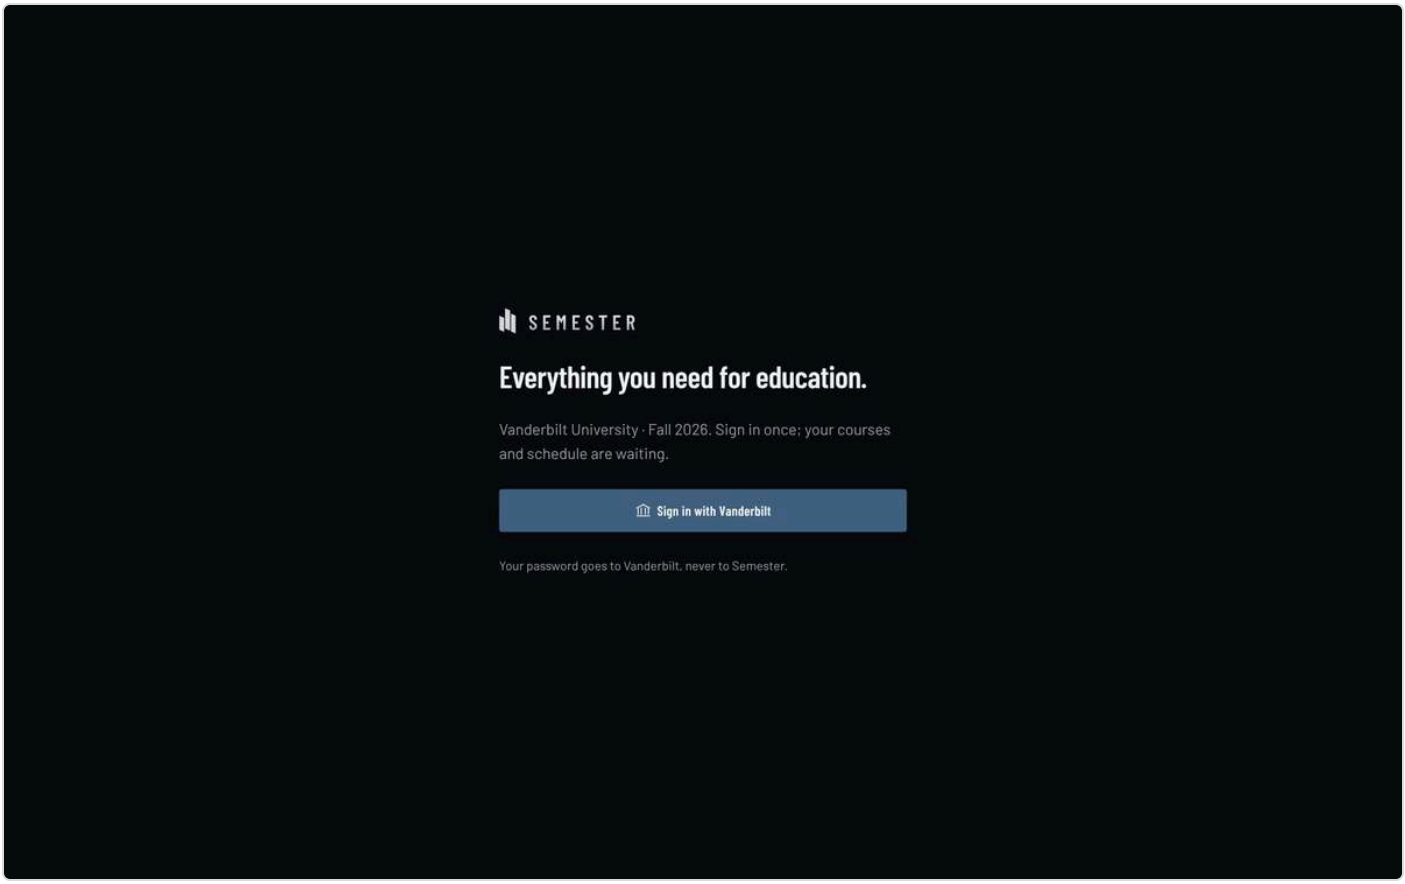

Opening view

OnboardingStudentAffairs.dc.html

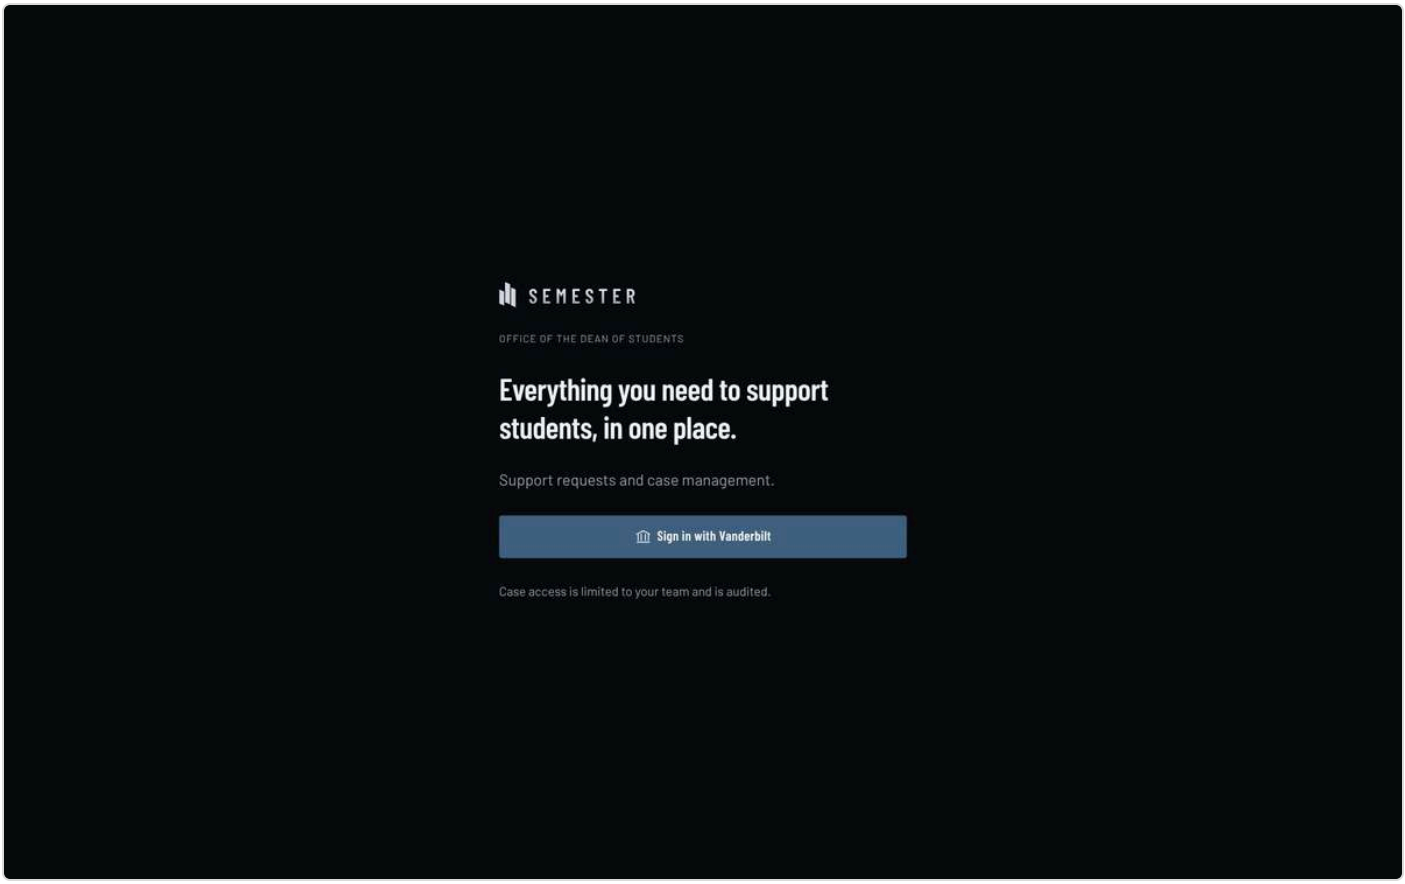

Opening view

OnboardingSupport.dc.html

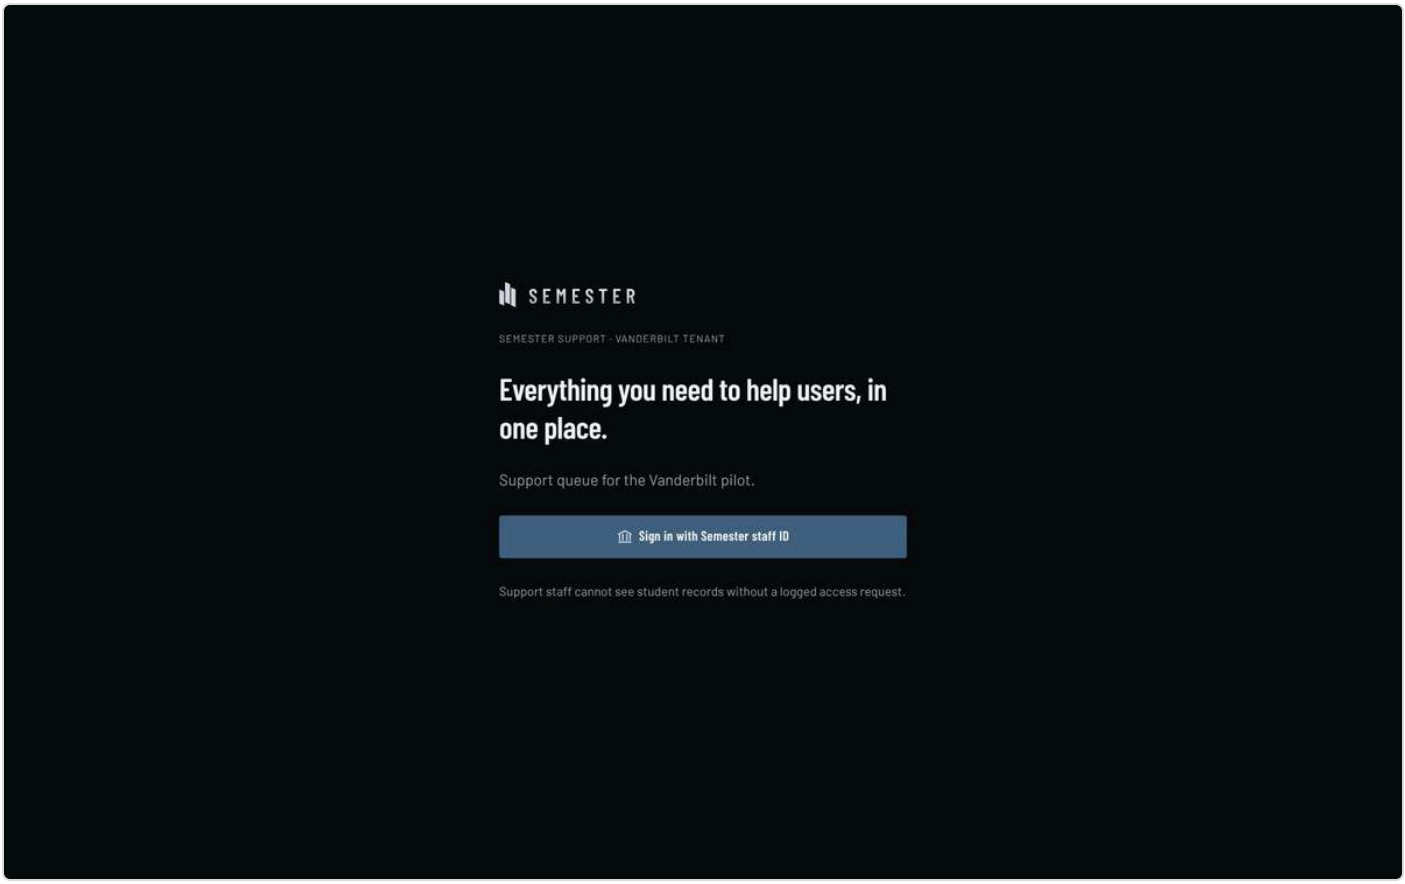

Opening view

OnboardingTA.dc.html

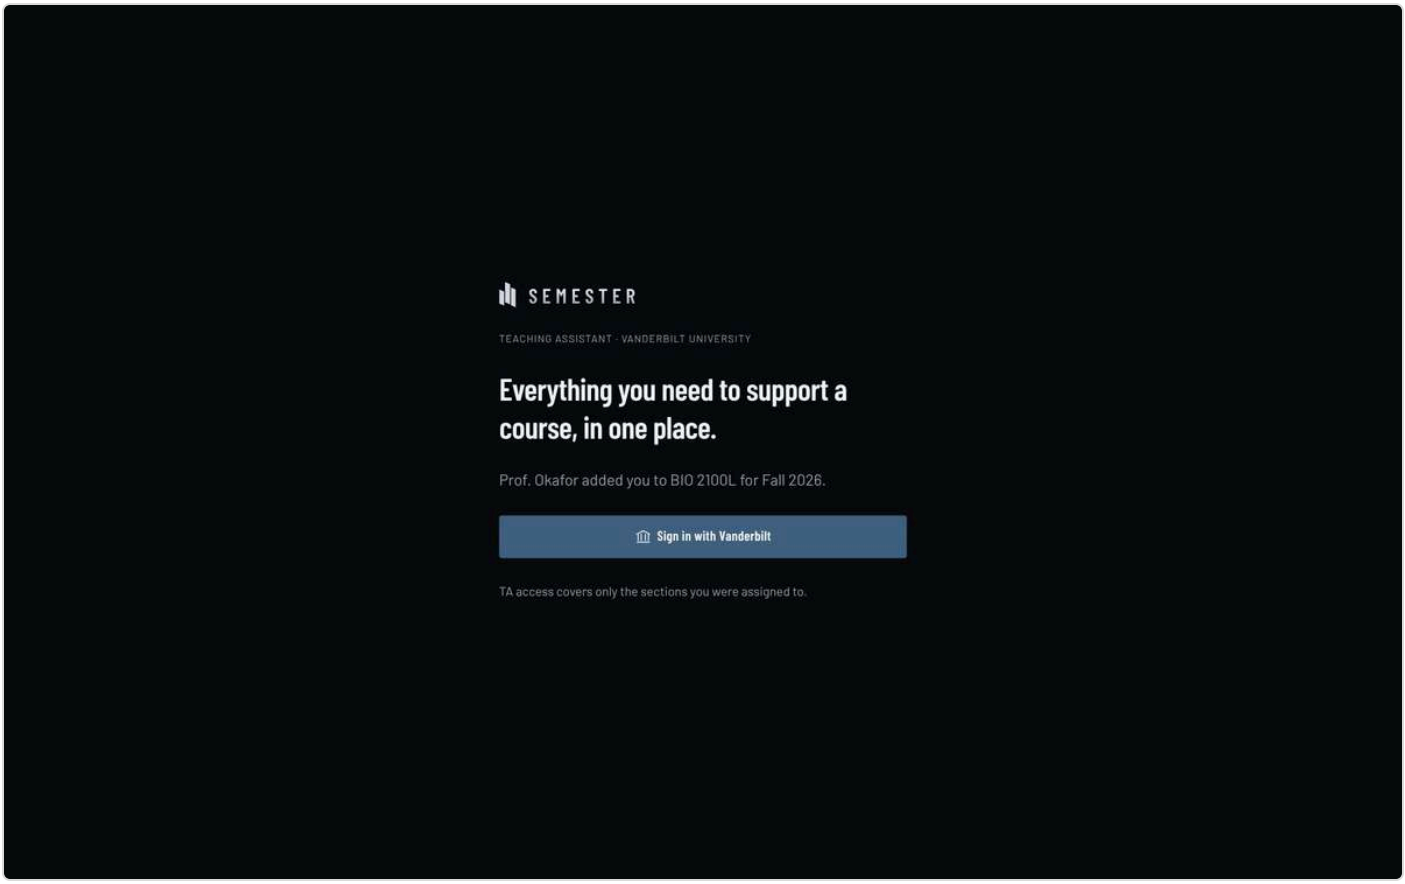

Opening view

Role onboarding

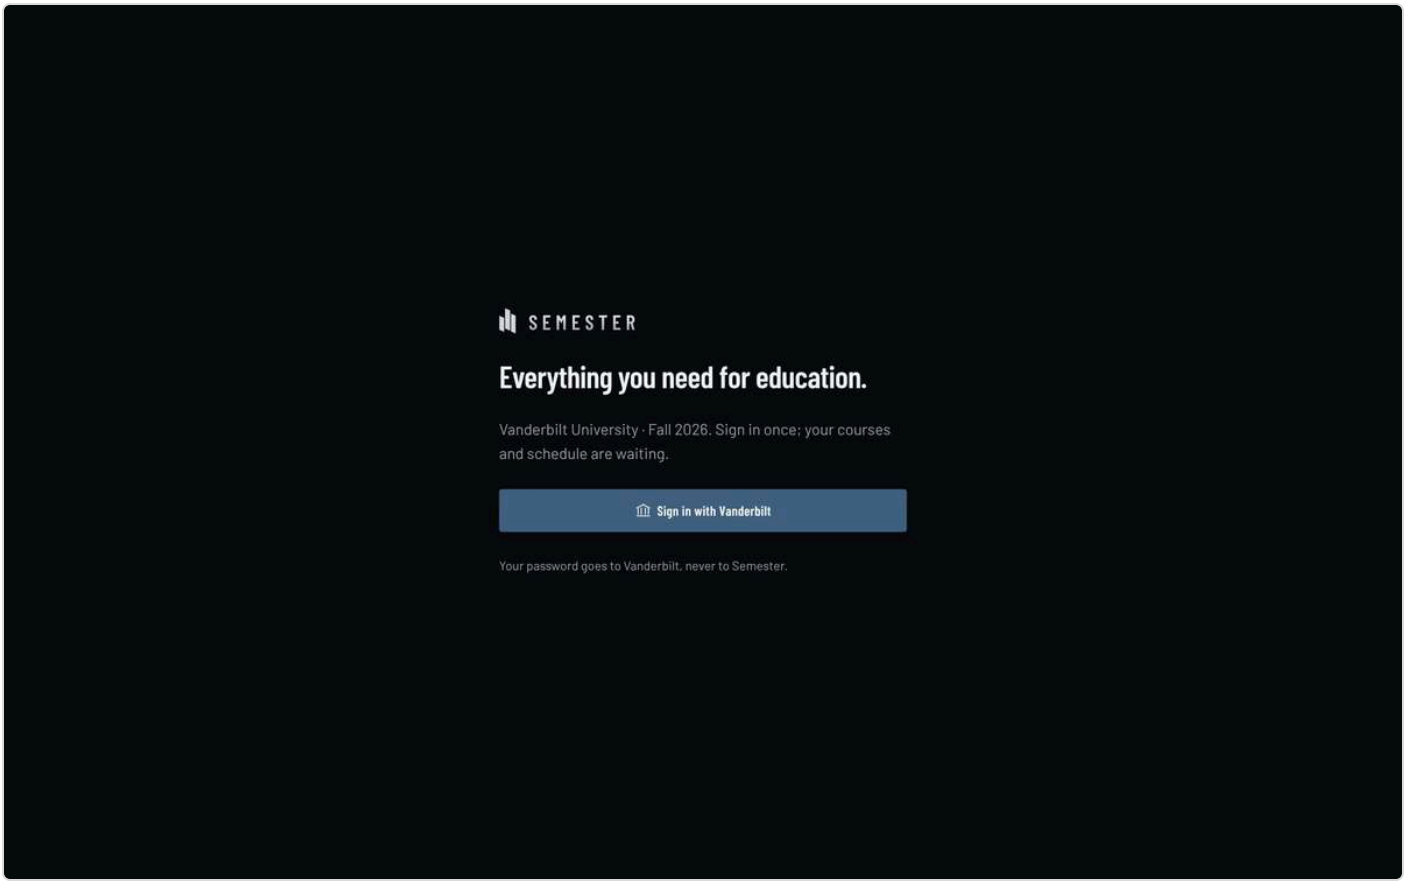

Opening view

Product data catalogs

The structured data that drives the product prototypes: every capability, workflow step, role, screen and maturity score, rendered as tables.

Master catalog — ui_kits/master-catalog/catalog-data.js

Window.CATALOG

Roles

- Prospective student, Discover programs, understand fit, explore value, apply or sign up
- Applicant, Track admissions tasks, documents, decisions, aid and onboarding
- Student, Daily workspace, learning, planning, actions, support, campus life, career
- Transfer student, Credit evaluation, articulation, path comparison, onboarding
- Online student, Remote learning, time-zone-aware schedule, support, community, career
- Adult learner, Flexible plans, credential tracking, employer links, financial planning
- Graduate student, Research, milestones, advisor collaboration, funding, career
- International student, Visa/immigration handoffs, orientation, support, compliance notifications
- Student athlete, Academic plan, permitted support sharing, travel and eligibility-aware workflows
- Student worker, Schedule, payroll/employment handoffs, workload planning
- Student parent/caregiver, Flexible planning, childcare/resource handoffs, support coordination
- Alumni, Credentials, lifelong learning, mentoring, opportunities, network
- Family/guardian, Student-consented support, payment/support handoffs, approved summaries
- Faculty/instructor, Course Studio, course policy, learning content, assessment, gradebook
- Teaching assistant, Scoped course support, grading/feedback, office hours, course content
- Department chair, Curriculum, faculty/course operations, outcomes, demand, approvals
- Program director, Program path, requirements, outcomes, advising, retention, curriculum
- Academic advisor, Student path, action completion, check-ins, referrals, planning
- Student success staff, Caseload, interventions, campaigns, referrals, outcomes
- Registrar staff, Terms, catalog, sections, registration, holds, overrides, records
- Financial aid staff, Aid handoffs, required actions, policy-guided communication
- Student accounts staff, Balances, payment plans, reconciliation, holds, controlled account actions
- Admissions staff, Prospects, applicants, campaigns, recruitment conversion
- Housing staff, Assignments, requests, service handoffs, housing policy workflows
- Dining/campus-card staff, Locations, plans, orders, balances, service operations
- Library staff, Resources, research guidance, discovery, course reserves
- Accessibility/disability services, Accommodation workflows, consented access, service plans
- Counseling/wellbeing staff, Safe referral and resource handoffs; no unnecessary broad access
- Career staff, Opportunities, employer relations, appointments, skills, outcomes
- Employer, Approved talent discovery, postings, internships, verified evidence

- Mentor, Mentoring offers, requests, schedule, scoped student interaction
- Peer mentor, Consent-based peer support, program workflows, supervision
- Campus safety staff, Institution-authorized emergency/safety handoffs only
- Community moderator, Content reports, moderation queue, appeals, safety escalation
- Student organization leader, Organization setup, membership, events, communications, finance handoffs
- Institutional IT, SSO, SCIM, integrations, security, tenant configuration
- Institutional security/privacy, Security review, data flows, access, policy, evidence, incidents
- Institutional executive, Outcomes, adoption, risk, operational health, strategic decisions
- Institutional auditor, Scoped evidence, audit history, compliance proof
- Semester support operator, Ticket queue, time-limited support access, incident escalation
- Semester implementation lead, Tenant setup, integrations, training, rollout, launch readiness
- Semester customer-success manager, Health, QBRs, renewals, expansion, pilot conversion
- Semester revenue operations, Accounts, quotes, contracts, plans, pricing exceptions, forecast
- Semester finance operator, Invoices, collections, dunning, financial reporting, approved adjustments
- Semester security operator, Access reviews, security evidence, incidents, vulnerabilities
- Semester privacy/legal operator, Data requests, legal holds, retention, contracts, claims
- Semester product operator, Roadmap, feature flags, beta, feedback, release evidence
- Semester executive, Company health, risk, strategy, major approvals, board reporting
- Developer/partner, APIs, sandbox, integration, marketplace publishing, support

Screens

A · Public company, sales & marketing site	Homepage, Product overview, Student workspace page, Institution platform page, Registration Readiness Pilot page, Course Studio page, Governed AI page, Advising and Student Success page, Registrar and Academic Operations page, Campus Services page, Career and Lifelong Learning page, Integrations page, Solutions: Students, Solutions: Advisors, Solutions: Student Success, Solutions: Faculty, Solutions: Registrars, Solutions: Departments, Solutions: Institutions, Solutions: Enterprise/Multi-campus, Solutions: Partners, Pilot overview, Pilot scope, Pilot success metrics, Implementation approach, Request pilot form, Pricing: Student plans, Pricing: Department plans, Pricing: Institution plans, Pricing: Enterprise plans, Feature comparison, AI usage policy, Request pricing, Demo request, Calendar booking, Demo confirmation, Qualification follow-up, Trust: Security overview, Trust: Privacy overview, Trust: Accessibility, Trust: Responsible AI, Trust: Data practices, Trust: Subprocessors, Trust: Compliance roadmap, Trust: Status/reliability, Security document request, Trust room request, Vulnerability disclosure, Guides, Research, Webinars, Product updates, Case studies, FAQ, Glossary, Newsletter, Compare: fragmented tools, Compare: LMS-only, Compare: manual advising, Compare: separate AI tools, Partners, Ambassador program, Careers, Mission, Leadership, Values, Press kit, Contact, Terms, Privacy, Acceptable use, DPA, Cookies, Subprocessor terms, Login, Sign up, Password reset, System status handoff, Help center handoff, 404 / maintenance / outage
B · Student OS	Today, Action Center, Notifications, Calendar, Schedule, Tasks, Goals, Path, Degree progress, Program requirements, Plan, Term planner, Course comparison, Workload planner, Cost planner, Registration readiness, Registration status, Holds, Course search, Course details, Section comparison, Seat watch, Graduation scenarios, Transfer credit view, Articulation view, Courses, Course Studio, Course schedule, Course assignments, Course resources, Course announcements, Course AI guidance, Study packs, Notes, Files, Documents, Project workspace, Group workspace, Focus mode, Study sessions, Search, AI Copilot, Research workspace, Writing workspace, Community, Organizations, Events, Dining, Housing, Campus services, Student account, Payment plan, Financial-support handoff, Support center, Help request, Advisor sharing, Family sharing, Accessibility services, Career, Skills, Portfolio, Opportunities, Mentors, Profile, Account settings, Privacy settings, AI settings, Notification settings, Data export, Account deletion request, Join institution, Confirm identity, Connect SSO, Complete onboarding, Import or review course context, User asks, Intent identified, Prompt/tool permission validated, Response generated, Human escalation offered, Usage/spend logged, Feedback/correction captured

C · Faculty & Course Studio	Faculty dashboard, Course list, Course home, Course setup, Syllabus, Learning objectives, Course schedule, Course announcements, Course guidance, Course AI rules, Resource library, Approved sources, Assignments, Assessment builder, Question bank, Rubric builder, Gradebook, Grade entry, Grade moderation, Grade release, Regrade queue, Grade passback, Feedback workspace, Student progress view, Course activity aggregates, Study packs, Office hours, Discussions, Group management, TA management, Course accessibility review, Academic-integrity workflow, Course imports/exports, Course archive, Course version history, Course settings, Publish course AI policy, Manage roster, Communicate with class
D · Advisor & student success	Advisor dashboard, Caseload, Student profile, Student path, Academic plan, Action completion, Holds and registration status, Check-ins, Appointment schedule, Advising notes, Success plan, Referral workflow, Support request history, Shared student workspace, Student consent/grant view, Risk and priority signals, Outreach queue, Communication composer, Cohort dashboard, Program dashboard, Outcome aggregates, Intervention tracker, Escalation workflow, Student support resources, Advisor settings, Refer to office, Review consented share, Conduct term review, Close or transition case
E · Registrar & academic operations	Registrar dashboard, Term management, Academic calendar, Catalog management, Course management, Section management, Faculty assignment, Room scheduling, Capacity management, Waitlist management, Prerequisite rules, Co-requisite rules, Registration windows, Time tickets, Holds, Overrides, Enrollment queue, Add/drop/withdrawal workflow, Registration audit, Academic record search, Record correction queue, Grade ledger, Grade change workflow, Regrade resolution, Degree audit rules, Program requirements, Transfer evaluation, Articulation rules, Graduation review, Credential conferral, Transcript/export workflow, SIS reconciliation, Migration dashboard, Data-quality exceptions, Registrar settings, Reconcile with SIS
F · Student accounts, aid & commerce	Account summary, Charges, Credits, Balance, Payment plan, Installments, Due dates, Holds, Statements, Payment provider handoff, Refund status, Scholarship view, Financial-aid handoff, Budget planner, Cost planner, Emergency aid resources, Financial support request, Staff: Account queue, Staff: Request queue, Staff: Charge/credit request, Staff: Reconciliation, Staff: Month close, Staff: Payment plan review, Staff: Hold management, Staff: Refund review, Staff: Dunning, Staff: Dispute queue, Staff: Audit ledger, Staff: Reporting
G · Campus life	Dining locations, Dining hours, Menus, Meal plan, Meal balance, Mobile order, Donation/pool program, Housing assignment, Housing requests, Maintenance, Roommate resources, Housing handoff, Campus calendar, Event detail, Event registration, Personal schedule, Organization directory, Organization profile, Membership, Organization events, Leadership tools, Study space availability, Study space booking, Location details, Transit and parking, Recreation, Library, Bookstore, Campus jobs, Volunteer opportunities, Local services, Safety resources, Wellness resources, Accessibility resources, Emergency official handoff, Request resolved, Request accommodation, Accommodation approved
H · Community & moderation	Community directory, Community feed, Post creation, Comments/reactions, Alias/pseudonym settings, Community membership, Community events, Study sessions, Peer connections, Study groups, Peer mentor directory, Mentor requests, Organization communities, Community guidelines, Report content, Appeal decision, Community safety resources, Community settings, Mod: Reports queue, Mod: Cases, Mod: Content review, Mod: Escalations, Mod: Appeals, Mod: Restriction actions, Mod: Audit trail, Mod: Volunteer review tasks, Mod: Calibration tasks, Mod: Policy configuration, Mod: Analytics, Set profile visibility per field, Answer endorsed by TA, Create marketplace listing, Integrity filter checks listing, Make offer in chat, Arrange safe meet-up
I · Family & guardian	Invitation acceptance, Relationship confirmation, Consent scope, Shared categories, Time-limited access, Shared items, Billing/support handoff, Resource center, Communication preferences, Access history, Revocation, Privacy/support information, Audit retained
J · Career, employer, alumni	Skills graph, Skill evidence, Verified skill claims, Credential wallet, Portfolio, Resume builder, Cover letter workspace, Interview preparation, Career plan, Opportunity search, Job postings, Internship postings, Employer profiles, Applications, Career appointments, Mentor directory, Alumni mentor offers, Networking, Career events, Continuing education, Microcredentials, Credential renewal, Career outcome history, Employer: Organization profile, Employer: Opportunity creation, Employer: Applicant criteria, Employer: Talent discovery, Employer: Consent-based profile, Employer: Interview scheduling, Employer: Hiring workflow, Employer: Internship management, Employer: Analytics, Employer: Partnership settings, Alumni: Profile, Alumni: Mentoring offers, Alumni: Opportunities, Alumni: Continuing education, Alumni: Community, Alumni: Donations/engagement handoff, Alumni: Credential history

K · Institutional administration	Tenant overview, Institution profile, Campus hierarchy, School/department/program structure, Identity providers, SSO configuration, SCIM provisioning, Memberships, Roles, Capabilities, Role grants, Access reviews, Tenant plan, Entitlements, Feature policies, Feature cohorts, Kill switches, Module modes, Tenant rollout, Configuration studio, Workflow builder, Policy hierarchy, Governance stewards, Governance decisions, Integration control, Data classification, Consent policy, Retention policy, Legal holds, Privacy requests, AI provider policy, Approved sources, Trust Center, Compliance controls, Evidence register, Accessibility program, Incident notices, Risk register, Audit explorer, Offboarding, Data export/portability, Operational champion named, Reconciliation passed, Admin training, Student communication prepared, Launch readiness gate passed, Controlled launch, Adoption monitored, Midpoint review
L · Integrations	Provider directory, Connection list, Connection setup, Security review, Scope approval, Credentials configuration, Mapping studio, Mapping versions, Field transformations, Sync schedule, Sync run history, Sync errors, Dead-letter queue, Replay request, Reconciliation dashboard, Schema drift dashboard, Duplicate resolution, Source owner management, Data freshness, Integration analytics, Webhook events, LTI configuration, OneRoster import, OneRoster REST sync, Edu-API configuration, Google/Microsoft integration, AI provider integration, Integration offboarding, Business purpose defined, Sandbox validated, Monitoring enabled, Write direction requested, Controlled write pilot, Rollback verified, Domain inventory, Validation, Dual run, User acceptance, Cutover, Enhanced monitoring, Rollback window, Legacy retirement, Post-migration review, Partner applies, Partner agreement signed, Sandbox tenant created, Register OAuth client, Build against SDK, App review, Listed in marketplace, Institution enables app, Metering and billing, App retired
M · Trust, privacy, security	Trust: Security overview, Trust: Privacy overview, Trust: Accessibility statement, Trust: Responsible AI, Trust: Data practices, Trust: Retention/deletion, Trust: Subprocessors, Trust: Status, Trust: Compliance roadmap, Trust: HECVAT readiness, Trust: DPA process, Trust: Questionnaire request, Trust: Trust room request, Trust: Vulnerability disclosure, Sec: Overview, Sec: Asset inventory, Sec: Access review, Sec: Secret inventory, Sec: Vulnerability management, Sec: Dependency findings, Sec: Alerts, Sec: Threat models, Sec: Incident queue, Sec: Incident command center, Sec: Controls, Sec: Control evidence, Sec: Pen-test evidence, Sec: Vendor risk, Sec: Exceptions, Sec: Audit log, Sec: Break-glass review, Sec: Backup/restore evidence, Sec: Disaster recovery, Sec: Reporting, Priv: Data inventory, Priv: Data map, Priv: Classification rules, Priv: Retention schedule, Priv: Deletion runs, Priv: Legal holds, Priv: Data subject requests, Priv: Export requests, Priv: Erasure requests, Priv: Consent records, Priv: Subprocessor records, Priv: Incidents, Priv: Impact assessments, Priv: Reporting
N · Operations Command Center (/ops)	Executive Overview, Operations Inbox, My Work, Approvals, Approval request detail, Tenant Directory, Tenant 360, Customer Directory, Customer 360, GTM Pipeline, Accounts, Stakeholders, Decision log, Pilot Workspace, Pilot metrics, Pilot outcomes, Implementation projects, Implementation milestones, Success plans, QBRs, Renewals, Account health, Revenue operations, Products, Plans, Prices, Quotes, Contracts, Subscriptions, Entitlements, Invoices, Payments, Refunds/credits, Dunning, Cancellations, Support operations, Ticket queue, Ticket detail, Escalations, Support notifications, Product operations, Feature flags, Cohorts, Beta programs, Beta feedback, Known issues, Release evidence, Rollouts, Integrations, Sync health, Errors/dead letters, Trust/compliance, Trust artifacts, Trust room, Compliance frameworks, Controls, Evidence, Claims register, Content register, Privacy, Data requests, Retention, Legal holds, Security, Access review, Break-glass, Incidents, SLOs, Error budgets, Audit explorer, Risk register, Vendor management, Finance dashboard, Financial model, Forecast scenarios, Cash/runway, Company KPI dashboard, Operating review reports, Board/investor reports, People/capacity plan, Operator preferences, Minimum safe context captured, Categorized + severity, Routed to team/office, Owner accepts or routes, Resolution delivered, Confirm or close, Root cause tagged, SLA and satisfaction recorded, Triage, Severity declared, Technical lead, Communications lead, Mitigation executed, Internal update, Resolved, Postmortem, Measures sheet signed, Instrument events (no PII), Aggregate with minimum cell size, Course analytics shared with faculty, Improvement backlog prioritized

Workflows

Student	Create account, Join institution, Confirm identity, Connect SSO, Complete onboarding, Select program/path, Import or review course context, Review Today, Create action/task, Complete first meaningful action, Build term plan, Compare courses/sections, Review registration readiness, Resolve hold through official handoff, Enroll or request registration, Build study plan, Join course workspace, Read course guidance, Follow course AI rules, Use AI copilot, Search approved sources, Create notes, Organize files, Join study group, Request peer mentor, Request advisor support, Share with advisor, Share with family, Review student account, Request payment plan, Find campus resource, Order dining, Join organization/event, Build portfolio, Search opportunity, Apply for opportunity, Export personal data, Adjust privacy/AI settings, Request deletion/correction, Transition to alumni

Faculty	Accept course assignment, Configure course workspace, Publish syllabus, Publish learning objectives, Publish course guidance, Publish course AI policy, Add approved resources, Create assignment, Create rubric, Create assessment, Create study pack, Manage roster, Review student work, Provide feedback, Enter grade, Moderate grade, Release grade, Resolve regrade, Hold office hours, Communicate with class, Review aggregate learning signals, Review course accessibility, Export/archive, Grade passback (if approved)
Advisor / student success	Receive caseload, Review student path, Review action completion, Schedule meeting, Record check-in, Create success plan, Refer to office, Track referral outcome, Send approved outreach, Review support request, Review consented share, Escalate risk through approved process, Review cohort aggregates, Conduct term review, Prepare registration readiness outreach, Review intervention effectiveness, Close or transition case
Registrar	Create term, Configure academic calendar, Import/manage catalog, Create sections, Assign capacity/waitlists, Define prerequisites/co-requisites, Publish registration windows, Issue time tickets, Sync holds, Grant override, Review enrollment attempt, Approve/deny exception, Manage add/drop/withdrawal, Reconcile with SIS, Correct academic record, Manage grade changes, Run degree audit, Evaluate transfer credit, Review graduation, Export official records, Close-of-term audit
Institutional implementation	Contract signed, Tenant created, Executive sponsor named, Operational champion named, Security/privacy scope confirmed, Data/integration inventory, SSO/identity configured, Tenant policy configured, Roles configured, Feature cohorts configured, Data mapping approved, Sandbox sync tested, Reconciliation passed, Admin training, Student communication prepared, Launch readiness gate passed, Controlled launch, Adoption monitored, Support and incident path live, Midpoint review, Pilot outcome review, Annual conversion or offboarding
Controlled integration	Integration request, Business purpose defined, Data classification identified, Security/privacy review, Scope requested, Tenant approval, Credential configured server-side, Sandbox validated, Mapping created, Mapping version approved, Read-only sync enabled, Reconciliation passed, Monitoring enabled, Write direction requested, Higher approval required, Controlled write pilot, Rollback verified, Production approval, Periodic scope review, Retirement/offboarding
AI	User asks, Intent identified, Role/tenant/course scope established, Data classification checked, Consent checked, Course/tenant AI policy checked, Provider/model selected, Allowed sources retrieved, Prompt/tool permission validated, Response generated, Sources and limits shown, Suggested action presented, Official handoff offered, Human escalation offered, Usage/spend logged, Audit/evaluation signal recorded, Feedback/correction captured
Support	User searches help, Opens support request, Minimum safe context captured, Categorized + severity, Routed to team/office, Owner accepts or routes, User receives status, Resolution delivered, Confirm or close, Root cause tagged, Product/KB feedback loop, SLA and satisfaction recorded
Incident	Alert or report, Triage, Severity declared, Incident commander, Technical lead, Communications lead, Impact assessed, Risky releases paused, Mitigation executed, Internal update, Customer update, Recovery monitored, Resolved, Postmortem, Corrective actions to Inbox, SLO/error budget reviewed, Release policy updated
Domain migration	Domain inventory, Source data inventory, Field mapping, Data classification, Import staging, Validation, Duplicate/conflict resolution, Reconciliation, Dual run, User acceptance, Institution approval, Cutover, Enhanced monitoring, Rollback window, Archive/export, Legacy retirement, Post-migration review
Student finance	Review student account, Review charges and credits, See hold blocking registration, Open cost planner, Request payment plan, Review plan terms, Accept payment plan, Payment handoff to processor, Processor confirms payment, Reconcile payment with SIS, Release hold, Notify student of hold release, Request refund status, Financial-aid handoff, Emergency support request, Audit ledger reviewed
Campus services	Open campus map, Find study space, Check dining hours and menus, Order dining, Pay with meal balance, Pick up order, Donate meal swipes to pool, Submit housing maintenance request, Housing staff accepts request, Request resolved, Find accessibility services, Request accommodation, Accommodation approved, Find safety resources, Wellness handoff
Community & moderation	Set profile visibility per field, Choose alias for public posts, Join course community, Join organization space, Create post, AI pre-screen public post, Post published, Ask question in Q&A, Answer endorsed by TA, Create marketplace listing, Integrity filter checks listing, Make offer in chat, Arrange safe meet-up, Report content, Moderator reviews report, Remove content or warn, Student appeals, Appeal decided, Safety escalation, Community health reviewed

Career & employer	Build skills profile, Add evidence to portfolio, Request skill verification, Faculty verifies skill, Generate resume from evidence, Search opportunities, Employer posts internship, Career staff approves posting, Apply to internship, Employer reviews approved evidence, Book career appointment, Interview scheduled, Offer recorded, Career outcome captured, Transition to alumni, Alumni offers mentoring, Mentor matched with student, Continuing education enrolment
Family consent	Student opens family sharing, Choose information categories, Set access expiry, Send consent invitation, Guardian confirms relationship, Guardian accepts scope, Guardian views shared items, Billing/support handoff, Access history reviewed, Student narrows scope, Student revokes access, Access expires automatically, Audit retained
Developer platform	Partner applies, Partner agreement signed, Sandbox tenant created, Request data scopes, Security review of app, Scopes approved, Register OAuth client, Configure webhooks, Build against SDK, Integration certification, App review, Listed in marketplace, Institution enables app, Metering and billing, Version deprecation notice, App retired
Analytics & outcomes	Define success measures with sponsor, Measures sheet signed, Instrument events (no PII), Aggregate with minimum cell size, Weekly metrics review, SLO dashboard reviewed, Error budget checked, Pilot midpoint report, Course analytics shared with faculty, Program outcomes reviewed, Pilot results report, Improvement backlog prioritized, Release evidence recorded, Quarterly operating review

Systems

Product systems	Identity, Authorization, Tenant, Profile, Student Workspace, Task, Calendar, Notes, Files, Search, Knowledge Graph, Academic Path, Course, Learning, Assessment, Gradebook, Registration, Academic Record, Degree Audit, Transfer, Student Success, Support, Appointment, Community, Organization, Campus Services, Housing, Dining, Financial Account, Payment Plan, Career, Skills, Credential, Family/Guardian, AI Gateway, AI Policy Engine, AI Evaluation, Notification, Communication, Analytics, Outcome, Marketplace, Developer Platform, Integration, Migration, Trust, Compliance, Privacy, Security, Audit, Release, Billing, CRM/GTM, Customer Success, Operations Console, Finance, People/Capacity, Board/Investor Reporting
Platform control systems	RLS and Tenant Isolation, Role and Capability, Approval, Two-Person Control, Break-Glass Access, Feature Flags, Cohort Rollout, Tenant Rollout, Configuration Studio, Workflow Builder, Policy Hierarchy, Data Classification Rules, Consent Registry, Retention Engine, Legal Hold Engine, Data Subject Requests, Audit Events, Human Override Registry, Trust Artifact Registry, Claims Register, Content Register, Risk Register, Incident System, SLO/Error Budget, Projection/Read Models, Integration Governance, Vendor Governance, Offboarding, Backup/Restore, Release Evidence

Graph

Identity, Profile, Institution membership, Role grants, Program, Courses, Sections, Enrollment, Calendar, Tasks, Plans, Actions, Requirements, Assessments, Grades, Skills, Evidence, Credentials, Support, Advisors, Appointments, Community, Organizations, Campus services, Student account, Opportunities, Mentors, Family grants, AI interactions, Consent, Privacy settings, Outcomes

Graph Rules

ID, Tenant, Owner, Source authority, Classification, Permission rule, Retention rule, Created date, Updated date, Version, Audit event, Provenance, Relationship scope, Policy reference, Migration source, Export behavior, Deletion behavior

Docs

Product & architecture	SEMESTER_UNIFIED_EDUCATION_OS_THESIS, EDUCATION_GRAPH_ARCHITECTURE, ROLE_EXPERIENCE_MATRIX, DOMAIN_AUTHORITY_MATRIX, DOMAIN_REPLACEMENT_MATRIX, CONNECT_REPLACE_OPERATE_STRATEGY, INTEROPERABILITY_AND_MIGRATION_STRATEGY, PRODUCT_COHERENCE_MODEL, PRODUCT_NAVIGATION_SYSTEM, MOBILE_AND_DESKTOP_INTERACTION_MODEL, DESIGN_SYSTEM_GUIDE, ACCESSIBILITY_ARCHITECTURE
Academic & learning	COURSE_STUDIO_SPEC, LEARNING_OBJECTIVE_MODEL, ASSESSMENT_AND_GRADEBOOK_SPEC, ACADEMIC_INTEGRITY_POLICY, ACADEMIC_RECORD_LEDGER_SPEC, REGISTRATION_ENGINE_SPEC, DEGREE_AUDIT_SPEC, TRANSFER_AND_ARTICULATION_SPEC, FACULTY_WORKSPACE_SPEC, STUDENT_SUCCESS_MODEL

AI	AI_GOVERNANCE_POLICY, AI_MODEL_ROUTING, AI_DATA_CLASSIFICATION, AI_EVALUATION_HARNESS, AI_RED_TEAM_PLAN, AI_PROVIDER_REGISTRY, AI_COURSE_POLICY_MODEL, AI_SPEND_AND_QUOTA_POLICY, AI_INCIDENT_RESPONSE, AI_TRANSPARENCY_UX
Integration & migration	LTI_IMPLEMENTATION, ONEROSTER_IMPLEMENTATION, EDU_API_STRATEGY, SIS_ERP_MIGRATION_FACTORY, INTEGRATION_GOVERNANCE, DATA_MAPPING_STANDARD, RECONCILIATION_STANDARD, DUAL_RUN_AND_CUTOVER, ROLLBACK_STANDARD, INTEGRATION_OFFBOARDING
Trust & compliance	SECURITY, PRIVACY, ACCESSIBILITY, DATA_INVENTORY, DATA_CLASSIFICATION, DATA_RETENTION, LEGAL_HOLDS, INCIDENT_RESPONSE, BUSINESS_CONTINUITY, DISASTER_RECOVERY, HECVAT_ROADMAP, TRUST_CENTER, VENDOR_RISK, SECURITY_QUESTIONNAIRE_LIBRARY, PUBLIC_CLAIMS_REGISTER
Business & operations	COMPANY_OPERATING_SYSTEM, GTM_PLAYBOOK, SALES_PLAYBOOK, PILOT_DELIVERY_FACTORY, CUSTOMER_SUCCESS_PLAYBOOK, PRICING_AND_PACKAGING, FINANCIAL_MODEL, BUDGET_AND_RUNWAY, KPI_TREE, RISK_REGISTER, OPERATING_CADENCE, BOARD_REPORTING, PARTNERSHIPS, PEOPLE_AND_HIRING
Engineering & reliability	ENGINEERING_STANDARDS, TEST_STRATEGY, RELEASE_POLICY, SLO_POLICY, ERROR_BUDGET_POLICY, OBSERVABILITY, CQRS_READ_MODEL_ARCHITECTURE, OPERATIONS_CONSOLE_ARCHITECTURE, RUNBOOK_INDEX, BACKUP_RESTORE_TESTS, SECURE_SDLC

Proto

Homepage, Registration Readiness Pilot page, Pilot overview, Request pilot form, Pricing: Student plans, Pricing: Department plans, Pricing: Institution plans, Pricing: Enterprise plans, Feature comparison, Trust: Security overview, Trust: Privacy overview, Trust: Accessibility, Trust: Responsible AI, Mission, Contact, Today, Notifications, Calendar, Tasks, Path, Degree progress, Plan, Registration readiness, Registration status, Holds, Course search, Courses, Course AI guidance, Study packs, Notes, Documents, Group workspace, Focus mode, Search, AI Copilot, Writing workspace, Community, Organizations, Events, Dining, Housing, Campus services, Student account, Support center, Advisor sharing, Family sharing, Career, Opportunities, Profile, Account settings, Privacy settings, AI settings, Data export, Account deletion request, Gradebook, Grade release, Regrade queue, Course AI rules, Caseload, Student path, Shared student workspace, Student consent/grant view, Enrollment queue, Overrides, Registration audit, Balance, Payment plan, Holds, Staff: Hold management, Dining locations, Meal balance, Housing assignment, Maintenance, Organization directory, Community feed, Report content, Consent scope, Shared items, Access history, Revocation, Applications, Employer: Hiring workflow, Alumni: Profile, Alumni: Mentoring offers, Tenant overview, Roles, Role grants, Feature cohorts, Audit explorer, Evidence register, Connection list, Sync run history, Sync errors, Sec: Access review, Sec: Break-glass review, Sec: Incident queue, Executive Overview, Approvals, Approval request detail, GTM Pipeline, Pilot Workspace, Ticket queue, Integrations, Risk register, Financial model, People/capacity plan, Release evidence

Proto W

Join institution, Connect SSO, Complete onboarding, Review Today, Complete first meaningful action, Build term plan, Review registration readiness, Resolve hold through official handoff, Enroll or request registration, Use AI copilot, Follow course AI rules, Share with advisor, Share with family, Export personal data, Adjust privacy/AI settings, Release grade, Resolve regrade, Publish course AI policy, Review consented share, Grant override, User asks, Course/tenant AI policy checked, Sources and limits shown, Data classification checked, Opens support request, Approve/deny exception

Doc Have

DESIGN SYSTEM GUIDE	readme.md + guidelines/*
GTM PLAYBOOK	ui_kits/business (Go-to-market)
COMPANY OPERATING SYSTEM	ui_kits/business/Operating Manual.html
RISK REGISTER	ui_kits/business (Risks)
OPERATING CADENCE	Operating Manual §3

PEOPLE AND HIRING	ui_kits/business (Hiring)
PRICING AND PACKAGING	company site Pricing + GTM
ACCESSIBILITY	guidelines/06-accessibility.md
PUBLIC CLAIMS REGISTER	compliance kit FTC rules
CQRS READ MODEL ARCHITECTURE	ui_kits/architecture
AI GOVERNANCE POLICY	guidelines/02-ai-governance.md
PRODUCT NAVIGATION SYSTEM	guidelines/07-layout-and-responsive.md
ROLE EXPERIENCE MATRIX	ui_kits/role-lens + atlas
TRUST CENTER	company site Trust Center

Added Screens

Name	Group	Flow	Step
Join institution	B · Student OS	Student	1
Confirm identity	B · Student OS	Student	2
Connect SSO	B · Student OS	Student	3
Complete onboarding	B · Student OS	Student	4
Import or review course context	B · Student OS	Student	6
Publish course AI policy	C · Faculty & Course Studio	Faculty	5
Manage roster	C · Faculty & Course Studio	Faculty	11
Communicate with class	C · Faculty & Course Studio	Faculty	19
Refer to office	D · Advisor & student success	Advisor / student success	6
Review consented share	D · Advisor & student success	Advisor / student success	10
Conduct term review	D · Advisor & student success	Advisor / student success	13
Close or transition case	D · Advisor & student success	Advisor / student success	16
Reconcile with SIS	E · Registrar & academic operations	Registrar	13
Operational champion named	K · Institutional administration	Institutional implementation	3
Reconciliation passed	K · Institutional administration	Institutional implementation	12
Admin training	K · Institutional administration	Institutional implementation	13
Student communication prepared	K · Institutional administration	Institutional implementation	14
Launch readiness gate passed	K · Institutional administration	Institutional implementation	15
Controlled launch	K · Institutional administration	Institutional implementation	16
Adoption monitored	K · Institutional administration	Institutional implementation	17
Midpoint review	K · Institutional administration	Institutional implementation	19
Business purpose defined	L · Integrations	Controlled integration	1
Sandbox validated	L · Integrations	Controlled integration	7
Monitoring enabled	L · Integrations	Controlled integration	12
Write direction requested	L · Integrations	Controlled integration	13
Controlled write pilot	L · Integrations	Controlled integration	15

Name	Group	Flow	Step
Rollback verified	L · Integrations	Controlled integration	16
User asks	B · Student OS	AI	0
Intent identified	B · Student OS	AI	1
Prompt/tool permission validated	B · Student OS	AI	8
Response generated	B · Student OS	AI	9
Human escalation offered	B · Student OS	AI	13
Usage/spend logged	B · Student OS	AI	14
Feedback/correction captured	B · Student OS	AI	16
Minimum safe context captured	N · Operations Command Center (/ops)	Support	2
Categorized + severity	N · Operations Command Center (/ops)	Support	3
Routed to team/office	N · Operations Command Center (/ops)	Support	4
Owner accepts or routes	N · Operations Command Center (/ops)	Support	5
Resolution delivered	N · Operations Command Center (/ops)	Support	7
Confirm or close	N · Operations Command Center (/ops)	Support	8
Root cause tagged	N · Operations Command Center (/ops)	Support	9
SLA and satisfaction recorded	N · Operations Command Center (/ops)	Support	11
Triage	N · Operations Command Center (/ops)	Incident	1
Severity declared	N · Operations Command Center (/ops)	Incident	2
Technical lead	N · Operations Command Center (/ops)	Incident	4
Communications lead	N · Operations Command Center (/ops)	Incident	5
Mitigation executed	N · Operations Command Center (/ops)	Incident	8
Internal update	N · Operations Command Center (/ops)	Incident	9
Resolved	N · Operations Command Center (/ops)	Incident	12
Postmortem	N · Operations Command Center (/ops)	Incident	13
Domain inventory	L · Integrations	Domain migration	0
Validation	L · Integrations	Domain migration	5
Dual run	L · Integrations	Domain migration	8
User acceptance	L · Integrations	Domain migration	9
Cutover	L · Integrations	Domain migration	11
Enhanced monitoring	L · Integrations	Domain migration	12
Rollback window	L · Integrations	Domain migration	13
Legacy retirement	L · Integrations	Domain migration	15
Post-migration review	L · Integrations	Domain migration	16
Request resolved	G · Campus life	Campus services	9
Request accommodation	G · Campus life	Campus services	11
Accommodation approved	G · Campus life	Campus services	12
Set profile visibility per field	H · Community & moderation	Community & moderation	0

Name	Group	Flow	Step
Answer endorsed by TA	H · Community & moderation	Community & moderation	8
Create marketplace listing	H · Community & moderation	Community & moderation	9
Integrity filter checks listing	H · Community & moderation	Community & moderation	10
Make offer in chat	H · Community & moderation	Community & moderation	11
Arrange safe meet-up	H · Community & moderation	Community & moderation	12
Audit retained	I · Family & guardian	Family consent	12
Partner applies	L · Integrations	Developer platform	0
Partner agreement signed	L · Integrations	Developer platform	1
Sandbox tenant created	L · Integrations	Developer platform	2
Register OAuth client	L · Integrations	Developer platform	6
Build against SDK	L · Integrations	Developer platform	8
App review	L · Integrations	Developer platform	10
Listed in marketplace	L · Integrations	Developer platform	11
Institution enables app	L · Integrations	Developer platform	12
Metering and billing	L · Integrations	Developer platform	13
App retired	L · Integrations	Developer platform	15
Measures sheet signed	N · Operations Command Center (/ops)	Analytics & outcomes	1
Instrument events (no PII)	N · Operations Command Center (/ops)	Analytics & outcomes	2
Aggregate with minimum cell size	N · Operations Command Center (/ops)	Analytics & outcomes	3
Course analytics shared with faculty	N · Operations Command Center (/ops)	Analytics & outcomes	8
Improvement backlog prioritized	N · Operations Command Center (/ops)	Analytics & outcomes	11

`OS capability map — ui_kits/workflow-runner/os-map-data.js`

Window.OSMAP

Doctrine

Build core capabilities natively. Integrate responsibly during transition. Replace by domain only with evidence. Operate every domain as one coherent system.

Chain

Identity, Institution / tenant, Membership, Role, Capability, Scope, Policy, Data classification, Consent, Source authority, Workflow, Audit, Evidence, Outcome

Layers

- - Public company and growth layer
  - A
  -
  - company-site

    - Homepage, Product overview, Solutions by audience, Pilot pages, Pricing, Trust Center, Mission, Contact, Request pilot form
-
    - Identity, tenant, policy and trust foundation
    - KM
    - Institutional implementation
    - console
    - Identity providers, SSO configuration, SCIM provisioning, Memberships, Roles, Capabilities, Role grants, Policy hierarchy, Data classification, Consent policy, Audit explorer
-
    - Student OS
    - B
    - Student
    - student
    - Today, Action Center, Calendar, Schedule, Tasks, Goals, Path, Degree progress, Program requirements, Term planning, Registration readiness, Course comparison, Workload planning, Cost planning, Courses, Notes, Files, Workspace, Search, AI Copilot, Community, Campus, Support, Career, Student account, Profile, Privacy settings, AI settings, Notifications, Data export/delete controls
-
    - Productivity and collaboration workspace
    - B
    - Student
    - student
    - Tasks, Calendar, Notes, Documents, Files, Projects, Group workspaces, Research workspace, Writing workspace, Focus mode, Study sessions, Templates, Search, Notifications, Automations
-
    - Academic path and degree planning
    - BE
    - Student, Registrar
    - student
    - Program, Major/minor, Degree requirements, Course history, Current term, Future terms, Degree audit, Graduation scenarios, Transfer credits, Articulation rules, Prerequisites, Holds, Registration eligibility, Workload plan, Cost plan, Official record handoff
-
    - Course Studio and learning OS
    - C
    - Faculty
    - staff
    - Course home, Syllabus, Learning objectives, Schedule, Announcements, Assignments, Assessments, Rubrics, Resources, Readings, Annotations, Study packs, Flashcards, Practice, Discussions, Groups, Office hours, Feedback, Gradebook, Regrades, Course AI rules, Academic integrity, Accessibility support, Learning evidence, Course analytics
-
    - Governed AI and intelligence platform
    -
    - AI
    - architecture

    - Student Copilot, Course Tutor, Research Assistant, Writing Assistant, Study Planner, Registration Guide, Academic Path Explainer, Advisor Assistant, Faculty Assistant, Staff Workflow Assistant, Institutional Knowledge Assistant, Model Registry, Provider Registry, Policy Engine, Course AI Rules, Data Classification, Consent Controls, Source Retrieval, Citation/Provenance, Tool Permissions, Usage Quotas, Spend Meter, Evaluation Harness, Safety/Red-Team Tests, Human Escalation, AI Audit Log
- - Advising, student success and support
    - D
    - Advisor / student success, Support
    - staff
    - Caseload, Student path, Action completion, Check-ins, Appointments, Success plans, Advising notes, Referrals, Outreach, Support requests, Student-consented shares, Intervention tracking, Cohort view, Program outcomes, Escalation, Aggregate insight
- - Registrar, SIS and academic operations
    - E
    - Registrar
    - staff
    - Academic calendar, Terms, Catalog, Courses, Sections, Faculty assignments, Meeting times, Rooms, Capacity, Waitlists, Prerequisites, Registration windows, Time tickets, Holds, Overrides, Enrollment, Add/drop, Withdrawal, Academic record ledger, Grade ledger, Grade changes, Regrades, Degree audit, Transfer evaluation, Articulation rules, Graduation checks, Credential conferral, Transcript/export, Reconciliation, Migration center
- - Student accounts, billing and financial workflows
    - F
    - Student finance
    - staff
    - Student account, Charges, Credits, Balance, Holds, Payment plan, Installments, Payment handoff, Refund status, Scholarships, Financial-aid handoff, Cost planner, Budget planner, Emergency support, Reconciliation, Audit ledger
- - Campus life and service super-app
    - G
    - Campus services
    - student
    - Dining, Housing, Events, Organizations, Study spaces, Transit, Parking, Recreation, Library, Bookstore, Campus jobs, Volunteer opportunities, Local services, Safety resources, Wellness handoffs, Accessibility services
- - Community, organizations and peer connection
    - H
    - Community & moderation
    - community
    - Community directory, Community feed, Posts, Comments, Reactions, Groups, Study sessions, Peer mentoring, Organization spaces, Alias/pseudonym controls, Reporting, Moderation, Appeals, Safety escalation, Community retention, Audit
- - Career, alumni, employer and lifelong learning

- J
- Career & employer
- external
- Skills graph, Evidence portfolio, Verified skills, Credential wallet, Resume, Cover letters, Interview prep, Opportunities, Internships, Employer profiles, Applications, Mentors, Alumni network, Career appointments, Career events, Continuing education, Microcredentials, Credential renewal, Career outcomes

- Family and guardian consent platform
- I
- Family consent
- external
- Consent invitation, Relationship confirmation, Scoped grants, Chosen information categories, Time-limited access, Shared items, Billing/support handoff, Communication preferences, Access history, Revocation, Audit

- Institutional administration and control plane
- K
- Institutional implementation
- console
- Tenant overview, Campus hierarchy, SSO, SCIM, Membership, Roles, Capabilities, Access reviews, Plans and entitlements, Feature policies, Cohorts, Kill switches, Module modes, Rollouts, Configuration Studio, Workflow Builder, Policy hierarchy, Governance stewards, Governance decisions, Integrations, Data classification, Consent policy, Retention, Legal holds, Data requests, AI provider policy, Approved sources, Compliance, Trust artifacts, Accessibility program, Incident notices, Risks, Audit explorer, Offboarding, Portability/export

- Integration, migration and interoperability fabric
- L
- Controlled integration, Domain migration
- console
- Provider directory, Connections, Security/privacy review, Scope approval, Mapping Studio, Mapping versions, Transform rules, Sync schedule, Sync runs, Sync errors, Dead-letter queue, Replay requests, Reconciliation, Schema drift, Duplicate resolution, Source ownership, Freshness monitoring, Webhooks, LTI, OneRoster, Edu-API, SIS/ERP adapters, LMS adapters, Google/Microsoft/Apple adapters, AI-provider adapters, Integration retirement

- Security, privacy, accessibility, compliance and trust
- M
- Incident
- compliance
- Trust Center, Security overview, Privacy overview, Accessibility statement, Responsible AI, Data practices, Subprocessors, Reliability/status, HECVAT readiness, DPA process, Security questionnaires, Trust room, Vulnerability reporting, Asset inventory, Access review, Secret inventory, Vulnerabilities, Threat models, Security alerts, Incidents, Controls, Evidence, Vendor risk, Pen-test evidence, Break-glass review, Backup/restore, Disaster recovery, Data inventory, Retention, Legal holds, Privacy requests, Erasure/export

- Operations command center
- N

    - Incident, Support
    - ops
    - Executive Overview, Operations Inbox, My Work, Approvals, Tenants, Tenant 360, Customers, Customer 360, GTM Accounts, Pilots, Implementation, Success Plans, QBRs, Renewals, Customer Health, Revenue, Billing, Support, Product Operations, Releases, Feature flags, Beta, Integrations, Trust, Compliance, Privacy, Security, Access Reviews, Break Glass, Incidents, SLOs, Error Budgets, Audit Explorer, Risks, Vendors, Finance, Forecasts, Reports, Board/Investor, Capacity, Preferences
- - Revenue, GTM, customer success and company operations
    - N
    - Institutional implementation, Analytics & outcomes
    - business
    - Corporate governance, Legal operations, Finance, Budget/runway, Pricing, Sales, Marketing, GTM, CRM, Pilots, Customer success, Implementation, Support, Billing, Collections, Partnerships, Marketplace, Vendor management, Product operations, Engineering, Reliability, Security, Privacy, Compliance, AI governance, People/hiring, Board/investor reporting, Risk management, Release operations, Operating cadence
- - Developer platform, marketplace and partner ecosystem
    -
    - Developer platform
    - external
    - API documentation, OAuth/OIDC, API keys, Service accounts, Webhooks, Event subscriptions, SDKs, Sandbox tenants, Test data, Integration certification, Marketplace, Partner directory, App review, Data scopes, Versioning, Metering, Billing, Support, Incident notices
- - Analytics, outcomes, reliability and continuous improvement
    - N
    - Analytics & outcomes
    - ops
    - Company KPI dashboard, Pilot metrics, Pilot outcomes, Program outcomes, Course analytics, Integration analytics, SLOs, Error budgets, Operating review reports, Release evidence

Journeys

- - Core student journey
    - Signs in, Today, Action Center, Path, Plan, Courses, Copilot, Support, Campus, Career, Lifelong relationship
- - Student daily loop
    - What changed?, What matters?, What can I do?, What is official?, Who can help?, What progress did I make?
- - Learning flow
    - Faculty publishes structure, Student gets course context, Studies and completes work, Tasks, calendar, notes, AI connected, Faculty feedback, Grade released, Evidence and path update
- - Registration workflow
    - Student selects section, Term, hold, prerequisite, capacity, credit, policy checks, Enroll / waitlist / deny / route, Immutable audit entry, Authoritative result
- - Operations action model

    - Request, Attach evidence, Required approval, Impact preview, Execution, Audit event, Read-model refresh, Operator review
-
    - Family consent
    - Student chooses scope, Family accepts, Only permitted info visible, Access audited, Expires or revoked
-
    - Learner lifecycle
    - Prospect, Applicant, Student, Learner, Planner, Course participant, Community member, Support recipient, Credential holder, Job candidate, Employee, Alumnus, Lifelong learner, Mentor / partner / employer
-
    - Institution lifecycle
    - Configures, Provisions, Governs, Supports, Measures, Improves, Trusts, Expands, Migrates, Operates

Shared

- Authentication, Student, Connect SSO
- Tenant provisioning, Institutional implementation, Tenant created
- Role/capability grant, Registrar, Grant override
- Consent grant/revocation, Family consent, Student revokes access
- Course enrollment, Student, Enroll or request registration
- Task creation/completion, Student, Create action/task
- Academic plan update, Student, Build term plan
- Registration request, Student, Enroll or request registration
- Grade entry/release, Faculty, Release grade
- Support request, Support, Opens support request
- Advisor referral, Advisor / student success, Refer to office
- AI request, AI, User asks
- Integration sync, Controlled integration, Read-only sync enabled
- Data export/erasure, Student, Export personal data
- Feature rollout, Institutional implementation, Feature cohorts configured
- Tenant rollout, Institutional implementation, Controlled launch
- Pilot conversion, Institutional implementation, Annual conversion or offboarding
- Billing/payment, Student finance, Payment handoff to processor
- Incident response, Incident, Alert or report
- Domain migration, Domain migration, Domain inventory
- Offboarding, Controlled integration, Retirement/offboarding

Done

- Product requirement, 1
- Role definition, 1
- Route/screen, 1
- Data model, 1
- Source authority, 1
- Tenant scope, 1
- Permission/capability, 1

- Data classification, 1
- Consent model, 1
- Accessibility evidence, 0
- Security controls, 0
- Privacy/retention rules, 1
- Audit event, 1
- Integration plan, 0
- Error/loading/empty/forbidden state, 1
- Support path, 1
- Monitoring/SLO, 0
- Test coverage, 0
- Rollback plan, 0
- Documentation, 1
- Release evidence, 0
- Owner and review date, 0

Workflow runner — ui_kits/workflow-runner/runner-data.js

Window.RUNNER

Flows

Student journey

Key: Student

Name: Student journey

Icon: today

Groups: B, F, G, H, J, M

Lanes:

-
- Student

To:

-
- Registrar staff
-
- Academic advisor
-
- Family/guardian
-
- Student accounts staff
-
- Peer mentor
-
- Dining/campus-card staff
-
- Alumni
-
- Employer
-
- Registrar staff
-
- Student organization leader
-
- Institutional security/privacy
-
- Institutional IT

Faculty course lifecycle

Key: Faculty

Name: Faculty course lifecycle

Icon: courses

Groups: C

Lanes:

-
- Faculty/instructor

To:

-
- Teaching assistant
-
- Department chair
-
- Registrar staff
-
- Accessibility/disability services
-
- Student
-
- Student
-
- Department chair

Advising & student success

Key: Advisor / student success

Name: Advising & student success

Icon: people

Groups: D

Lanes:

-
- Student success staff
-
- Academic advisor

To:

-
- Counseling/wellbeing staff
-
- Student success staff
-
- Student

Registrar & academic operations

Key: Registrar

Name: Registrar & academic operations

Icon: registrar

Groups: E

Lanes:

-
- Registrar staff

To:

-
- Student
-
- Institutional IT
-
- Academic advisor
-
- Transfer student
-
- Institutional auditor
-
- Faculty/instructor

Institution implementation

Key: Institutional implementation
Name: Institution implementation
Icon: university
Groups: K, N
Lanes:

-
- Institutional executive
-
- Semester customer-success manager
-
- Institutional security/privacy
-
- Institutional IT
-
- Semester implementation lead

To:

-
- Semester revenue operations
-
- Student
-
- Registrar staff
-
- Semester support operator
-
- Semester implementation lead
-
- Institutional executive

Controlled integration

Key: Controlled integration
Name: Controlled integration
Icon: connect
Groups: L, K
Lanes:

-
- Institutional security/privacy
-
- Institutional IT
-
- Semester implementation lead

To:

-
- Institutional security/privacy
-
- Semester implementation lead
-
- Semester support operator

Governed AI request

Key: AI

Name: Governed AI request

Icon: ask

Groups: B, K, M

Lanes:

- Student
- AI gateway (system)

To:

- Academic advisor
- Registrar staff
- Semester product operator
- Student

Support request

Key: Support

Name: Support request

Icon: support

Groups: N, B

Lanes:

- Student
- Semester product operator
- Semester support operator

To:

- Semester support operator
- Registrar staff
- Student

Incident response

Key: Incident

Name: Incident response

Icon: spam

Groups: N, M

Lanes:

- Semester executive
- Semester customer-success manager
- Semester product operator
- Semester security operator

To:

- Institutional executive
- Semester product operator
- Semester support operator
- Institutional security/privacy

Domain migration

Key: Domain migration

Name: Domain migration

Icon: import

Groups: L, K

Lanes:

- Institutional executive
- Registrar staff
- Institutional IT
- Semester implementation lead

To:

- Registrar staff
- Semester implementation lead
- Institutional auditor

Student finance & payment

Key: Student finance

Name: Student finance & payment

Icon: costs

Groups: F

Added: True

List: Review student account, Review charges and credits, See hold blocking registration, Open cost planner, Request payment plan, Review plan terms, Accept payment plan, Payment handoff to processor, Processor confirms payment, Reconcile payment with SIS, Release hold, Notify student of hold release, Request refund status, Financial-aid handoff, Emergency support request, Audit ledger reviewed

Lanes:

- Student accounts staff
- Payment processor (system)
- Student
- Student

To:

- Student accounts staff
- Financial aid staff
- Payment processor (system)
- Student
- Registrar staff
- Institutional auditor

Campus services

Key: Campus services

Name: Campus services

Icon: campus

Groups: G

Added: True

List: Open campus map, Find study space, Check dining hours and menus, Order dining, Pay with meal balance, Pick up order, Donate meal swipes to pool, Submit housing maintenance request, Housing staff accepts request, Request resolved, Find accessibility services, Request accommodation, Accommodation approved, Find safety resources, Wellness handoff

Lanes:

-
- Housing staff
-
- Dining/campus-card staff
-
- Accessibility/disability services
-
- Student

To:

-
- Dining/campus-card staff
-
- Housing staff
-
- Student
-
- Accessibility/disability services
-
- Counseling/wellbeing staff
-
- Campus safety staff

Community & moderation

Key: Community & moderation

Name: Community & moderation

Icon: classmates

Groups: H

Added: True

List: Set profile visibility per field, Choose alias for public posts, Join course community, Join organization space, Create post, AI pre-screen public post, Post published, Ask question in Q&A, Answer endorsed by TA, Create marketplace listing, Integrity filter checks listing, Make offer in chat, Arrange safe meet-up, Report content, Moderator reviews report, Remove content or warn, Student appeals, Appeal decided, Safety escalation, Community health reviewed

Lanes:

-
- Community moderator
-
- Teaching assistant
-
- AI gateway (system)
-
- Student
-
- Community moderator
-
- Student

To:

-
- Community moderator
-
- Campus safety staff
-
- Student
-
- Student
-
- Semester product operator

Career, employer & alumni

Key: Career & employer

Name: Career, employer & alumni

Icon: career

Groups: J

Added: True

List: Build skills profile, Add evidence to portfolio, Request skill verification, Faculty verifies skill, Generate resume from evidence, Search opportunities, Employer posts internship, Career staff approves posting, Apply to internship, Employer reviews approved evidence, Book career appointment, Interview scheduled, Offer recorded, Career outcome captured, Transition to alumni, Alumni offers mentoring, Mentor matched with student, Continuing education enrolment

Lanes:

-
- Faculty/instructor
-
- Employer
-
- Career staff
-
- Alumni
-
- Student

To:

-
- Faculty/instructor
-
- Career staff
-
- Employer
-
- Career staff
-
- Student
-
- Career staff
-
- Alumni

Family & guardian consent

Key: Family consent

Name: Family & guardian consent

Icon: family

Groups: I

Added: True

List: Student opens family sharing, Choose information categories, Set access expiry, Send consent invitation, Guardian confirms relationship, Guardian accepts scope, Guardian views shared items, Billing/support handoff, Access history reviewed, Student narrows scope, Student revokes access, Access expires automatically, Audit retained

Lanes:

-
- Family/guardian
-
- Semester privacy/legal operator
-
- Student

To:

-
- Family/guardian
-
- Student
-
- Student accounts staff
-
- Student

Developer platform & marketplace

Key: Developer platform

Name: Developer platform & marketplace

Icon: make

Groups: L

Added: True

List: Partner applies, Partner agreement signed, Sandbox tenant created, Request data scopes, Security review of app, Scopes approved, Register OAuth client, Configure webhooks, Build against SDK, Integration certification, App review, Listed in marketplace, Institution enables app, Metering and billing, Version deprecation notice, App retired

Lanes:

-
- Semester product operator
-
- Institutional security/privacy
-
- Semester finance operator
-
- Developer/partner

To:

-
- Semester product operator
-
- Institutional security/privacy
-
- Developer/partner
-
- Student

Analytics, outcomes & reliability

Key: Analytics & outcomes

Name: Analytics, outcomes & reliability

Icon: analyse

Groups: N, K

Added: True

List: Define success measures with sponsor, Measures sheet signed, Instrument events (no PII), Aggregate with minimum cell size, Weekly metrics review, SLO dashboard reviewed, Error budget checked, Pilot midpoint report, Course analytics shared with faculty, Program outcomes reviewed, Pilot results report, Improvement backlog prioritized, Release evidence recorded, Quarterly operating review

Lanes:

- Institutional executive
- Semester product operator
- Semester customer-success manager
- Semester executive
- Semester customer-success manager

To:

- Institutional executive
- Faculty/instructor
- Semester product operator
- Board/investor (company)

Kinds

- ai
- milestone
- decide
- consent
- sync
- handoff
- comms
- review

- form

Systems

- AI Gateway
- Identity
- Authorization
- Tenant
- Task
- Academic Path
- Registration
- Gradebook
- Assessment
- Course
- Degree Audit
- Transfer
- Academic Record
- Financial Account
- Payment Plan
- Student Success
- Support
- Privacy

- Audit
- Integration
- Migration
- Security
- Release
- Dining
- Community
- Career
- Notes
- Files
- Calendar
- Communication
- Billing
- Financial Account
- Dining
- Housing
- Campus Services
- Community
- Marketplace
- Career

- Family/Guardian
- Developer Platform
- Analytics
- Release
- Student Success
- Student Workspace

Guard

Ai	No student records leave the gateway. Sources and limits shown; labelled AI-assisted; a human confirms any action.
Milestone	Marked done only with evidence attached.
Decide	Preview before apply. Two-person rule where the action is consequential. Audit event written before the change.
Consent	Student-controlled, scoped, time-limited and revocable. Every access is logged.
Sync	Read-only until write is approved. Reconciliation must be clean before moving on.
Handoff	The official office or system stays authoritative. Semester tracks status only.
Comms	Approved templates only. No student record content in email or SMS.
Review	Scoped read model with a freshness label. Nothing changes from this view.
Form	Saved as a draft and versioned until published.

Verb

Ai	Run check
Milestone	Attach evidence
Decide	Approve
Consent	Confirm sharing
Sync	Run
Handoff	Send hand-off
Comms	Send
Review	Mark reviewed
Form	Save

Kits

A	../company-site/index.html
B	../student/index.html
C	../staff/index.html
D	../staff/index.html

E	../staff/index.html
F	../staff/index.html
G	../student/index.html
H	../community/index.html
I	../external/index.html
J	../external/index.html
K	../console/index.html
L	../console/index.html
M	../console/index.html
N	../ops/index.html

`Platform maturity — ui_kits/platform-maturity/platform-data.js`

Window.PLATFORM

Principle

Semester must become the system people prefer to use every day, the system institutions trust to operate, and the system partners prefer to build on.

Success

Daily user preference, Institutional trust, Migration confidence, Partner leverage, Operational resilience, Durable economics, Measurable outcomes, Compounding platform advantage

Pillars

World-class daily student experience

Id: daily
Name: World-class daily student experience
Doc: DAILY_STUDENT_EXPERIENCE_STANDARD
Owner: Product, Engineering (app), Founder
Evidence: ui_kits/student/, ui_kits/mobile/, templates/platform-shell/, ui_kits/every-screen/
State: Designed: 64 student destinations, six-state screens, mobile tab bar. Not shipped to real students.
Metrics: Answers the six questions in under 5 s (usability test), First meaningful action in first session ≥ 70%, Weekly next actions completed, Students choosing Semester over portal + LMS for daily check
Gate: Pilot cohort usability test passes on mobile and desktop
Next: Run a 5-student moderated test of Today on the pilot build
Body: Every session answers: Where am I? What matters now? What should I do next? What is official? What can I safely ignore? Who can help?, Opens fast on mobile; works when data is partly unavailable; shows source and freshness on every fact., Progressive disclosure: layer 1 what matters now, layer 2 explanation and choices, layer 3 detail and settings., Every action links to a course, path, policy, support or goal. Honest guidance, never fake certainty., Interaction language written once: alerts, official data, AI uncertainty, approvals, policy restrictions, recovery after errors.

Education identity and knowledge graph

Id: graph

Name: Education identity and knowledge graph

Doc: EDUCATION_GRAPH_ROADMAP

Owner: Product, Engineering (data), Founder

Evidence: ui_kits/architecture/, docs/master/SEMESTER_EDUCATION_GRAPH.md, handoff/semester-core/provenance.ts.txt

State: Designed: 32 graph nodes, 17 rules, provenance ranking in semester-core. Not built.

Metrics: Share of fields with source + freshness, Duplicate person rate, Stale-source alerts resolved in SLA, Permission-aware search precision

Gate: Canonical IDs + source authority on every pilot field

Next: Define canonical identifiers and the source-authority table for pilot fields

Body: Nodes: person, identity, institution, program, course, requirement, task, action, learning objective, skill, evidence, credential, support resource, policy, opportunity, community, mentor, employer, outcome., Stable canonical identifiers; source authority and freshness per important field; tenant-aware relationship boundaries., Versioned policies and requirements; provenance for derived data and AI outputs; event history; exportable record structure., Graph-quality tools: duplicate detection, missing relationships, stale sources, policy conflicts, reconciliation reports., The moat is understanding relationships among data, policies, people, actions and outcomes, not storing data.

Governed AI intelligence layer

Id: ai

Name: Governed AI intelligence layer

Doc: AI_INTELLIGENCE_PLATFORM

Owner: Product, Engineering (AI gateway), Security

Evidence: ui_kits/architecture/ (AI gateway), handoff/semester-core/aigateway.ts.txt, guidelines/02-ai-governance.md, components/trust/AIResponse.jsx

State: Designed: 17-step governed request, AIResponse component, gateway logic with tests. Red-team suite not run.

Metrics: Student-record leaks to providers = 0, Answers with citations, Human escalation offered when policy requires, Cost per workflow

Gate: Red-team suite passes (pilot launch gate)

Next: Write and run the red-team prompt suite against the staging gateway

Body: Generic AI is prompt → answer. Semester AI is person + role + tenant + course + policy + source authority + consent → allowed model and tools → contextual answer → citations and limits → safe action or hand-off → audit and improvement., Model routing, provider policy, course policy, institution policy, student preferences, data classification, source retrieval, citations, tool permissions, cost controls., Evaluation harness, red-team tests, human escalation, feedback and correction, AI audit log, AI incident response., Aligned with the NIST AI RMF Generative AI Profile (NIST AI 600-1): manage trustworthiness, privacy and legal risk across design, deployment, use and evaluation., AI can explain an official rule. It cannot silently become the official rule.

Interoperability and migration factory

Id: interop

Name: Interoperability and migration factory

Doc: INTEGRATION_AND_MIGRATION_FACTORY

Owner: Engineering (integrations), Implementation, Institution IT

Evidence: ui_kits/console/ (integrations), ui_kits/workflow-runner/ (Controlled integration, Domain migration), docs/launch/Cutover Plan.html

State: Designed: 20-step controlled integration, 17-step migration, cutover plan. No connector built.

Metrics: Time to first clean reconciliation, Unexplained mismatches = 0, Rollbacks rehearsed per migration, Integrations certified

Gate: Read-only SIS sync reconciled for pilot (launch gate)

Next: Build the SIS read connector and reconciliation report for the pilot extract

Body: Families: identity (SSO, OIDC, SAML, SCIM), learning (LTI, deep linking, grade passback only when approved), rostering (OneRoster CSV and REST), academic operations (SIS/ERP adapters), productivity (Google, Microsoft, Apple import/export), research, payments (providers only), campus services, career, AI providers, analytics, support., Migration factory: inventory → discovery → scope → security review → mapping → staging → validation → reconciliation → dual run → cutover → rollback → export/archive → retirement., Assets: intake questionnaire, source inventory template, field-mapping studio, data-quality dashboard, reconciliation engine, duplicate-resolution workspace, evidence register, cutover checklist, rollback runbook, acceptance template, export formats, decommission plan., Win long sales cycles by making replacement safer than staying fragmented.

Enterprise trust and procurement readiness

Id: trust

Name: Enterprise trust and procurement readiness

Doc: ENTERPRISE_TRUST_PROGRAM

Owner: Founder, Security & compliance (fractional), Counsel

Evidence: docs/secure/, docs/legal/, ui_kits/company-site/ (Trust), ui_kits/compliance/

State: Drafted: 10 policies, readiness plan, MSA/DPA/order form, Trust Center page. Insurance, HECVAT, ACR not complete.

Metrics: HECVAT accepted, DPA signed, Insurance bound, ACR delivered, Questionnaire turnaround (days)

Gate: All six pilot blockers closed with evidence

Next: Bind cyber + E&O insurance and submit HECVAT Full

Body: Trust Center, HECVAT readiness, security and privacy overviews, accessibility program, responsible AI documentation, architecture and data-flow diagrams, subprocessor list, DPA process, SLA/support policy., Incident response, business continuity, disaster recovery, pen-test roadmap, evidence register, questionnaire library, vendor risk program, compliance roadmap., Answer for CIO, security, privacy, accessibility, registrar and procurement: can we trust, operate, migrate to, get our data out of, control, support and hold it accountable?

Global reliability and operations

Id: rel

Name: Global reliability and operations

Doc: RELIABILITY_AND_GLOBAL_OPERATIONS

Owner: Engineering, Founder (on-call)

Evidence: docs/operate/, ui_kits/ops/, ui_kits/architecture/ (lag simulator)

State: Drafted: SLOs, error-budget policy, 10 alerts, 8 runbooks. No monitoring live.

Metrics: SLO attainment, Error budget remaining, Restore drill time, Incidents with postmortem in 5 days

Gate: Restore drill timed; alerts firing in staging

Next: Wire error tracking, uptime checks and the SIS-lag alert in staging

Body: Service catalog, critical journey map, SLIs and SLOs, error-budget policy (feature work slows when the budget is spent), release policy, incident command, status communications., Disaster recovery, backup/restore drills, load and capacity testing, dependency map, observability, tenant health, integration health, operations inbox, on-call matrix, RCA and corrective actions, release cohorts and kill switches.

Developer platform and marketplace

Id: dev

Name: Developer platform and marketplace

Doc: DEVELOPER_PLATFORM_AND_MARKETPLACE

Owner: Product, Engineering (platform), Partnerships

Evidence: ui_kits/workflow-runner/ (Developer platform), ui_kits/external/ (Marketplace partner)

State: Designed: 16-step partner workflow. No API published.

Metrics: Certified apps, Partner time to first API call, Tenant installs, Partner incidents

Gate: After pilot: one partner integration certified end to end

Next: Draft the public API surface and versioning policy (post-pilot)

Body: Developer portal, API gateway, OAuth/OIDC, service accounts, webhooks, event subscriptions, SDKs (TypeScript first), sandbox tenants, test data, certification suite, migration guides, changelog and deprecation policy, partner support SLA, community, publishing workflow., Marketplace categories: learning tools, tutoring, research, accessibility, assessment, career, campus services, advising, financial wellness, AI providers, courseware, analytics, engagement, connectors., Every extension: verified publisher, security and privacy review, tenant-approved scope, versioning, support owner, incident contact, export/delete path, offboarding.

Global expansion architecture

Id: global

Name: Global expansion architecture

Doc: GLOBAL_EXPANSION_ARCHITECTURE

Owner: Engineering, Product, Counsel

Evidence: tokens/ (locale-neutral tokens), docs/legal/Subprocessors.html

State: Not started beyond US assumptions.

Metrics: Strings externalized, RTL layout check passes, Regions supported, Calendar/grading models supported

Gate: Before first non-US tenant

Next: Externalize UI strings and remove US-only calendar and grading assumptions from the data model

Body: Internationalization: locale content, translation management, RTL readiness, local calendars and time zones, currency and tax abstraction, address and phone formats, multi-language search, localized policy variants., Regional data: residency strategy, region-aware tenants, cross-border documentation, regional subprocessors, local privacy review, retention and accessibility-law mapping, regional payments and SSO., Models: US higher ed, community colleges, private and public systems, K–12, international universities, vocational, corporate learning, certification, bootcamps, online universities, government training, lifelong learning. Assume no single calendar, grading scheme, credential or privacy regime.

Research and learning-efficacy engine

Id: research

Name: Research and learning-efficacy engine

Doc: RESEARCH_AND_OUTCOMES_ENGINE

Owner: Founder, Customer success, Institutional research partner

Evidence: templates/pilot-results-report/, docs/grow/GTM Plan.html (case study plan)

State: Designed: pilot results report template and measures sheet. No study run.

Metrics: Pilots with signed measures and baseline, Measures met, Published studies, IRB/ethics reviews passed

Gate: Vanderbilt measures signed before launch

Next: Sign the measures sheet and baseline with the Vanderbilt sponsor

Body: Research governance, study templates, ethics/privacy review, cohort definitions, outcome metric catalog, experiment registry, A/B policy, qualitative repository, surveys, feedback governance, efficacy methodology, research partnerships, publication workflow, evidence review board., Student outcomes: clarity, action completion, persistence, learning progress, confidence, support access, career readiness. Faculty: workload, feedback turnaround, course clarity, safe AI use, teaching insight. Institution: service efficiency, adoption, workflow completion, data quality, vendor consolidation, retention proxies, satisfaction.

Distribution engine

Id: dist

Name: Distribution engine

Doc: DISTRIBUTION_ENGINE

Owner: Founder, Account executive (later), Marketing

Evidence: docs/grow/GTM Plan.html, ui_kits/company-site/, ui_kits/ops/ (social, marketing)

State: Drafted: GTM plan, price book, public site. One signed pilot.

Metrics: Qualified pipeline, Pilot-to-annual conversion, Student weekly actives in pilot, Referenceable customers

Gate: Case study approved after pilot

Next: Build the 40-account target list and book 10 discovery calls

Body: Institutional engine: account-based sales, pilots, security/procurement room, implementation factory, customer success, renewal and expansion, case studies, references, partners, integrators, consortia, conferences, analyst relations., Student engine: ambassadors, orientation, advisor and faculty champions, student organizations, on-campus activation, referrals, student content, search, peer learning, career and credential value., Credibility engine: Trust Center, research reports, open standards, public roadmap, accessibility work, responsible AI, transparent status, customer evidence, partner ecosystem, developer platform.

Durable unit economics

Id: econ
Name: Durable unit economics
Doc: PLATFORM_ECONOMICS
Owner: Founder, Finance operator
Evidence: docs/run/Finance Model.html, docs/grow/GTM Plan.html (price book)
State: Drafted: setup scenarios, run-rate, revenue scenarios, price book. No multi-year model.
Metrics: Gross margin, AI cost per workflow, CAC payback, Net revenue retention, Runway (months)
Gate: Annual price confirmed after pilot results
Next: Extend the finance model to 36 months with AI cost per workflow and implementation capacity
Body: Multi-year model, usage and margin, AI cost per workflow, infrastructure unit economics, implementation capacity, support cost, CAC and payback, pilot-to-annual conversion, gross and net retention, expansion, marketplace and partner revenue., Pricing governance, discount approvals, quote-to-cash, collections, revenue recognition review, budget and headcount planning, financing strategy, build-vs-buy.

Culture, cadence and organizational design

Id: org
Name: Culture, cadence and organizational design
Doc: ORGANIZATIONAL_MATURITY_MODEL
Owner: Founder
Evidence: ui_kits/business/Operating Manual.html, docs/run/Hiring Plan.html
State: Drafted: operating manual, cadence, revenue-triggered hiring plan. Solo founder.
Metrics: Weekly review held, Decisions with owners and dates, Hires on trigger, not calendar
Gate: First hire onboarded with the full checklist
Next: Start the weekly operating review with the scorecard in this program
Body: Principles: student agency over surveillance; evidence over hype; trust before shortcuts; interoperability over lock-in; accessibility by design; human judgment for high-stakes decisions; systems over heroics; reliability before vanity features; documentation is part of the product; every claim needs evidence; every action needs an owner; every critical workflow needs a rollback., Functions: product and design; engineering and platform; learning science and academic operations; student success and implementation; security, privacy and compliance; GTM and customer success; finance, legal and operations; developer ecosystem and partnerships; research and evidence.

Scorecard

- Product coherence, 2, One design system, one shell, 673 screens rendered; not shipped
- Daily student utility, 2, Student app designed; no real users
- Faculty/course utility, 2, Course Studio partly designed
- Institutional operations, 2, Console + workflows designed
- Data authority, 2, Source labels + provenance logic; no live data
- Tenant isolation, 1, RLS migrations written, not run
- Security, 1, Policies drafted; controls not evidenced
- Privacy, 2, DPA, privacy policy, consent model drafted
- Accessibility, 2, WCAG 2.2 AA design rules, test plan; no ACR
- AI governance, 2, Gateway design + logic; red-team not run
- Reliability, 1, SLOs + runbooks drafted; no monitoring
- Integration capability, 1, Designed; no connector
- Migration capability, 1, Workflow + cutover designed
- Support maturity, 2, Support plan, macros, desk designed
- Customer success, 1, Plan only; first pilot not launched

- Commercial readiness, 2, Signed paid pilot; price book drafted
- Financial sustainability, 1, Bootstrapped; pre-revenue model
- Developer ecosystem, 0, Not started
- Marketplace maturity, 0, Not started (student marketplace ≠ app marketplace)
- Global readiness, 0, US-only assumptions
- Research/outcome proof, 1, Measures template; no study
- Brand trust, 1, Brand + site; one pilot, no case study
- Partner ecosystem, 0, None
- Organizational maturity, 1, Operating manual; solo founder

Moats

Daily student workspace students prefer over their tool stack, Source authority and freshness on every fact, Education graph of relationships, not just records, Governed AI that is course-, policy- and source-aware, Zero student records to AI providers, proven by tests, Migration factory that makes replacement safer than staying, Reconciliation engine with rollback on every domain, Consent and sharing model students trust, Tenant isolation proven per table in CI, Trust Center with evidence, not claims, One design system across product, site and ops, Implementation factory: signature to launch in weeks, Pilot-to-annual playbook with signed measures, Outcome evidence from real cohorts, Interoperability with LTI, OneRoster, Edu-API, SIS adapters, Developer platform with certification and scoped installs, Marketplace governed by the same consent model, Company runs on Semester: nobody leaves the product, Accessibility as a product feature, not a checkbox, Long institutional relationships through renewal evidence

Risks

- Pilot launches without insurance or DPA, Contract breach, P0
- Student data exposure across tenants, Trust ends, P0
- AI receives student records, FERPA + trust, P0
- SIS data shown wrongly, Student harm, P0
- Solo founder capacity, Delivery slips, P0
- SSO failures on launch day, Adoption, P1
- ACR not ready, Procurement block, P1
- Breadth outruns depth, Nothing is excellent, P1
- No monitoring at launch, Silent failures, P1
- Pilot measures not signed, No proof, P1
- Pricing too low to fund support, Economics, P1
- Long procurement cycles, Runway, P1
- Integration variety per institution, Implementation cost, P1
- Incumbent bundling, Lost deals, P2
- AI provider cost or policy change, Margins, P2
- Accessibility regressions, Exclusion + legal, P1
- Key-person dependency, Continuity, P1
- Regulatory change (state student-privacy laws), Rework, P2
- Marketplace misuse (integrity, safety), Trust, P2
- Over-claiming in marketing, FTC + trust, P1

Roadmap36

- 0–6 months
  - Prove the pilot
  - Close six launch blockers, Ship SSO, SIS read sync, Today, registration readiness, governed AI, Run the Vanderbilt pilot with signed measures, Monitoring, runbooks, restore drill live
- 6–12 months
  - Convert and repeat
  - Results report and case study, Annual conversion, Pilots #2–#3 via the implementation factory, First engineer and implementation lead
- 12–24 months
  - Become the operating layer
  - Course Studio, advising, registrar desk in production, Migration factory runs first real domain migration, SOC 2 readiness; pen test, Public API beta and first certified partner
- 24–36 months
  - Platform and ecosystem
  - Marketplace with governed installs, Multi-campus and system offices, First non-US or K–12 model, Published outcome research

Next50

Bind cyber + E&O insurance, Get counsel review of MSA, DPA, order form, Sign the DPA/FERPA addendum, Submit HECVAT Full, Name Vanderbilt IT, registrar and sponsor contacts, Sign the success-measures sheet and baseline, Run stream 00 (repo audit, toolkit, CI), Approve the design-system baseline, Run stream 01 (migrations, RLS tests), Prove every RLS policy red-then-green, Install semester-core and pass its tests, Set up staging Supabase + Vercel projects, Configure staging SAML with the test IdP, Map IdP attributes to pilot roles, Build the SIS read connector for the pilot extract, Build the reconciliation report, Reach 0 unexplained mismatches on staging data, Ship Today with source labels, Ship registration readiness and hold hand-off, Ship sharing with advisor and revoke, Ship the AI gateway with course policy, Write and pass the red-team suite, Ship advisor caseload (consented shares), Ship registrar desk read views, Ship institution console: roles, cohorts, kill switch, audit, Wire error tracking and uptime checks, Wire SSO-failure and SIS-lag alerts, Time a restore drill, Run axe in CI on pilot routes, Manual screen-reader pass on pilot paths, Draft the ACR, Run a 5-student usability test of Today, Fix the top 5 usability findings, Staff training for advisors and registrar, Dry run with test accounts, Final go/no-go with the sponsor, Production cutover C1–C11, Launch to the pilot cohort, Run day-1 and week-1 support, Week-1 review with the sponsor, Midpoint review and case-study permission, Build the 40-account target list, Book 10 discovery calls, Publish pilot, pricing and trust pages, Extend finance model to 36 months, Results report at end of term, Annual conversion proposal, Hire the founding engineer on trigger, Start pilot #2 through the implementation factory, Publish the case study

Tiers

- Tier 1 · Experience platform
  - Apple-like: calm, clear, fast, accessible, coherent
  - Student OS, Faculty Course Studio, Advisor workspace, Registrar tools, Campus services, Family portal, Career/alumni, Company site, Operations console
- Tier 2 · Education intelligence platform
  - Google-like: data, search, AI, source authority and recommendations working together

    - Identity graph, Education graph, Search, AI gateway, Policy engine, Workflow engine, Evidence/provenance, Analytics, Recommendations, Outcome models, AI evaluation, Human escalation
-
    - Tier 3 · Institutional infrastructure platform
    - Microsoft-like: safe to buy, configure, deploy, govern, integrate and operate for years
    - Tenant control plane, RLS and authorization, SSO/SCIM, Roles/capabilities, Approval workflows, Audit and evidence, Integration gateway, LTI/OneRoster/Edu-API, Migration and reconciliation, Feature flags and rollout, Billing, Trust/compliance, SLOs/incidents, Backup/restore/offboarding, Developer ecosystem

Borrow

- Apple, Integrated experience, design discipline, privacy posture, premium support, Calm student OS, cohesive navigation, accessibility, offline-safe, student-controlled sharing, quality mobile, Closed ecosystem, forced lock-in, opaque platform rules
- Google, Search, cloud, identity, AI, data systems, developer distribution, Education search, education graph, membership layer, AI gateway, APIs, partners, Ad-tech incentives on student data, uncontrolled aggregation
- Microsoft, Enterprise identity, productivity, administration, procurement readiness, long contracts, Tenant admin, SSO/SCIM, workspace, compliance controls, implementation, annual licensing, marketplace, Complex enterprise UX, configuration overload, fragmented surfaces
- Canvas/Brightspace, Course workflow and institutional deployment, Course Studio connected to planning, actions, support, AI, career, Course experience isolated from the wider journey
- SIS/ERP vendors, Record authority, policy, transaction integrity, Canonical academic domains, deterministic rules, audit, migration, reconciliation, rollback, Legacy UX, closed integrations
- ChatGPT/Claude/Perplexity, Conversational intelligence and research, Governed copilot, policy-aware routing, citations, academic context, human escalation, Treating model output as official truth

Apis

- Identity, Accounts, sessions, memberships, SSO, SCIM, roles, Server-authorized; auditable
- Tenant, Institutions, campuses, policies, configurations, feature state, Tenant admin + approval path
- Academic, Terms, catalog, sections, enrollment, holds, records, grades, Deterministic policy + registrar authority
- Learning, Courses, objectives, resources, assignments, assessments, study packs, Faculty/course-scoped capabilities
- Workspace, Tasks, notes, files, calendar, plans, projects, Student ownership + sharing grants
- AI, Requests, policy, providers, sources, usage, evaluations, Gateway-enforced, tenant/course policy
- Student success, Caseload, check-ins, referrals, success plans, support, Purpose-limited, consent/role-scoped
- Campus, Dining, housing, events, organizations, spaces, Service-owner policy + tenant scope
- Career, Skills, evidence, credentials, opportunities, mentors, Student consent + verified claim rules
- Family, Grants, invitations, scoped shares, revocation, Student-controlled, time-limited
- Integrations, Connections, scopes, mappings, syncs, webhooks, Approval-gated, server-only credentials
- Commercial, Quotes, contracts, subscriptions, invoices, entitlements, Finance capability + approvals
- Trust, Controls, evidence, claims, artifacts, trust-room grants, Security/legal scoped
- Operations, Approvals, incidents, SLOs, audits, rollouts, risks, Internal capabilities, two-person controls
- Platform, Apps, API keys, OAuth clients, webhooks, marketplace, Tenant install approval + developer governance

Contract

- Identity, Who is calling?
- Scope, Which tenant, customer, course or person may be accessed?
- Purpose, Why is this data or action needed?
- Authority, Official, derived, AI-generated, user-owned or external?
- Policy, Which rules constrain it?
- Validation, Are inputs structurally and semantically valid?
- Idempotency, Can a retry create duplicate harm?
- Audit, What event must be recorded?
- Freshness, Live, delayed, stale or unavailable?
- Error, What safe recovery or human hand-off is available?

Endpoints

GET /v1/identity/me, GET /v1/tenants/{tenantId}, GET /v1/tenants/{tenantId}/policy, GET /v1/academic/terms, GET /v1/academic/sections, POST /v1/academic/registration-requests, POST /v1/academic/registration-requests/{id}/decision, GET /v1/learning/courses/{courseId}, GET /v1/learning/gradebook, GET /v1/workspace/tasks, POST /v1/ai/requests, GET /v1/ai/sources, POST /v1/support/requests, GET /v1/advising/caseload, GET /v1/career/opportunities, POST /v1/family/grants, GET /v1/integrations/sync-runs, POST /v1/integrations/{id}/scope-approval, POST /v1/commercial/quotes/{id}/send, POST /v1/ops/approval-requests/{id}/decision, POST /v1/privacy/data-subject-requests/{id}/complete, GET /v1/platform/apps

Authority

- Official institutional, Enrollment, grade, hold, term dates, Institution/registrar-authorized record
- Instructor-published, Syllabus, course AI rules, study packs, Course/term scoped, versioned
- Student-owned, Notes, tasks, private plan, AI preferences, Private by default; student controls sharing
- Semester-derived, Workload estimate, action suggestion, Explainable, source-linked, never silently official
- AI-generated, Summary, draft, recommendation, Policy-bound, cited, not authoritative
- External source, Library source, partner opportunity, Labelled with source and freshness
- Community-generated, Post, review, peer tip, Moderated, clearly non-official
- Verified credential, Institution-approved skill or award, Evidence and authority required

Node Fields

Canonical ID, Tenant ID, Owner, Source authority, Source system, Source record ID, Freshness timestamp, Version, Data classification, Consent/grant requirement, Role/capability requirement, Retention policy, Audit history, Export rule, Deletion rule, Migration source, Confidence/verification status

Ladder

Development, Tenant-safe test environment, Sandbox integration, Preview deployment, Internal beta, Private beta tenant, Pilot tenant, Controlled production cohort, Annual customer deployment, Multi-campus expansion

Ladder Gate

Configuration, Policy approval, Security review, Accessibility review, Data validation, Integration test, Rollback plan, Support readiness, Monitoring, Release evidence, Owner approval

Stages

- 1, Daily student OS + registration readiness
- 2, Course Studio + advising/support workflows
- 3, Institution control plane + integrations + rollout factory
- 4, Native registrar/academic domains where authorized
- 5, Campus services + student account + career + family
- 6, Developer platform + marketplace + global ecosystem
- 7, Education infrastructure company: identity, cloud, AI, operating layer, standards, partners, global, lifelong learners

Conclusion

Sell the unified Education OS, deploy a focused pilot, expand as a trusted institutional platform, and mature into an open ecosystem where students, institutions, developers, employers and partners all gain from the same connected graph.

Competitive

- Student daily value, Rarely useful, Preferred daily education workspace, 2
- Product coherence, Disconnected modules, One intuitive system, 2
- Mobile quality, Desktop port, Native-feeling, reliable mobile, 1
- Learning quality, Content container, Connected learning with evidence, 1
- AI quality, Generic chat wrapper, Policy-bound, source-aware intelligence, 2
- Academic authority, Informal planning, Deterministic, auditable official workflows, 1
- Institutional trust, Marketing claims, Evidence-backed procurement readiness, 1
- Security/privacy, Reactive, Continuous controls and governance, 1
- Accessibility, Patchwork, Embedded design/release discipline, 2
- Integration, One-off integrations, Repeatable interoperability factory, 1
- Migration, Manual project work, Reusable migration product, 1
- Reliability, Best effort, SLO-driven, incident-ready, 1
- Customer success, Reactive support, Repeatable implementation and renewal, 1
- Commercial maturity, Ad hoc pricing, Predictable unit economics and deal governance, 2
- Developer ecosystem, Closed product, Documented APIs, marketplace, partners, 0
- Global readiness, Local assumptions, Configurable international architecture, 0
- Outcome proof, Anecdotes, Verified measurable evidence, 1
- Brand trust, Unknown, Recognized education infrastructure brand, 1
- Organizational maturity, Founder heroics, Owners, cadence, systems, resilience, 1

Coherence

Who uses it?, What problem does it solve?, What source is authoritative?, What data does it need?, What action does it create or complete?, What policy governs it?, How does it connect to Path, Action Center, Support and Career?, What happens when it fails?, What happens when data is stale?, How is it supported?, How is it measured?, How is it rolled back?

Core Loop

Identity, Path, Action, Learning, Support, Evidence, Progress, Opportunity

Window.ROLEPAGES

Cats

Learner

- Learners
- Own records in full. Shares are their choice, scoped and revocable.
- Read and act on their own records, Share chosen items with advisors or family, with expiry, Export or request deletion of their data
- See another student's records, Change official records (requests go to the owning office)

Family

- Family
- Sees only what the student shares, until it expires or is revoked.
- View shared categories, Pay or get support through hand-offs
- See anything not shared, Contact instructors through Semester on the student's behalf

Academic

- Academic staff
- Scoped to their courses, sections, caseload or programme.
- Act on records in their scope, See consented shares, Approve within their authority (two-person where consequential)
- See students outside their scope, Read shares after expiry

Service

- Campus services
- Scoped to their service and the requests routed to them.
- Work their service queue, See minimum safe context for each request
- Browse student records, See academic data unless the student shares it

Institution

- Institution leadership & IT
- Configures the tenant; sensitive views are audited.
- Configure roles, policies, integrations and features, Read aggregates, Break-glass with reason and review
- Read individual records without an audited reason

External

- External
- Only what a student or the institution approves for them.

- See approved evidence or postings, Message within the platform's safety rules
- See education records, Contact students outside approved channels

Company

- Semester company
- Business data only, in /ops.
- Run tenants, pilots, support, billing and releases, See aggregate product metrics
- Read any student table (enforced by RLS and tested), Act inside a tenant without an audited support grant

Roles

Prospective student

- learner
- A
-
- Pilot page → sign-up conversion, Questions answered without staff, Time to first visit of Today after admission
- Lands on a programme page from a search, Compares cost and fit with plain numbers and sources, Asks a question and gets a cited answer, Starts an application or saves for later

Applicant

- learner
- B
- Applicant
- Admission tasks done on time, Documents submitted first try, Days from admit to onboarding
- Opens the checklist: two documents left, Uploads a transcript; status shows received, Sees an aid hand-off and books a call, Gets the decision and moves into onboarding

Student

- learner
- BFGHJ
- Student
- Weekly next actions completed, Holds resolved before registration opens, Self-service answers vs support tickets
- Opens Today: one class, one lab report due, Fixes a hold flagged two weeks before registration, Plans next term and compares sections, Asks Semester about the drop deadline and gets a cited answer

Transfer student

- learner
- BE
- Student
- Credits evaluated before first term, Requirements left vs plan, Advisor meetings in first 30 days

- Uploads a prior transcript, Sees which credits transferred and which are pending, Compares two path options, Shares the plan with an advisor

Online student

- learner
- B
- Student
- Deadlines met across time zones, Support resolved without calls, Community participation
- Today shows deadlines in local time, Joins a study group in another time zone, Opens a support request at night and sees status in the morning, Plans next term around work hours

Adult learner

- learner
- BJ
- Student
- Credential progress per term, Employer reimbursement submitted on time, Plan changes without advisor wait
- Sets a part-time plan, Sees credential progress, Downloads an employer reimbursement summary, Moves a course to next term without losing the plan

Graduate student

- learner
- BC
- Student
- Milestones on schedule, Funding deadlines met, Advisor feedback turnaround
- Checks thesis milestones, Shares a draft with the advisor, Sees a funding deadline and the office to contact, Logs TA hours

International student

- learner
- B
- Student
- Compliance notices acted on in time, Orientation tasks done, Support questions routed to the right office first time
- Gets a full-time enrolment reminder, Follows a hand-off to the international office, Completes orientation tasks, Finds housing and transit

Student athlete

- learner
- B
- Student
- Eligibility checks clear, Travel conflicts flagged early, Study hours logged

- Sees travel days against assignment deadlines, Shares a progress summary with academic support, by choice, Plans make-up work, Checks eligibility status

Student worker

- learner
- BG
- Student
- Shifts and classes without conflict, Workload within plan, Payroll hand-offs completed
- Sees shifts beside classes, Moves a study block around a shift, Follows the payroll hand-off, Checks hours against the plan

Student parent/caregiver

- learner
- BG
- Student
- Flexible-plan adherence, Resource hand-offs completed, Missed deadlines avoided
- Plans study time around childcare, Finds the childcare resource office, Gets an extension request routed, Shares a summary with a support coordinator

Alumni

- external
- J
- Alumni
- Mentoring matches active, Credential requests fulfilled, Continuing-education enrolments
- Downloads a verified credential, Offers mentoring for two students, Browses continuing-education courses, Updates career profile

Family/guardian

- family
- I
- Guardian
- Invitations accepted, Payment hand-offs completed, Support requests resolved
- Accepts the student's invitation, Sees the shared balance and pays through the hand-off, Checks the shared calendar, Access expires on the date the student set

Faculty/instructor

- academic
- C
- Faculty
- Course published before term, Grade turnaround, Regrades resolved in policy time

- Publishes syllabus and course AI rules, Creates an assignment with a rubric, Releases grades with a preview, Reviews aggregate course signals

Teaching assistant

- academic
- C
- TA
- Grading queue cleared on time, Office-hours attendance, Feedback quality score
- Opens the grading queue for their sections, Leaves rubric-based feedback, Runs office hours, Flags an integrity concern to the instructor

Department chair

- academic
- CE
-
- Courses staffed, Section fill vs capacity, Curriculum approvals on time
- Approves a course assignment, Reviews demand vs capacity, Moderates a grade dispute, Signs off a curriculum change

Program director

- academic
- DE
-
- On-time progress in programme, Retention, Requirement changes published
- Reviews programme outcomes, Updates a requirement, Checks students at risk in aggregate, Plans advising capacity

Academic advisor

- academic
- D
- Advisor
- Check-ins completed, Referral outcomes tracked, Students registration-ready
- Opens the caseload: nine need follow-up, Records a check-in, Refers a student to counseling, Prepares registration-readiness outreach

Student success staff

- academic
- D
- Student affairs
- Intervention effectiveness, Campaign response, Cases closed with outcome
- Reviews cohort aggregates, Sends an approved outreach, Tracks referral outcomes, Closes a case with notes

Registrar staff

- academic
- E
- Registrar
- Registration errors, Overrides processed in SLA, Reconciliation mismatches
- Checks overnight SIS reconciliation, Approves an override with a second approver, Publishes registration windows, Exports official records

Financial aid staff

- service
- F
- Finance
- Required actions completed by students, Aid questions resolved first contact, Hand-off turnaround
- Works the aid hand-off queue, Sends a required-action notice, Answers a policy question with the source, Closes the hand-off

Student accounts staff

- service
- F
- Finance
- Holds released on payment, Payment plans set up, Reconciliation clean
- Reviews payment-plan requests, Releases a hold after processor confirmation, Reconciles with the SIS, Answers a billing hand-off

Admissions staff

- service
- A
-
- Applicant task completion, Admit-to-enrol conversion, Response time
- Reviews applicant checklists, Sends a document reminder, Answers a question, Hands admitted students to onboarding

Housing staff

- service
- G
-
- Maintenance resolved in SLA, Assignment requests processed, Resident satisfaction
- Opens the maintenance queue, Accepts and schedules a request, Updates an assignment, Closes with a note to the student

Dining/campus-card staff

- service
- G
-
- Order accuracy, Pickup time, Donation-pool use
- Sees incoming orders, Marks orders ready, Checks meal-plan balances in aggregate, Updates hours and menus

Library staff

- service
- G
-
- Reserves available on time, Research consultations, Resource use
- Adds course reserves, Answers a research request, Updates resource links, Reviews usage in aggregate

Accessibility/disability services

- service
- G
-
- Accommodations approved in time, Barrier reports resolved, Consented shares used
- Reviews an accommodation request, Approves with scoped sharing to instructors, Checks a barrier report, Updates a service plan

Counseling/wellbeing staff

- service
- G
-
- Referrals accepted, Time to first contact, Safe hand-offs completed
- Receives a referral with minimum context, Contacts the student through the safe channel, Records outcome (no notes shared back), Reviews referral volume in aggregate

Career staff

- service
- J
-
- Postings approved, Appointments booked, Outcomes captured
- Approves an employer posting, Runs career appointments, Verifies an outcome, Reviews skills demand

Employer

- external
- J
- Employer
- Applications received, Time to interview, Hires from campus

- Posts an internship for approval, Reviews approved evidence from applicants, Schedules interviews, Records an offer

Mentor

- external
- J
-
- Active mentees, Sessions held, Mentee goals met
- Accepts a match, Books a session, Shares a resource, Closes the match with feedback

Peer mentor

- learner
- DH
-
- Mentees supported, Requests answered, Escalations made correctly
- Sees a mentoring request, Meets a first-year student, Points them to the right office, Escalates a concern safely

Campus safety staff

- service
- GH
-
- Safety escalations handled, Response time, Safe meet-up spots maintained
- Receives a community safety escalation, Responds through the safe channel, Updates safety resources, Reviews meet-up locations

Community moderator

- service
- H
-
- Reports resolved in SLA, Appeals decided, Repeat-offence rate
- Opens the moderation queue, Removes a post with a reason, Decides an appeal, Reviews community health

Student organization leader

- learner
- H
-
- Event RSVPs, Member retention, Announcements read
- Creates an event, Approves new members, Posts an announcement, Checks RSVPs

Institutional IT

- institution

- KL
- IT security
- SSO uptime, Sync freshness, Integration incidents
- Checks sync health, Rotates a credential server-side, Maps a new IdP attribute, Approves a mapping version

Institutional security/privacy

- institution
- KM
- IT security
- Access reviews on time, Privacy requests in SLA, Incidents with postmortems
- Runs the quarterly access review, Approves an integration scope, Reviews a break-glass event, Answers a privacy request

Institutional executive

- institution
- K
-
- Pilot measures attained, Adoption by role, Conversion decision on time
- Reads the weekly pilot summary, Joins the midpoint review, Approves the success measures, Decides on annual conversion

Institutional auditor

- institution
- KM
-
- Evidence requests met, Audit findings closed, Records exports complete
- Opens the audit explorer, Requests evidence for a control, Exports an official-records log, Reviews findings

Semester support operator

- company
- N
- Support
- First response time, Tickets resolved, Escalations correct
- Triages overnight tickets, Routes a hold question to the registrar, Updates the known-issues note, Tags root causes

Semester implementation lead

- company
- NK
-
- Days from signature to launch, Go/no-go gates on time, Training completion
- Runs the implementation plan, Tests SSO in staging, Leads the dry run, Works the cutover checklist

Semester customer-success manager

- company
- N
-
- Pilot measure attainment, Sponsor engagement, Renewal rate
- Sends the weekly sponsor update, Prepares the midpoint review, Drafts the results report, Plans the renewal

Semester revenue operations

- company
- N
-
- Pipeline accuracy, Quote-to-signature time, Forecast error
- Updates the pipeline, Builds an order form, Checks discount rules, Prepares the forecast

Semester finance operator

- company
- N
-
- Days sales outstanding, Monthly close on time, Runway accuracy
- Sends an invoice, Reconciles the bank, Runs the monthly close, Updates runway

Semester security operator

- company
- NM
-
- Alerts acknowledged in SLA, Patch SLA, Restore drill time
- Reviews security alerts, Patches a critical dependency, Runs the restore drill, Updates the evidence register

Semester privacy/legal operator

- company
- NM
-
- DPAs executed, Privacy requests in SLA, Subprocessor notices sent
- Reviews an institution DPA, Logs a privacy request, Sends a subprocessor notice, Updates the claims register

Semester product operator

- company
- N
-
- Release cadence, Feature-flag hygiene, Error budget remaining

- Plans the release, Rolls a feature to a cohort, Reviews AI evaluation signals, Prunes stale flags

Semester executive

- company
- N
-
- Cash and runway, Pilot-to-annual conversion, Incidents and SLOs
- Reads the executive overview, Leads an incident as commander, Reviews weekly metrics, Prepares the board update

Developer/partner

- external
- L
-
- Apps certified, Scope requests approved, Integration incidents
- Applies for a sandbox, Requests data scopes, Passes certification, Gets listed in the marketplace

---

```
Role lens — ui_kits/role-lens/roles.js
```

Window.LENS

ROLES

- student, Student
- applicant, Applicant
- guardian, Guardian
- alumni, Alumni
- faculty, Faculty
- ta, Teaching assistant
- advisor, Advisor
- registrar, Registrar
- finance, Finance
- affairs, Student affairs
- security, IT / security
- support, Support / ops
- employer, Employer
- partner, Marketplace partner
- chair, Department chair
- moderator, Community moderator
- mentor, Mentor
- implementation, Implementation lead
- csm, Customer success

- revops, Revenue operations
- investor, Investor / board
- buyer, Institution buyer

SAID

Full	Full — their own records
Scoped	Scoped — only their sections, tickets or listings
Shared	Shared — only what a student chose to share, until it expires
Read	Read-only
Audited	Audited — break-glass or approval, every view logged
None	Not available — the screen does not render for this role. Company roles (investor, customer success, revenue ops) work in the company consoles — investor portal, business workspace, /ops — with aggregate data only, never student records

BACKEND

Today

Src	SIS, LMS, Calendar feeds, Semester
Tables	items, term_plan_courses, sync_state
Rls	owner_id = auth.uid()
Api	Edge: sync-feeds · RPC: today_items()

Plan

Src	SIS, Registrar, Bursar, Semester
Tables	term_plan_courses, registration_time_tickets, holds, plans
Rls	owner_id = auth.uid(); official rows read-only
Api	RPC: enroll(), drop(), withdraw() with idempotency keys

Learn

Src	LMS, Course materials, Semester, AI provider (no student records)
Tables	courses, assignments, grades, notes, study_sets
Rls	enrolment-scoped; instructors by section; released grades only to students
Api	Edge: lms-sync · AI: ask (context-scoped)

Help

Src	Offices, Semester
Tables	support_requests, shares, share_events
Rls	requester or granted office; shares by grantee + expiry
Api	RPC: request_help(), share_with(), revoke_share()

Campus

Src	Dining, Housing, Events, Maps
Tables	events, dining_hours, housing_requests, posts
Rls	tenant members read; moderators write
Api	Edge: campus-feeds

Progress

Src	SIS degree audit, Semester
Tables	degree_audit, scenarios, metrics
Rls	owner; advisor via active share
Api	RPC: degree_progress()

You

Src	Semester, Identity provider (SAML)
Tables	profiles, settings, connections, audit_log
Rls	owner_id = auth.uid(); security role via break-glass
Api	Auth: SAML SSO · RPC: export_my_data(), delete_account()

`Every screen — ui_kits/every-screen/every-data.js`

Window.EVERY

Groups

A

Shell	site
Role	Public visitor
Icon	announce
Metrics	
Rows	

B

Shell

app

Role

Student

Icon

today

Metrics

Next actions, Due this week, Holds

Rows

- Lab report 3: Enzyme kinetics, Due Thu 9 Oct · BIO 2100, connected, Open
- Advising hold, Clear before 3 Nov, official, Action required
- Problem set 5, Due Fri 10 Oct · ECON 1010, connected, Open
- Term plan · Spring 2027, Draft · 15 credits, personal, Draft

C

Shell

app

Role

Faculty/instructor

Icon

courses

Metrics

Submissions to grade, Grades ready to release, Open regrades

Rows

- BIO 2100 · Lab report 3, 41 submissions · rubric v2, connected, 12 to grade
- BIO 2100 · Midterm, 44 graded, official, Ready to release
- Regrade · Q4, Student request · 2 days, personal, Waiting
- Course AI rules, Planning allowed · graded work not, official, Published

D

Shell

app

Role

Academic advisor

Icon

people

Metrics

Caseload, Need follow-up, Referrals open

Rows

- Student A-1042, Hold before registration · shared plan, personal, Follow up

- Student A-1077, Check-in due, official, Due
- Referral R-221, Counseling · accepted, official, In progress
- Cohort · first-years, Aggregate · 118 students, estimated, Review

E

Shell

app

Role

Registrar staff

Icon

registrar

Metrics

Overrides pending, Sync mismatches, Sections near capacity

Rows

- HIST 2140 · Section 01, 3 seats · waitlist 0, official, Open
- Override 0-88, Prerequisite · needs 2nd approver, official, Pending
- Reconciliation · nightly, 4,812 rows · 0 mismatches, connected, Clean
- Spring 2027 term, Windows publish 1 Nov, official, Draft

F

Shell

app

Role

Student accounts staff

Icon

costs

Metrics

Payment plans pending, Holds to release, Unreconciled

Rows

- Payment plan PP-310, 4 installments · requested today, personal, Review
- Hold H-77, Paid · processor confirmed, official, Release
- Refund RF-12, Processing, official, In progress
- Batch · 4 Oct, Reconciled with SIS, connected, Clean

G

Shell

app

Role

Student

Icon

campus

Metrics

Open requests, Events this week, Meal balance

Rows

- Rand Dining · open until 20:00, Menu updated 11:00, official, Open
- Maintenance M-41, Leaking tap · accepted, official, Scheduled
- Study room 3B, Free 14:00–16:00, connected, Book
- Shuttle · Blue line, Next in 6 min, connected, Live

H

Shell

app

Role

Student

Icon

classmates

Metrics

Groups, Reports open, Listings

Rows

- BIO 2100 study group, 14 members · course community, personal, Active
- Report RP-19, Post · harassment · 1 h ago, official, Review
- Listing · BIO textbook, $40 · campus-verified, personal, Live
- Q&A · enzyme kinetics, Answer endorsed by TA, official, Answered

I

Shell

app

Role

Family/guardian

Icon

family

Metrics

Shared categories, Days left on access, Requests

Rows

- Balance (shared), Updated today, official, Shared
- Calendar (shared), Read-only, connected, Shared
- Grades, Not shared, personal, Hidden
- Access, Expires 31 Dec, personal, Active

J

Shell

app

Role

Student

Icon

career

Metrics

Applications, Verified skills, Opportunities

Rows

- Summer research internship, Applied · employer reviewing, external, In review
- Skill · Data analysis, Verified by Prof. Okafor, official, Verified
- Career appointment, Thu 14:00, official, Booked
- Mentor match, Alumni · biotech, personal, Matched

K

Shell

app

Role

Institution admin

Icon

university

Metrics

Active members, Features on, Access reviews due

Rows

- Role · Advisor, 38 members · scoped to caseload, official, Active
- Feature · Community, Off for all cohorts, official, Off
- Cohort · Pilot first-years, 500 students, official, On
- Access review Q4, Due 15 Dec, official, Scheduled

L

Shell

app

Role

Institutional IT

Icon

connect

Metrics

Connections live, Sync lag, Dead letters

Rows

- SIS read sync, Every 15 min · last 3 min ago, connected, Live
- LMS (OneRoster), Last 12 min ago, connected, Recent
- Holds feed, Last 2 h ago, stale, Delayed
- Mapping v7, Awaiting approval, review, Pending

M

Shell

app

Role

Institutional security/privacy

Icon

privacy

Metrics

Open incidents, Privacy requests, Controls with evidence

Rows

- Privacy request PR-4, Export · due in 6 days, official, Open
- Break-glass BG-2, Reason recorded · review pending, official, Review
- Control AC-2, Evidence attached, official, Met
- Subprocessor change, Notice sent · 30 days, official, Notified

N

Shell

app

Role

Semester operator

Icon

data

Metrics

Open tickets, Pilots live, Error budget left

Rows

- Vanderbilt · pilot, Week 3 · measures on track, made, Live
- T-2041 · Sign-in loop, S2 · assigned, made, Open
- Release v2026.10.05-1, Staging smoke passed, made, Ready
- Invoice INV-003, Net 30 · due 4 Nov, made, Sent

Archetypes

- marketing, None
- dashboard
- queue
- builder
- settings
- list
- detail

One place — ui_kits/one-place/one-place-data.js

Window.ONEPLACE

Audiences

Student, Faculty & staff, Institution, Company (Semester)

Rows

- Student, Check what's due and what to do next, LMS dashboard, planner app, Today + Action Center, designed, ../student/index.html
- Student, Calendar and schedule, Google / Outlook calendar, Calendar (two-way sync optional), designed, ../student/index.html
- Student, Notes, docs, sheets, slides, Google Docs, Notion, Word, Write, Sheets, Decks, Notes, designed, ../student/index.html
- Student, Study cards and practice, Quizlet, Anki, Study (course-provided + yours), designed, ../../templates/platform-shell/PlatformShell.dc.html
- Student, AI help, ChatGPT, other assistants, Ask Semester (governed, cited), designed, ../student/index.html
- Student, Email and messages, School webmail, group chats, Mail + DMs with safety tools, designed, ../student/index.html
- Student, Plan degree and register, SIS portal, degree audit tool, Path, Plan, Registration readiness (SIS stays official), designed, ../student/index.html
- Student, Pay a bill or set a payment plan, Bursar portal, Billing; payment runs inside an embedded processor checkout, embed, ../student/index.html
- Student, Find people, groups, events, Instagram, Discord, GroupMe, Community, groups, events, designed, ../community/index.html
- Student, Buy and sell on campus, Facebook Marketplace, Marketplace (campus-verified), designed, ../community/index.html
- Student, Dining, housing, maps, services, Campus apps, GET, maps, Campus, designed, ../student/index.html
- Student, Get help, Office websites, phone trees, Support (routes to the owning office), designed, ../student/index.html
- Student, Career, resume, applications, Handshake, LinkedIn, Word, Career + portfolio, build, ../external/index.html
- Student, Share with family, Screenshots, forwarded emails, Family sharing (scoped, revocable), designed, ../student/index.html
- Student, Video office hours and study rooms, Zoom, Teams, Meet (calls inside Semester), build, None
- Faculty & staff, Build and run a course, LMS course shell, Course Studio (LTI to the LMS during transition), build, ../staff/index.html
- Faculty & staff, Grade and release, LMS gradebook, spreadsheets, Gradebook, release, regrade queue, designed, ../staff/index.html
- Faculty & staff, Advising caseload and notes, Navigate-type CRM, spreadsheets, Advisor workspace, designed, ../staff/index.html
- Faculty & staff, Registrar desk, SIS admin screens, Registrar desk (writes go to SIS via approved integration), designed, ../staff/index.html
- Faculty & staff, Student accounts, Bursar system, Student accounts desk, designed, ../staff/index.html
- Faculty & staff, Team chat and email, Slack, Outlook, Mail + team spaces, build, None
- Faculty & staff, Meetings, Zoom, Teams, Meet, build, None

- Institution, Configure tenant, roles, policies, Vendor admin consoles, Institution console, designed, ../console/index.html
- Institution, Integrations and migration, Vendor ETL tools, Integration hub + migration center, designed, ../console/index.html
- Institution, Audit, access reviews, incidents, Ticketing + spreadsheets, Security operations + audit explorer, designed, ../console/index.html
- Institution, Single sign-on, Institution IdP, Stays the institution's IdP; Semester signs in through it, embed, None
- Institution, System of record (transition), SIS / LMS, Stays official until the institution chooses to migrate a domain, embed, ../workflow-runner/index.html
- Company (Semester), CRM and pipeline, HubSpot, Salesforce, /ops GTM pipeline, accounts, stakeholders, designed, ../ops/index.html
- Company (Semester), Email and calendar, Google Workspace, Mail + Calendar for operators (custom domain via mail provider), embed, None
- Company (Semester), Docs, sheets, decks, Google Docs, Sheets, Slides, Write, Sheets, Decks (same modules as students), designed, ../student/index.html
- Company (Semester), Team chat, Slack, Ops inbox + team spaces, build, ../ops/index.html
- Company (Semester), Support desk, Zendesk, Intercom, /ops support desk + macros, designed, ../ops/index.html
- Company (Semester), Status page and incidents, Statuspage, PagerDuty, /ops incidents, SLOs, public status page, designed, ../ops/index.html
- Company (Semester), Social media, Hootsuite, Buffer, /ops social media control, designed, ../ops/index.html
- Company (Semester), Marketing site and CMS, Webflow, WordPress, Company site + content register, designed, ../company-site/index.html
- Company (Semester), Invoices and receivables, QuickBooks invoicing, /ops finance: invoices, AR, dunning, designed, ../ops/index.html
- Company (Semester), Accounting ledger and tax filing, QuickBooks, accountant, Ledger view + monthly close in /ops; filings by the accountant, embed, ../../docs/run/Finance%20Model.html
- Company (Semester), Banking and card payments, Bank, Stripe, Must stay with a licensed bank and payment processor; balances and payouts shown in /ops, embed, ../ops/index.html
- Company (Semester), Contracts and e-signature, DocuSign, Contracts register + in-app signing (or embedded e-sign provider), build, ../../docs/legal/Master%20Services%20Agreement.html
- Company (Semester), Hiring and people, Greenhouse, Gusto, /ops people: hiring pipeline, onboarding; payroll runs through a payroll provider, embed, ../../docs/run/Hiring%20Plan.html
- Company (Semester), Compliance evidence, Vanta, Drata, spreadsheets, /ops trust & compliance: controls, evidence, HECVAT, designed, ../ops/index.html
- Company (Semester), Roadmap and tickets, Linear, Jira, /ops product operations: backlog, releases, feature flags, designed, ../ops/index.html
- Company (Semester), Code and CI, GitHub, Vercel, Stays on GitHub + Vercel; release evidence and deploy status shown in /ops, embed, ../ops/index.html
- Company (Semester), Board and investor reporting, Decks, email, /ops board/investor reports + investor portal, designed, ../investor/index.html
- Company (Semester), Company metrics, Spreadsheets, BI tools, /ops executive overview + KPI dashboard, designed, ../ops/index.html

Why

Embed	External by law, licence or the institution's choice. Semester shows it, links it and runs the workflow around it so nobody switches apps; the regulated step happens in an embedded provider screen.

`Atlas — ui_kits/atlas/atlas-data.js`

Window.ATLAS

Role	Kit	Features

Student	../student/index.html	• Today
		  ◦ Today, Course hub, Notifications
		  ◦ See the next action, Source label on every fact, Snooze / complete, Ask Semester about this week
		• Plan
		  ◦ Calendar, Registration, Changes, Decisions, Runway, Pathway, Applying, Launchpad, Career, Opportunities, Costs & billing, Notes & tasks
		  ◦ Add/schedule, Review → enroll/drop with preview, Clear holds, Track applications, Pay at processor
		• Learn
		  ◦ Courses, Grades, Import, Sources, Study, Meet, Ask Semester, Analyse, Solve, Exam prep, Work, Time, Group work, Draw, Decks, Write, Sheets, Equations, Create, Essay, Proofread
		  ◦ Open course workspace, Submit work, Study cards/quizzes, AI help within course policy, Focus timer, Collaborate
		• Help
		  ◦ Support, Catching up, People, Family, Help
		  ◦ No-wrong-door support, Share with family/advisor, Revoke shares, See access history
		• Campus
		  ◦ Campus, Maps, University, Activities, Classmates, Dining, Housing, Links, Mail, Calls, Athletics, NIL, Community
		  ◦ Directions, RSVP, Report housing issue, Meal swipes, Post / report
		• Progress
		  ◦ Me, Reports, Degree, Advising
		  ◦ Degree progress, What-if, Book + prepare advising, Weekly brief
		• You
		  ◦ Profile, Account, Settings, Connect, Privacy & data, Export
		  ◦ Appearance + accessibility, Connect accounts, AI scope, Export / delete

Applicant	../external/index.html	• Application
		  ◦ Your application, Checklist, Cost estimate
		  ◦ Track checklist, Remind recommender, Estimate net price, Book a visit

Guardian	../external/index.html	• Family portal
		  ◦ What's shared with you, Billing milestones, Final grades
		  ◦ View only what's shared, Make a payment, Ask the student to share

Alumni	../external/index.html	• Alumni
		  ◦ Verified achievements, Mentoring requests, Visibility
		  ◦ Download records, Accept mentoring, Set visibility

Faculty	../staff/index.html	• Teaching
		  ◦ Gradebook, Regrade requests, Course AI policy
		  ◦ Draft vs release grades, Decide regrades, Set AI policy, Announce changes

Teaching assistant	../staff/index.html	• Grading
		  ◦ Grading queue
		  ◦ Draft scores + comments, Next/previous submission, See own authority

Role	Kit	Features

Advisor	../staff/index.html	• Advising
		  ◦ Advisees, Shared degree plans, Meeting notes
		  ◦ Open shared plans, Record agreed actions, Approve plans (if authorised)

Registrar	../staff/index.html	• Registration desk
		  ◦ Approval requests, Capacity, Record changes
		  ◦ Approve overrides, Manage capacity, Audit trail

Finance	../staff/index.html	• Student accounts
		  ◦ Balances, Holds, Payment plans
		  ◦ Release holds (two-person), Set up plans, Refunds via processor

Student affairs	../staff/index.html	• Basic needs
		  ◦ Support requests, Resource directory
		  ◦ Offer swipes/grants, Refer offices, See only what student shared

IT / security	../console/index.html	• Security operations
		  ◦ Privileged sessions, Sign-in alerts, Break-glass, Access review
		  ◦ Revoke sessions, Request break-glass (2 approvers), Export access review
		• Configuration
		  ◦ Roles & permissions, Policies, Integrations, Feature flags
		  ◦ Rotate credentials, Change flags, Map roles

Institution admin	../console/index.html	• Console
		  ◦ Overview, Approvals, Audit log, Compliance evidence
		  ◦ Approve two-person duties, Export evidence, Release readiness

Support / ops	../console/index.html	• Support queue
		  ◦ Tickets, Student-granted access
		  ◦ Diagnose sync, Reply, Escalate, Access expires with ticket

Employer	../external/index.html	• Postings
		  ◦ Posting, Applicants
		  ◦ Edit posting, Review shared evidence, Move stage

Marketplace partner	../external/index.html	• Listing
		  ◦ Listing preview, Review checklist
		  ◦ Submit for review, See student-facing labels

Founder / company	../business/index.html	• Business OS
		  ◦ Gap analysis, Launch tracker, 90-day roadmap, Go-to-market, Launch checklist, Pilot checklist, Risks, Hiring, Fundraising, Documents & decks
		  ◦ Update status, Export CSV, Print pack, Present decks
		• Platform
		  ◦ Architecture, Lag simulator, Role lens, Workflow lab, Compliance, Company site
		  ◦ Model projections, Audit WCAG/FTC, Route AI workflows

`Community — ui_kits/community/community.js`

V

Tab

feed

Mf

All

Liked

Saved

Rsvp

Bids

Drop1	42

TABS

- feed, Feed,
- groups, Groups, 3
- events, Events,
- qa, Q&A,
- clubs, Clubs & leaders,
- mentor, Mentorship, New
- market, Marketplace, LIVE
- msgs, Messages, 2
- safety, Privacy & safety,

POSTS

- MK, Maya K., CHEM 210 · Study group, Running a practice-problem session in the library, room 3B, Thursday 7pm. Bring your problem set 6 questions., 14, course
- RS, Robotics Society, Club, Build night moved to Friday. New members welcome, and we have spare kits., 31, club
- JL, Jordan L., Peer mentor, Tip for first-years: register for spring as soon as your readiness check is green. Waitlists fill in the first 48 hours., 58, campus
- AO, Alumni Office, Official, Mentorship matching for juniors opens Monday. Pick up to 3 industries., 22, official

GROUPS

- CHEM 210 study group, Course · 18 members, Thu 7pm
- Robotics Society, Club · 142 members, Fri build night
- First-gen students network, Community · 310 members, Monthly mixer
- Intramural soccer, Rec · 64 members, Sun games

EVENTS

- ev1, Career fair: tech & data, Oct 9 · Student Center, 412 going
- ev2, Finals de-stress yoga, Oct 12 · Rec Hall, 88 going

- ev3, Robotics open build night, Oct 10 · Engineering 120, 36 going
- ev4, First-gen mixer, Oct 15 · Commons, 120 going

QA

- How do I appeal a waitlist decision?, Registrar staff endorsed, 12, True
- Best way to study for ORGO midterm?, Peer answers, 27, False
- Is the shuttle running during fall break?, Transportation endorsed, 6, True

LIST

- I1, Organic Chemistry, 9th ed., Textbooks, $45, Like new,
- I2, TI-84 Plus calculator, Gear, $60, Good,
- I3, Spring sublet, 1BR near campus, Housing, $780/mo, Jan–May, warn
- I4, Calculus tutoring, 1 hr, Services, $25/hr, Tutor verified, ok
- I5, Mini fridge, Gear, $40, Good,
- I6, Homecoming tickets ×2, Tickets, $30, Face value, ok
- I7, Desk lamp + chair, Gear, $25, Fair,
- I8, Intro Psych notes (my own), Textbooks, $10, Integrity check, warn

MENT

- DA, Dana A. · Class of 2019, Data analyst · Healthcare, Shared: first-gen, Economics major, 92
- PR, Priya R. · Senior, Peer mentor · Pre-med, Shared: CHEM 210, Biology, 88
- TW, Tom W. · Class of 2015, Product manager · EdTech, Shared: Robotics Society, 81

CLUBS

- Robotics Society, 142 members, Leader: you (President), 1
- First-gen network, 310 members, Ambassador program, 0
- Debate Union, 58 members, Officer elections Oct 20, 0

R

Index of every captured screen

655 screens, listed by the prototype they come from and the navigation that opens each one.

Prototype / template	Screens	Screens captured (by the control that opens them)
architecture	11	Opening view · Full stack & data · Read-model pipeline · AI gateway · Lag simulator · Migration phases · Full stack & data › Front end · Full stack & data › Middleware · Full stack & data › Server / API · Lag simulator › OffProjection worker failed · Lag simulator › OffBlue/green rebuild to tenant_overview_v2
atlas	16	Opening view · Applicant3 · Guardian3 · Alumni3 · Faculty3 · Teaching assistant1 · Advisor3 · Registrar3 · Finance3 · Student affairs2 · IT / security8 · Institution admin4 · Support / ops2 · Employer2 · Marketplace partner2 · Founder / company16
business	13	Opening view · Launch tracker · 90-day roadmap · Go-to-market · Launch checklist · Pilot checklist · Risk register · Hiring plan · Fundraising · Documents & decks · Launch tracker › P0 · Launch tracker › P1 · Launch tracker › P2
community	23	Opening view · Groups · Events · Q&A · Clubs & leaders · Mentorship · Marketplace · Messages · Privacy & safety · Groups › Open · Events › RSVP · Clubs & leaders › Leader tools · Clubs & leaders › Join · Clubs & leaders › Apply · Mentorship › Not for me · Marketplace › Bid $44 · Marketplace › Textbooks · Marketplace › Gear · Marketplace › Housing · Marketplace › Services · Marketplace › Tickets · Messages › Decline · Messages › Report or block
company-site	11	Opening view · Product · Students · Institutions · Pilot · Trust · Pricing · About · Talk to us · Legal · Pilot › Send
compliance	1	Opening view
console	8	Opening view · Approvals3 · Support queue27 · Integrations · Security operations · Audit log · Approvals3 › Approve… · Security operations › Break-glass access…
demo-video	1	Opening view
every-screen	19	Opening view · Public company, sales & marketing site80 · Faculty & Course Studio39 · Advisor & student success29 · Registrar & academic operations36 · Student accounts, aid & commerce29 · Campus life38 · Community & moderation35 · Family & guardian13 · Career, employer, alumni40 · Institutional administration49 · Integrations53 · Trust, privacy, security48 · Operations Command Center (/ops)102 · Loading · Empty · Error · Forbidden · Offline
external	5	Opening view · Guardian · Alumni · Employer · Marketplace partner
forms	3	Opening view · Capabilities · Interfaces
gap-screens	41	Opening view · Confirm identity · Connect SSO · Complete onboarding · Import or review course context · User asks · Intent identified · Prompt/tool permission validated · Response generated · Human escalation offered · Usage/spend logged · Feedback/correction captured · Publish course AI policy · Manage roster · Communicate with class · Refer to office · Review consented share · Conduct term review · Reconcile with SIS · Operational champion named · Reconciliation passed · Admin training · Student communication prepared · Launch readiness gate passed · Controlled launch · Adoption monitored · Midpoint review · Business purpose defined · Sandbox validated · Monitoring enabled · Write direction requested · Controlled write pilot · Rollback verified · Domain inventory · Validation · Dual run · User acceptance · Cutover · Enhanced monitoring · Rollback window · Legacy retirement
investor	6	Opening view · KPIs · Cash & runway · Pipeline · Risks · Data room
launch-kit	1	Opening view
master-catalog	9	Opening view · Roles · 51 · Screens · 673 · Workflows · 319 · Systems · 88 · Education graph · Documents · 82 · Gap register · Claude Code prompt
master-control	1	Opening view
mobile	6	Opening view · My Path · Search · Plan · Me · Me › OnFinal grades

Prototype / template	Screens	Screens captured (by the control that opens them)
one-place	8	Opening view · Student15 · Faculty & staff7 · Institution5 · Company (Semester)18 · Designed · To build · Embedded
ops	46	Opening view · Marketing & campaigns · Finance console · Sales & RevOps · Partnerships · Customer success · Support desk · Trust & safety · community · Legal & compliance · IT & security · People ops · Data & analytics · Marketing & campaigns › Registrar roundtable Events $61k 88 $693 Planning · Marketing & campaigns › Accessibility month Social · PR $22k 140 $157 Live · Marketing & campaigns › CIO webinar series Webinar $18k 206 $87 Live · Marketing & campaigns › Community college tour Field $96k 74 $1,297 Over budget · Finance console › New invoice · Finance console › Invoices & AR · Finance console › Contracts & renewals · Finance console › Usage billing · Finance console › AI cost · Finance console › Payroll summary · Sales & RevOps › Pilot → full Lakeshore College Proposal $210k Dec 2 L. Brandt · Sales & RevOps › 3 campuses Eastbrook University Procurement $880k Jan 20 R. Osei · Sales & RevOps › New logo Brightwater CC Discovery $95k Feb 28 M. Chen · Sales & RevOps › Expansion seats Valewood University Verbal $140k Oct 30 L. Brandt · Partnerships › LMS vendor B LMS Strategic Certified $1.1M Active · Partnerships › Regional reseller C Reseller Select — $0.7M Onboarding · Partnerships › Accessibility vendor D Tech Select In review $0.2M Pilot · Customer success › Ridgeway Community College B. Lowe 64 52% 5 Adoption plan · Customer success › Northmere University A. Ruiz 88 68% 1 Expansion call · Customer success › Coastline Tech K. Imani 41 29% 9 Exec save plan · Customer success › St. Aurel College B. Lowe 79 66% 0 — · Customer success › Valewood University K. Imani 85 70% 3 Training · Customer success › Pinecrest CC A. Ruiz 58 47% 6 Champion left · Customer success › Marrow Institute B. Lowe 81 63% 2 QBR Nov 4 · Customer success › Eastbrook University K. Imani 90 74% 1 Case study · Support desk › #58207 Coastline Tech SSO certificate rotation P2 2h left In progress · Support desk › #58199 Pinecrest CC Bulk course import CSV P3 1d Waiting on customer · Support desk › #58190 Northmere University Caption export format P4 3d Solved · Legal & compliance › New subprocessor notice AI vendor B Subprocessor GC Oct 18 30-day notice out · Legal & compliance › State privacy addendum Oakvale State Addendum GC Oct 25 Drafting · Legal & compliance › Records request Halden State Institution request Privacy Oct 9 Fulfilled · IT & security › CC7.2 Monitoring Ops Alert runbooks Platform — Passing · IT & security › CC8.1 Change mgmt Eng PR approvals sample P. Adeyemi — Passing · IT & security › A1.2 Backups Ops Restore test Platform Oct 30 Scheduled
platform-maturity	15	Opening view · Three tiers · 12 pillars · Scorecard · Competitive scorecard · APIs · Graph & authority · Roadmap · Moats & risks · Next 50 actions · Scorecard › 0 — None · Scorecard › 1 — Idea · Scorecard › 3 — Built, untested · Scorecard › 4 — In production with evidence · Scorecard › 5 — Proven at scale
role-lens	46	Opening view · Student64 · Applicant13 · Alumni13 · Faculty14 · Teaching assistant10 · Advisor11 · Registrar9 · Finance4 · Student affairs7 · IT / security4 · Support / ops3 · Employer4 · Marketplace partner2 · Department chair8 · Community moderator4 · Mentor6 · Implementation lead4 · Customer success1 · Revenue operations1 · Investor / board0 · Institution buyer2 · This role · This role › Course hub— none · This role › Notifications— none · This role › Registration— none · This role › Changes— none · This role › Decisions— none · This role › Runway— none · This role › Pathway— none · This role › Applying— none · This role › Launchpad— none · This role › Career— none · This role › Opportunities— none · This role › Costs & billing— none · This role › Notes & tasks— none · This role › Grades— none · This role › Import— none · This role › Sources— none · This role › Study— none · This role › Meet— none · This role › Ask Semester— none · This role › Analyse— none · This role › Solve— none · This role › Exam prep— none · This role › Work— none
role-pages	46	Opening view · Prospective student · Applicant · Transfer student · Online student · Adult learner · Graduate student · International student · Student athlete · Student worker · Student parent/caregiver · Peer mentor · Student organization leader · Family/guardian · Faculty/instructor · Teaching assistant · Department chair · Program director · Academic advisor · Student success staff · Registrar staff · Financial aid staff · Student accounts staff · Admissions staff · Housing staff · Dining/campus-card staff · Library staff · Accessibility/disability services · Counseling/wellbeing staff · Career staff · Campus safety staff · Community moderator · Institutional IT · Institutional security/privacy · Institutional executive · Institutional auditor · Alumni · Employer · Mentor · Developer/partner · Semester support operator · Semester implementation lead · Semester customer-success manager · Semester revenue operations · Semester finance operator · Semester security operator
staff	7	Opening view · TA grading queue16 · Advisees42 · Registration desk3 · Student accounts · Support requests2 · TA grading queue16 › Save draft and next

Prototype / template	Screens	Screens captured (by the control that opens them)
student	78	Opening view · App directory · Notifications · Calendar · Registration · Career · Costs & billing · Courses · Study · Ask Semester · Write · Sheets · Decks · Grades · Support · Family · Maps · Mail · Community · Me · Degree · Advising · Settings · Connect · Privacy & data · Search or run a command · App directory › Course hub · App directory › Changes · App directory › Decisions · App directory › Runway · App directory › Pathway · App directory › Applying · App directory › Launchpad · App directory › Opportunities · App directory › Notes & tasks · App directory › Import · App directory › Sources · App directory › Meet · App directory › Analyse · App directory › Solve · App directory › Exam prep · App directory › Work · App directory › Time · App directory › Group work · App directory › Draw · App directory › Equations · App directory › Create · App directory › Essay · App directory › Proofread · App directory › Catching up · App directory › People · App directory › University · App directory › Activities · App directory › Classmates · App directory › Dining · App directory › Housing · App directory › Links · App directory › Calls · App directory › Athletics · App directory › NIL · App directory › Reports · App directory › Account · App directory › Export · Registration › Review ENGL 245-03 · Registration › Review BIO 410-01 · Costs & billing › Pay $1,240.00… · Study › Show answer · Ask Semester › Add 3 blocks to calendar… · Decks › 2 Methods · Decks › 3 Results · Decks › 4 Discussion · Family › OnShare Final grades · Family › OnShare Billing milestones · Family › OffShare Class schedule · Mail › Registrar · Mail › Rowing club · Mail › Career Center · Advising › Preview and share…
wireframes	25	Opening view · Applicant13 · Guardian11 · Alumni13 · Faculty14 · Teaching assistant10 · Advisor11 · Registrar9 · Finance4 · Student affairs7 · IT / security4 · Support / ops3 · Employer4 · Marketplace partner2 · Department chair8 · Community moderator4 · Mentor6 · Implementation lead4 · Customer success1 · Revenue operations1 · Investor / board0 · Institution buyer2 · OnHide screens this role can't open · Open wireframe: Help · Open wireframe: University
workflow-lab	4	Opening view · Feature matrix · Benchmark lab · Benchmark lab › OnTested reload
workflow-runner	32	Opening view · Run a workflow · All workflows · By role · Screen coverage · Faculty course lifecycle24 · Advising & student success17 · Registrar & academic operations21 · Institution implementation22 · Controlled integration20 · Governed AI request17 · Support request12 · Incident response17 · Domain migration17 · Student finance & payment16 · Campus services15 · Community & moderation20 · Career, employer & alumni18 · Family & guardian consent13 · Developer platform & marketplace16 · Analytics, outcomes & reliability14 · Run a workflow › Auto-run · Run a workflow › Save · Run a workflow › Next → · All workflows › Start · By role › ◖ · Screen coverage › A · Public company, sales & marketing site · Advising & student success17 › Mark reviewed · Institution implementation22 › Attach evidence · Controlled integration20 › Send hand-off · Governed AI request17 › Run check · Domain migration17 › Run
Market Research	1	Opening view
Operating Manual	1	Opening view
Operating Pack	1	Opening view
Pilot Invitation Email	1	Opening view
Pilot One-Pager	1	Opening view
Vanderbilt Campus Map	1	Opening view
Data Hosting Map	1	Opening view
Incident Notice Email	1	Opening view
Semester Mark 3D	0	

Prototype / template	Screens	Screens captured (by the control that opens them)
Sponsor Weekly Update	1	Opening view
Staff Training Flier	1	Opening view
Welcome Email	1	Opening view
Semester Staff Workspaces	4	Opening view · Advisees · Registration desk · Student accounts
Command center screen	9	Opening view · Tenants · Revenue · Releases · Reliability · Support · Trust · Finance · Localisation
Company deck	14	Slide 1 · Slide 2 · Slide 3 · Slide 4 · Slide 5 · Slide 6 · Slide 7 · Slide 8 · Slide 9 · Slide 10 · Slide 11 · Slide 12 · Slide 13 · Slide 14
Institution console screen	1	Opening view
Education OS domain map	20	Opening view · Connect · Co-pilot · Domains · Core · OS · Productivity · AI · Advising · Degree audit · Campus services · Career · Family · Support · LMS · Gradebook · SIS · Registration · Student accounts · Company operations
Finish line	21	Opening view · Readiness · Release evidence · Cadence · 02 · 03 · 04 · 05 · 06 · 07 · 08 · 09 · 10 · 11 · 12 · 13 · 14 · 15 · 16 · 17 · 18
Institution buyer deck	5	Slide 1 · Slide 2 · Slide 3 · Slide 4 · Slide 5
Institution OS screen	7	Opening view · Communications · Course Studio · Registrar OS · Research · Admissions · Last year
Internal plan deck	4	Slide 1 · Slide 2 · Slide 3 · Slide 4
Investor deck	6	Slide 1 · Slide 2 · Slide 3 · Slide 4 · Slide 5 · Slide 6
Launch poster	1	Opening view
OnboardingAdvisor.dc.html	1	Opening view
OnboardingAlumni.dc.html	1	Opening view
OnboardingApplicant.dc.html	1	Opening view
OnboardingEmployer.dc.html	1	Opening view

Prototype / template	Screens	Screens captured (by the control that opens them)
OnboardingFaculty.dc.html	1	Opening view
OnboardingFinance.dc.html	1	Opening view
OnboardingGuardian.dc.html	1	Opening view
OnboardingITSecurity.dc.html	1	Opening view
OnboardingRegistrar.dc.html	1	Opening view
OnboardingStudent.dc.html	1	Opening view
OnboardingStudentAffairs.dc.html	1	Opening view
OnboardingSupport.dc.html	1	Opening view
OnboardingTA.dc.html	1	Opening view
Master operating map	21	Opening view · 1 · Education experience · 2 · Learning and assessment · 3 · Academic records and registrar · 4 · Student success and support · 5 · Productivity and knowledge · 6 · Governed AI · 7 · Campus life and commerce · 8 · Career and lifelong learning · 9 · Identity, trust and governance · 10 · Institutional intelligence · 11 · Platform and partners · 12 · Company operating system · 02 · Productivity and knowledge · 03 · Academic records and registrar · 04 · Learning and assessment · 05 · Learning and assessment · 06 · Governed AI · 07 · Productivity and knowledge · 08 · Education experience · 09 · Student success and support
Product overview deck	10	Slide 1 · Slide 2 · Slide 3 · Slide 4 · Slide 5 · Slide 6 · Slide 7 · Slide 8 · Slide 9 · Slide 10
Pilot results report	1	Opening view
Platform screen shell	7	Opening view · Study cards · Connections · Safety · Accessibility · Marketplace · Developers
Privacy center	1	Opening view
Product teaser (30 s)	1	Opening view

Prototype / template	Screens	Screens captured (by the control that opens them)
Student quick start	1	Opening view
Research brief	1	Opening view
Role onboarding	1	Opening view
Student screen	1	Opening view
Vision deck	12	Slide 1 · Slide 2 · Slide 3 · Slide 4 · Slide 5 · Slide 6 · Slide 7 · Slide 8 · Slide 9 · Slide 10 · Slide 11 · Slide 12

APPENDIX

Source research

The research reports and planning documents the founder gathered while building Semester, reproduced in full.

Map Out entire Semester OS

Semester OS is a **unified, AI-native operating system for education**: one platform that connects and progressively replaces fragmented student tools, learning systems, registrar/SIS functions, campus services, productivity suites, AI assistants, support systems, and institutional operations.

Its operating doctrine is:

> **Build core capabilities natively. Integrate responsibly during transition. Replace by domain only with evidence. Operate every domain as one coherent system.**

The full architecture is below.

Semester OS map

```
SEMESTER EDUCATION OPERATING SYSTEM
│
├── Public Company and Trust Layer
├── Identity, Tenant, and Policy Foundation
├── Student Daily Operating System
├── Productivity and Collaboration Workspace
├── Academic Path and Planning System
├── Course Studio and Learning System
├── Governed AI and Intelligence Platform
├── Advising, Student Success, and Support System
├── Registrar, SIS, and Academic Records System
├── Student Finance and Commerce System
├── Campus Life and Service Super-App
├── Community and Social Connection System
├── Career, Alumni, and Lifelong Learning System
├── Family and Guardian Consent System
├── Institutional Administration and Governance System
├── Integration, Migration, and Interoperability Fabric
├── Security, Privacy, Accessibility, and Compliance System
├── Operations Command Center
├── GTM, Revenue, Billing, and Customer Success System
├── Developer Platform and Marketplace
└── Analytics, Outcomes, Reliability, and Continuous Improvement
```

Shared foundation

Every module shares the same control chain:

```
Identity
  ↓
Institution / tenant
  ↓
Membership
  ↓
Role
  ↓
Capability
  ↓
Scope
  ↓
Policy
  ↓
Data classification
  ↓
Consent
  ↓
Source authority
  ↓
Workflow
  ↓
Audit
  ↓
Evidence
  ↓
Outcome
```

This is what prevents Semester from becoming a collection of disconnected apps.

Core user journey

```
Student signs in
  ↓
Today: sees meaningful current context
  ↓
Action Center: sees what matters now
  ↓
Path: understands degree/program progress
  ↓
Plan: compares and plans terms/courses
  ↓
Courses: learns, studies, submits work, receives feedback
  ↓
Copilot: gets source-aware, policy-bounded help
  ↓
Support: reaches the correct office or person
  ↓
Campus: uses student-life services
```

```
  ↓
Career: builds skills, evidence, credentials, and opportunities
  ↓
Lifelong relationship: alumni, mentoring, continuing education
```

Student OS

```
Student Home
├── Today
├── Action Center
├── Calendar
├── Schedule
├── Tasks
├── Goals
├── Path
├── Degree progress
├── Program requirements
├── Term planning
├── Registration readiness
├── Course comparison
├── Workload planning
├── Cost planning
├── Courses
├── Notes
├── Files
├── Workspace
├── Search
├── AI Copilot
├── Community
├── Campus
├── Support
├── Career
├── Student account
├── Profile
├── Privacy settings
├── AI settings
├── Notifications
└── Data export/delete controls
```

Student daily loop

```
What changed?
  ↓
What matters?
  ↓
What can I do?
  ↓
What is official?
  ↓
Who can help?
  ↓
What progress did I make?
```

Productivity workspace

```
Workspace
├── Tasks
├── Calendar
├── Notes
├── Documents
├── Files
├── Projects
├── Group workspaces
├── Research workspace
├── Writing workspace
├── Focus mode
├── Study sessions
├── Templates
├── Search
├── Notifications
└── Automations
```

Every task, note, file, or event can connect to:

```
Course
Assignment
Learning objective
Program requirement
Academic term
Advisor
Support office
Career competency
Institutional deadline
Student goal
```

Academic path system

```
Academic Path
├── Institution
├── Program
├── Major/minor
├── Degree requirements
├── Course history
├── Current term
├── Future terms
├── Degree audit
├── Graduation scenarios
├── Transfer credits
├── Articulation rules
├── Prerequisites
├── Holds
├── Registration eligibility
├── Workload plan
```

```
├── Cost plan
└── Official record handoff
```

Source labels

```
Official institutional record
Semester planning scenario
Student-entered plan
External/transferred record
AI explanation
Advisor/registrar confirmation required
```

Course Studio and Learning OS

```
Course Studio
├── Course home
├── Syllabus
├── Learning objectives
├── Schedule
├── Announcements
├── Assignments
├── Assessments
├── Rubrics
├── Resources
├── Readings
├── Annotations
├── Study packs
├── Flashcards
├── Practice
├── Discussions
├── Groups
├── Office hours
├── Feedback
├── Gradebook
├── Regrades
├── Course AI rules
├── Academic integrity
├── Accessibility support
├── Learning evidence
└── Course analytics
```

Learning flow

```
Faculty publishes course structure
  ↓
Student receives course context
  ↓
Student studies and completes work
  ↓
Semester connects tasks, calendar, notes, resources, and AI support
  ↓
```

```
Faculty reviews and provides feedback
  ↓
Grade/feedback is released
  ↓
Learning evidence and path progress update
```

Governed AI platform

```
Semester AI Gateway
├── Student Copilot
├── Course Tutor
├── Research Assistant
├── Writing Assistant
├── Study Planner
├── Registration Guide
├── Academic Path Explainer
├── Advisor Assistant
├── Faculty Assistant
├── Staff Workflow Assistant
├── Institutional Knowledge Assistant
├── Model Registry
├── Provider Registry
├── Policy Engine
├── Course AI Rules
├── Data Classification
├── Consent Controls
├── Source Retrieval
├── Citation/Provenance
├── Tool Permissions
├── Usage Quotas
├── Spend Meter
├── Evaluation Harness
├── Safety/Red-Team Tests
├── Human Escalation
└── AI Audit Log
```

AI workflow

```
User request
  ↓
Role / tenant / course context
  ↓
Policy + consent + classification check
  ↓
Approved provider/model routing
  ↓
Approved source retrieval
  ↓
AI response with source/provenance
  ↓
Safe suggested action or official handoff
```

```
  ↓
Usage, feedback, audit, evaluation
```

AI can explain an official rule. It cannot silently become the official rule.

Advising, student success, and support

```
Student Success OS
├── Caseload
├── Student path
├── Action completion
├── Check-ins
├── Appointments
├── Success plans
├── Advising notes
├── Referrals
├── Outreach
├── Support requests
├── Student-consented shares
├── Intervention tracking
├── Cohort view
├── Program outcomes
├── Escalation
└── Aggregate insight
```

Support flow

```
Student need
  ↓
Self-service answer or support request
  ↓
Safe context and correct routing
  ↓
Office/team ownership
  ↓
Response, resolution, or referral
  ↓
Student status update
  ↓
Outcome/quality signal
```

Registrar, SIS, and academic operations

```
Registrar OS
├── Academic calendar
├── Terms
├── Catalog
├── Courses
├── Sections
├── Faculty assignments
├── Meeting times
```

```
├── Rooms
├── Capacity
├── Waitlists
├── Prerequisites
├── Registration windows
├── Time tickets
├── Holds
├── Overrides
├── Enrollment
├── Add/drop
├── Withdrawal
├── Academic record ledger
├── Grade ledger
├── Grade changes
├── Regrades
├── Degree audit
├── Transfer evaluation
├── Articulation rules
├── Graduation checks
├── Credential conferral
├── Transcript/export
├── Reconciliation
└── Migration center
```

Registration workflow

```
Student selects section
  ↓
Term, hold, prerequisite, capacity, credit, and policy checks
  ↓
Enroll / waitlist / deny / route for review
  ↓
Immutable audit entry
  ↓
Student receives authoritative result
```

Student finance and campus commerce

```
Student Finance OS
├── Student account
├── Charges
├── Credits
├── Balance
├── Holds
├── Payment plan
├── Installments
├── Payment handoff
├── Refund status
├── Scholarships
├── Financial-aid handoff
├── Cost planner
├── Budget planner
├── Emergency support
```

```
├── Reconciliation
└── Audit ledger
```

Campus super-app

```
Campus OS
├── Dining
│   ├── Locations
│   ├── Hours
│   ├── Menus
│   ├── Meal plans
│   ├── Balances
│   ├── Orders
│   └── Donation pool
├── Housing
├── Events
├── Organizations
├── Study spaces
├── Transit
├── Parking
├── Recreation
├── Library
├── Bookstore
├── Campus jobs
├── Volunteer opportunities
├── Local services
├── Safety resources
├── Wellness handoffs
└── Accessibility services
```

Community and social connection

```
Community OS
├── Community directory
├── Community feed
├── Posts
├── Comments
├── Reactions
├── Groups
├── Study sessions
├── Peer mentoring
├── Organization spaces
├── Alias/pseudonym controls
├── Reporting
├── Moderation
├── Appeals
├── Safety escalation
├── Community retention
└── Audit
```

Career, alumni, employer, and lifelong learning

```
Career OS
├── Skills graph
├── Evidence portfolio
├── Verified skills
├── Credential wallet
├── Resume
├── Cover letters
├── Interview prep
├── Opportunities
├── Internships
├── Employer profiles
├── Applications
├── Mentors
├── Alumni network
├── Career appointments
├── Career events
├── Continuing education
├── Microcredentials
├── Credential renewal
└── Career outcomes
```

Family and guardian consent system

```
Family Support OS
├── Consent invitation
├── Relationship confirmation
├── Scoped grants
├── Chosen information categories
├── Time-limited access
├── Shared items
├── Billing/support handoff
├── Communication preferences
├── Access history
├── Revocation
└── Audit
```

Student control is mandatory:

```
Student chooses scope
→ family accepts
→ only permitted information is visible
→ access is audited
→ access expires or can be revoked
```

Institutional control plane

```
Institution OS
├── Tenant overview
├── Campus hierarchy
├── SSO
├── SCIM
├── Membership
├── Roles
├── Capabilities
├── Access reviews
├── Plans and entitlements
├── Feature policies
├── Cohorts
├── Kill switches
├── Module modes
├── Rollouts
├── Configuration Studio
├── Workflow Builder
├── Policy hierarchy
├── Governance stewards
├── Governance decisions
├── Integrations
├── Data classification
├── Consent policy
├── Retention
├── Legal holds
├── Data requests
├── AI provider policy
├── Approved sources
├── Compliance
├── Trust artifacts
├── Accessibility program
├── Incident notices
├── Risks
├── Audit explorer
├── Offboarding
└── Portability/export
```

Integration and migration fabric

```
Integration Hub
├── Provider directory
├── Connections
├── Security/privacy review
├── Scope approval
├── Mapping Studio
├── Mapping versions
├── Transform rules
├── Sync schedule
├── Sync runs
├── Sync errors
├── Dead-letter queue
```

```
├── Replay requests
├── Reconciliation
├── Schema drift
├── Duplicate resolution
├── Source ownership
├── Freshness monitoring
├── Webhooks
├── LTI
├── OneRoster
├── Edu-API
├── SIS/ERP adapters
├── LMS adapters
├── Google/Microsoft/Apple adapters
├── AI-provider adapters
└── Integration retirement
```

Migration model

```
Inventory
→ map
→ stage
→ validate
→ reconcile
→ dual run
→ user acceptance
→ institutional approval
→ cutover
→ monitor
→ rollback window
→ archive/export
→ legacy retirement
```

Trust, privacy, security, and compliance

```
Trust System
├── Trust Center
├── Security overview
├── Privacy overview
├── Accessibility statement
├── Responsible AI
├── Data practices
├── Subprocessors
├── Reliability/status
├── HECVAT readiness
├── DPA process
├── Security questionnaires
├── Trust room
└── Vulnerability reporting

Internal Trust and Security
├── Asset inventory
├── Access review
├── Secret inventory
```

```
├── Vulnerabilities
├── Threat models
├── Security alerts
├── Incidents
├── Controls
├── Evidence
├── Vendor risk
├── Pen-test evidence
├── Break-glass review
├── Backup/restore
├── Disaster recovery
├── Data inventory
├── Classification
├── Retention
├── Legal holds
├── Privacy requests
├── Erasure/export
└── Audit
```

Operations Command Center

```
/ops
├── Executive Overview
├── Operations Inbox
├── My Work
├── Approvals
├── Tenants
├── Tenant 360
├── Customers
├── Customer 360
├── GTM Accounts
├── Pilots
├── Implementation
├── Success Plans
├── QBRs
├── Renewals
├── Customer Health
├── Revenue
├── Billing
├── Support
├── Product Operations
├── Releases
├── Feature flags
├── Beta
├── Integrations
├── Trust
├── Compliance
├── Privacy
├── Security
├── Access Reviews
├── Break Glass
├── Incidents
├── SLOs
├── Error Budgets
├── Audit Explorer
```

```
├── Risks
├── Vendors
├── Finance
├── Forecasts
├── Reports
├── Board/Investor
├── Capacity
└── Preferences
```

Operations action model

```
Request
→ attach evidence
→ required approval
→ impact preview
→ execution
→ audit event
→ projection/read-model refresh
→ operator review
```

Company operating system

```
Semester Company OS
├── Corporate governance
├── Legal operations
├── Finance
├── Budget/runway
├── Pricing
├── Sales
├── Marketing
├── GTM
├── CRM
├── Pilots
├── Customer success
├── Implementation
├── Support
├── Billing
├── Collections
├── Partnerships
├── Marketplace
├── Vendor management
├── Product operations
├── Engineering
├── Reliability
├── Security
├── Privacy
├── Compliance
├── AI governance
├── People/hiring
├── Board/investor reporting
├── Risk management
```

```
├── Release operations
└── Operating cadence
```

Developer platform and marketplace

```
Developer Platform
├── API documentation
├── OAuth/OIDC
├── API keys
├── Service accounts
├── Webhooks
├── Event subscriptions
├── SDKs
├── Sandbox tenants
├── Test data
├── Integration certification
├── Marketplace
├── Partner directory
├── App review
├── Data scopes
├── Versioning
├── Metering
├── Billing
├── Support
└── Incident notices
```

Required shared workflows

```
Authentication
Tenant provisioning
Role/capability grant
Consent grant/revocation
Course enrollment
Task creation/completion
Academic plan update
Registration request
Grade entry/release
Support request
Advisor referral
AI request
Integration sync
Data export/erasure
Feature rollout
Tenant rollout
Pilot conversion
Billing/payment
Incident response
Domain migration
Offboarding
```

Completion definition

No screen, workflow, system, or domain is complete until it has:

```
1. Product requirement
2. Role definition
3. Route/screen
4. Data model
5. Source authority
6. Tenant scope
7. Permission/capability
8. Data classification
9. Consent model
10. Accessibility evidence
11. Security controls
12. Privacy/retention rules
13. Audit event
14. Integration plan
15. Error/loading/empty/forbidden state
16. Support path
17. Monitoring/SLO
18. Test coverage
19. Rollback plan
20. Documentation
21. Release evidence
22. Owner and review date
```

Semester OS in one flow

```
Prospect
→ applicant
→ student
→ learner
→ planner
→ course participant
→ community member
→ support recipient
→ credential holder
→ job candidate
→ employee
→ alumnus
→ lifelong learner
→ mentor / partner / employer

Institution
→ configures
→ provisions
→ governs
→ supports
→ measures
→ improves
→ trusts
→ expands
```

```
→ migrates
→ operates
```

Master command

```
Create the definitive Semester OS master map.

Audit the Semester repository, database, migrations, routes, screens,
components, operations console, company site, integrations, policies, tests,
and documentation.

Produce a complete catalog of:

- Every user role
- Every public page
- Every student screen
- Every faculty screen
- Every advisor/student-success screen
- Every registrar/academic operations screen
- Every finance/student-account screen
- Every campus service screen
- Every community/moderation screen
- Every family/guardian screen
- Every career/employer/alumni screen
- Every institutional admin/control-plane screen
- Every integration/migration screen
- Every trust/security/privacy/compliance screen
- Every operations-console screen
- Every GTM/customer-success/billing/company operation screen
- Every developer/marketplace screen
- Every workflow
- Every system
- Every data domain
- Every graph relationship
- Every integration
- Every required document
- Every release gate
- Every test gate
- Every risk
- Every owner
- Every P0/P1/P2/P3 gap

Create:

docs/master/SEMESTER_OS_MASTER_MAP.md
docs/master/SEMESTER_ROLE_CATALOG.md
docs/master/SEMESTER_SCREEN_CATALOG.md
docs/master/SEMESTER_WORKFLOW_CATALOG.md
docs/master/SEMESTER_SYSTEM_CATALOG.md
docs/master/SEMESTER_DATA_DOMAIN_CATALOG.md
docs/master/SEMESTER_EDUCATION_GRAPH.md
docs/master/SEMESTER_CONSOLE_CATALOG.md
docs/master/SEMESTER_DOCUMENT_CATALOG.md
docs/master/SEMESTER_INTEGRATION_CATALOG.md
docs/master/SEMESTER_RELEASE_GATE_CATALOG.md
```

```
docs/master/SEMESTER_TRACEABILITY_MATRIX.md
docs/master/SEMESTER_GAP_REGISTER.md

For every item record:
- name
- domain
- role
- route
- job to be done
- source authority
- data model
- tenant scope
- permission/capability
- consent requirement
- AI policy
- accessibility requirement
- security/privacy/retention requirements
- audit event
- integration/migration dependency
- support owner
- SLO/reliability class
- tests
- release gate
- evidence
- current status
- risk
- priority
- next action

Do not mark anything complete unless code, permissions, RLS/tenant isolation,
accessibility, tests, monitoring, support, documentation, and release evidence
all exist.
```

Map semester out as a whol provide full map out of every workflow and role function screen system of semester

Semester should be mapped as one **Education Operating System** with shared identity, policy, data authority, audit, and workflow foundations—not as hundreds of disconnected screens. Below is the master map of roles, systems, screens, workflows, data domains, consoles, and company functions that make up Semester.

The central rule is:

> **Every Semester capability must connect to identity, tenant, permissions, policy, source authority, audit, support, and measurable outcomes.**

This map reflects Semester's full product thesis: student OS, productivity suite, LMS/Course Studio, registrar/SIS pathway, advising and student success, campus super-app, governed AI, marketplace/platform, institutional control plane, and company operating system. The existing architecture materials describe the same direction: build native capabilities, integrate during transition, replace only after evidence, and operate all domains as one system.[1]

Semester master map

```
SEMESTER EDUCATION OPERATING SYSTEM
│
├── 1. Public Company and Growth Layer
├── 2. Identity, Tenant, Policy, and Trust Foundation
├── 3. Student OS
├── 4. Productivity and Collaboration Workspace
├── 5. Academic Path and Degree Planning
├── 6. Course Studio and Learning OS
├── 7. Governed AI and Intelligence Platform
├── 8. Advising, Student Success, and Support
├── 9. Registrar, SIS, and Academic Operations
├── 10. Student Accounts, Billing, and Financial Workflows
├── 11. Campus Life and Service Super-App
├── 12. Community, Organizations, and Peer Connection
├── 13. Career, Alumni, Employer, and Lifelong Learning
├── 14. Family and Guardian Consent Platform
├── 15. Institutional Administration and Control Plane
├── 16. Integration, Migration, and Interoperability Fabric
├── 17. Security, Privacy, Accessibility, Compliance, and Trust
├── 18. Operations Command Center
├── 19. Revenue, GTM, Customer Success, and Company Operations
```

```
├── 20. Developer Platform, Marketplace, and Partner Ecosystem
└── 21. Analytics, Outcomes, Reliability, and Continuous Improvement
```

Shared foundation

Every system runs through the same shared control model:

```
Identity
  ↓
Tenant / institution scope
  ↓
Membership
  ↓
Role
  ↓
Capability
  ↓
Purpose
  ↓
Policy
  ↓
Data classification
  ↓
Consent / grant
  ↓
Source authority
  ↓
Workflow
  ↓
Audit event
  ↓
Evidence
  ↓
Outcome
```

Shared data objects

```
Person
Institution
Campus
School
Department
Program
Term
Course
Section
Enrollment
Role grant
Capability
Policy
Consent
Plan
Action
```

```
Task
Assignment
Resource
Evidence
Skill
Credential
Support request
Appointment
Community
Organization
Opportunity
Contract
Tenant
Customer
Integration
Audit event
Incident
Decision
Workflow
```

1. Public company and growth layer

Users

- Prospective student
- Prospective institutional buyer
- Student-success leader
- Advisor
- Registrar
- CIO/IT/security reviewer
- Procurement/legal/privacy reviewer
- Parent/family visitor
- Employer/partner
- Candidate/employee
- Press/media
- Investor
- Existing customer
- Developer/integration partner

Screens

```
/
├── Homepage
├── Product overview
├── Student workspace page
```

```
├── Institution platform page
├── Registration Readiness Pilot page
├── Course Studio page
├── Governed AI page
├── Student Success page
├── Registrar/Academic Operations page
├── Campus Services page
├── Career/Lifelong Learning page
├── Integrations page
├── Solutions
│   ├── Students
│   ├── Advisors
│   ├── Faculty
│   ├── Departments
│   ├── Registrars
│   ├── Student Success
│   ├── Institutions
│   └── Enterprise/Multi-campus
├── Pilot
├── Pricing
├── Feature comparison
├── Request demo
├── Request pricing
├── Trust Center
├── Security
├── Privacy
├── Accessibility
├── Responsible AI
├── Resources
├── Guides
├── Webinars
├── Research
├── Product updates
├── Case studies
├── Compare pages
├── Partners
├── Ambassadors
├── Careers
├── Company
├── Contact
├── Legal
├── Login
├── Sign up
├── Help handoff
├── Status handoff
└── 404 / maintenance
```

Workflows

```
Institutional visitor
→ pilot/use-case page
→ demo request
→ consent and attribution capture
→ CRM/GTM routing
→ discovery call
```

```
→ pilot design
→ security/procurement
→ paid pilot
→ implementation
→ annual conversion

Student visitor
→ student value page
→ product walkthrough
→ sign up
→ onboarding
→ first meaningful action
→ retained use
→ referral/Premium conversion
```

2. Identity, tenant, policy, and trust foundation

Roles

- Student
- Faculty
- TA
- Advisor
- Registrar
- Institutional admin
- Security admin
- Privacy officer
- IT administrator
- Support operator
- Finance operator
- Semester executive
- Auditor
- Partner developer
- Service account
- Family/guardian
- Employer
- Moderator

Screens

```
Identity and Access
├── Sign in
├── Sign up
├── Password reset
├── Magic link / MFA
├── SSO launch
├── Account linking
├── Profile
├── Account settings
├── Privacy settings
├── Notification settings
├── Security settings
├── Connected accounts
├── Institution membership
├── Role view
├── Capability view
├── Data export
├── Data request
├── Account deletion request
└── Session/device management
```

Core workflows

```
Account creation
→ identity verification
→ invite/SSO eligibility
→ tenant membership
→ role grant
→ capability resolution
→ onboarding
→ audit

Institution provisioning
→ identity provider configuration
→ SCIM or roster provisioning
→ membership reconciliation
→ role assignment
→ access review
→ deprovisioning
```

Core systems

```
Authentication
SSO
SCIM
Role grants
Capabilities
Tenant isolation
RLS
Approval workflow
```

```
Break-glass access
Consent
Data classification
Retention
Legal holds
Audit
Feature flags
Rollout policies
```

3. Student OS

Student screens

```
Student Home
├── Today
├── Action Center
├── My Path
├── My Plan
├── Calendar
├── Schedule
├── Tasks
├── Goals
├── Notes
├── Files
├── Workspace
├── Search
├── Courses
├── Study
├── Community
├── Support
├── Campus
├── Career
├── Student Account
├── Settings
└── AI Copilot
```

Student daily workflow

```
Sign in
→ see Today
→ understand urgent action
→ review context/source
→ complete action or request help
→ update plan/progress
→ return to dashboard with current status
```

Student action types

```
Academic
- Registration
- Course selection
- Assignment
- Study plan
- Degree requirement
- Grade/regrade

Support
- Advising
- Tutoring
- Financial support
- Accessibility
- Housing/dining
- Wellness resource handoff

Career
- Resume
- Internship
- Mentor
- Opportunity
- Portfolio

Campus
- Event
- Organization
- Dining
- Study space
- Campus job
```

4. Productivity and collaboration workspace

Screens

```
Workspace
├── My tasks
├── Shared tasks
├── Calendar
├── Notes
├── Documents
├── Files
├── Projects
├── Templates
├── Focus mode
├── Study sessions
├── Group workspaces
├── Research workspace
├── Writing workspace
├── Meeting notes
├── Notifications
```

```
├── Search
└── Workspace settings
```

Workflows

```
Create task
→ connect to course/goal/action
→ assign due date and priority
→ complete or defer
→ progress recorded
→ analytics/action center updates

Create note
→ link to course/resource/assignment
→ annotate
→ search later
→ optionally share with group/advisor
→ preserve owner/permission/audit boundaries

Create group workspace
→ invite permitted members
→ assign roles
→ create project/tasks/files
→ collaborate
→ close/archive/export
```

5. Academic path and degree planning

Screens

```
Academic Path
├── Program overview
├── Degree requirements
├── Requirement detail
├── Course history
├── Current term
├── Future-term plan
├── Graduation scenarios
├── Major/minor comparison
├── Degree audit
├── Transfer credit
├── Articulation rules
├── Workload planner
├── Cost planner
├── Academic standing
├── Holds
├── Registration readiness
└── Official-record handoff
```

Workflow

```
Student selects goal
→ Semester loads official/authorized program data
→ shows requirements and course history
→ calculates planning scenario
→ marks official versus estimated result
→ student adjusts plan
→ Semester identifies next action
→ official system handoff or native transaction
```

Required authority labels

```
Official institution record
Semester planning scenario
Student-entered plan
External/transferred record
AI explanation
Requires advisor/registrar confirmation
```

6. Course Studio and Learning OS

Student screens

```
Course Home
├── Syllabus
├── Objectives
├── Announcements
├── Schedule
├── Assignments
├── Resources
├── Readings
├── Notes
├── Study packs
├── Flashcards
├── Practice
├── Discussions
├── Groups
├── Office hours
├── Feedback
├── Grades
├── Regrades
├── Course AI rules
├── Course Copilot
└── Course settings
```

Faculty screens

```
Faculty Course Studio
├── Course setup
├── Syllabus editor
├── Objectives
├── Course guidance
├── Course AI policy
├── Approved sources
├── Resource library
├── Assignment builder
├── Assessment builder
├── Question bank
├── Rubric builder
├── Gradebook
├── Grade moderation
├── Grade release
├── Regrade queue
├── Feedback workspace
├── Study packs
├── Office hours
├── Group management
├── TA management
├── Course analytics
├── Accessibility review
├── Integrity workflow
├── LTI settings
└── Archive/export
```

Learning workflow

```
Faculty publishes:
syllabus + objectives + resources + AI policy
  ↓
Student enters course
  ↓
Student sees tasks, due dates, resources, guidance
  ↓
Student studies, creates notes, practices, asks policy-bounded AI
  ↓
Student submits work / completes assessment
  ↓
Faculty reviews, grades, gives feedback
  ↓
Grade is released or passed back under controlled policy
  ↓
Learning evidence and course progress update
```

7. Governed AI and intelligence platform

AI user experiences

```
Student AI Copilot
Course Copilot
Research Assistant
Writing Assistant
Study Planner
Path and Registration Guide
Advisor Assistant
Faculty Authoring Assistant
Staff Workflow Assistant
Institutional Knowledge Assistant
Support Assistant
Operator Assistant
```

AI screens

```
AI Copilot
├── New conversation
├── Conversation history
├── Context selector
├── Course context
├── Source panel
├── Citation panel
├── Suggested actions
├── Policy notice
├── Usage/budget view
├── AI settings
├── Memory controls
├── Feedback
├── Report problem
└── Human handoff
```

AI workflow

```
User request
→ identity and tenant identified
→ role/capability checked
→ course/tenant policy checked
→ data classification checked
→ consent checked
→ provider/model selected
→ approved sources retrieved
→ answer generated
→ citations/source authority shown
→ action suggestion/handoff offered
→ usage, audit, feedback, and evaluation signal recorded
```

AI governance systems

```
Model registry
Provider registry
AI policy
Course AI rules
Data classification
Prompt registry
Tool permission matrix
Source/provenance
Evaluation harness
Safety/red-team suite
AI incident response
Cost/spend meter
Quota/rate limit
Human override
Human escalation
Audit log
```

8. Advising, student success, and support

Advisor screens

```
Advisor Workspace
├── Caseload
├── Student profile
├── Path view
├── Academic plan
├── Action completion
├── Holds/status
├── Check-ins
├── Appointments
├── Advising notes
├── Success plans
├── Referrals
├── Student-consented shares
├── Outreach queue
├── Cohort view
├── Program outcomes
├── Intervention tracker
├── Escalation queue
└── Settings
```

Student-support screens

```
Support Center
├── Search help
├── Resource directory
├── Open support request
├── My support requests
├── Request detail
├── Messages
```

```
├── Referral status
├── Appointment scheduling
├── Emergency resource handoff
├── Accessibility support
├── Financial support
└── Feedback
```

Workflow

```
Student identifies need
→ finds self-service answer or opens request
→ safe context attached
→ correct office receives request
→ owner accepts/routes/responds
→ student sees progress
→ issue resolved or escalated
→ outcome recorded
→ aggregate service insight improves operations
```

9. Registrar, SIS, and academic operations

Screens

```
Registrar Console
├── Terms
├── Academic calendar
├── Catalog
├── Courses
├── Sections
├── Faculty assignments
├── Meeting times
├── Rooms
├── Capacity
├── Waitlists
├── Prerequisites
├── Co-requisites
├── Registration windows
├── Time tickets
├── Holds
├── Overrides
├── Enrollment queue
├── Add/drop/withdrawal
├── Registration audit
├── Academic records
├── Record corrections
├── Grade ledger
├── Grade changes
├── Regrades
├── Degree audit rules
├── Transfer evaluations
├── Articulation rules
├── Graduation review
```

```
├── Credential conferral
├── Transcript/export
├── Reconciliation
├── Migration center
└── Settings
```

Registration workflow

```
Term published
→ student receives registration window
→ student searches and compares sections
→ prerequisites/holds/capacity checked
→ student submits enrollment request
→ deterministic policy engine evaluates
→ enroll / waitlist / deny / approval required
→ audit event created
→ official record updated
→ student receives result
```

10. Student accounts and financial workflows

Screens

```
Student Finance
├── Account summary
├── Charges
├── Credits
├── Balance
├── Holds
├── Statements
├── Payment plans
├── Installments
├── Payment handoff
├── Refund status
├── Scholarship view
├── Aid handoff
├── Budget planner
├── Cost planner
└── Financial support resources

Staff Finance
├── Account queue
├── Charge/credit requests
├── Payment-plan review
├── Reconciliation
├── Month close
├── Dunning
├── Refund review
├── Disputes
├── Ledger audit
└── Reporting
```

11. Campus life and service super-app

Screens

```
Campus
├── Dining
├── Housing
├── Events
├── Organizations
├── Study spaces
├── Transit
├── Parking
├── Recreation
├── Library
├── Bookstore
├── Campus jobs
├── Volunteer work
├── Local services
├── Safety resources
├── Wellness resources
├── Accessibility resources
└── Emergency handoff
```

Dining workflow

```
Student opens Dining
→ sees location/hours/menu
→ views plan/balance where authorized
→ places order or receives official payment handoff
→ order state updates
→ ledger/reconciliation occurs
→ student receives status
```

12. Community and social connection

Screens

```
Community
├── Feed
├── Community directory
├── Community profile
├── Create post
├── Comments
├── Reactions
├── Membership
├── Alias settings
├── Events
├── Study sessions
├── Groups
├── Mentor discovery
```

```
├── Report content
├── Appeal
├── Guidelines
└── Settings

Moderation
├── Reports queue
├── Cases
├── Decisions
├── Appeals
├── Restrictions
├── Escalations
├── Volunteer tasks
├── Calibration
├── Safety entries
├── Policy
└── Audit
```

13. Career, employer, alumni, and lifelong learning

Screens

```
Career
├── Skills graph
├── Evidence
├── Verified claims
├── Credential wallet
├── Portfolio
├── Resume
├── Cover letter
├── Interview prep
├── Career plan
├── Opportunities
├── Applications
├── Employer profiles
├── Mentors
├── Alumni network
├── Career appointments
├── Career events
├── Continuing education
├── Microcredentials
└── Outcome history

Employer
├── Organization profile
├── Job/internship postings
├── Candidate criteria
├── Candidate search
├── Consent-based talent profiles
├── Interview scheduling
├── Hiring workflow
├── Internship management
└── Analytics
```

14. Family and guardian platform

Screens

```
Family Portal
├── Invitation
├── Relationship confirmation
├── Consent scope
├── Shared categories
├── Shared items
├── Time-bound access
├── Billing/support handoff
├── Resources
├── Communication preferences
├── Access history
├── Revoke access
└── Privacy information
```

Rule

```
Student grants access
→ family member accepts
→ only approved categories/resources visible
→ every access is auditable
→ access expires or is revoked
→ no broad academic surveillance
```

15. Institutional control plane

Screens

```
Institution Admin
├── Tenant overview
├── Campus hierarchy
├── Programs/departments
├── Identity providers
├── SSO
├── SCIM
├── Memberships
├── Roles
├── Capabilities
├── Access reviews
├── Tenant plan
├── Entitlements
├── Feature policies
├── Cohorts
├── Kill switches
├── Module modes
├── Rollout
├── Configuration Studio
```

```
├── Workflow Builder
├── Policy hierarchy
├── Governance stewards
├── Governance decisions
├── Integrations
├── Data classification
├── Consent policy
├── Retention policy
├── Legal holds
├── Data subject requests
├── AI provider policy
├── Approved learning sources
├── Compliance
├── Trust artifacts
├── Accessibility program
├── Incident notices
├── Risk register
├── Audit explorer
├── Offboarding
└── Export/portability
```

16. Integration, interoperability, and migration

Screens

```
Integration Hub
├── Provider directory
├── Connections
├── New connection
├── Security review
├── Scope approval
├── Mapping studio
├── Mapping versions
├── Field transforms
├── Sync schedule
├── Sync runs
├── Sync errors
├── Dead-letter queue
├── Replay requests
├── Reconciliation
├── Schema drift
├── Duplicate resolution
├── Source owners
├── Data freshness
├── Webhooks
├── LTI
├── OneRoster
├── Edu-API
├── Google/Microsoft
├── AI providers
└── Retirement
```

Integration workflow

```
Request
→ purpose
→ data classification
→ security/privacy review
→ scope approval
→ sandbox
→ mapping
→ read-only sync
→ reconciliation
→ controlled write request
→ approval
→ monitored production
→ periodic review
→ retirement/native replacement
```

17. Trust, security, privacy, and compliance

Public Trust Center

```
Trust Center
├── Security
├── Privacy
├── Accessibility
├── Responsible AI
├── Data practices
├── Subprocessors
├── Reliability/status
├── Compliance roadmap
├── HECVAT process
├── DPA process
├── Security document request
├── Trust room
└── Vulnerability report
```

Internal security and privacy

```
Security
├── Asset inventory
├── Access review
├── Secret inventory
├── Vulnerabilities
├── Dependencies
├── Threat models
├── Alerts
├── Incidents
├── Controls
├── Evidence
├── Vendor risk
├── Pen-test evidence
├── Break-glass review
```

```
├── Backup/restore
├── DR
└── Security reporting

Privacy
├── Data inventory
├── Data map
├── Classification
├── Retention
├── Deletion
├── Legal holds
├── Consent
├── Data requests
├── Export
├── Erasure
├── Subprocessors
├── Privacy incidents
└── Privacy reporting
```

18. Operations Command Center

Route map

```
/ops
├── Overview
├── Operations Inbox
├── My Work
├── Approvals
├── Tenants
├── Customers
├── Accounts
├── Pilots
├── Implementation
├── Success plans
├── Renewals
├── Customer health
├── Revenue
├── Billing
├── Support
├── Releases
├── Feature flags
├── Beta
├── Integrations
├── Trust
├── Compliance
├── Privacy
├── Security
├── Access reviews
├── Break-glass
├── Incidents
├── SLOs
├── Error budgets
├── Audit
├── Risks
```

```
├── Vendors
├── Finance
├── Forecasts
├── Reports
├── Board reports
├── Capacity
└── Preferences
```

Operating workflows

```
High-risk action:
request
→ evidence
→ approval
→ execution
→ audit
→ projection update
→ operator review

Support escalation:
ticket
→ severity
→ assignment
→ response
→ customer update
→ resolve
→ root cause
→ corrective action

Tenant rollout:
contract
→ implementation
→ evidence
→ launch gate
→ controlled launch
→ pilot
→ conversion
→ expansion/offboarding

Incident:
alert
→ triage
→ severity
→ command roles
→ mitigation
→ communication
→ recovery
→ postmortem
→ corrective work
```

19. Company operating system

Business systems

```
Company OS
├── Corporate governance
├── Legal operations
├── Finance
├── Budget
├── Runway
├── Pricing
├── Sales
├── Marketing
├── GTM
├── CRM
├── Pilots
├── Customer success
├── Support
├── Implementation
├── Billing
├── Collections
├── Partnerships
├── Vendor management
├── People/hiring
├── Product operations
├── Engineering
├── Security
├── Compliance
├── AI governance
├── Board/investor reporting
├── Risk
└── Operating cadence
```

Company workflows

```
Lead
→ qualification
→ discovery
→ demo
→ pilot design
→ security/procurement
→ contract
→ implementation
→ launch
→ adoption
→ pilot review
→ annual conversion
→ renewal
→ expansion
→ reference/case study
```

20. Developer platform and marketplace

Screens

```
Developer Portal
├── API documentation
├── API keys
├── OAuth clients
├── Service accounts
├── Webhooks
├── Event subscriptions
├── SDKs
├── Sandbox tenant
├── Test data
├── Integration certification
├── App marketplace
├── Partner directory
├── App review
├── Data scopes
├── Version management
├── Usage/metering
├── Support
└── Incident notices
```

21. Required document system

```
Product:
- Product thesis
- Architecture
- Role matrix
- Screen catalog
- Workflow catalog
- Data authority matrix
- Domain replacement matrix
- Release gates
- Roadmap
- Risk register

Academic:
- Course Studio
- Assessment
- Gradebook
- Registrar
- Academic records
- Degree audit
- Transfer
- Student success

AI:
- AI governance
- Provider registry
- Model routing
- Evaluation
```

```
- Red team
- Incident response
- Spend controls
- Course policy

Trust:
- Security
- Privacy
- Accessibility
- Data classification
- Retention
- Legal holds
- Incident response
- DR
- HECVAT
- Trust Center
- Vendor risk

Business:
- GTM
- Pricing
- Financial model
- Sales
- Pilot delivery
- Customer success
- Marketing
- Operations
- Board reporting
- Hiring plan

Engineering:
- Engineering standards
- Test strategy
- CI/CD
- SLOs
- Error budgets
- Observability
- CQRS/read models
- Operations Console
- Runbooks
- Backup/restore
```

22. Master traceability rule

Every screen, workflow, system, and document must be recorded with:

```
Name
Domain
Role
Route
Job to be done
Source authority
Data model
Tenant scope
Permission/capability
```

```
Consent requirement
AI policy
Accessibility requirement
Security requirement
Privacy/retention requirement
Audit event
Integration dependency
Migration dependency
Support owner
SLO/reliability class
Commercial relevance
Customer-success relevance
Required documentation
Test coverage
Rollback approach
Release gate
Current status
Evidence path
Owner
Priority
Dependency
Risk
Next action
```

Master execution command

```
Create the definitive Semester Master Catalog.

Semester is the unified AI-native operating system for education. It includes
student productivity, learning, LMS, SIS/registrar, advising, student success,
financial workflows, campus services, community, career, family/guardian,
institutional governance, integrations, security, privacy, AI, marketplace,
company operations, and developer platform capabilities.

Audit the current Semester repository and database first.

Then create:

docs/master/SEMESTER_COMPLETE_CATALOG.md
docs/master/SEMESTER_SCREEN_CATALOG.md
docs/master/SEMESTER_ROLE_CATALOG.md
docs/master/SEMESTER_WORKFLOW_CATALOG.md
docs/master/SEMESTER_SYSTEM_CATALOG.md
docs/master/SEMESTER_CONSOLE_CATALOG.md
docs/master/SEMESTER_DATA_DOMAIN_CATALOG.md
docs/master/SEMESTER_EDUCATION_GRAPH.md
docs/master/SEMESTER_DOCUMENT_CATALOG.md
docs/master/SEMESTER_INTEGRATION_CATALOG.md
docs/master/SEMESTER_RELEASE_GATE_CATALOG.md
docs/master/SEMESTER_TRACEABILITY_MATRIX.md
docs/master/SEMESTER_GAP_AND_STATUS_REGISTER.md

For every catalog item include:
- domain
- role
```

```
- screen/route
- workflow
- source authority
- data classification
- tenant scope
- permission/capability
- consent requirement
- AI policy
- accessibility requirement
- security/privacy requirement
- audit requirement
- integration/migration dependency
- support owner
- SLO
- tests
- release gate
- current verified status
- evidence
- priority
- risk
- next action

Do not mark an item complete based only on a screen, document, table, or
migration. It is complete only when code, authorization, tenant isolation,
accessibility, tests, monitoring, support, documentation, and release evidence
exist.

Return:
- every role
- every screen
- every workflow
- every system
- every console
- every document
- every graph/domain
- every integration
- every release gate
- every P0/P1/P2/P3 gap
- a branch-by-branch implementation plan
- the top 50 actions in priority order.
```

The most important organizing principle is simple:

> **Students should experience one coherent system. Institutions should operate one governed platform. Semester should run one accountable company.**

⁂

1. expand-evan-further-provide-prompt-and-comand-to-e.pdf

Central Education OS architecture map: how Semester maps to Canvas, SIS registrars, Brightspace, and AI models like Claude and ChatGPT

Computer
Semester vs legacy campus tech: feature-by-feature integration matrix comparing SIS, LMS, Google/Microsoft, and AI services
Computer
Map out the integration and migration strategy for LTI and OneRoster
Draft the technical architecture for the multi-tenant institutional OS
Build the student-facing daily productivity and AI copilot interface

Semester should be designed as a **unified Education OS** with one education graph, one policy/control plane, and multiple role-specific experiences. It can connect to Canvas, Brightspace, SIS/registrar platforms, Google/Microsoft productivity tools, and AI providers during transition—then become the native authoritative system for individual domains as institutions approve migration.

The practical architecture is: **connect first, replace by domain, operate as one system.** LTI supports secure learning-tool connections to institutional learning environments, while OneRoster supports standardized exchange of users, courses, enrollments, resources, and grades across education systems. [1] [2] [3]

Central Education OS map

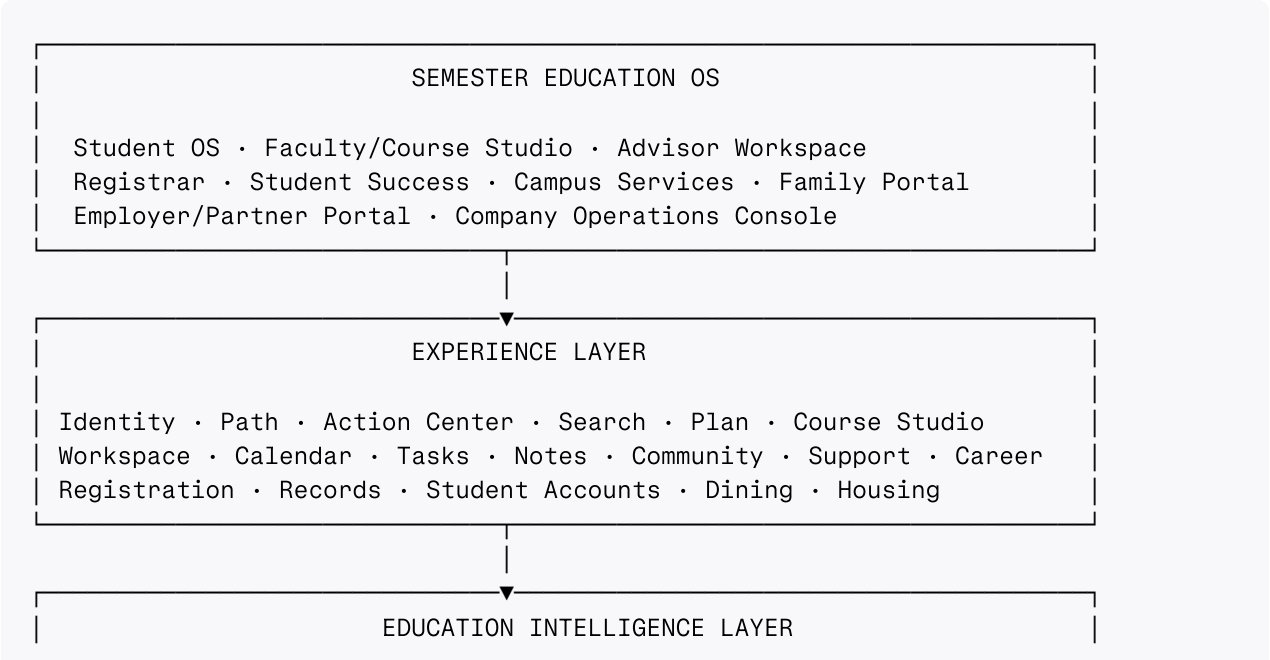

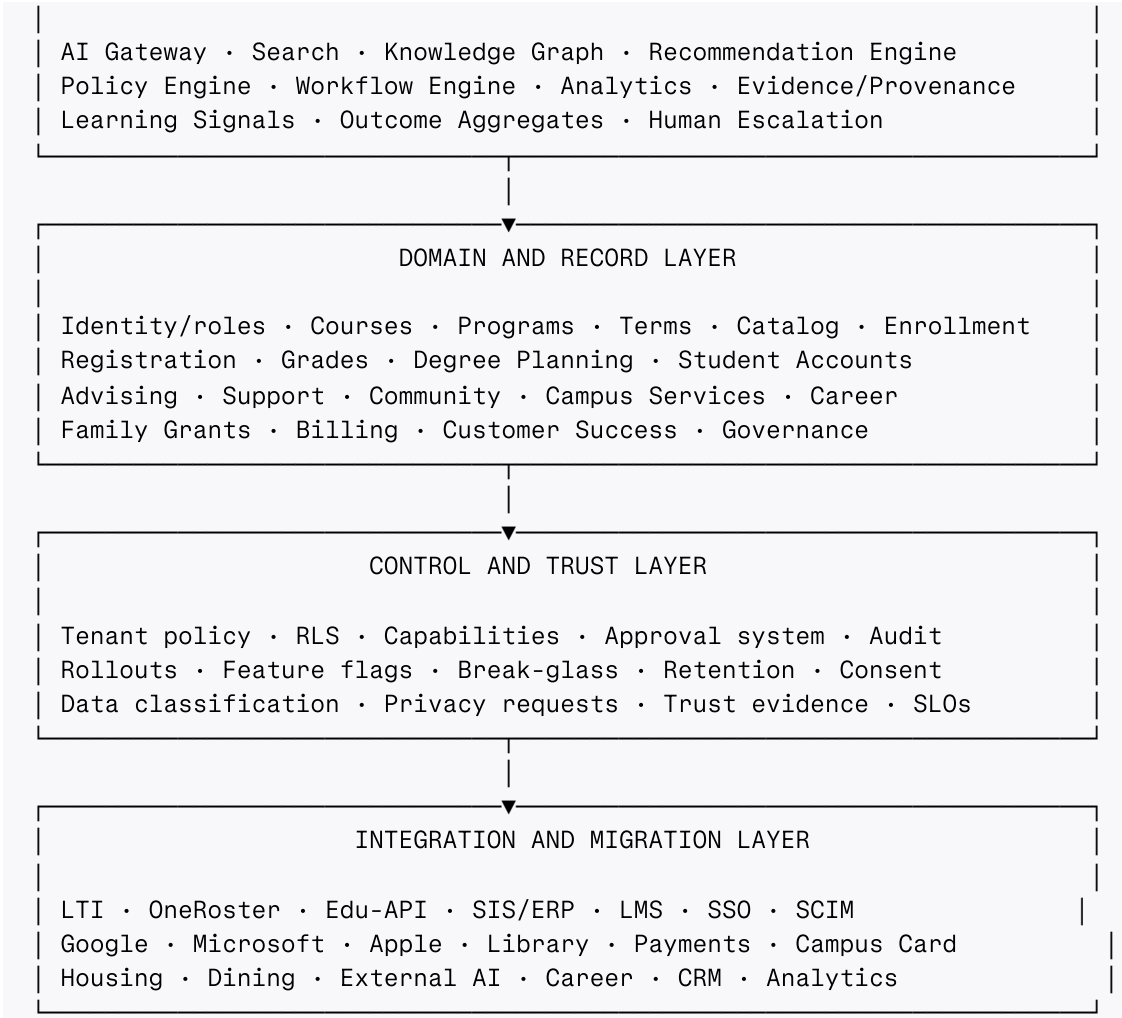

Semester vs legacy systems

Legacy category	Typical tools	Current limitation	Semester integration phase	Semester end-state
LMS/course platform	Canvas, Brightspace, Blackboard, Top Hat	Course experience is separated from planning, support, career, and daily work	LTI launch, roster/course sync, assignment/resource import	Native Course Studio, assignments, study packs, feedback, grade workflows, governed AI
SIS/registrar	Banner, PeopleSoft, Workday Student, Colleague, Jenzabar	Records/registration are disconnected from student guidance and action	Read-only roster/catalog/term/hold sync, official handoffs	Native enrollment, catalog, prerequisites, holds, overrides, registration, academic record workflows

Legacy category	Typical tools	Current limitation	Semester integration phase	Semester end-state
Degree audit/advising	Degree Works, Stellic, advising CRMs	Planning is separate from daily student work and institutional support	Import program requirements and official progress	Semester Path, scenarios, degree planning, advisor workflows, source-aware requirement checks
Student success	EAB Navigate, Starfish, Civitas-style tools	Alerts, advising, engagement, and interventions are isolated	Import authorized signals and referrals	Native Action Center, support workflow, case management, outcome intelligence
Productivity	Google Workspace, Microsoft 365, Apple Notes/Calendar	Generic tools lack academic context	Calendar/file/account integration	Native education workspace: tasks, plans, notes, project work, study sessions, AI
AI tools	ChatGPT, Claude, Perplexity, Copilot	No institutional policy, course context, source authority, cost controls, or audit	Approved-model routing via AI gateway	Semester AI copilot with policy, evidence, provenance, course rules, human escalation
Search	Google Search, campus site search, library discovery	Student must know where to search; results lack role/policy context	Federated search/indexing	Permission-aware education search with official sources, citations, context, and action
Campus services	Separate housing, dining, transit, event, safety apps	Campus life is fragmented from student plan	Read-only feeds and approved action handoffs	Native service action layer where institution chooses it
Billing/student accounts	SIS finance modules, payment portals	Financial obligations are opaque and disconnected from deadlines/support	Account-balance/status integration	Native student-account ledger, payment plans, reconciliation, official payment-provider workflows
Career	Handshake, LinkedIn, career portals	Skills, coursework, projects, advising, and opportunity discovery are disconnected	Opportunity import and approved profile sharing	Career graph, verified skills, portfolio, mentoring, opportunities, employer relationships

Legacy category	Typical tools	Current limitation	Semester integration phase	Semester end-state
Family/guardian	Separate portals and email workflows	Sharing is often overly broad or opaque	Identity-linking and consent-aware handoffs	Student-controlled grants, time-bound sharing, audit history, scoped support
Company operations	CRM, support desk, billing, spreadsheet stacks	Product, revenue, support, pilots, trust, and rollout data remain siloed	Read-model integration	Semester Operations Command Center

Integration strategy

Principles

1. **Do not break institutional authority.** Existing official records remain authoritative until a formal domain migration is approved.
2. **Minimum data first.** Pull only the fields needed for the workflow.
3. **Read before write.** Begin with read-only sync; enable writes only after reconciliation, governance, rollback, and approval.
4. **Every integration has a purpose.** No “connect everything” scope.
5. **Every field has provenance.** Source, freshness, transformation, owner, and conflict state must be visible.
6. **Every write has an idempotency key.** Retrying must never create duplicate enrollment, payment, grade, or record changes.
7. **Every migration has rollback.** Dual-run, reconciliation, cutover, and restoration must be explicit.
8. **Every external model is policy-governed.** AI providers receive only allowed data under tenant/course policy.

Integration lifecycle

```
Inventory
  ↓
Business purpose
  ↓
Data classification
  ↓
Security/privacy review
  ↓
Scope approval
  ↓
Sandbox/test connection
  ↓
Read-only sync
```

```
  ↓
Data mapping and reconciliation
  ↓
Pilot workflow
  ↓
Controlled write approval
  ↓
Production monitoring
  ↓
Periodic access and scope review
  ↓
Retirement or native replacement
```

Integration connection record

```
type IntegrationConnection = {
  id: string;
  tenantId: string;
  provider: string;
  systemType:
    | "sis"
    | "lms"
    | "identity"
    | "productivity"
    | "ai"
    | "library"
    | "payments"
    | "campus-service"
    | "career"
    | "analytics";

  status:
    | "draft"
    | "security_review"
    | "approved"
    | "sandbox"
    | "read_only"
    | "write_enabled"
    | "paused"
    | "retired";

  direction: "read" | "write" | "bidirectional";
  approvedScopes: string[];
  dataClassification: string[];
  ownerRole: string;

  lastSuccessfulSyncAt?: string;
  freshnessTargetMinutes?: number;
  reconciliationStatus:
    | "not_started"
    | "passing"
    | "warning"
    | "failed";

  rollbackPlan: string;
```

```
  approvalReference: string;
};
```

LTI strategy

LTI should be the first LMS connection path where Semester behaves as a tool launched from Canvas, Brightspace, Blackboard, or another compatible learning environment.

LTI use cases

LTI workflow	Semester experience
Course launch	Student opens Semester from course context without a separate login flow
Course membership	Semester receives authorized context about the course, user, and role
Study workspace	Student enters course-specific notes, tasks, study packs, and AI support
Instructor tools	Faculty publish course guidance, AI rules, approved sources, study packs
Assignment support	Semester links action plans and preparation to course tasks
Grade passback	Only after explicit institutional approval and controlled grade workflow
Analytics	Aggregate course engagement/workflow signals subject to tenant policy

LTI is a standard for connecting learning tools to institutional learning environments, helping tools receive context such as roles, enrollment, and course context without separate sign-in flows.[1]

LTI implementation sequence

```
1. Register Semester as an LTI tool.
2. Validate OIDC login, state, nonce, issuer, audience, deployment, and signatures.
3. Bind LTI launch identity to a Semester account through controlled linking.
4. Create or refresh tenant/course membership only from approved source claims.
5. Open course-scoped Semester experience.
6. Store no unnecessary raw launch claims.
7. Audit launch validation and account-linking events.
8. Support deep links to course-specific views.
9. Begin read-only.
10. Enable grade passback only after:
    - institution approval
    - role/capability verification
    - grade policy mapping
    - idempotency
    - reconciliation
    - audit
    - rollback process
```

OneRoster strategy

OneRoster should handle structured exchange of users, organizations, courses, classes, enrollments, resources, and grades where supported.

OneRoster is designed to exchange roster, course, learning-resource, and grade information between education systems; it supports both CSV and REST-based models.[2] [3]

OneRoster migration map

OneRoster entity	Semester canonical model	Migration use
Org	Institution, campus, school, department	Tenant hierarchy
User	Person, profile, membership	Provisioning and identity linkage
Academic session	Term	Term calendar and policy scope
Course	Catalog course	Official course reference
Class	Section/course offering	Course instance and schedule
Enrollment	Institution membership/course enrollment	Access and course context
Resource	Course material/study pack reference	Approved source/resource links
Result/grade	Grade ledger/version	Controlled read/import or passback
Line item	Gradebook item	Assessment mapping

OneRoster migration phases

```
Phase A — CSV import
- Validate schema.
- Map external identifiers.
- Stage rows.
- Report duplicates/errors.
- Reconcile counts.
- Keep source authority external.

Phase B — OneRoster REST read sync
- Incremental roster/course/term sync.
- Per-record freshness.
- Soft deletes.
- Source snapshots.
- Reconciliation dashboards.

Phase C — Controlled workflow exchange
- Resource publishing.
- Course-context sync.
- Approved grade/line-item exchange.
- Strict scope and audit controls.

Phase D — Native Semester domain
- Semester becomes authoritative for approved records.
- Dual-run with old system.
```

```
- Migration evidence.
- Reconciliation.
- Institutional acceptance.
- Cutover.
- Rollback window.
```

Multi-tenant institutional OS architecture

Tenant hierarchy

```
Semester Platform
└── System
    └── Institution
        └── Campus
            └── School/College
                └── Department
                    └── Program
                        └── Course
                            └── Section
                                └── Cohort
                                    └── Person
```

Policy narrows as it moves downward:

```
Platform policy
  ↓
Institution policy
  ↓
Campus policy
  ↓
School policy
  ↓
Program policy
  ↓
Course policy
  ↓
Individual consent and grants
```

A lower policy can become stricter but should not silently override a higher-risk platform/institution restriction.

Multi-tenant access model

```
Identity
  ↓
Authenticated account
  ↓
Institution membership
  ↓
Role grant
```

```
  ↓
Capability
  ↓
Scope:
- global
- tenant
- campus
- school
- program
- course
- section
- individual
  ↓
Purpose
  ↓
Time limit
  ↓
Audit
```

Every sensitive decision must answer:

```
Who is acting?
What capability do they have?
What tenant/campus/course scope applies?
Why is this access needed?
What data category is involved?
How long does the grant last?
What audit event is recorded?
Can the action be reversed?
```

Core institutional OS domains

```
Identity and provisioning
├── SSO
├── SCIM
├── Membership
├── Roles
├── Capabilities
└── Access review

Academic operations
├── Terms
├── Catalog
├── Sections
├── Enrollment
├── Registration
├── Holds
├── Prerequisites
├── Overrides
├── Grades
├── Academic records
├── Degree planning
├── Transfer evaluation
```

```
└── Graduation

Learning
├── Course Studio
├── Assignments
├── Study packs
├── Course guidance
├── AI policy
├── Gradebook
├── Feedback
├── Integrity
└── LTI

Student success
├── Action Center
├── Advising
├── Support
├── Early signals
├── Referrals
├── Check-ins
├── Office actions
└── Outcome analysis

Campus life
├── Dining
├── Housing
├── Events
├── Organizations
├── Community
├── Safety
├── Wellness handoffs
└── Campus services

Commerce and operations
├── Billing
├── Student accounts
├── Payment plans
├── Financial aid handoffs
├── Contracts
├── Commercial plans
├── Entitlements
└── Customer success

Trust and governance
├── Privacy
├── Consent
├── Retention
├── Legal holds
├── Audit
├── Human overrides
├── Compliance
├── Trust room
├── Risk
└── Incident response
```

Student-facing daily productivity and AI copilot

The student experience should not resemble a dashboard full of widgets. It should act as a daily **decision and action environment**.

Daily workspace

```
┌──────────────────────────────────────────────────────────┐
| Semester                                                 |
| Good evening, Harrison.                                  |
|                                                          |
| Today                                                    |
| ├── 2 urgent actions                                     |
| ├── 1 upcoming registration deadline                     |
| ├── 3 study tasks                                        |
| └── 1 support/resource recommendation                    |
|                                                          |
| Your path                                                |
| ├── Current term progress                                |
| ├── Degree / goal progress                               |
| ├── Schedule and workload                                |
| └── Next milestone                                       |
|                                                          |
| Courses                                                  |
| ├── Course Studio shortcuts                              |
| ├── Upcoming work                                        |
| ├── Study packs                                          |
| └── Course AI guidance                                   |
|                                                          |
| Copilot                                                  |
| “What do you need to understand, decide, or do next?”    |
|                                                          |
| Action Center                                            |
| ├── Registration                                         |
| ├── Advising                                             |
| ├── Financial / account notices                          |
| ├── Campus services                                      |
| └── Career opportunities                                 |
└──────────────────────────────────────────────────────────┘
```

Core student navigation

```
Home
Path
Plan
Courses
Workspace
Calendar
Actions
Search
Community
Support
```

```
Career
Profile
```

AI copilot architecture

```
Student request
  ↓
Intent classification:
- explain
- summarize
- plan
- compare
- draft
- research
- study
- navigate
- troubleshoot
- escalate
  ↓
Context selection:
- course
- term
- plan
- calendar
- institution policy
- approved source
- student-owned workspace
  ↓
Policy check:
- role
- tenant
- course AI rules
- data classification
- consent
- provider restriction
- integrity rules
- budget
  ↓
Response:
- answer
- source citations
- confidence/limits
- action suggestions
- official handoff
- human escalation
  ↓
Evidence:
- source references
- policy applied
- action log
- user feedback
```

Copilot interaction principles

Principle	Product behavior
Explainable	“Here is why this recommendation appears.”
Source-aware	Official records, course content, approved sources, and public research are clearly labeled
Non-authoritative by default	AI guidance does not silently become an official institutional decision
Action-linked	The copilot can create draft tasks, plans, notes, or navigate to official handoffs
Permission-bounded	It only sees what the user/tenant/policy permits
Human-aware	It escalates to advisor, instructor, registrar, support, or office when appropriate
Integrity-aware	Course-level AI guidance constrains study, drafting, assessment, and citation behavior
Cost-aware	Shows or meters expensive AI actions and respects tenant budget
Student-controlled	Student can inspect, correct, disable, or limit personal AI memory where appropriate

Copilot example

```
Student:
“Can I register for BIO 221 next term?”

Semester:
“You appear to have completed BIO 101, which is listed as a prerequisite
for BIO 221 in the current catalog record.

Before you register:
- Your registration window opens on [date/time].
- There is one advising hold listed by [office].
- BIO 221 has [available/waitlist] status.
- Your current plan would total [X] credits.

This is planning guidance, not an official enrollment decision.
Open Registration → Review the official section and hold details.”
```

This response:

- Uses authoritative-source labels.
- Explains data source and limits.
- Does not make an unsupported official decision.
- Links to the correct action.
- Helps the student act without hiding institutional authority.

Build prompt

```
Build the Semester Central Education OS architecture and role-specific
experiences.

Semester's product thesis is to become the unified operating system for
education: student OS, productivity suite, course/learning platform,
institutional OS, AI platform, campus super-app, registrar/SIS system,
marketplace, family/guardian platform, career platform, and company operations
platform.

The strategy is:

CONNECT FIRST.
REPLACE BY DOMAIN.
OPERATE AS ONE SYSTEM.

Build the system as one coherent education graph, not disconnected modules.

Implement or document:

1. Central Education OS architecture map
2. Legacy-system integration/replacement matrix:
   - Canvas
   - Brightspace
   - Blackboard
   - Top Hat
   - SIS/ERP/Registrar
   - degree audit
   - advising/student success
   - Google
   - Microsoft
   - Apple productivity
   - ChatGPT
   - Claude
   - Perplexity
   - campus services
   - career platforms
3. LTI integration strategy
4. OneRoster import/sync/migration strategy
5. Edu-API/interoperability strategy where applicable
6. Multi-tenant institutional hierarchy
7. Role/capability/scope model
8. Source-of-authority matrix
9. Connect-to-native replacement roadmap
10. Student daily workspace
11. Student AI copilot
12. Course Studio
13. Academic/registrar architecture
14. Campus services architecture
15. Family/guardian consent/grant model
16. Career and lifelong-learning architecture
17. Institutional control plane
18. AI governance/model-routing layer
19. Migration, reconciliation, dual-run, cutover, rollback, and offboarding
20. Security, privacy, audit, retention, accessibility, and support requirements
```

```
For every domain define:
- user roles
- jobs to be done
- authoritative source
- tenant boundary
- permission model
- data classification
- integration path
- native replacement state
- migration plan
- audit trail
- rollback
- support model
- success metrics
- launch gates
- commercial model

Do not claim an existing native capability unless code, migration, test, and
operational evidence prove it exists.

Do not replace official records, grades, registration, payment, identity, or
legal processes without formal institutional authority, tested migration,
reconciliation, auditability, rollback, and approval.

The student experience must feel unified:
Identity → Path → Plan → Courses → Actions → Support → Career.

The final result must make users feel:
“This is not another portal. This is where my educational life works.”
```

⁂

1. https://www.1edtech.org/standards/lti
2. https://www.1edtech.org/standards/oneroster
3. https://www.1edtech.org/blog/rostering-resources-and-gradebook-standards

perplexity

expand evan further provide prompt and comand to excute

Semester's ambition should be expanded beyond "unifying existing tools" into a complete doctrine for becoming the **foundational education platform**: the common operating layer for learning, academic progress, identity, records, campus services, productivity, AI, institutional operations, and lifelong outcomes.

The key is to preserve the full replacement thesis while making it technically and institutionally credible:

> **Build every major domain natively. Integrate during transition. Replace only after evidence. Operate every domain as one coherent system.**

Semester can be comprehensive from inception without pretending every legacy migration is complete on day one. The platform must have native modules for every major domain, while integration, dual-run, reconciliation, accessibility, migration, institutional approval, support, and rollback determine when it becomes authoritative for each domain. Standards like LTI, OneRoster, and Edu-API provide transition mechanisms for learning-tool context, roster/course/grade exchange, and academic enterprise interoperability. [1] [2] [3]

Expanded Semester doctrine

The mission

> **Semester is the operating system for education: a unified, AI-native platform that brings the entire educational life cycle—identity, learning, planning, records, services, community, career, administration, intelligence, and operations—into one trusted system.**

The long-term goal is not a portal that aggregates links. It is not a dashboard layered on top of a dozen systems. It is not merely an LMS, SIS, advisor tool, or AI assistant.

Semester is intended to become:

```
The student's daily operating system
The educator's teaching and learning workspace
The advisor's action and support environment
The registrar's academic workflow engine
The institution's governance and intelligence layer
The family's consent-based support channel
```

```
The employer’s verified talent pathway
The company’s commercial and operating platform
```

The full replacement thesis

```
Fragmented education stack
  ↓
Semester connects the pieces
  ↓
Semester centralizes the experience
  ↓
Semester owns the workflow layer
  ↓
Semester becomes native system of record by domain
  ↓
Semester becomes the central education operating system
```

The intended endpoint:

```
Before Semester:
Student uses:
- LMS
- SIS portal
- registrar portal
- degree audit
- Google Drive
- Microsoft Office
- calendar app
- note app
- task app
- ChatGPT
- Perplexity
- advising portal
- tutoring portal
- library system
- career portal
- student account portal
- housing portal
- dining app
- events app
- campus safety app
- group-chat tools
- support ticket portal

After Semester:
Student uses:
Semester
```

Behind the scenes, Semester either:

1. **Natively operates the domain**
2. **Synchronizes a transitional external domain**

3. **Uses a specialist partner only where required**
4. **Provides an official handoff until institutional authorization permits replacement**

The student should not have to know which architecture is active. The user sees one coherent path.

The complete product universe

1. Personal education OS

```
Semester Home
├── Today
├── Action Center
├── Calendar
├── Tasks
├── Notes
├── Files
├── Plans
├── Goals
├── Reminders
├── Focus
├── Time and workload
├── Personal AI copilot
├── Search
├── Notifications
├── Profile and settings
└── Cross-device sync
```

This replaces the student's fragmented use of calendar apps, task apps, notes apps, reminders, generic cloud folders, generic productivity suites, and disconnected AI chats.

2. Academic path OS

```
Academic Path
├── Institution
├── Program
├── Degree requirements
├── Course history
├── Current courses
├── Future terms
├── Prerequisites
├── Registration eligibility
├── Holds
├── Transfer credit
├── Articulation rules
├── Degree audit
├── Graduation scenarios
├── Major/minor comparison
├── Workload planning
├── Cost projections
```

```
├── Credential milestones
└── Official record handoffs
```

This replaces the fragmented experience across degree-audit systems, PDF catalogs, registrar portals, spreadsheets, advising notes, email chains, and unofficial student planning tools.

3. Learning and course OS

```
Course Studio
├── Course home
├── Objectives
├── Syllabus
├── Schedule
├── Announcements
├── Assignments
├── Assessment calendar
├── Resources
├── Reading and annotation
├── Notes
├── Study packs
├── Flashcards
├── Practice
├── Tutor workflows
├── Discussions
├── Groups
├── Office hours
├── Feedback
├── Gradebook
├── Regrade process
├── Academic integrity guidance
├── Course AI rules
├── Research sources
└── Learning evidence
```

This replaces or absorbs functions typically scattered across Canvas, Brightspace, Blackboard, Top Hat, publisher courseware, study apps, flashcard apps, generic note apps, email, group chat, and isolated AI tools.

4. AI-native education OS

```
Semester AI
├── Copilot
├── Course-aware tutor
├── Research assistant
├── Writing assistant
├── Study planner
├── Registration guide
├── Academic path explainer
├── Advisor support assistant
├── Faculty content assistant
├── Staff workflow assistant
├── Institutional knowledge assistant
```

```
├── Search and source synthesis
├── Agentic workflow execution
├── Model routing
├── Policy engine
├── Data classification
├── Consent controls
├── Source provenance
├── Cost controls
├── Integrity controls
├── Human escalation
└── AI evaluation and audit
```

Semester's goal is not to build one monolithic model that defeats every foundation model. It is to become the **trusted education intelligence layer** that makes any approved model useful, safe, contextual, source-aware, policy-bound, auditable, and action-connected.

```
ChatGPT / Claude / Perplexity / other models
                 ↓
          Semester AI Gateway
                 ↓
          Education context
                 ↓
Course policy + institutional policy + consent + permissions
                 ↓
Approved sources + student workspace + official records
                 ↓
Explainable answer + safe action + audit + human handoff
```

NIST's AI Risk Management Framework provides a useful reference for designing, deploying, governing, and evaluating AI systems with explicit risk management and trustworthiness considerations.[4] [5]

5. Advisor and student-success OS

```
Student Success Workspace
├── Caseload
├── Student path view
├── Action completion
├── Support signals
├── Check-ins
├── Appointments
├── Outreach
├── Referrals
├── Student communication
├── Early support indicators
├── Intervention workflows
├── Success plans
├── Progress reviews
├── Outcome analytics
├── Escalation rules
├── Privacy/consent scope
└── Aggregate institutional insights
```

This replaces disconnected advising CRMs, alert systems, spreadsheets, email workflows, appointment tools, support ticket systems, and generic retention dashboards.

6. Registrar and academic operations OS

```
Registrar OS
├── Academic calendar
├── Terms
├── Course catalog
├── Sections
├── Meeting times
├── Capacity
├── Waitlists
├── Prerequisites
├── Registration windows
├── Time tickets
├── Holds
├── Overrides
├── Enrollment
├── Add/drop/withdrawal
├── Academic record ledger
├── Grade ledger
├── Grade changes
├── Regrades
├── Graduation checks
├── Transfer credit
├── Academic policy rules
├── Audit reports
└── Official export/integration channels
```

The full vision includes native registrar capability, but it must only become authoritative through formal institutional approval, migration evidence, reconciliation, tested rollback, policy review, and controlled cutover.

7. Student finance and account OS

```
Student Financial OS
├── Student account
├── Charges
├── Credits
├── Balance
├── Payment plan
├── Due dates
├── Holds
├── Reconciliation
├── Refund status
├── Financial-aid handoffs
├── Scholarships
├── Budget tools
├── Cost planning
├── Institutional payment provider
```

```
├── Family consent-based support
└── Audit ledger
```

This replaces the fragmented student experience around bursar portals, payment-plan tools, spreadsheet budgets, emails, billing notices, and opaque account holds.

8. Campus life OS

```
Campus OS
├── Housing
├── Dining
├── Campus card
├── Events
├── Student organizations
├── Community
├── Study spaces
├── Transit
├── Campus safety
├── Wellness handoffs
├── Accessibility services
├── Recreation
├── Library
├── Bookstore
├── Campus jobs
├── Volunteer work
├── Local services
└── Emergency communications
```

The platform should not automatically centralize sensitive health, safety, conduct, or emergency data. It should use purpose limitation, strict tenant policy, explicit authority, and safe official handoffs.

9. Career and lifelong learner OS

```
Career OS
├── Skills graph
├── Evidence portfolio
├── Resume
├── Project history
├── Credentials
├── Internship search
├── Jobs
├── Employer profiles
├── Alumni mentors
├── Career appointments
├── Interview preparation
├── Opportunity matching
├── Verified learning evidence
├── Continuing education
├── Credential renewal
└── Alumni relationship
```

Semester's opportunity is to connect learning evidence to career outcomes without turning student data into ungoverned surveillance or a data-broker product.

10. Family and guardian OS

```
Family Support OS
├── Consent-based family invitations
├── Scoped permissions
├── Time-bounded access
├── Chosen categories
├── Resource sharing
├── Billing/support handoffs
├── Progress summaries
├── Communication preferences
├── Revocation
├── Audit history
└── No broad academic surveillance
```

The student must control sharing. No "parent portal" should expose more than what the student and institution authorize.

11. Faculty and academic leadership OS

```
Faculty Workspace
├── Course Studio
├── Syllabus and policy publishing
├── Course AI rules
├── Resources
├── Assessments
├── Gradebook
├── Feedback
├── Regrade workflow
├── Office hours
├── Teaching assistants
├── Learning signals
├── Course improvement
├── Curriculum alignment
├── Accessibility checks
├── Academic-integrity workflows
└── Cross-course outcomes
```

12. Institutional governance OS

```
Institutional Control Plane
├── Identity and provisioning
├── Roles and capabilities
├── Tenant policy
├── Feature controls
├── Configuration studio
├── Workflow builder
├── Integration governance
```

```
├── Data classification
├── Retention
├── Consent
├── Legal holds
├── Privacy requests
├── Accessibility governance
├── AI provider policy
├── Source authority
├── Rollout controls
├── Security controls
├── Audit
├── Incident response
├── Compliance evidence
├── Trust room
├── Procurement
└── Offboarding and portability
```

13. Developer and platform ecosystem

```
Semester Platform Ecosystem
├── Developer portal
├── APIs
├── Webhooks
├── OAuth/OIDC
├── LTI
├── OneRoster
├── Edu-API
├── SCIM
├── App marketplace
├── Partner directory
├── Integration certification
├── Sandbox environments
├── SDKs
├── Event subscriptions
├── Extension framework
├── Partner governance
└── Revenue sharing
```

This is how Semester becomes a platform rather than a closed product.

Deeper strategic moat

1. Education graph moat

The moat is not one feature. It is the relationship between all the data and workflows:

```
Student
→ course
→ assignment
→ skill
→ academic requirement
→ task
```

```
→ resource
→ advisor
→ support office
→ institutional policy
→ career opportunity
→ verified outcome
```

Once Semester is the system where these relationships live, competitors must rebuild the graph, policy engine, integrations, workflow history, and trust evidence—not merely match a screen.

2. Policy and trust moat

```
AI rule
+ course rule
+ institution rule
+ consent
+ data classification
+ role
+ tenant scope
+ source authority
+ audit
+ human override
= trusted educational action
```

Generic AI companies cannot easily offer this without becoming education infrastructure. Legacy campus vendors cannot easily offer it without rebuilding their architecture around modern AI, student experience, cross-domain workflows, and policy-aware intelligence.

3. Migration moat

Semester should make migration a product:

```
Inventory
→ map
→ import
→ reconcile
→ dual run
→ validate
→ migrate users
→ cut over
→ monitor
→ rollback if needed
→ retain/export/archive
```

Every migration creates institutional knowledge, field maps, quality rules, reconciliation evidence, and implementation expertise that improve the next migration.

4. Outcome moat

Semester must prove:

```
Student:
- understands next steps faster
- completes more critical actions
- experiences less administrative friction
- gains clearer path and career visibility

Institution:
- sees fewer avoidable support contacts
- gains better action completion
- improves implementation consistency
- receives explainable aggregate insights
- reduces fragmented vendor burden

Faculty/staff:
- spend less time chasing information
- use clearer workflows
- have safer, more governed AI support
- retain human judgment where it matters
```

Complete domain replacement matrix

Domain	Transition integration	Native Semester capability	Replacement gate
Identity	SSO, SCIM, directory sync	Identity membership, role grants, capabilities	Provisioning reconciliation, access review, rollback
LMS	LTI, roster/course read sync	Course Studio, study packs, learning workflows	Faculty acceptance, accessibility, grade workflow parity
SIS	Read-only APIs, OneRoster/Edu-API, imports	Canonical academic data and policy workflows	Data reconciliation, legal/registrar approval, audit
Registration	SIS handoff	Native terms, sections, enrollment, waits, holds, overrides	Transaction integrity, capacity correctness, rollback
Gradebook	LMS passback/read	Native grade ledger, assessments, regrades	Faculty policy, student visibility, official-record governance
Degree audit	Requirement import	Path engine, scenarios, requirement evaluation	Registrar validation and official-signoff workflow
Advising	CRM/referral sync	Caseload, success plan, action center, referrals	Privacy, caseload, intervention, outcome validation
Student accounts	Balance/status sync	Ledger, requests, payment plans, reconciliations	Finance controls, payment reconciliation, audit
Productivity	Google/Microsoft/Apple integrations	Notes, tasks, calendar, files, projects	Data portability, reliability, user acceptance
AI	Approved model routing	Copilot, tutor, research, agent workflows	Policy, evaluation, course rules, cost control

Domain	Transition integration	Native Semester capability	Replacement gate
Campus services	Feed/handoff	Native service workflows where approved	Service-owner approval, safety/privacy review
Career	Opportunity import	Skills graph, portfolio, matching	Employer data rules, student consent, outcome evidence
Family	Existing communication handoffs	Scoped grants, sharing, audits	Student consent, institution policy, revocation
Support	Existing helpdesk integration	Support tickets, help requests, knowledge base	SLA, escalation, privacy, operational readiness
Company operations	CRM/billing/support integrations	Operations Command Center	Internal controls, finance/security review

Semester build order

The thesis is full replacement from inception. The **build order** must still respect dependency and risk:

```
Foundation:
Identity, tenancy, RLS, audit, policy, data classification, consent,
integrations, rollout, support, observability.

Daily student OS:
Home, Action Center, Path, Plan, Calendar, Tasks, Notes, Search, Copilot.

Learning:
Course Studio, resources, study, course policies, AI rules, learning evidence.

Institutional workflow:
Advising, registration readiness, tenant configuration, implementation, pilots.

Core academic operations:
Catalog, sections, registration, gradebook, records, degree progression.

Campus life and services:
Dining, events, community, organizations, spaces, support, accessibility.

Career and lifelong relationship:
Skills, portfolio, mentors, opportunities, employer ecosystem, alumni.

Platform:
Developer ecosystem, marketplace, APIs, extensions, multi-campus governance.

Company command center:
GTM, billing, customer success, trust, compliance, finance, security,
operations, SLOs, releases, support, renewals.
```

Expanded master execution prompt

Use this with Claude Code, Codex, or a GitHub-connected coding agent.

```
You are the combined Chief Product Officer, Chief Technology Officer,
Chief Learning Officer, Chief Academic Officer, Chief Information Security
Officer, Chief Operating Officer, Head of Student Success, Registrar Systems
Architect, AI Governance Lead, and Platform Ecosystem Architect for Semester.

Repository:
https://github.com/harrisonjrubin7-cmyk/semester

Semester's thesis is comprehensive:

Semester is the unified, AI-native operating system for education.

It is designed from inception to become:

- Student operating system
- Productivity suite
- Course and learning platform
- LMS replacement
- SIS and registrar replacement
- Academic record and degree-planning system
- Advising and student-success system
- Student financial/account system
- Campus services super-app
- AI copilot and governed intelligence platform
- Search and knowledge platform
- Family/guardian consent platform
- Career and lifelong learning platform
- Institutional control plane
- Developer ecosystem and marketplace
- SaaS company operating platform

The long-term purpose is to replace the fragmented technology stack currently
spread across:

- ChatGPT
- Claude
- Perplexity
- generic AI assistants
- Google Workspace
- Microsoft 365
- Apple productivity workflows
- Canvas
- Brightspace
- Blackboard
- Top Hat
- publisher courseware
- SIS/ERP
- Registrar
- degree audit
- academic records
- registration systems
- gradebooks
```

```
- advising CRMs
- student-success platforms
- student account portals
- financial aid handoffs
- housing portals
- dining apps
- campus safety apps
- community platforms
- career systems
- support portals
- family portals
- separate campus services
- disconnected company operations tools

The strategy is:

CONNECT FIRST.
REPLACE BY DOMAIN.
OPERATE AS ONE SYSTEM.

Do not narrow Semester's product thesis.

However:

- Do not falsely claim native replacement where only an integration exists.
- Do not replace official records, grades, registration, financial records,
  identity, or legal processes without formal authority, migration, audit,
  reconciliation, rollback, and institution approval.
- Do not create disconnected feature silos.
- Do not treat generic AI output as official institutional truth.
- Do not compromise tenant isolation, student agency, accessibility, privacy,
  or source authority.

Build a complete architecture and execution program.

============================================================
PHASE 0 — UNIFIED PRODUCT AUDIT
============================================================

Read all relevant code, migrations, architecture, feature inventory, audit,
security, governance, integration, product, and operations documentation.

Create:

docs/product/SEMESTER_UNIFIED_EDUCATION_OS_THESIS.md
docs/product/EDUCATION_OS_PRODUCT_MAP.md
docs/product/EDUCATION_GRAPH_ARCHITECTURE.md
docs/product/ROLE_EXPERIENCE_MATRIX.md
docs/product/DOMAIN_AUTHORITY_MATRIX.md
docs/product/DOMAIN_REPLACEMENT_MATRIX.md
docs/product/CONNECT_REPLACE_OPERATE_STRATEGY.md
docs/product/INTEROPERABILITY_AND_MIGRATION_STRATEGY.md
docs/product/AI_GOVERNANCE_AND_MODEL_ROUTING.md
docs/product/EDUCATION_OS_RELEASE_GATES.md
docs/product/EDUCATION_OS_RISK_REGISTER.md
docs/product/EDUCATION_OS_BACKLOG.md
```

```
For every claimed domain, classify:

- Native and verified
- Native but incomplete
- Integrated
- Designed/documented only
- Planned
- Not started
- Unsafe to activate
- Requires institutional approval
- Requires legal/security/accessibility review
- Requires migration/reconciliation/rollback design

Do not start implementation until the audit establishes current truth.

============================================================
PHASE 1 — EDUCATION GRAPH FOUNDATION
============================================================

Define and implement or reconcile:

1. Identity graph
2. Institution/campus/school/program/course/section hierarchy
3. Membership and role grants
4. Student-owned workspace graph
5. Academic path graph
6. Course and learning graph
7. Evidence/provenance graph
8. Support and intervention graph
9. Skills/credential/career graph
10. Consent and sharing graph
11. Commercial/customer graph
12. Governance/audit/risk graph

For every graph edge define:

- Source authority
- Tenant scope
- Permission rule
- Data classification
- Retention rule
- Consent requirement
- Audit event
- Integration source
- Migration source
- Native replacement status

============================================================
PHASE 2 — ROLE-SPECIFIC EDUCATION OS
============================================================

Build coherent role experiences:

A. Student OS
- Home
```

- Today
- Action Center
- Path
- Plan
- Calendar
- Tasks
- Notes
- Files
- Search
- Courses
- Study
- Community
- Support
- Career
- Profile
- AI copilot

B. Faculty / Course Studio
- Course home
- Syllabus
- objectives
- resources
- assignments
- study packs
- course guidance
- AI rules
- discussions
- gradebook
- regrade
- feedback
- office hours
- accessibility and integrity tools

C. Advisor / Student Success
- Caseload
- student path
- action completion
- check-ins
- referrals
- support
- success plans
- outcome insight
- privacy-scoped sharing

D. Registrar / Academic Operations
- Terms
- catalog
- sections
- registration
- holds
- overrides
- enrollment
- academic record
- grades
- regrades
- degree progression

```
- graduation
- transfer evaluation

E. Campus Services
- dining
- housing
- events
- organizations
- community
- study spaces
- campus employment
- support offices
- accessibility services
- safety handoffs

F. Family/Guardian
- consented invitations
- scoped sharing
- revocation
- audit history
- resource/support handoff

G. Career / Alumni / Employers
- skills graph
- verified evidence
- portfolio
- opportunities
- mentors
- career advising
- alumni engagement
- lifelong credentials

H. Institutional Control Plane
- policy
- configuration
- workflow builder
- integrations
- AI provider policy
- security
- privacy
- retention
- audit
- approvals
- rollouts
- trust
- compliance
- support
- offboarding

I. Semester Company Operations
- GTM
- pilots
- billing
- customer success
- renewals
- trust
```

```
- compliance
- support
- security
- release operations
- financial visibility
- workforce/capacity planning

============================================================
PHASE 3 — AI EDUCATION PLATFORM
============================================================

Build a governed model-routing architecture.

Support approved external AI models but make Semester the governance and
education context layer.

For each AI interaction require:

- identity
- tenant
- role
- purpose
- course/context scope
- data classification
- consent
- AI provider policy
- course AI rules
- academic-integrity rule
- source/knowledge retrieval policy
- budget/rate limit
- logging/audit
- response provenance
- human escalation option

Build:

- student copilot
- course-aware tutor
- research assistant
- writing assistant
- study planner
- registration guide
- advising support assistant
- staff workflow assistant
- institutional knowledge assistant
- faculty authoring assistant
- AI evaluation system
- AI red-team and safety test plan
- model/provider registry
- spend meter
- policy engine
- source/citation layer
- human override and escalation
- tenant AI configuration
- course AI configuration
```

```
No AI output becomes official institutional truth without explicit authority,
human approval, and audited workflow.

================================================================
PHASE 4 — INTEROPERABILITY AND MIGRATION
================================================================

Implement or define:

A. LTI
- OIDC login
- state/nonce validation
- issuer/audience/deployment validation
- role and course context
- deep linking
- membership binding
- tool launch audit
- controlled grade passback
- consent and course policy integration

B. OneRoster
- CSV staging/import
- REST sync
- users
- orgs
- terms
- courses
- classes
- enrollments
- resources
- line items
- results/grades
- mapping versioning
- soft deletes
- reconciliation
- error queue
- source freshness
- export and rollback

C. Edu-API and enterprise education APIs
- academic enterprise mapping
- standard vs institution-specific adapter model
- source authority
- change detection
- idempotency
- audit
- reconciliation

D. SIS/ERP migration
- inventory
- field mapping
- data classification
- staging
- data quality
- duplicate handling
- reconciliation
```

```
- dual run
- cutover
- rollback
- archive/export
- retention
- offboarding

E. Productivity migration
- Google/Microsoft/Apple import/export
- calendar
- files
- tasks
- notes
- identity
- permissions
- data portability

F. AI provider transition
- external provider registry
- model routing
- fallback
- provider policy
- spend policy
- source restrictions
- data restrictions
- evaluation
- incident handling

============================================================
PHASE 5 — DOMAIN REPLACEMENT GATES
============================================================

For every domain, define replacement gates:

1. Functional parity
2. Data model completeness
3. Accessibility
4. Security and privacy controls
5. RLS/tenant isolation
6. Auditability
7. Migration integrity
8. Reconciliation
9. Dual-run reliability
10. User acceptance
11. Institutional policy approval
12. Support readiness
13. Incident/rollback readiness
14. Export/portability
15. Commercial and implementation readiness

No domain may be marked “native authoritative” without passing all applicable
gates.

============================================================
PHASE 6 — OUTCOME AND MOAT
============================================================
```

```
Build outcome frameworks for:

Students:
- action clarity
- meaningful action completion
- learning progress
- time/effort efficiency
- support access
- confidence
- career readiness

Faculty:
- course clarity
- workload reduction
- feedback cycle
- policy enforcement
- learning insight

Institutions:
- student activation
- retention proxies
- support load
- workflow completion
- data quality
- vendor consolidation
- implementation consistency
- operating cost
- trust/compliance evidence

Semester:
- platform adoption
- renewal
- expansion
- gross retention
- net revenue retention
- implementation capacity
- reliability
- security posture
- AI cost/margin
- migration throughput
- partner ecosystem growth

Return:
- complete product architecture
- build order
- role matrix
- data authority matrix
- integration/migration roadmap
- domain replacement gate matrix
- 12-month implementation plan
- launch readiness plan
- risk register
- engineering backlog
- commercial model
- required team roles
```

```
- test strategy
- operating cadence

Do not stop at a high-level vision. Create implementation-ready plans,
schemas, interfaces, test gates, and traceability artifacts.
```

Recommended execution branches

```
# Establish truth
git checkout -b audit/unified-education-os-baseline

# Foundation
git checkout -b feat/education-graph-foundation

# Student OS and daily workspace
git checkout -b feat/student-os-daily-workspace

# Course Studio and learning
git checkout -b feat/course-studio-learning-os

# AI gateway and copilot
git checkout -b feat/governed-ai-copilot

# Advising/student success
git checkout -b feat/student-success-os

# Registrar/academic operations
git checkout -b feat/registrar-academic-os

# LTI, OneRoster, and migration fabric
git checkout -b feat/education-interoperability-fabric

# Campus life/family/career
git checkout -b feat/campus-life-family-career

# Institutional control plane
git checkout -b feat/institutional-control-plane

# Marketplace/platform ecosystem
git checkout -b feat/education-platform-ecosystem
```

Final strategic framing

The thesis is not:

> “Semester is a better portal.”

The thesis is:

> **Semester is the education operating system that replaces the fragmented infrastructure of learning, academic life, student support, campus services, institutional operations, productivity, and AI with one connected, governed, human-centered platform.**

The practical discipline is:

> **Build everything natively. Integrate responsibly. Replace only with proof. Operate every domain as one system.**

⁂

1. https://www.1edtech.org/standards/lti
2. https://www.1edtech.org/standards/oneroster
3. https://www.1edtech.org/standards/edu-api
4. https://www.nist.gov/itl/ai-risk-management-framework
5. https://www.nist.gov/publications/artificial-intelligence-risk-management-framework-generative-artificial-intelligence
6. https://www.perplexity.ai/search/fb4dd733-3429-4e79-a23f-22ed168705d3
7. https://www.perplexity.ai/search/21fb2488-6e02-4456-8782-d255401fae2b
8. https://www.perplexity.ai/search/f8eed7b1-f091-4697-9199-fa3abfefbb9f

expand further on brand identy algorthims workflowws data flows and ui

Semester needs a unified **brand identity system, algorithmic intelligence system, workflow language, data-flow architecture, and UI grammar**. These must work together so the product feels like one calm, trusted Education OS rather than a set of features stitched together.

The design principle is:

> **Semester should make an institutionally complex world feel personally clear.**

A student should immediately understand: where they are, what matters, what is official, what action they can take, and who can help. The existing Semester direction emphasizes a calm, premium, accessible, low-stimulus interface with progressive disclosure—immediate decision first, explanation second, advanced detail on demand.

Brand identity

Brand position

```
Semester is the education operating system.

It turns fragmented academic information, campus systems, learning tools,
support workflows, productivity tools, and AI into one clear, governed,
human-centered environment.
```

Emotional outcome

Audience	Desired feeling
Student	“I know what to do next.”
Faculty	“This helps me teach clearly without adding administrative burden.”
Advisor	“I can support students without chasing information across systems.”
Registrar	“This respects academic authority, auditability, and correctness.”
CIO/security	“This is controlled, governable, interoperable, and operationally mature.”
Parent/guardian	“I can support without invading the student’s privacy.”
Employer	“This is credible, verified educational evidence—not a scraped profile.”
Semester operator	“I can see, govern, support, and improve the platform safely.”

Brand personality

```
Calm, not sterile
Intelligent, not patronizing
Ambitious, not inflated
Academic, not bureaucratic
Modern, not trendy for its own sake
Warm, not childish
Trustworthy, not vague
Human-centered, not surveillance-centered
Powerful, not overwhelming
```

Brand vocabulary

Use

```
Path
Action
Progress
Evidence
Source
Guide
Workspace
Course Studio
Support
Plan
Clarity
Next step
Governed
Trusted
Connected
Official
Student-controlled
Explainable
Accessible
Institution-ready
```

Avoid

```
Disrupt everything
Revolutionary AI magic
Replace humans
Guaranteed outcomes
Fully automated advising
Perfect personalization
Total surveillance
One-click compliance
All-in-one without explanation
Enterprise-grade without evidence
```

Core brand statements

```
Short:
Semester is the education operating system.

Student:
Semester helps you understand where you are, what matters next,
and how to move forward.

Institution:
Semester connects student action, learning, planning, support,
and institutional operations in one governed platform.

Technical:
Semester is a multi-tenant education platform with role-aware workflows,
policy-governed AI, source authority, evidence, interoperability,
and operational controls.

Trust:
Semester is built to make educational information clearer, more actionable,
more accessible, and more accountable.
```

Visual identity

Visual design doctrine

```
Primary visual feeling:
A calm, high-trust academic workspace.

Not:
A noisy student social app.
A legacy university portal.
A generic corporate dashboard.
A childish EdTech product.
A glowing “AI” landing page.
```

Color system

```
Primary:
Indigo / blue-violet
Meaning:
Clarity, action, trusted intelligence

Neutral:
Slate / near-black / soft white
Meaning:
Calm, focus, readable density

Success:
Emerald
Meaning:
Completed, healthy, confirmed
```

```
Warning:
Amber
Meaning:
Needs attention, review, limited confidence

Critical:
Rose/red
Meaning:
Error, security concern, failed action, urgent issue

Information:
Blue
Meaning:
Source, guidance, context, available action
```

Semantic rules

```
Indigo = user action, focus, selected state, trusted navigation
Green = confirmed completion or healthy state
Amber = caution, review, data freshness issue, pending work
Rose = blocked, failed, unsafe, destructive, high urgency
Gray = context, inactive, historical, unavailable
```

Never use status colors as decoration. Never communicate a critical state with color alone.

Typography

```
Display:
Large narrative statements, landing page hero, major decision context

Heading:
Screen titles, page sections, workflow steps

Subheading:
Cards, modules, grouped content

Body:
Primary explanation and reading content

Body small:
Metadata, source/freshness, secondary context

Label:
Form labels, controls, status labels, section metadata

Mono:
Record IDs, audit IDs, correlation IDs, technical configuration
```

Typography rules

```
- One H1 per page.
- Use a strict heading hierarchy.
- Keep student-facing sentences short.
- Use plain language before specialist language.
- Expand acronyms on first use.
- Avoid large blocks of all caps.
- Use numeric/tabular typography for finance, analytics, and schedules.
- Make source, status, and data freshness readable but secondary.
```

Shape, depth, and motion

```
Corner radius:
Moderate, consistent, not overly rounded or toy-like

Elevation:
Minimal; use border and contrast before shadow

Motion:
Short, purposeful, optional
- page transition: subtle
- modal: direct
- save state: visible
- completion: calm
- loading: non-distracting
- reduced motion: always supported

Illustration:
Use only when it clarifies workflow or reduces anxiety
Do not use decorative filler art to make empty screens seem busy
```

Semester UI grammar

The UI must behave the same across every screen.

Universal page shell

```
┌──────────────────────────────────────────────────────────────┐
| Semester logo | Context | Search | Notifications | Profile   |
├──────────────────────────────────────────────────────────────┤
| Primary navigation                                           |
| Today · Path · Plan · Courses · Workspace · Support · Career |
├──────────────────────────────────────────────────────────────┤
| Page title                                                   |
| What this page helps you do                                  |
| Source/freshness/context                                     |
├──────────────────────────────────────────────────────────────┤
| Layer 1: Immediate decision / most important action          |
├──────────────────────────────────────────────────────────────┤
| Layer 2: Explanation, choices, and supporting context        |
├──────────────────────────────────────────────────────────────┤
```

```
| Layer 3: Advanced detail, settings, history, export, audit   |
└──────────────────────────────────────────────────────────────┘
```

Three-layer disclosure model

Layer	Purpose	Example
Layer 1	Immediate decision	“Your registration opens Tuesday at 8:00 AM. You have one hold.”
Layer 2	Explanation and action	“The hold is from Student Accounts. Here is why it matters and who can help.”
Layer 3	Advanced detail	Source system, policy text, history, export, integration state, audit trail

A student should not need Layer 3 to complete a normal daily action. Operators and staff may need Layer 3 frequently, but still should not be overwhelmed by it initially.

Screen question model

Every Semester screen should answer:

```
Where am I?
What is this screen for?
What matters now?
What can I do?
What is official?
What is stale or uncertain?
What happens if I take this action?
Who can help?
Where can I find deeper detail?
```

Algorithms

Semester’s algorithms should be **explainable, policy-bounded, source-aware, and purpose-limited.** No hidden “black box” should make high-impact educational decisions.

Algorithm inventory

```
1. Next-action ranking
2. Student workload estimation
3. Registration readiness
4. Degree path scenario engine
5. Course/section recommendation
6. Study-plan recommendation
7. Learning-resource recommendation
8. Search ranking
9. Support routing
10. Advisor caseload prioritization
11. Student-success aggregate risk signals
12. Career opportunity matching
13. Mentor matching
14. Community safety ranking
15. Event recommendation
```

```
16. Campus service recommendation
17. Notification priority
18. AI model routing
19. AI source retrieval
20. AI answer confidence/escalation
21. Content moderation assistance
22. Integration health scoring
23. Tenant health scoring
24. Customer health scoring
25. Pilot conversion scoring
26. Revenue forecast
27. AI cost forecasting
28. Anomaly detection
29. Data-quality scoring
30. Migration reconciliation
```

Algorithm governance requirements

Every algorithm must have:

```
Purpose
Owner
Users affected
Decision type
Input data
Excluded data
Source authority
Data classification
Tenant policy
Consent requirement
Output
Confidence/uncertainty
Explanation
Human review path
Appeal/correction path
Bias/fairness review
Monitoring
Evaluation dataset
Version
Audit record
Rollback/deprecation plan
```

1. Next-action ranking

Purpose

Show the student the most useful next action without overwhelming them.

Inputs

```
Official deadlines
Course assignments
Registration windows
Holds
Academic plan
Task commitments
Student-selected goals
Support requests
Course schedule
Institution notices
User preference
```

Never use without explicit policy/consent

```
Private message content
Sensitive health data
Protected characteristics
Financial aid details beyond action need
Accommodation details
Disciplinary records
External browsing history
Unapproved behavioral surveillance
```

Ranking formula

$$\text{Action Priority} = w_d D + w_i I + w_b B + w_g G + w_c C - w_o O$$

Where:

$$D = \text{deadline urgency}$$

$$I = \text{institutional importance}$$

$$B = \text{blocker severity}$$

$$G = \text{student-selected goal relevance}$$

$$C = \text{course/program context relevance}$$

$$O = \text{overload penalty}$$

The overload penalty is essential. Semester should not maximize notifications; it should prioritize meaningful action.

Explainability UI

```
Recommended: Review your registration hold

Why this appears:
- Your registration window opens in 3 days.
- This hold may prevent enrollment.
- Student Accounts is the responsible office.

Source:
Official institution record, updated 2 hours ago.

Next step:
View hold details or contact Student Accounts.
```

2. Workload estimation

Inputs

```
Credits
Course meeting schedule
Assignment due dates
Student-entered time estimates
Course workload guidance
Assessment dates
Known schedule conflicts
Student preference
```

Output

```
Low / balanced / heavy workload estimate
Peak weeks
Conflict warnings
Suggested study blocks
Suggested sequencing
```

Important rule

```
Workload estimate is guidance, not academic authority.
Students can override personal estimates.
No punitive institutional action uses workload score.
```

3. Registration readiness algorithm

```
Readiness =
registration window known
+ account status known
+ holds checked
+ plan exists
+ prerequisite status checked
+ credit load reviewed
+ course sections selected
+ alternatives considered
+ official handoff available
```

Output:

```
Ready
Almost ready
Blocked
Needs advisor review
Information unavailable
```

Every readiness item must show its source, timestamp, and action path.

4. Degree path scenario engine

```
Student selects:
- program goal
- term preference
- possible courses
- workload preference
- cost preference
- graduation target

Semester computes:
- requirement coverage
- prerequisite sequence
- credit load
- estimated graduation timeline
- potential conflicts
- missing official information
- advisor/registrar confirmation needs
```

The system must label:

```
Official requirement
Planning estimate
Assumption
Unavailable data
Advisor/registrar confirmation required
```

5. Search ranking

```
Query
  ↓
Permission filter
  ↓
Tenant/course/context filter
  ↓
Source authority ranking
  ↓
Freshness ranking
  ↓
User context relevance
  ↓
Result type diversity
  ↓
Explainable result list
```

Search result categories

```
Official institution policy
Course content
Student-owned content
Approved learning source
Campus service
Support resource
Career opportunity
Community content
External web/research
AI-generated answer
```

Search must never make community content appear more authoritative than official policy.

6. AI model router

```
Request
  ↓
Data classification
  ↓
Tenant provider policy
  ↓
Course AI policy
  ↓
Cost/latency requirement
  ↓
Required capability:
- reasoning
- research
- writing
- code
- retrieval
- summarization
```

```
  ↓
Approved model/provider
  ↓
Fallback model or human handoff
```

Router output

```
Chosen provider/model
Why it was chosen
What context was shared
What sources were used
Whether data was retained
Cost/usage impact
Fallback behavior
```

7. Support routing

```
Student request
  ↓
Issue category
  ↓
Urgency
  ↓
Institution/tenant
  ↓
Student-selected context
  ↓
Office/service ownership
  ↓
Eligibility/policy check
  ↓
Correct queue
  ↓
Escalation path
```

No algorithm should make a clinical, disciplinary, emergency, or financial decision. It can route to an approved official process.

8. Tenant health algorithm

```
Tenant Health =
commercial
+ implementation
+ activation
+ workflow completion
+ support
+ reliability
+ integration health
+ security/compliance
```

```
+ executive engagement
+ renewal status
```

Output must explain:

```
Health band
Score components
Top drivers
Data freshness
Recommended actions
Owner
Due date
```

Workflow architecture

Workflow definition model

Every workflow needs:

```ts
type SemesterWorkflow = {
  id: string;
  version: number;
  tenantId: string | null;

  name: string;
  purpose: string;
  domain: string;

  trigger: string;
  actors: string[];
  requiredCapabilities: string[];

  inputs: string[];
  outputs: string[];

  sourceAuthority: string[];
  dataClassification: string[];

  states: string[];
  transitions: string[];

  approvalRequirements: string[];
  auditEvents: string[];

  sla?: string;
  supportOwner: string;

  rollbackPlan?: string;
  retentionPolicy?: string;

  accessibilityRequirements: string[];
  aiPolicyRequirements?: string[];
```

```
  successMetrics: string[];
};
```

Universal workflow state pattern

```
Draft
→ Submitted
→ Validating
→ Waiting for information
→ Waiting for approval
→ Approved
→ Executing
→ Completed
→ Failed
→ Escalated
→ Cancelled
→ Archived
```

Workflow examples

```
Student registration
Support request
Advisor referral
Pilot implementation
Integration activation
Data migration
Feature rollout
Price exception
Security document request
Privacy erasure request
Family grant
AI agent action
Course publication
Grade change
Payment plan
Community moderation
Incident response
Tenant offboarding
```

Data-flow architecture

Data flow standard

```
Source system
  ↓
Connection approval
  ↓
Scope approval
  ↓
Secure ingestion
  ↓
```

```
Staging
  ↓
Validation
  ↓
Transformation
  ↓
Canonical model
  ↓
Source/provenance record
  ↓
Policy and permission filter
  ↓
Role-specific read model
  ↓
User interface
  ↓
Action/command
  ↓
Audit/event/outbox
  ↓
Projection/analytics
```

Data layers

```
Raw external payload
  ↓
Staging data
  ↓
Validated mapped data
  ↓
Canonical education graph
  ↓
Domain workflow records
  ↓
Read models/projections
  ↓
User interface
  ↓
Analytics/aggregate outcomes
  ↓
Export/archive/deletion
```

Data classification

Tier	Example	Handling
T0	Public marketing content	Public cacheable
T1	Internal operational metadata	Authorized staff
T2	Student-owned workspace data	Student/private by default
T3	Institutional academic/personal data	Tenant-scoped, policy controlled

Tier	Example	Handling
T4	Sensitive support/accessibility/financial data	Restricted, purpose-limited, audit-heavy
T5	Credentials, secrets, authentication material	Server-only, never browser exposed
T6	Highly restricted legal/security evidence	Controlled access, named reviewers only

UI system

Required shared components

```
AppShell
ContextBar
GlobalNavigation
MobileNavigation
GlobalSearch
CommandPalette
PageHeader
SourceBadge
FreshnessBadge
AuthorityBadge
PolicyBadge
ConsentBadge
StatusBadge
HealthBadge
RiskBanner
ActionCard
ActionCenter
WorkflowStepper
DecisionCard
EvidenceDrawer
AuditTimeline
DataTable
EmptyState
LoadingState
ErrorState
OfflineState
ForbiddenState
SupportHandoff
AIAnswerPanel
CitationPanel
ActionPreview
ApprovalBanner
FormField
ErrorSummary
Modal
Toast
NotificationCenter
```

Standard data trust panel

Every critical screen should show:

```
Source: Official institution record
Updated: 2 hours ago
Authority: Registrar
Status: Current
Policy: Institution registration policy v4.2
Action: View official details
```

Standard AI panel

```
Answer
Sources
What this means
Suggested next step
Limits and uncertainty
Course/institution policy
Give feedback
Ask a person / official office
```

Standard error state

```
What happened
What data may be affected
What you can do now
Whether action was saved
Whether it will retry
Who can help
Reference ID
```

Master design/data/algorithm execution prompt

```
Build the Semester Brand, Intelligence, Workflow, Data-Flow, and UI System.

Semester is the unified Education Operating System. It must feel like one calm,
premium, accessible, trustworthy product across student, faculty, advisor,
registrar, campus, family, career, institutional, company, and developer
experiences.

Create:

docs/design/SEMESTER_BRAND_IDENTITY.md
docs/design/SEMESTER_VISUAL_LANGUAGE.md
docs/design/SEMESTER_UI_GRAMMAR.md
docs/design/SEMESTER_COMPONENT_LIBRARY.md
docs/design/SEMESTER_INTERACTION_LANGUAGE.md
docs/design/SEMESTER_MOTION_AND_FEEDBACK.md
docs/design/SEMESTER_DATA_TRUST_UI.md
```

```
docs/design/SEMESTER_RESPONSIVE_STRATEGY.md
docs/algorithms/SEMESTER_ALGORITHM_CATALOG.md
docs/algorithms/SEMESTER_ALGORITHM_GOVERNANCE.md
docs/algorithms/SEMESTER_NEXT_ACTION_RANKING.md
docs/algorithms/SEMESTER_WORKLOAD_MODEL.md
docs/algorithms/SEMESTER_REGISTRATION_READINESS.md
docs/algorithms/SEMESTER_SEARCH_RANKING.md
docs/algorithms/SEMESTER_AI_ROUTING.md
docs/workflows/SEMESTER_WORKFLOW_ARCHITECTURE.md
docs/workflows/SEMESTER_WORKFLOW_CATALOG.md
docs/data/SEMESTER_DATA_FLOW_ARCHITECTURE.md
docs/data/SEMESTER_DATA_CLASSIFICATION.md
docs/data/SEMESTER_SOURCE_AUTHORITY.md
docs/data/SEMESTER_PROVENANCE_MODEL.md

For every algorithm define:
- purpose
- owner
- affected users
- inputs
- excluded inputs
- source authority
- tenant scope
- data classification
- consent
- output
- explanation
- confidence
- human escalation
- bias/fairness review
- evaluation
- monitoring
- version
- audit
- rollback

For every workflow define:
- trigger
- actors
- capabilities
- states
- transitions
- approvals
- audit
- inputs/outputs
- support owner
- SLA
- retention
- rollback
- success metric

For every UI component define:
- semantic token usage
- accessibility requirement
- responsive behavior
- loading/empty/error/offline/forbidden states
```

```
- analytics event
- source/freshness display
- test coverage

The product must use progressive disclosure:
Layer 1: immediate decision
Layer 2: explanation and action
Layer 3: advanced detail and history

Do not use opaque high-impact algorithms.
Do not use protected or sensitive data for recommendations without explicit
authority.
Do not treat AI output as official institutional truth.
Do not use visual decoration instead of clarity.
Do not allow modules to invent their own colors, spacing, status vocabulary,
permission behavior, or source labels.

Return:
- complete brand system
- complete algorithm inventory
- workflow map
- data-flow map
- UI component system
- screen consistency plan
- accessibility plan
- analytics plan
- testing plan
- P0/P1/P2 backlog
- exact next 25 implementation actions.
```

The final design principle

```
One brand language
One source-authority language
One action language
One policy language
One privacy language
One error-recovery language
One accessibility standard
One workflow grammar
One education graph
= One Semester OS
```

⁂

1. projects.semester.cross_device_experience
2. https://www.perplexity.ai/search/c9a3bc23-faef-4a39-b797-d8dd40ace80f
3. https://www.perplexity.ai/search/7249ab05-f244-41ee-9573-13192050bbd6
4. projects.semester.branding
5. https://www.perplexity.ai/search/ac312ed1-3dc7-4597-b9d0-63678f97be71
6. https://www.perplexity.ai/search/170323cf-9154-442a-b80c-7fc5fd712889

7. https://www.perplexity.ai/search/e8fa66a2-9133-47dc-b9e6-912f6d4ed810

list every artifact and thing for claud to genrate and produce for Semester

Claude can generate almost any self-contained deliverable you would put in front of a user, teammate, customer, investor, student, or developer. For **Semester**—assuming it is a product, startup, or software project—the most useful approach is to define artifacts across strategy, brand, product, engineering, sales, operations, and customer success.

Claude's native artifact formats include documents, decks, designs, dashboards, code, single-page websites, diagrams, images, and small interactive tools. [1] [2]

Strategy and company

- Company narrative and "what is Semester?" one-pager
- Mission, vision, values, and operating principles
- Founding story and origin memo
- Product thesis
- Market thesis
- Category-definition memo
- Investor narrative
- Pitch deck
- Fundraising data room index
- Executive summary
- Annual plan
- Quarterly operating plan
- OKRs and KPI tree
- Strategic roadmap
- Decision memos
- Board-deck outline and board updates
- Competitive landscape
- Competitor battlecards
- SWOT analysis
- Porter's Five Forces analysis
- TAM/SAM/SOM market-sizing model

- Pricing and packaging strategy
- Business-model canvas
- Unit-economics model
- Revenue forecast
- Hiring plan
- Org-chart proposal
- Job scorecards
- Interview rubrics
- Company handbook
- Remote-work and communications norms
- Risk register
- Security and compliance roadmap

Brand and marketing

- Brand strategy document
- Positioning statement
- Messaging architecture
- Value-proposition matrix
- Ideal customer profile definition
- Buyer personas
- Jobs-to-be-done interviews and synthesis
- Voice-and-tone guidelines
- Brand naming explorations
- Taglines and slogans
- Brand manifesto
- Brand style guide
- Color palette and typography proposal
- Logo brief or SVG logo concepts
- Moodboards and visual-direction briefs
- Homepage copy
- Full marketing-site copy
- Landing pages by audience or use case
- Product-launch plan
- Go-to-market strategy
- Content strategy

- SEO strategy and keyword clusters
- Editorial calendar
- Blog outlines and complete articles
- Case-study templates and customer stories
- Whitepapers and reports
- Lead magnets
- Email nurture sequences
- Lifecycle-email copy
- Newsletter drafts
- LinkedIn content calendar
- X/Twitter posts and threads
- Founder-led content
- Press release
- Media kit
- Podcast pitch emails
- Partner-marketing plans
- Webinar scripts and slide decks
- Event booth copy and collateral
- Ad creative briefs
- Search-ad copy
- Social-ad variations
- Retargeting campaigns
- Referral-program copy
- Product Hunt launch kit
- Community-launch plan

Product artifacts

- Product vision document
- Product requirements documents (PRDs)
- Feature specifications
- User stories
- Acceptance criteria
- User journeys
- Journey maps
- Jobs-to-be-done maps

- Use-case library
- Feature prioritization matrix
- RICE, ICE, MoSCoW, and Kano analyses
- Product roadmap
- Release plans
- Release notes
- Changelog copy
- Product positioning per feature
- User-research plan
- Interview discussion guides
- Survey questions
- Usability-test scripts
- Research synthesis
- Insight repository
- Feature-request taxonomy
- Problem statements
- Opportunity-solution trees
- Experiment briefs
- A/B-test hypotheses
- Success-metric definitions
- North-star metric proposal
- Product analytics tracking plan
- Event taxonomy
- Funnel definition
- Retention-cohort analysis framework
- Product feedback forms
- Beta-program plan
- Early-access application
- Feature-announcement emails
- In-app onboarding flows
- Empty-state copy
- Error messages
- Tooltips
- Upgrade prompts
- Paywall copy

- Cancellation survey and save-flow copy

UX, design, and prototypes

- Product-design brief
- Information architecture
- Sitemap
- Navigation model
- User flows
- Task flows
- Wireframes
- Low-fidelity prototypes
- High-fidelity interface mockups
- Interactive React or HTML prototypes
- Mobile-app screens
- Responsive web designs
- Design-system documentation
- Component inventory
- Component specifications
- Token definitions for color, spacing, type, radius, shadows, and motion
- UI copy and microcopy
- Accessibility requirements
- WCAG review checklist
- Empty, loading, success, warning, and error states
- Dashboard layouts
- Admin-console layouts
- Pricing-page mockups
- Onboarding wizard prototype
- Settings-page prototype
- Data-table prototype
- Command-palette prototype
- Interactive calculator
- Interactive configurator
- Clickable customer demo
- SVG illustrations
- Mermaid diagrams

- Flowcharts
- Architecture diagrams
- Service blueprints

Claude can create visual work such as landing pages, one-pagers, product mockups, and interface prototypes, as well as interactive pages and small tools. [2] [1]

Engineering and technical

- Technical design documents
- System architecture diagrams
- Data-flow diagrams
- Sequence diagrams
- Database schema and ERDs
- API specifications
- OpenAPI/Swagger definitions
- API reference documentation
- SDK documentation
- Authentication and authorization design
- Role-and-permission matrix
- Data model
- Migration plan
- Infrastructure-as-code templates
- Dockerfiles and Docker Compose configuration
- CI/CD pipeline configuration
- GitHub Actions workflows
- Deployment runbooks
- Environment-variable documentation
- Secrets-management plan
- Observability plan
- Logging standards
- Alerting rules
- Incident-response playbook
- Disaster-recovery plan
- Backup and restore procedures
- Performance-testing plan
- Load-test scripts

- QA strategy
- Test plans
- Unit, integration, end-to-end, and regression test cases
- Test-data generators
- Bug-report templates
- Debugging checklists
- Code-review checklist
- Repository README files
- Contribution guide
- Architecture decision records
- Technical debt register
- Dependency audit
- Security threat model
- Privacy impact assessment
- Data-retention policy
- Accessibility test plan
- Release checklist
- Developer onboarding guide
- Prompt library for internal AI features
- RAG architecture and evaluation plan, if Semester uses AI
- LLM guardrails and safety specifications
- Evaluation datasets and scoring rubrics
- Production code for web apps, APIs, scripts, CLIs, automations, and internal tools

Artifacts can include code, websites, diagrams, dashboards, and interactive React-based components—useful for turning specs into a working prototype rather than merely a document. [3] [4]

Sales and revenue

- Sales strategy
- Sales playbook
- Discovery-call script
- Qualification framework
- MEDDICC, BANT, or custom qualification checklist
- Discovery-question bank
- Demo script

- Demo environment plan
- Sales deck
- One-page product overview
- ROI calculator
- Business-case template
- Proposal template
- Statement of work
- Pricing quote template
- Procurement-response kit
- RFP/RFI response library
- Objection-handling guide
- Competitor battlecards
- Security questionnaire responses
- Technical-validation guide
- Pilot-plan template
- Proof-of-concept success criteria
- Account plan
- Mutual action plan
- Sales-email sequences
- Cold outbound sequences
- LinkedIn outreach messages
- Follow-up email templates
- Renewal playbook
- Expansion playbook
- Channel-partner playbook
- Affiliate-program terms
- CRM pipeline stages and definitions
- Sales dashboard
- Forecasting model
- Revenue-operations SOPs
- Commission-plan draft

Customer success and support

- Customer onboarding plan
- Welcome sequence
- Implementation guide
- Customer training curriculum
- Training deck
- Product tutorials
- Interactive walkthrough prototype
- Knowledge-base articles
- FAQ library
- Troubleshooting guides
- Support macros
- Support ticket taxonomy
- Escalation policy
- Service-level objectives
- Customer health-score model
- Adoption dashboard
- QBR template
- Customer-success playbook
- Renewal and churn-prevention plan
- Customer-feedback program
- NPS/CSAT surveys
- Churn survey
- User-community guidelines
- Community-launch plan
- Customer advisory board charter
- Status-page incident templates
- Customer-facing postmortem template

Operations, legal, and finance

- Operating manual
- Standard operating procedures
- Meeting templates
- Weekly business review agenda
- Leadership-team agenda

- Project plans
- RACI matrix
- Vendor-evaluation matrix
- Vendor onboarding checklist
- Procurement checklist
- Policy library
- Employee onboarding checklist
- Offboarding checklist
- Performance-review templates
- Compensation philosophy draft
- Benefits-guide draft
- Data-processing addendum draft
- Privacy-policy first draft
- Terms-of-service first draft
- Acceptable-use policy
- Cookie-policy draft
- Security overview
- SOC 2 readiness checklist
- Information-security policy drafts
- Incident-response policy
- Business continuity plan
- Budget model
- Cash-flow forecast
- P&L model
- Headcount budget
- Expense policy
- Invoice templates
- Financial dashboard
- KPI dashboard
- Investor-update template
- Board-report template

For legal, financial, security, privacy, or compliance documents, use Claude to create a structured first draft and checklist—but have qualified counsel, accountants, and security professionals review and approve final versions.

Best “Semester” starter bundle

If you want Claude to produce the highest-leverage initial set for Semester, start with these 15 artifacts:

1. A sharp company narrative and product thesis
2. An ICP, personas, and jobs-to-be-done document
3. A competitive landscape and positioning matrix
4. A pricing and packaging proposal
5. A 12-month roadmap with quarterly milestones
6. A full PRD for the first flagship workflow
7. A clickable prototype or single-page product demo
8. A technical architecture and data model
9. A marketing homepage and two use-case landing pages
10. A sales deck, demo script, and one-pager
11. A ROI calculator for prospects
12. An onboarding flow and customer implementation plan
13. A launch plan and content calendar
14. A KPI tree plus founder dashboard
15. An investor deck and monthly investor-update template

Example Claude prompt

> Build a complete “Semester Operating System” as a set of linked artifacts. Create: (1) company narrative, (2) ICP and personas, (3) competitive positioning matrix, (4) 12-month roadmap, (5) PRD for our first product, (6) clickable web prototype, (7) technical architecture diagram, (8) homepage copy, (9) sales deck outline, (10) ROI calculator, (11) onboarding plan, and (12) KPI dashboard. Use a clean, modern B2B SaaS style. Ask questions only where missing information materially changes the output; otherwise state assumptions clearly.

The practical distinction is: **documents explain Semester, prototypes demonstrate it, code implements it, dashboards measure it, and sales/marketing materials distribute it.**

⁂

Semester project dashboard: build a sortable tracker for every artifact type Claude can generate — by category, format, and use case

Computer
Interactive Claude artifact catalog: compare text docs, React apps, SVG diagrams, and slide decks in a live filterable gallery
Computer
Show me product and engineering artifacts for Semester
Show me brand and go-to-market artifacts for Semester
Show me operations and legal artifacts for Semester

Below is a **build-ready catalog and tracker spec** for a Semester project dashboard. It organizes artifacts by category, output format, and practical use case—and includes the exact grouped views you asked for.

Claude artifacts can cover documents, code, single-page HTML sites, SVGs, diagrams, and interactive React components; newer workflows also support editable document, design, and slide templates with export options such as PowerPoint, PDF, and Word. [11] [12]

Dashboard structure

Build the main dashboard as a **sortable, filterable React artifact** with these columns:

Field	Purpose	Example values
Artifact	What Claude should generate	PRD, architecture diagram, investor deck
Category	Business function	Product, Engineering, Brand, GTM, Operations, Legal
Format	Best generation/output medium	Markdown, React, SVG, Mermaid, HTML, Slides, PDF
Use case	Why Semester needs it	Define build scope, close deals, onboard users
Primary owner	Accountable role	Founder, Product, Design, Engineering, Legal
Stage	Workflow status	Backlog, Draft, Review, Approved, Shipped
Priority	Importance	P0, P1, P2
Dependencies	Needed before it can be finalized	Customer interviews, pricing decision, architecture
Claude prompt	One-click generation brief	“Create a technical PRD for…”
Deliverable	Final artifact destination	Notion, GitHub, Drive, website, PDF

Recommended filters

- **Category:** Product, Engineering, Brand, Go-to-Market, Sales, Customer Success, Operations, Legal, Finance, Leadership
- **Format:** Markdown/document, React app, HTML page, SVG, Mermaid diagram, slide deck, spreadsheet/CSV, PDF, source code

- **Audience:** Internal team, prospective customer, current customer, investor, candidate, partner, regulator
- **Lifecycle stage:** Validate, build, launch, sell, onboard, scale, govern
- **Artifact type:** Strategy, research, specification, interface, code, dashboard, collateral, policy, playbook
- **Status:** Not started, in progress, needs review, approved, obsolete
- **Priority:** P0 through P3

For the live gallery, distinguish formats by what they are best at: Markdown/docs for structured thinking, React for stateful interactive tools, SVG/Mermaid for diagrams and visual explanation, HTML for self-contained web pages, and Slides for presentation narratives. [13] [14] [11]

Product and engineering

Artifact	Category	Best format	Use case
Product vision	Product	Markdown doc	Align the company on the durable product direction
Product strategy	Product	Markdown doc	Explain target market, wedge, differentiation, and sequencing
Customer problem brief	Product	Markdown doc	Define the problem before choosing a solution
ICP and persona library	Product	Markdown doc + table	Identify users, buyers, champions, and blockers
Jobs-to-be-done map	Product	Markdown doc + diagram	Capture the user's functional and emotional goals
User interview guide	Product Research	Markdown doc	Run consistent discovery conversations
Research synthesis	Product Research	Markdown doc	Turn interviews into themes, opportunities, and quotes
User journey map	Product Design	SVG or Mermaid	Visualize the end-to-end current and future workflow
Opportunity-solution tree	Product Strategy	Mermaid diagram	Connect outcomes, opportunities, solutions, and experiments
Product roadmap	Product	React dashboard + CSV	Sort initiatives by quarter, outcome, owner, and confidence
Feature prioritization matrix	Product	React tool	Score initiatives using RICE, ICE, or weighted criteria
PRD	Product	Markdown doc	Specify the user problem, requirements, behavior, metrics, and rollout
User stories	Product	Markdown doc/table	Define buildable slices of functionality
Acceptance criteria	Product	Markdown doc/table	Establish testable requirements for engineering and QA
UX copy inventory	Product Design	Markdown doc/table	Centralize labels, empty states, errors, prompts, and tooltips

Artifact	Category	Best format	Use case
Information architecture	Product Design	Mermaid or SVG	Define pages, hierarchy, navigation, and object relationships
Sitemap	Product Design	Mermaid or SVG	Show the website or app's page structure
User flow	Product Design	Mermaid or SVG	Show screens, decisions, states, and path completion
Low-fidelity wireframes	Product Design	HTML or React	Explore layout and interaction before visual polish
Interactive product prototype	Product Design	React app	Demonstrate core workflows before production implementation
Design-system inventory	Product Design	Markdown doc + React gallery	Define components, variants, tokens, and usage guidance
Component playground	Product Design	React app	Browse buttons, forms, cards, modals, tables, and states
Accessibility checklist	Product Design	Markdown doc	Ensure keyboard, contrast, semantic, and screen-reader considerations
Product analytics plan	Product Analytics	Markdown doc/table	Define what must be measured before implementation
Event taxonomy	Product Analytics	Markdown doc + CSV	Name product events, properties, triggers, and owners
KPI tree	Product Analytics	SVG, Mermaid, or React	Link the north-star metric to leading and lagging indicators
Product dashboard	Product Analytics	React dashboard	Track activation, usage, retention, conversion, and churn
Experiment brief	Product Growth	Markdown doc	State hypothesis, audience, variants, metrics, and decision rules
A/B-test tracker	Product Growth	React dashboard	Track experiment status, results, learnings, and next actions
Release plan	Product	Markdown doc	Sequence feature readiness, communications, support, and rollout
Release notes	Product	Markdown doc	Explain changes to users and internal stakeholders
Changelog	Product	HTML page or Markdown	Publish chronological product improvements
Feature announcement	Product Marketing	HTML or Markdown	Launch a feature via email, blog, in-app, and sales enablement

Engineering artifacts

Artifact	Category	Best format	Use case
Technical design document	Engineering	Markdown doc	Explain a proposed implementation and tradeoffs

Artifact	Category	Best format	Use case
System architecture	Engineering	Mermaid or SVG	Visualize services, clients, APIs, storage, and third parties
Context diagram	Engineering	Mermaid or SVG	Show Semester's system boundaries and external integrations
Data-flow diagram	Engineering	Mermaid or SVG	Trace movement of user, application, and third-party data
Sequence diagram	Engineering	Mermaid	Show how systems interact during a request or workflow
Database schema	Engineering	Mermaid ERD + SQL	Define entities, relationships, constraints, and ownership
Data dictionary	Engineering	Markdown doc/table	Document tables, fields, types, definitions, and retention
API specification	Engineering	OpenAPI YAML + Markdown	Define endpoints, schemas, authentication, errors, and examples
API reference portal	Engineering	HTML or React	Give developers searchable, navigable API documentation
Authentication design	Engineering	Markdown doc + diagram	Define sessions, identity providers, roles, and permissions
Permissions matrix	Engineering	Markdown table	State what every role can view, create, edit, approve, or delete
Security threat model	Security	Markdown doc + diagram	Identify assets, threats, mitigations, and residual risk
Privacy data map	Security/Privacy	Mermaid + table	Identify collection, processing, storage, sharing, and deletion paths
Architecture decision record	Engineering	Markdown doc	Preserve a decision, context, alternatives, and consequences
Infrastructure diagram	Platform	Mermaid or SVG	Map cloud resources, networks, queues, databases, and services
CI/CD pipeline	Platform	Mermaid + YAML	Describe build, test, deploy, rollback, and approval stages
Infrastructure-as-code	Platform	Terraform/Pulumi code	Reproducibly provision required infrastructure
Environment configuration guide	Engineering	Markdown doc	Document development, staging, production, variables, and secrets
Observability plan	Platform	Markdown doc	Define logs, traces, metrics, ownership, retention, and tooling
SLO/SLI dashboard	Platform	React dashboard	Monitor availability, latency, error rate, and performance
Alert runbook	Platform	Markdown doc	Specify triage, escalation, diagnostics, mitigation, and resolution

Artifact	Category	Best format	Use case
Incident response plan	Security/Operations	Markdown doc	Coordinate response, communication, containment, and postmortems
Postmortem template	Engineering	Markdown doc	Record impact, timeline, root cause, actions, and prevention
QA strategy	Quality	Markdown doc	Establish quality gates and ownership across release stages
Test plan	Quality	Markdown doc/table	Specify scenarios, test data, environments, risks, and expected outcomes
Test-case library	Quality	CSV or Markdown table	Track manual, automated, regression, and edge-case coverage
Test-data generator	Quality	Python/TypeScript code	Produce safe and realistic development or QA records
Release checklist	Engineering	Markdown checklist	Confirm quality, security, migration, monitoring, and communication readiness
Developer onboarding guide	Engineering	Markdown doc	Make a new engineer productive quickly
Repository README	Engineering	Markdown doc	Explain setup, architecture, commands, testing, and contribution
Contribution guide	Engineering	Markdown doc	Standardize branches, pull requests, review, and release practices
Technical debt register	Engineering	React dashboard + CSV	Prioritize debt by impact, risk, effort, owner, and target release

Brand and go-to-market

Artifact	Category	Best format	Use case
Brand strategy	Brand	Markdown doc	Define the durable identity and market role of Semester
Positioning statement	Brand	Markdown doc	State who Semester serves, what it does, and why it wins
Messaging architecture	Brand	Markdown doc/table	Align core message, proof points, audience angles, and CTAs
Value proposition canvas	Brand	SVG or Markdown	Connect customer jobs, pains, gains, and Semester’s value
Brand manifesto	Brand	Markdown doc	Articulate the company’s worldview and conviction
Naming exploration	Brand	Markdown table	Compare candidate names for fit, clarity, defensibility, and tone
Tagline library	Brand	Markdown doc	Produce concise external value statements
Voice and tone guide	Brand	Markdown doc	Standardize language by audience, channel, and emotional context

Artifact	Category	Best format	Use case
Visual identity brief	Brand	Markdown doc	Direct logo, typography, color, imagery, and motion design
Moodboard	Brand	HTML, SVG, or design board	Establish a visual reference direction
Logo concepts	Brand	SVG	Generate editable vector logo explorations
Brand guidelines	Brand	HTML site or PDF	Publish rules for logo use, color, typography, imagery, and voice
Icon system	Brand/Product Design	SVG gallery	Create reusable visual symbols for product and marketing
Illustration system	Brand	SVG gallery	Create consistent custom visual language
Homepage	Marketing	HTML or React	Explain what Semester is and convert qualified visitors
Product overview page	Marketing	HTML or React	Present capabilities, outcomes, proof, and CTA
Use-case landing pages	Marketing	HTML or React	Target a specific persona, workflow, or vertical
Persona landing pages	Marketing	HTML or React	Speak separately to buyers, operators, leaders, or developers
Pricing page	Marketing	HTML or React	Clarify packaging, plan differences, proof, and conversion path
Comparison page	Marketing	HTML or React	Help prospects evaluate Semester against alternatives
Customer story	Marketing	Markdown, HTML, or PDF	Show a credible before-and-after result
Case-study template	Marketing	Markdown doc	Standardize problem, implementation, outcomes, and quote capture
Lead magnet	Demand Generation	PDF or HTML	Exchange useful content for qualified lead information
Industry report	Content Marketing	PDF + HTML landing page	Create authority, earned media, and lead capture
SEO strategy	Growth	Markdown doc + CSV	Target themes, keywords, intent, pages, and update cycles
Keyword map	Growth	CSV	Map target queries to pages, personas, funnel stage, and ownership
Editorial calendar	Content Marketing	React dashboard + CSV	Plan content by date, theme, author, stage, and performance
Blog-post outline	Content Marketing	Markdown doc	Establish angle, audience, evidence, structure, and CTA
Blog article	Content Marketing	Markdown/HTML	Publish educational or demand-generation content

Artifact	Category	Best format	Use case
Newsletter	Content Marketing	Markdown/HTML	Keep subscribers informed and engaged
Founder content system	Brand/Growth	Markdown doc + tracker	Create repeatable founder-led posts, themes, and repurposing flows
LinkedIn post library	Social	Markdown doc/table	Generate audience-specific social content variants
Social content calendar	Social	React dashboard + CSV	Plan, approve, schedule, and measure social posts
Search-ad campaign	Demand Generation	Markdown/CSV	Define keywords, ads, landing pages, negative terms, and metrics
Paid-social campaign brief	Demand Generation	Markdown doc	Align audience, creative, offer, landing page, and measurement
Ad copy variants	Demand Generation	Markdown doc	Generate testable headlines, primary text, and CTAs
Email nurture sequence	Lifecycle Marketing	Markdown/HTML	Move leads from interest to education, evaluation, and conversion
Product-launch plan	Product Marketing	Markdown doc + Gantt	Coordinate positioning, audience, channels, assets, timing, and owners
Launch calendar	Product Marketing	React dashboard	Track asset readiness and cross-functional dependencies
Press release	PR	Markdown doc	Announce a meaningful company or product milestone
Media kit	PR	PDF/HTML	Give journalists logos, facts, executive bios, images, and boilerplate
Analyst brief	GTM	Slides or Markdown	Explain category, market traction, product, and differentiation
Webinar deck	Demand Generation	Slides	Teach a topic and create pipeline
Webinar run-of-show	Demand Generation	Markdown doc	Control timing, speakers, transitions, Q&A, and follow-up
Partner pitch deck	Partnerships	Slides	Explain shared value, offer, economics, and activation plan
Partner playbook	Partnerships	Markdown doc	Standardize co-selling, referrals, delivery, and co-marketing
Product Hunt launch kit	Community/Growth	Markdown + assets	Prepare listing, copy, screenshots, comments, and response playbook
Community guidelines	Community	Markdown doc	Set expectations for participation, moderation, and safety

Operations and legal

Artifact	Category	Best format	Use case
Company operating system	Operations	Markdown hub	Centralize principles, cadence, metrics, decisions, and ownership
Annual operating plan	Leadership	Markdown doc + spreadsheet	Set yearly goals, bets, budgets, hiring, and milestones
Quarterly plan	Operations	Markdown doc + dashboard	Translate strategy into owned and measurable execution
OKR framework	Operations	Markdown doc/table	Define objectives, key results, owners, confidence, and cadence
KPI dashboard	Operations	React dashboard	Monitor company, product, revenue, and operating health
Weekly business review	Leadership	Slides or Markdown	Review trends, decisions, risks, and commitments
Leadership meeting agenda	Operations	Markdown doc	Standardize decision-oriented executive meetings
Decision log	Operations	Markdown/React tracker	Preserve decisions, owners, dates, rationale, and reversibility
RACI matrix	Operations	Markdown table	Make responsibility and approvals explicit across initiatives
Project plan	Program Management	React dashboard + CSV	Track scope, milestones, owners, blockers, and dependencies
Project kickoff brief	Program Management	Markdown doc	Align objective, scope, stakeholders, risks, and success metrics
Risk register	Operations	React dashboard + CSV	Track probability, impact, mitigation, owner, and review date
Standard operating procedure	Operations	Markdown doc	Document a repeatable process with steps and controls
Process flowchart	Operations	Mermaid or SVG	Make complex workflows understandable and auditable
Vendor evaluation matrix	Procurement	Spreadsheet/CSV	Compare vendors by cost, capability, risk, integration, and support
Procurement checklist	Procurement	Markdown checklist	Ensure commercial, security, legal, and technical review occurs
Vendor onboarding guide	Operations	Markdown doc	Establish access, ownership, invoice, data, and renewal handling
Employee handbook	People Operations	Markdown/PDF	Document policies, norms, benefits, conduct, and expectations
Employee onboarding plan	People Operations	Markdown checklist	Make a new hire productive with a coordinated first 30–90 days

Artifact	Category	Best format	Use case
Role scorecard	People Operations	Markdown doc	Define mission, outcomes, competencies, and performance expectations
Job description	Recruiting	Markdown doc	Attract candidates with a clear role narrative and requirements
Interview plan	Recruiting	Markdown doc	Define stages, interviewers, competencies, and decision criteria
Interview rubric	Recruiting	Markdown table	Assess candidates consistently and reduce bias
Performance review template	People Operations	Markdown doc	Guide fair, outcome-oriented feedback and development
Compensation philosophy	People Operations	Markdown doc	Explain how salary, equity, levels, and adjustments work
Benefits guide	People Operations	PDF/HTML	Help employees understand available benefits and enrollment
Expense policy	Finance	Markdown doc	Define reimbursable expenses, limits, receipts, approvals, and timing
Budget model	Finance	Spreadsheet/CSV	Plan spend by department, vendor, headcount, and period
Cash-flow forecast	Finance	Spreadsheet/CSV	Anticipate runway, inflows, outflows, and financing needs
P&L model	Finance	Spreadsheet/CSV	Track revenue, cost of goods, operating expenses, and profit
Headcount plan	Finance/People	Spreadsheet/CSV	Align hiring dates, cost, role, manager, and business impact
Financial dashboard	Finance	React dashboard	Track revenue, burn, runway, AR, spend, and forecast variance
Investor update	Leadership	Markdown/email template	Communicate metrics, wins, challenges, asks, and financial status
Board-deck outline	Leadership	Slides	Structure company progress, strategy, risks, decisions, and asks
Data inventory	Privacy	Markdown table	List personal and business data, purpose, owner, location, and retention
Data-retention schedule	Privacy	Markdown table	Define how long categories of data are stored and why
Privacy policy draft	Legal	Markdown/HTML	Explain consumer-facing data practices in clear language
Terms of service draft	Legal	Markdown/HTML	Set user agreement, service scope, limitations, and dispute framework
Acceptable-use policy	Legal	Markdown/HTML	Set prohibited actions and platform-use boundaries

Artifact	Category	Best format	Use case
Cookie policy draft	Legal	Markdown/HTML	Explain cookie categories, purpose, controls, and disclosure
Data processing addendum draft	Legal/Privacy	Markdown doc	Define processor obligations and data-protection terms
Vendor DPA review checklist	Legal/Privacy	Markdown checklist	Evaluate data-processing obligations and risk in vendors' terms
Security overview	Security/GTM	HTML/PDF	Explain technical and organizational security controls to buyers
Security questionnaire library	Security/Sales	Markdown table	Reuse vetted answers to common enterprise security questions
Information-security policy set	Security	Markdown docs	Define access, encryption, incident, device, vendor, and change controls
Incident-response policy	Security	Markdown doc	Formalize readiness, roles, escalation, communication, and reporting
Business continuity plan	Operations/Security	Markdown doc	Prepare continuity and recovery during disruption
Disaster-recovery runbook	Engineering/Security	Markdown doc	Restore systems, data, dependencies, and validated service
Compliance readiness tracker	Legal/Security	React dashboard	Track controls, evidence, owners, audit status, and gaps
Contract review checklist	Legal	Markdown checklist	Flag key commercial, liability, IP, privacy, security, and termination terms
NDA template	Legal	Document	Protect confidential information during discussions
MSA template	Legal	Document	Establish core commercial terms for customer agreements
Order form template	Legal/Sales	Document	Specify product, price, term, quantity, and service details
Statement of work	Legal/Services	Document	Define a scoped implementation or professional-services engagement

Legal, privacy, tax, accounting, employment, and security materials should be treated as structured first drafts and reviewed by the relevant professional before operational use.

Live catalog behavior

The best implementation is a **React artifact** rather than a static document. Claude supports interactive React components as well as single-page HTML sites, diagrams, SVGs, code, and documents; a single artifact page can also offer downloadable outputs such as CSV or PNG. [12] [11]

Core interactions

- Search across artifact name, description, tags, and use case.
- Filter by category, format, audience, lifecycle stage, owner, priority, and status.
- Sort by priority, category, format, estimated effort, impact, owner, or last updated.
- Toggle between **table**, **gallery**, **Kanban**, and **roadmap** views.
- Click any artifact card to open:
  - Description and success criteria
  - Suggested output format
  - Recommended owner
  - Required inputs and dependencies
  - Complete Claude generation prompt
  - Review checklist
  - Export or tracking fields
- Save filtered views, such as “P0 artifacts for launch” or “all legal documents needing counsel review.”
- Export the current filtered table as CSV.
- Provide progress counters:
  - Total artifacts
  - Drafted
  - Approved
  - Shipped
  - Blocked
  - P0 outstanding

Gallery cards

Use four visually distinct artifact families:

Family	Card examples	Best for
Text documents	PRDs, policies, playbooks, briefs, research	Decisions, process, specifications, writing
React applications	Roadmaps, dashboards, calculators, trackers, prototypes	Filterable data, user interaction, tools, product demos
SVG/Mermaid visuals	Architecture maps, workflows, ERDs, journey maps	Shared understanding of complex systems and flows
Slide decks	Investor decks, launch plans, sales presentations, board updates	Narrative communication and live presentations

Build prompt

Paste this into Claude to create the catalog as an interactive artifact:

```
Build a responsive React artifact named “Semester Artifact Catalog.”

Purpose:
Create a searchable, sortable, filterable operating dashboard for every deliverable (

Data model:
Each artifact record must include:
- id
- artifactName
- category
- subcategory
- format
- useCase
- description
- audience
- lifecycleStage
- primaryOwner
- priority: P0, P1, P2, P3
- status: Backlog, Draft, Review, Approved, Shipped, Blocked
- effort: XS, S, M, L, XL
- impact: Low, Medium, High
- dependencies
- suggestedPrompt
- reviewNotes
- tags

Preload the catalog with these categories:
1. Product
2. Engineering
3. Product Design
4. Product Analytics
5. Brand
6. Marketing
7. Go-to-Market
8. Sales
9. Customer Success
10. Operations
11. Finance
12. People
13. Legal
14. Privacy
15. Security
16. Leadership

Include at least 100 high-quality preloaded artifact records. Ensure the catalog con
- Product vision, strategy, PRDs, user stories, acceptance criteria, research plan, 
- Technical design documents, architecture diagrams, data-flow diagrams, sequence dia
- Brand strategy, positioning, messaging, voice and tone, visual identity, website co
- Operating plans, OKRs, KPI dashboards, SOPs, RACI matrices, risk registers, hiring

Views:
- Default sortable table
```

```
- Card gallery
- Kanban board grouped by status
- Roadmap grouped by lifecycle stage
- Four preset galleries: Text Documents, React Apps, SVG/Mermaid Diagrams, and Slide

Filters:
- Category
- Format
- Use case
- Audience
- Lifecycle stage
- Owner
- Priority
- Status
- Effort
- Impact
- Tags

Interactions:
- Full-text search
- Multi-select filters
- Sort by any column
- Click artifact to open a detail drawer
- Detail drawer includes description, suggested prompt, requirements, dependencies, a
- Bookmark/star artifacts
- Mark status from the table or drawer
- Display completion metrics and category progress bars
- Export the currently filtered results to CSV
- Include a reset filters button
- Use local state only; do not require a backend

Design:
- Clean, premium B2B software aesthetic
- Dense but readable founder dashboard
- Responsive desktop-first layout
- Neutral background, clear hierarchy, high-contrast table text
- Use badges for category, format, priority, and status
- Use accessible colors and keyboard-friendly controls
- Include a compact dark-mode toggle

Place the following saved view buttons at the top:
- All Artifacts
- Product + Engineering
- Brand + GTM
- Operations + Legal
- PO Launch Essentials
- React Apps
- Diagrams
- Documents
- Slide Decks
```

A React implementation is the right format because it supports client-side state, event handling, interactive filtering, component composition, and dashboard-like UI behavior; SVG and Mermaid remain ideal for architecture, flows, ERDs, and journey maps, while slide and document formats fit narrative deliverables. [14] [13]

Build a sortable Claude artifact catalog: compare HTML, React, SVG, Mermaid, Docs, and Slides by category, format, and use case

Computer
Turn Claude artifact formats into an interactive decision tree: pick your use case and get the exact format, export type, and limitations
Computer
Show me the React code for this tracker dashboard
Add sample rows for Semester project artifacts
How do I structure the data model for the filters

Below is a self-contained React tracker you can paste into a Claude React artifact. It includes:

- A sortable, searchable tracker of Semester artifacts
- Filters for category, format, use case, priority, status, and audience
- Sample rows across Product, Engineering, Brand, GTM, Operations, and Legal
- A live “format decision tree” that recommends HTML, React, SVG, Mermaid, Docs, or Slides
- A detail panel with an artifact-generation prompt
- CSV export for the filtered view

For Claude’s artifact environment, React is appropriate for a stateful dashboard with search, filters, sort controls, expandable detail panels, and in-memory editing. Claude artifacts are typically self-contained HTML pages or interactive React components; the React sandbox has dependency and persistence constraints, so this example uses only React state and no external packages.[21] [22] [23]

React tracker code

```
import React, { useMemo, useState } from "react";

const FORMAT_META = {
  HTML: {
    icon: "◫",
    color: "bg-amber-100 text-amber-800 border-amber-200",
    bestFor: "Standalone pages, lightweight tools, calculators, dashboards, and inter
    export: "Interactive .html file; PDF or screenshot for a static snapshot.",
    limits: "Best as one self-contained page. Complex persistence, private APIs, and
  },
  React: {
    icon: "⚛",
    color: "bg-sky-100 text-sky-800 border-sky-200",
    bestFor: "Stateful trackers, filtering interfaces, product prototypes, dashboards
    export: "JSX source; use Claude preview or place into a Vite/Next.js project to c
    limits: "Artifact sandboxes commonly restrict arbitrary packages, required props
```

```
  },
  SVG: {
    icon: "◇",
    color: "bg-violet-100 text-violet-800 border-violet-200",
    bestFor: "Logos, icons, illustrations, static architecture diagrams, and polishe
    export: ".svg, PNG, or PDF.",
    limits: "Not intended for rich application state, large interactive datasets, or
  },
  Mermaid: {
    icon: "↳",
    color: "bg-emerald-100 text-emerald-800 border-emerald-200",
    bestFor: "Flowcharts, sequence diagrams, ERDs, Gantt charts, roadmaps, and syste
    export: "Mermaid source, SVG, PNG, or PDF after rendering.",
    limits: "Layout styling is constrained; use SVG when precise visual art directio
  },
  Docs: {
    icon: "▤",
    color: "bg-slate-100 text-slate-800 border-slate-200",
    bestFor: "PRDs, briefs, policies, research synthesis, playbooks, specifications,
    export: "Markdown, Word, PDF, or a shared document.",
    limits: "Not suited to deep interaction, live filtering, or rich visual simulati
  },
  Slides: {
    icon: "▣",
    color: "bg-rose-100 text-rose-800 border-rose-200",
    bestFor: "Investor narratives, board reporting, sales presentations, launch brie
    export: "PowerPoint, PDF, or presentation-ready HTML.",
    limits: "Slides communicate a linear narrative; they are not the best system of
  },
};

const INITIAL_ARTIFACTS = [
  {
    id: 1,
    artifact: "Product Vision and Strategy",
    category: "Product",
    format: "Docs",
    useCase: "Align the team on target customer, differentiated value, strategic bet
    audience: "Internal",
    lifecycle: "Validate",
    owner: "Founder / Product",
    priority: "P0",
    status: "Draft",
    effort: "M",
    impact: "High",
    tags: ["strategy", "alignment", "roadmap"],
    prompt:
      "Create a Semester product vision and strategy document. Cover ICP, customer p
  },
  {
    id: 2,
    artifact: "Flagship Workflow PRD",
    category: "Product",
    format: "Docs",
    useCase: "Turn the primary user problem into an implementation-ready specificati
    audience: "Internal",
```

```
    lifecycle: "Build",
    owner: "Product",
    priority: "P0",
    status: "Backlog",
    effort: "L",
    impact: "High",
    tags: ["prd", "requirements", "feature"],
    prompt:
      "Write an implementation-ready PRD for Semester's flagship workflow. Include pr
  },
  {
    id: 3,
    artifact: "Semester Roadmap Dashboard",
    category: "Product",
    format: "React",
    useCase: "Prioritize and communicate initiatives by quarter, owner, outcome, con
    audience: "Internal",
    lifecycle: "Build",
    owner: "Founder / Product",
    priority: "P0",
    status: "In Review",
    effort: "L",
    impact: "High",
    tags: ["roadmap", "dashboard", "prioritization"],
    prompt:
      "Build a React roadmap dashboard for Semester. Include sortable initiatives, fi
  },
  {
    id: 4,
    artifact: "User Journey Map",
    category: "Product Design",
    format: "Mermaid",
    useCase: "Map a user's end-to-end workflow, friction points, decisions, emotions
    audience: "Internal",
    lifecycle: "Validate",
    owner: "Product Design",
    priority: "P1",
    status: "Backlog",
    effort: "M",
    impact: "High",
    tags: ["research", "journey", "ux"],
    prompt:
      "Create a Mermaid user journey map for Semester's primary user, from initial pr
  },
  {
    id: 5,
    artifact: "Interactive Product Prototype",
    category: "Product Design",
    format: "React",
    useCase: "Demonstrate the core Semester user journey before production engineerin
    audience: "Internal",
    lifecycle: "Build",
    owner: "Product Design",
    priority: "P0",
    status: "Backlog",
    effort: "XL",
```

```
    impact: "High",
    tags: ["prototype", "ux", "demo"],
    prompt:
      "Build a clickable React prototype for Semester's core workflow. Include onboar
  },
  {
    id: 6,
    artifact: "System Architecture",
    category: "Engineering",
    format: "Mermaid",
    useCase: "Align engineering on components, services, integrations, data stores, a
    audience: "Internal",
    lifecycle: "Build",
    owner: "Engineering",
    priority: "P0",
    status: "Draft",
    effort: "M",
    impact: "High",
    tags: ["architecture", "systems", "platform"],
    prompt:
      "Create a Mermaid system architecture diagram for Semester. Include web client
  },
  {
    id: 7,
    artifact: "Database Schema and ERD",
    category: "Engineering",
    format: "Mermaid",
    useCase: "Define core entities, relationships, tenancy boundaries, and lifecycle
    audience: "Internal",
    lifecycle: "Build",
    owner: "Engineering",
    priority: "P0",
    status: "Backlog",
    effort: "M",
    impact: "High",
    tags: ["database", "erd", "data-model"],
    prompt:
      "Create a Mermaid ERD for Semester. Include users, organizations, memberships,
  },
  {
    id: 8,
    artifact: "API Specification",
    category: "Engineering",
    format: "Docs",
    useCase: "Define endpoint contracts, request and response schemas, authorization
    audience: "Internal",
    lifecycle: "Build",
    owner: "Engineering",
    priority: "P1",
    status: "Backlog",
    effort: "L",
    impact: "High",
    tags: ["api", "openapi", "developer-experience"],
    prompt:
      "Draft an OpenAPI-style API specification for Semester's core workflow. Include
  },
```

```
  {
    id: 9,
    artifact: "Launch Readiness Checklist",
    category: "Engineering",
    format: "Docs",
    useCase: "Prevent missed quality, performance, security, support, and rollback re
    audience: "Internal",
    lifecycle: "Launch",
    owner: "Engineering",
    priority: "P0",
    status: "Backlog",
    effort: "S",
    impact: "High",
    tags: ["release", "quality", "launch"],
    prompt:
      "Create a launch readiness checklist for Semester. Cover testing, accessibility
  },
  {
    id: 10,
    artifact: "Homepage and Product Narrative",
    category: "Brand",
    format: "HTML",
    useCase: "Explain what Semester does, who it is for, why it matters, and what act
    audience: "Prospects",
    lifecycle: "Launch",
    owner: "Brand / Marketing",
    priority: "P0",
    status: "Draft",
    effort: "L",
    impact: "High",
    tags: ["website", "positioning", "conversion"],
    prompt:
      "Create a polished, responsive HTML homepage for Semester. Include a clear hero
  },
  {
    id: 11,
    artifact: "Messaging Architecture",
    category: "Brand",
    format: "Docs",
    useCase: "Keep positioning, claims, proof points, objection handling, and calls t
    audience: "Internal",
    lifecycle: "Validate",
    owner: "Brand / Marketing",
    priority: "P0",
    status: "Draft",
    effort: "M",
    impact: "High",
    tags: ["positioning", "messaging", "brand"],
    prompt:
      "Create a messaging architecture for Semester. Include category, positioning st
  },
  {
    id: 12,
    artifact: "Brand Mark Exploration",
    category: "Brand",
    format: "SVG",
```

```
    useCase: "Explore editable icon and logo directions that can be reviewed in produ
    audience: "Internal",
    lifecycle: "Launch",
    owner: "Brand / Design",
    priority: "P2",
    status: "Backlog",
    effort: "M",
    impact: "Medium",
    tags: ["logo", "identity", "visual"],
    prompt:
      "Create six distinct SVG logo-mark concepts for Semester. Keep them simple, geo
  },
  {
    id: 13,
    artifact: "Launch Plan",
    category: "Go-to-Market",
    format: "Slides",
    useCase: "Coordinate product, marketing, sales, customer success, and leadership
    audience: "Internal",
    lifecycle: "Launch",
    owner: "Product Marketing",
    priority: "PO",
    status: "Backlog",
    effort: "L",
    impact: "High",
    tags: ["launch", "gtm", "coordination"],
    prompt:
      "Create a Semester product launch deck. Cover target audience, positioning, goa
  },
  {
    id: 14,
    artifact: "ROI Calculator",
    category: "Sales",
    format: "React",
    useCase: "Help prospective customers estimate the operational and financial impac
    audience: "Prospects",
    lifecycle: "Sell",
    owner: "Sales / Marketing",
    priority: "P1",
    status: "Backlog",
    effort: "M",
    impact: "High",
    tags: ["sales", "calculator", "roi"],
    prompt:
      "Build a React ROI calculator for Semester. Let prospects enter team size, curr
  },
  {
    id: 15,
    artifact: "Operating Plan and OKRs",
    category: "Operations",
    format: "Docs",
    useCase: "Translate strategy into measurable goals, owners, milestones, and weekl
    audience: "Internal",
    lifecycle: "Scale",
    owner: "Founder / Operations",
    priority: "PO",
```

```
    status: "Draft",
    effort: "L",
    impact: "High",
    tags: ["okr", "planning", "operations"],
    prompt:
      "Create a Semester annual operating plan and quarterly OKR framework. Include s
  },
  {
    id: 16,
    artifact: "Company KPI Dashboard",
    category: "Operations",
    format: "React",
    useCase: "Give leadership a live view of product, revenue, growth, customer, and
    audience: "Internal",
    lifecycle: "Scale",
    owner: "Founder / Operations",
    priority: "P1",
    status: "Backlog",
    effort: "L",
    impact: "High",
    tags: ["kpi", "metrics", "dashboard"],
    prompt:
      "Build a React company KPI dashboard for Semester. Include MRR, pipeline, conve
  },
  {
    id: 17,
    artifact: "Privacy Data Map",
    category: "Legal",
    format: "Mermaid",
    useCase: "Document what data Semester collects, where it flows, who processes it
    audience: "Internal",
    lifecycle: "Govern",
    owner: "Legal / Security",
    priority: "PO",
    status: "Backlog",
    effort: "M",
    impact: "High",
    tags: ["privacy", "data", "compliance"],
    prompt:
      "Create a Mermaid privacy data-flow diagram for Semester. Show collection poin
  },
  {
    id: 18,
    artifact: "Terms of Service First Draft",
    category: "Legal",
    format: "Docs",
    useCase: "Create a structured initial customer agreement for legal review.",
    audience: "Customers",
    lifecycle: "Govern",
    owner: "Legal",
    priority: "P1",
    status: "Backlog",
    effort: "L",
    impact: "High",
    tags: ["terms", "contracts", "legal"],
    prompt:
```

```
      "Draft a plain-English first version of Terms of Service for Semester, with sec
  },
  {
    id: 19,
    artifact: "Security Overview",
    category: "Security",
    format: "HTML",
    useCase: "Give prospects a clear, buyer-friendly explanation of Semester security
    audience: "Prospects",
    lifecycle: "Sell",
    owner: "Security / Sales",
    priority: "P1",
    status: "Backlog",
    effort: "M",
    impact: "High",
    tags: ["security", "trust", "enterprise"],
    prompt:
      "Create a clean HTML security overview page for Semester. Cover access control
  },
];

const OPTIONS = {
  categories: [
    "Product",
    "Product Design",
    "Engineering",
    "Brand",
    "Go-to-Market",
    "Sales",
    "Operations",
    "Legal",
    "Security",
  ],
  formats: ["HTML", "React", "SVG", "Mermaid", "Docs", "Slides"],
  useCases: ["Strategy", "Validate", "Build", "Launch", "Sell", "Scale", "Govern"],
  audiences: ["Internal", "Prospects", "Customers", "Investors", "Partners"],
  priorities: ["P0", "P1", "P2", "P3"],
  statuses: ["Backlog", "Draft", "In Review", "Approved", "Shipped", "Blocked"],
};

const DEFAULT_FILTERS = {
  category: "All",
  format: "All",
  lifecycle: "All",
  audience: "All",
  priority: "All",
  status: "All",
};

function Badge({ children, className = "" }) {
  return (
    <span className={`inline-flex items-center rounded-full border px-2 py-0.5 text-x
      {children}
    </span>
  );
}
```

```
function SelectFilter({ label, value, onChange, options }) {
  return (
    <label className="flex min-w-[145px] flex-col gap-1 text-xs font-semibold text-sl
      {label}
      <select
        value={value}
        onChange={(event) => onChange(event.target.value)}
        className="rounded-lg border border-slate-200 bg-white px-3 py-2 text-sm font
      >
        <option value="All">All</option>
        {options.map((option) => (
          <option key={option} value={option}>
            {option}
          </option>
        ))}
      </select>
    </label>
  );
}

function FormatDecisionTree() {
  const [choice, setChoice] = useState("interactive");
  const [recommendation, setRecommendation] = useState(null);

  const chooseFormat = () => {
    const decisionMap = {
      interactive: "React",
      standalone: "HTML",
      diagram: "Mermaid",
      visual: "SVG",
      narrative: "Docs",
      presentation: "Slides",
    };
    setRecommendation(decisionMap[choice]);
  };

  const choices = [
    ["interactive", "I need a tracker, dashboard, calculator, prototype, or filterabl
    ["standalone", "I need a single self-contained web page or lightweight interactiv
    ["diagram", "I need a workflow, system map, ERD, sequence, or timeline diagram."]
    ["visual", "I need a logo, icon, illustration, or precisely art-directed static d
    ["narrative", "I need a brief, policy, PRD, plan, report, or structured written r
    ["presentation", "I need a persuasive, linear story for a meeting, pitch, or trai
  ];

  const meta = recommendation ? FORMAT_META[recommendation] : null;

  return (
    <section className="rounded-2xl border border-indigo-100 bg-indigo-50 p-5">
      <div className="mb-4">
        <h2 className="text-lg font-bold text-slate-900">Claude format decision tree</
        <p className="mt-1 text-sm text-slate-600">
          Pick the primary job of the artifact. The recommendation favors the best na
        </p>
      </div>
```

```
      <div className="grid gap-2 md:grid-cols-2">
        {choices.map(([value, label]) => (
          <button
            key={value}
            onClick={() => setChoice(value)}
            className={`rounded-xl border p-3 text-left text-sm transition ${
              choice === value
                ? "border-indigo-500 bg-white shadow-sm"
                : "border-indigo-100 bg-indigo-50 hover:border-indigo-300"
            }`}
          >
            <span className="mr-2 inline-block h-3 w-3 rounded-full border border-ind
              {choice === value && <span className="block h-2 w-2 rounded-full bg-ind
            </span>
            {label}
          </button>
        ))}
      </div>

      <button
        onClick={chooseFormat}
        className="mt-4 rounded-lg bg-indigo-600 px-4 py-2 text-sm font-semibold tex
      >
        Recommend a format
      </button>

      {meta && (
        <div className="mt-4 rounded-xl border border-white bg-white p-4">
          <div className="flex flex-wrap items-center gap-2">
            <span className="text-2xl">{meta.icon}</span>
            <h3 className="text-base font-bold text-slate-900">{recommendation}</h3>
            <Badge className={meta.color}>Recommended</Badge>
          </div>
          <div className="mt-3 grid gap-3 text-sm md:grid-cols-3">
            <div>
              <p className="font-semibold text-slate-700">Best for</p>
              <p className="mt-1 text-slate-600">{meta.bestFor}</p>
            </div>
            <div>
              <p className="font-semibold text-slate-700">Export</p>
              <p className="mt-1 text-slate-600">{meta.export}</p>
            </div>
            <div>
              <p className="font-semibold text-slate-700">Limitations</p>
              <p className="mt-1 text-slate-600">{meta.limits}</p>
            </div>
          </div>
        </div>
      )}
    </section>
  );
}

export default function SemesterArtifactCatalog() {
  const [artifacts, setArtifacts] = useState(INITIAL_ARTIFACTS);
```

```
  const [filters, setFilters] = useState(DEFAULT_FILTERS);
  const [search, setSearch] = useState("");
  const [sort, setSort] = useState({ key: "priority", direction: "asc" });
  const [selectedArtifact, setSelectedArtifact] = useState(null);
  const [view, setView] = useState("table");

  const filteredArtifacts = useMemo(() => {
    const query = search.trim().toLowerCase();

    const priorityOrder = { P0: 0, P1: 1, P2: 2, P3: 3 };
    const statusOrder = { Backlog: 0, Draft: 1, "In Review": 2, Approved: 3, Shipped

    return artifacts
      .filter((item) => {
        const textMatch =
          !query ||
          [
            item.artifact,
            item.category,
            item.format,
            item.useCase,
            item.audience,
            item.owner,
            item.lifecycle,
            ...item.tags,
          ]
            .join(" ")
            .toLowerCase()
            .includes(query);

        return (
          textMatch &&
          (filters.category === "All" || item.category === filters.category) &&
          (filters.format === "All" || item.format === filters.format) &&
          (filters.lifecycle === "All" || item.lifecycle === filters.lifecycle) &&
          (filters.audience === "All" || item.audience === filters.audience) &&
          (filters.priority === "All" || item.priority === filters.priority) &&
          (filters.status === "All" || item.status === filters.status)
        );
      })
      .sort((a, b) => {
        const aValue = a[sort.key];
        const bValue = b[sort.key];

        if (sort.key === "priority") {
          return sort.direction === "asc"
            ? priorityOrder[aValue] - priorityOrder[bValue]
            : priorityOrder[bValue] - priorityOrder[aValue];
        }

        if (sort.key === "status") {
          return sort.direction === "asc"
            ? statusOrder[aValue] - statusOrder[bValue]
            : statusOrder[bValue] - statusOrder[aValue];
        }
```

```
        return sort.direction === "asc"
          ? String(aValue).localeCompare(String(bValue))
          : String(bValue).localeCompare(String(aValue));
      });
  }, [artifacts, filters, search, sort]);

  const metrics = useMemo(() => {
    const total = artifacts.length;
    const shipped = artifacts.filter((item) => item.status === "Shipped").length;
    const pOOpen = artifacts.filter((item) => item.priority === "PO" && item.status
    const blocked = artifacts.filter((item) => item.status === "Blocked").length;

    return { total, shipped, pOOpen, blocked };
  }, [artifacts]);

  const updateFilter = (key, value) => {
    setFilters((current) => ({ ...current, [key]: value }));
  };

  const updateSort = (key) => {
    setSort((current) => ({
      key,
      direction: current.key === key && current.direction === "asc" ? "desc" : "asc"
    }));
  };

  const updateStatus = (id, status) => {
    setArtifacts((current) =>
      current.map((item) => (item.id === id ? { ...item, status } : item))
    );
    setSelectedArtifact((current) => (current ? { ...current, status } : current));
  };

  const applySavedView = (name) => {
    setSearch("");
    if (name === "All") setFilters(DEFAULT_FILTERS);
    if (name === "Product + Engineering") {
      setFilters({ ...DEFAULT_FILTERS, category: "Product" });
      setSearch("product engineering");
    }
    if (name === "React Apps") setFilters({ ...DEFAULT_FILTERS, format: "React" });
    if (name === "Diagrams") setFilters({ ...DEFAULT_FILTERS, format: "Mermaid" });
    if (name === "Documents") setFilters({ ...DEFAULT_FILTERS, format: "Docs" });
    if (name === "Slides") setFilters({ ...DEFAULT_FILTERS, format: "Slides" });
    if (name === "PO Launch") setFilters({ ...DEFAULT_FILTERS, priority: "PO" });
  };

  const exportCsv = () => {
    const columns = [
      "artifact",
      "category",
      "format",
      "useCase",
      "audience",
      "lifecycle",
      "owner",
```

```
      "priority",
      "status",
      "effort",
      "impact",
      "tags",
    ];

    const escape = (value) => `"${String(value ?? "").replace(/"/g, '""')}"`;
    const csv = [
      columns.join(","),
      ...filteredArtifacts.map((row) =>
        columns.map((column) => escape(Array.isArray(row[column]) ? row[column].join
      ),
    ].join("\n");

    const blob = new Blob([csv], { type: "text/csv;charset=utf-8;" });
    const url = URL.createObjectURL(blob);
    const link = document.createElement("a");
    link.href = url;
    link.download = "semester-artifact-catalog.csv";
    link.click();
    URL.revokeObjectURL(url);
  };

  const headerCell = (label, key) => (
    <button
      onClick={() => updateSort(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase track
    >
      {label}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
    </button>
  );

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <div className="flex flex-col justify-between gap-5 lg:flex-row lg:items-en
            <div>
              <p className="text-xs font-bold uppercase tracking-[0.18em] text-indigo
              <h1 className="mt-2 text-3xl font-bold tracking-tight">Claude Artifact
              <p className="mt-2 max-w-2xl text-sm text-slate-300">
                A sortable production tracker for what Claude can generate across pro
              </p>
            </div>
            <button
              onClick={exportCsv}
              className="rounded-lg bg-white px-4 py-2 text-sm font-bold text-slate-9
            >
              Export filtered CSV
            </button>
          </div>

          <div className="mt-6 grid grid-cols-2 gap-3 md:grid-cols-4">
            {[
```

```
            ["Catalog items", metrics.total],
            ["Shipped", metrics.shipped],
            ["Open PO work", metrics.pOOpen],
            ["Blocked", metrics.blocked],
          ].map(([label, value]) => (
            <div key={label} className="rounded-xl border border-white/10 bg-white/
              <p className="text-2xl font-bold">{value}</p>
              <p className="mt-1 text-xs text-slate-300">{label}</p>
            </div>
          ))}
        </div>
      </header>

      <FormatDecisionTree />

      <section className="rounded-2xl border border-slate-200 bg-white p-4 shadow-s
        <div className="flex flex-wrap gap-2">
          {["All", "Product + Engineering", "React Apps", "Diagrams", "Documents",
            <button
              key={name}
              onClick={() => applySavedView(name)}
              className="rounded-full border border-slate-200 bg-slate-50 px-3 py-1
            >
              {name}
            </button>
          ))}
        </div>

        <div className="mt-4 flex flex-col gap-3">
          <input
            value={search}
            onChange={(event) => setSearch(event.target.value)}
            placeholder="Search artifacts, tags, formats, owners, or use cases..."
            className="w-full rounded-xl border border-slate-200 px-4 py-3 text-sm
          />

          <div className="flex flex-wrap gap-3">
            <SelectFilter
              label="Category"
              value={filters.category}
              onChange={(value) => updateFilter("category", value)}
              options={OPTIONS.categories}
            />
            <SelectFilter
              label="Format"
              value={filters.format}
              onChange={(value) => updateFilter("format", value)}
              options={OPTIONS.formats}
            />
            <SelectFilter
              label="Lifecycle"
              value={filters.lifecycle}
              onChange={(value) => updateFilter("lifecycle", value)}
              options={OPTIONS.useCases}
            />
            <SelectFilter
```

```
              label="Audience"
              value={filters.audience}
              onChange={(value) => updateFilter("audience", value)}
              options={OPTIONS.audiences}
            />
            <SelectFilter
              label="Priority"
              value={filters.priority}
              onChange={(value) => updateFilter("priority", value)}
              options={OPTIONS.priorities}
            />
            <SelectFilter
              label="Status"
              value={filters.status}
              onChange={(value) => updateFilter("status", value)}
              options={OPTIONS.statuses}
            />
            <button
              onClick={() => {
                setFilters(DEFAULT_FILTERS);
                setSearch("");
              }}
              className="self-end rounded-lg px-3 py-2 text-sm font-semibold text-s
            >
              Reset
            </button>
          </div>
        </div>

        <div className="mt-5 flex items-center justify-between border-t border-sla
          <p className="text-sm text-slate-600">
            Showing <span className="font-bold text-slate-900">{filteredArtifacts.l
          </p>
          <div className="flex rounded-lg border border-slate-200 p-1">
            {["table", "gallery"].map((option) => (
              <button
                key={option}
                onClick={() => setView(option)}
                className={`rounded-md px-3 py-1.5 text-xs font-bold capitalize ${
                  view === option ? "bg-slate-900 text-white" : "text-slate-500 hov
                }`}
              >
                {option}
              </button>
            ))}
          </div>
        </div>
      </section>

      {view === "table" ? (
        <section className="overflow-hidden rounded-2xl border border-slate-200 bg-
          <div className="overflow-x-auto">
            <table className="w-full min-w-[1100px] border-collapse">
              <thead className="border-b border-slate-200 bg-slate-50">
                <tr>
                  <th className="px-4 py-3">{headerCell("Artifact", "artifact")}</t
```

```
                <th className="px-4 py-3">{headerCell("Category", "category")}</
                <th className="px-4 py-3">{headerCell("Format", "format")}</th>
                <th className="px-4 py-3">{headerCell("Use case", "lifecycle")}<
                <th className="px-4 py-3">{headerCell("Priority", "priority")}</
                <th className="px-4 py-3">{headerCell("Status", "status")}</th>
                <th className="px-4 py-3">{headerCell("Owner", "owner")}</th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase tr
              </tr>
            </thead>
            <tbody>
              {filteredArtifacts.map((item) => (
                <tr key={item.id} className="border-b border-slate-100 transitio
                  <td className="px-4 py-3">
                    <button
                      onClick={() => setSelectedArtifact(item)}
                      className="text-left text-sm font-bold text-slate-900 hove
                    >
                      {item.artifact}
                    </button>
                    <div className="mt-1 flex flex-wrap gap-1">
                      {item.tags.slice(0, 3).map((tag) => (
                        <span key={tag} className="text-xs text-slate-400">#{tag
                      ))}
                    </div>
                  </td>
                  <td className="px-4 py-3 text-sm text-slate-600">{item.category
                  <td className="px-4 py-3">
                    <Badge className={FORMAT_META[item.format].color}>
                      {FORMAT_META[item.format].icon} {item.format}
                    </Badge>
                  </td>
                  <td className="px-4 py-3 text-sm text-slate-600">{item.lifecyc
                  <td className="px-4 py-3">
                    <Badge className={
                      item.priority === "P0"
                        ? "border-red-200 bg-red-50 text-red-700"
                        : item.priority === "P1"
                        ? "border-amber-200 bg-amber-50 text-amber-700"
                        : "border-slate-200 bg-slate-50 text-slate-600"
                    }>
                      {item.priority}
                    </Badge>
                  </td>
                  <td className="px-4 py-3">
                    <select
                      value={item.status}
                      onChange={(event) => updateStatus(item.id, event.target.va
                      className="rounded-lg border border-slate-200 bg-white px-2
                    >
                      {OPTIONS.statuses.map((status) => (
                        <option key={status}>{status}</option>
                      ))}
                    </select>
                  </td>
                  <td className="px-4 py-3 text-sm text-slate-600">{item.owner}</
                  <td className="px-4 py-3">
```

```
                      <button
                        onClick={() => setSelectedArtifact(item)}
                        className="rounded-lg border border-slate-200 px-2 py-1 tex
                      >
                        Open
                      </button>
                    </td>
                  </tr>
                ))}
              </tbody>
            </table>
          </div>
        </section>
      ) : (
        <section className="grid gap-4 md:grid-cols-2 xl:grid-cols-3">
          {filteredArtifacts.map((item) => (
            <button
              key={item.id}
              onClick={() => setSelectedArtifact(item)}
              className="rounded-2xl border border-slate-200 bg-white p-5 text-lef
            >
              <div className="flex items-start justify-between gap-4">
                <Badge className={FORMAT_META[item.format].color}>
                  {FORMAT_META[item.format].icon} {item.format}
                </Badge>
                <Badge className={item.priority === "P0" ? "border-red-200 bg-red-5
                  {item.priority}
                </Badge>
              </div>
              <h3 className="mt-4 text-base font-bold text-slate-900">{item.artifac
              <p className="mt-2 text-sm leading-6 text-slate-600">{item.useCase}</
              <div className="mt-4 flex items-center justify-between border-t borde
                <span>{item.category}</span>
                <span>{item.status}</span>
              </div>
            </button>
          ))}
        </section>
      )}

      {selectedArtifact && (
        <div className="fixed inset-0 z-50 flex justify-end bg-slate-950/30">
          <button
            aria-label="Close details"
            className="absolute inset-0 cursor-default"
            onClick={() => setSelectedArtifact(null)}
          />
          <aside className="relative h-full w-full max-w-xl overflow-y-auto bg-whi
            <div className="flex items-start justify-between gap-4">
              <div>
                <div className="flex flex-wrap gap-2">
                  <Badge className={FORMAT_META[selectedArtifact.format].color}>
                    {FORMAT_META[selectedArtifact.format].icon} {selectedArtifact.f
                  </Badge>
                  <Badge className="border-slate-200 bg-slate-50 text-slate-600">{s
                  <Badge className="border-slate-200 bg-slate-50 text-slate-600">{s
```

```
                  </div>
                  <h2 className="mt-3 text-2xl font-bold text-slate-900">{selectedAr
                </div>
                <button
                  onClick={() => setSelectedArtifact(null)}
                  className="rounded-lg border border-slate-200 px-3 py-1.5 text-sm
                >
                  Close
                </button>
              </div>

              <div className="mt-6 space-y-6">
                <div>
                  <h3 className="text-sm font-bold text-slate-900">Use case</h3>
                  <p className="mt-2 text-sm leading-6 text-slate-600">{selectedArti
                </div>

                <div className="grid gap-3 sm:grid-cols-2">
                  {[
                    ["Audience", selectedArtifact.audience],
                    ["Lifecycle", selectedArtifact.lifecycle],
                    ["Owner", selectedArtifact.owner],
                    ["Effort", selectedArtifact.effort],
                    ["Impact", selectedArtifact.impact],
                    ["Current status", selectedArtifact.status],
                  ].map(([label, value]) => (
                    <div key={label} className="rounded-xl bg-slate-50 p-3">
                      <p className="text-xs font-bold uppercase tracking-wide text-sl
                      <p className="mt-1 text-sm font-semibold text-slate-800">{value
                    </div>
                  ))}
                </div>

                <div className="rounded-xl border border-indigo-100 bg-indigo-50 p-4"
                  <h3 className="text-sm font-bold text-indigo-950">Recommended forma
                  <p className="mt-2 text-sm text-indigo-900">{FORMAT_META[selectedAr
                  <p className="mt-2 text-xs text-indigo-700"><strong>Export:</strong
                  <p className="mt-1 text-xs text-indigo-700"><strong>Constraint:</st
                </div>

                <div>
                  <h3 className="text-sm font-bold text-slate-900">Suggested Claude p
                  <pre className="mt-2 whitespace-pre-wrap rounded-xl bg-slate-950 p-
                    {selectedArtifact.prompt}
                  </pre>
                </div>

                <div>
                  <h3 className="text-sm font-bold text-slate-900">Tags</h3>
                  <div className="mt-2 flex flex-wrap gap-2">
                    {selectedArtifact.tags.map((tag) => (
                      <Badge key={tag} className="border-slate-200 bg-slate-50 text-s
                    ))}
                  </div>
                </div>
              </div>
```

```
            </aside>
          </div>
        )}
      </div>
    </main>
  );
}
```

Data model for filters

Use a **single canonical artifact record**. Avoid a separate object for each view—table, gallery, Kanban, roadmap, filtered lists, exports, and dashboard metrics should all be derived from the same array.

```
type ArtifactFormat =
  | "HTML"
  | "React"
  | "SVG"
  | "Mermaid"
  | "Docs"
  | "Slides";

type ArtifactStatus =
  | "Backlog"
  | "Draft"
  | "In Review"
  | "Approved"
  | "Shipped"
  | "Blocked";

type ArtifactPriority = "P0" | "P1" | "P2" | "P3";

type ArtifactRecord = {
  id: string | number;
  artifact: string;
  category: string;
  subcategory?: string;
  format: ArtifactFormat;
  useCase: string;
  description?: string;

  audience: "Internal" | "Prospects" | "Customers" | "Investors" | "Partners";
  lifecycle: "Strategy" | "Validate" | "Build" | "Launch" | "Sell" | "Scale" | "Gover

  owner: string;
  priority: ArtifactPriority;
  status: ArtifactStatus;

  effort: "XS" | "S" | "M" | "L" | "XL";
  impact: "Low" | "Medium" | "High";

  tags: string[];
  dependencies?: string[];
  suggestedPrompt: string;
```

```
  createdAt?: string;
  updatedAt?: string;
  dueDate?: string;
  sourceUrl?: string;
};
```

Why this model works

- **Category** powers high-level organizational filters: Product, Engineering, Brand, Legal, and so on.
- **Format** drives the native Claude-artifact recommendation: HTML, React, SVG, Mermaid, Docs, or Slides.
- **Lifecycle** answers the strategic question: "What stage is this for?" A launch plan and a privacy map may both be documents, but one supports launch while the other supports governance.
- **Audience** separates internal operating work from buyer-facing, customer-facing, investor-facing, and partner-facing deliverables.
- **Status**, **priority**, **effort**, and **impact** make the catalog function like a production backlog rather than a passive reference list.
- **Tags** provide flexible filtering when the primary taxonomy is not enough—for example `#SOC2`, `#enterprise`, `#onboarding`, `#PLG`, or `#fundraising`.
- **Suggested prompt** turns every record into a directly usable Claude production brief.

Use a **filter state object** distinct from artifact data:

```
const [filters, setFilters] = useState({
  category: "All",
  format: "All",
  lifecycle: "All",
  audience: "All",
  priority: "All",
  status: "All",
  owner: "All",
  effort: "All",
  impact: "All",
  tags: [],
});
```

Then calculate visible items rather than mutate the source data:

```
const visibleArtifacts = artifacts.filter((artifact) => {
  const matchesCategory =
    filters.category === "All" ||
    artifact.category === filters.category;

  const matchesFormat =
    filters.format === "All" ||
```

```
    artifact.format === filters.format;

  const matchesLifecycle =
    filters.lifecycle === "All" ||
    artifact.lifecycle === filters.lifecycle;

  const matchesTags =
    filters.tags.length === 0 ||
    filters.tags.every((tag) => artifact.tags.includes(tag));

  return (
    matchesCategory &&
    matchesFormat &&
    matchesLifecycle &&
    matchesTags
  );
});
```

This preserves the original catalog, allows “Reset filters” to be trivial, and ensures CSV exports, counts, dashboards, and gallery views stay consistent.

Format decision guide

Format	Choose it when	Default export	Key limitation
HTML	You need a standalone page, simple dashboard, calculator, landing page, or small interactive tool	`.html`, PDF, screenshot	Usually best as one self-contained page; sophisticated app infrastructure belongs outside the artifact sandbox
React	You need state, tables, filters, modals, multiple views, a prototype, or dashboard behavior	JSX source; deploy via a real React build setup	Sandbox environments may restrict package installation, durable storage, private APIs, and backend integration
SVG	You need an editable logo, icon, illustration, or polished static visual	`.svg`, PNG, PDF	Weak fit for data-heavy or stateful interaction
Mermaid	You need fast, maintainable architecture, sequence, flow, ERD, Gantt, or roadmap diagrams	Mermaid source, SVG, PNG, PDF	Styling and fine-grained positioning are more limited than hand-authored SVG
Docs	You need a PRD, policy, strategy, brief, report, research synthesis, or operational playbook	Markdown, Word, PDF	No native rich interaction or application behavior
Slides	You need a narrative for a pitch, board meeting, sales demo, launch, or training	PowerPoint, PDF	Works best for linear communication, not as a searchable system of record

Claude Code documentation describes artifacts as single HTML pages capable of generating downloadable files such as CSVs and PNGs; it also notes that artifact content can be edited and exported into formats including PowerPoint, PDF, and Word. React artifacts are especially suited to stateful UI but, when copied outside Claude, commonly need to be placed into a standard project and built for deployment. Mermaid is the practical default for structured system and process diagrams; SVG is better when visual polish and precise control are the priority. [22] [23] [21]

Important implementation notes

- Keep tracker records in `INITIAL_ARTIFACTS` at first; later move them to Supabase, a JSON endpoint, or a CSV import workflow.
- Keep **display data** separate from **filter state**. The tracker should derive filtered rows with `useMemo`, never permanently delete rows after filtering.
- Use a normalized set of enumerated values for category, format, lifecycle, priority, and status. This prevents duplicate values such as `GTM`, `Go To Market`, and `go-to-market`.
- Prefer tags for cross-cutting attributes that do not fit a single hierarchy: `#security`, `#enterprise`, `#activation`, `#fundraising`, `#PLG`, `#compliance`.
- Add `createdAt`, `updatedAt`, `dueDate`, `sourceUrl`, `reviewer`, and `approvalStatus` once this shifts from planning catalog to real production system.
- Do not rely on browser persistence inside an artifact sandbox for production tracking. Use a connected backend such as Supabase or export/import CSV if data must persist. Sandboxes and single-file artifact constraints can limit local browser storage and full app behavior. [23] [22]

⁂

Interactive decision tree for Claude artifacts: pick your prompt and requirements to instantly output HTML, React, SVG, Mermaid, Docs, or Slides

Computer
Claude Artifacts vs ChatGPT Canvas vs v0: sandbox limits, single-file constraints, and export formats compared across 6 dimensions
Computer
Show me how to convert this into a multi-format exporter
Add code copy buttons and a quick generation prompt builder
Expand the decision tree with more conditional logic

Below is an expanded version of the tracker that adds a rule-based format decision engine, copy buttons, a prompt builder, and multi-format export. The exporter produces Markdown, JSON, CSV, Mermaid, SVG, standalone HTML, and a slide-deck outline; it does not pretend to generate a fully editable `.pptx` or `.docx` purely in-browser.

Claude artifacts are generally best treated as self-contained client-side experiences: interactive HTML/JS, React components, SVG, Mermaid, and documents. Their sandbox can constrain persistence and external access, which is why the exporter below uses in-memory state and browser downloads rather than a backend. [31] [32]

Upgraded React dashboard

This is a **single-file React component.** It extends the prior tracker with:

- Conditional decision logic rather than a one-question selector
- Multi-step requirement choices: interaction, content shape, visual precision, system complexity, audience, and export need
- Ranked recommendations with a primary and fallback format
- One-click copy controls for prompts and generated output
- A quick generation prompt builder
- Browser-based exports for CSV, JSON, Markdown, Mermaid, SVG, HTML, and a Markdown slide-deck outline
- Sample Semester artifacts

```
import React, { useMemo, useState } from "react";

const FORMAT_META = {
  HTML: {
    icon: "◫",
    color: "bg-amber-100 text-amber-800 border-amber-200",
    bestFor: "Standalone web pages, landing pages, lightweight tools, calculators, ar
    exportTypes: ["HTML", "PDF snapshot", "PNG screenshot"],
    constraints: [
      "Best kept as one self-contained page.",
      "No durable production persistence without an external backend.",
      "Complex multi-route app architecture is outside its sweet spot.",
    ],
  },
  React: {
    icon: "⚛",
    color: "bg-sky-100 text-sky-800 border-sky-200",
    bestFor: "Dashboards, filters, tables, stateful prototypes, trackers, configurato
    exportTypes: ["JSX source", "HTML bundle after build", "CSV/JSON generated by the
    constraints: [
      "Claude artifact previews are usually client-side and sandboxed.",
      "External APIs, secrets, auth, storage, and deployment need a real application
      "Reusable production code may need packaging, routing, tests, and dependency cl
    ],
  },
  SVG: {
    icon: "◇",
    color: "bg-violet-100 text-violet-800 border-violet-200",
    bestFor: "Logos, icon systems, illustrations, visual explainers, and art-directed
    exportTypes: ["SVG", "PNG", "PDF"],
    constraints: [
      "Not ideal for heavy state, filtering, large datasets, or application workflows
      "Precise vector design may still need human refinement in Figma or Illustrator
    ],
  },
  Mermaid: {
    icon: "↳",
    color: "bg-emerald-100 text-emerald-800 border-emerald-200",
```

```
    bestFor: "Flowcharts, sequence diagrams, ERDs, Gantt charts, roadmaps, system map
    exportTypes: ["Mermaid source", "SVG", "PNG", "PDF"],
    constraints: [
      "Layout and typography control are more constrained than hand-authored SVG.",
      "Best for structured relationships, not polished brand illustration.",
    ],
  },
  Docs: {
    icon: "▤",
    color: "bg-slate-100 text-slate-800 border-slate-200",
    bestFor: "PRDs, strategy, research, briefs, policies, specifications, operational
    exportTypes: ["Markdown", "PDF", "DOCX via document workflow"],
    constraints: [
      "Not the right choice for dynamic filtering, stateful simulation, or live dashb
      "Legal, financial, regulatory, and security content still needs professional re
    ],
  },
  Slides: {
    icon: "▣",
    color: "bg-rose-100 text-rose-800 border-rose-200",
    bestFor: "Investor decks, board updates, sales presentations, launch readouts, tr
    exportTypes: ["Presentation outline", "PDF", "PPTX through a presentation workflo
    constraints: [
      "Designed for linear narrative, not a searchable operational system of record."
      "Visual and factual claims require human review before external presentation."
    ],
  },
};

const INITIAL_ARTIFACTS = [
  {
    id: "prd",
    artifact: "Flagship Workflow PRD",
    category: "Product",
    format: "Docs",
    lifecycle: "Build",
    useCase: "Specify Semester's primary workflow with scope, stories, acceptance cri
    audience: "Internal",
    priority: "P0",
    status: "Draft",
    owner: "Product",
    tags: ["prd", "requirements", "core-product"],
    prompt:
      "Write an implementation-ready PRD for Semester's flagship workflow. Include th
  },
  {
    id: "catalog",
    artifact: "Semester Artifact Catalog",
    category: "Operations",
    format: "React",
    lifecycle: "Scale",
    useCase: "Track every Claude-generated deliverable by format, category, owner, pr
    audience: "Internal",
    priority: "P0",
    status: "In Review",
    owner: "Founder / Operations",
```

```
    tags: ["tracker", "dashboard", "operations"],
    prompt:
      "Build a React dashboard for Semester that tracks artifacts by category, forma
  },
  {
    id: "architecture",
    artifact: "System Architecture Diagram",
    category: "Engineering",
    format: "Mermaid",
    lifecycle: "Build",
    useCase: "Document client, API, database, workers, integrations, observability, a
    audience: "Internal",
    priority: "P0",
    status: "Draft",
    owner: "Engineering",
    tags: ["architecture", "systems", "security"],
    prompt:
      "Create a Mermaid system architecture diagram for Semester. Include client appl
  },
  {
    id: "erd",
    artifact: "Core Data Model ERD",
    category: "Engineering",
    format: "Mermaid",
    lifecycle: "Build",
    useCase: "Define core entities, tenancy, relationships, ownership, and lifecycle
    audience: "Internal",
    priority: "P0",
    status: "Backlog",
    owner: "Engineering",
    tags: ["database", "erd", "schema"],
    prompt:
      "Create a Mermaid ERD for Semester. Include organizations, users, memberships,
  },
  {
    id: "prototype",
    artifact: "Interactive Core Workflow Prototype",
    category: "Product Design",
    format: "React",
    lifecycle: "Validate",
    useCase: "Demonstrate the core user workflow before production engineering.",
    audience: "Internal",
    priority: "P0",
    status: "Backlog",
    owner: "Product Design",
    tags: ["prototype", "ux", "validation"],
    prompt:
      "Build a clickable React prototype for Semester's primary user journey. Include
  },
  {
    id: "homepage",
    artifact: "Homepage and Product Narrative",
    category: "Brand",
    format: "HTML",
    lifecycle: "Launch",
    useCase: "Explain Semester’s value proposition and turn qualified visitors into c
```

```
    audience: "Prospects",
    priority: "PO",
    status: "Draft",
    owner: "Brand / Marketing",
    tags: ["homepage", "positioning", "conversion"],
    prompt:
      "Create a polished responsive HTML homepage for Semester. Include a hero, the p
  },
  {
    id: "identity",
    artifact: "Logo-Mark Exploration",
    category: "Brand",
    format: "SVG",
    lifecycle: "Launch",
    useCase: "Explore simple, editable visual marks appropriate for a modern B2B soft
    audience: "Internal",
    priority: "P2",
    status: "Backlog",
    owner: "Brand / Design",
    tags: ["logo", "identity", "visual"],
    prompt:
      "Create six simple SVG logo-mark concepts for Semester. Make them geometric, di
  },
  {
    id: "launch",
    artifact: "Product Launch Narrative",
    category: "Go-to-Market",
    format: "Slides",
    lifecycle: "Launch",
    useCase: "Coordinate product, marketing, sales, customer success, and leadership
    audience: "Internal",
    priority: "PO",
    status: "Backlog",
    owner: "Product Marketing",
    tags: ["launch", "gtm", "deck"],
    prompt:
      "Create a Semester product launch deck. Cover target audience, positioning, goa
  },
  {
    id: "privacy",
    artifact: "Privacy Data Flow Map",
    category: "Legal",
    format: "Mermaid",
    lifecycle: "Govern",
    useCase: "Map data collection, processing, storage, subprocessors, retention, del
    audience: "Internal",
    priority: "PO",
    status: "Backlog",
    owner: "Legal / Security",
    tags: ["privacy", "data", "compliance"],
    prompt:
      "Create a Mermaid privacy data-flow diagram for Semester. Show collection point
  },
  {
    id: "terms",
    artifact: "Terms of Service First Draft",
```

```
    category: "Legal",
    format: "Docs",
    lifecycle: "Govern",
    useCase: "Create a structured first draft for counsel review before customer use
    audience: "Customers",
    priority: "P1",
    status: "Backlog",
    owner: "Legal",
    tags: ["terms", "contract", "legal"],
    prompt:
      "Draft a plain-English first version of Terms of Service for Semester. Include
  },
];

const DECISION_OPTIONS = {
  outcome: [
    ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or proto
    ["web-page", "Standalone web page, landing page, or lightweight demo"],
    ["structured-diagram", "Structured flow, architecture, sequence, ERD, or roadmap
    ["visual-asset", "Logo, icon, illustration, or art-directed visual"],
    ["written-record", "Brief, PRD, policy, report, plan, or knowledge document"],
    ["presentation", "Pitch, board update, sales story, launch, or training presenta
  ],
  interaction: [
    ["none", "No interaction; readers mainly consume content"],
    ["simple", "Buttons, toggles, calculators, basic chart or tab interaction"],
    ["complex", "Filtering, sorting, editable state, drawers, multi-step flows, or ap
  ],
  visualControl: [
    ["standard", "Structured output is fine; speed and maintainability matter most"]
    ["precise", "I need precise composition, art direction, and editable vector visua
  ],
  contentShape: [
    ["linear", "A linear narrative or reading order"],
    ["reference", "A durable reference document people will revisit"],
    ["relationship", "Relationships between systems, entities, steps, or actors"],
    ["data", "Rows, metrics, comparisons, records, or frequently changing data"],
  ],
  portability: [
    ["quick-share", "I need a fast shareable result in Claude"],
    ["source-export", "I need source I can copy into another tool or repository"],
    ["client-download", "Viewers need to download generated CSV, SVG, Markdown, or JS
    ["production", "This must become a deployed production application"],
  ],
};

const DEFAULT_DECISION = {
  outcome: "interactive-tool",
  interaction: "complex",
  visualControl: "standard",
  contentShape: "data",
  portability: "source-export",
};

function scoreFormats(decision) {
  const scores = {
```

```
    HTML: 0,
    React: 0,
    SVG: 0,
    Mermaid: 0,
    Docs: 0,
    Slides: 0,
  };

  const reasons = {
    HTML: [],
    React: [],
    SVG: [],
    Mermaid: [],
    Docs: [],
    Slides: [],
  };

  const add = (format, points, reason) => {
    scores[format] += points;
    reasons[format].push(reason);
  };

  switch (decision.outcome) {
    case "interactive-tool":
      add("React", 8, "Your primary goal is an interactive tool.");
      add("HTML", 5, "A standalone HTML page can support lighter interaction.");
      break;
    case "web-page":
      add("HTML", 8, "Your primary goal is a self-contained web page.");
      add("React", 4, "React is a fallback when the page becomes app-like.");
      break;
    case "structured-diagram":
      add("Mermaid", 8, "Your goal is to represent structured relationships.");
      add("SVG", 4, "SVG is a fallback for polished static visuals.");
      break;
    case "visual-asset":
      add("SVG", 9, "Your goal is an editable vector visual.");
      add("HTML", 2, "HTML can present the visual in a web context.");
      break;
    case "written-record":
      add("Docs", 9, "Your goal is a durable structured written record.");
      add("Slides", 2, "Slides are a fallback for executive summaries.");
      break;
    case "presentation":
      add("Slides", 9, "Your goal is a linear presentation narrative.");
      add("Docs", 2, "A document can support speaker notes or a follow-up memo.");
      break;
    default:
      break;
  }

  switch (decision.interaction) {
    case "none":
      add("Docs", 2, "No interaction is required.");
      add("Mermaid", 1, "Static diagrams fit non-interactive content.");
      add("SVG", 1, "Static vector content fits non-interactive output.");
```

```
      add("Slides", 1, "Slides suit read-only narrative.");
      break;
    case "simple":
      add("HTML", 4, "Simple controls fit a self-contained HTML page.");
      add("React", 3, "React works if interaction may expand later.");
      break;
    case "complex":
      add("React", 7, "Complex state and app-like interaction favor React.");
      add("HTML", 1, "HTML is possible but may become harder to maintain.");
      break;
    default:
      break;
  }

  switch (decision.visualControl) {
    case "standard":
      add("Mermaid", 3, "Structured, maintainable diagram syntax is acceptable.");
      add("Docs", 1, "Standard document formatting is acceptable.");
      break;
    case "precise":
      add("SVG", 7, "Precise composition and vector editability favor SVG.");
      add("HTML", 2, "HTML/CSS can help compose a visual presentation.");
      break;
    default:
      break;
  }

  switch (decision.contentShape) {
    case "linear":
      add("Slides", 4, "Linear narrative works well in slides.");
      add("Docs", 3, "Documents also suit sequential reading.");
      break;
    case "reference":
      add("Docs", 5, "A durable reference is best represented as a document.");
      break;
    case "relationship":
      add("Mermaid", 6, "Relationships map naturally to Mermaid syntax.");
      add("SVG", 2, "SVG can render a refined version of the relationship map.");
      break;
    case "data":
      add("React", 5, "Changing data, rows, and filters favor React.");
      add("HTML", 2, "HTML can fit a smaller static dataset.");
      break;
    default:
      break;
  }

  switch (decision.portability) {
    case "quick-share":
      add("HTML", 2, "A self-contained page is straightforward to share.");
      add("Docs", 2, "Documents are easy to distribute and review.");
      break;
    case "source-export":
      add("React", 3, "React source can move into a product codebase.");
      add("HTML", 3, "Standalone HTML is portable and easy to host.");
      add("Mermaid", 2, "Mermaid source remains editable as text.");
```

```
      add("SVG", 2, "SVG remains editable in visual-design tools.");
      break;
    case "client-download":
      add("React", 3, "React can generate data exports in-browser.");
      add("HTML", 2, "HTML can generate simple browser downloads.");
      break;
    case "production":
      add("React", 4, "Production interactive applications typically need a real Reac
      add("HTML", 1, "Production static marketing pages can begin as HTML.");
      break;
    default:
      break;
  }

  return Object.entries(scores)
    .map(([format, score]) => ({
      format,
      score,
      reasons: reasons[format],
    }))
    .sort((a, b) => b.score - a.score);
}

function artifactPrompt({ title, category, format, audience, goal, requirements, expo
  const formatGuidance = {
    HTML: "Create one self-contained responsive HTML file with embedded CSS and JavaS
    React: "Create one self-contained React component using local state. Use no exter
    SVG: "Create a clean, editable SVG with a considered viewBox, grouped layers, ser
    Mermaid: "Create valid Mermaid source code. Prefer clear node labels, logical sub
    Docs: "Create a structured Markdown document with an executive summary, headings
    Slides: "Create a slide-by-slide presentation outline with title, key message, re
  };

  return `Create a ${format} artifact for Semester.

Artifact title: ${title || "[Artifact title]"}
Category: ${category || "Product / Operations"}
Audience: ${audience || "Internal stakeholders"}
Primary outcome: ${goal || "Clarify and accelerate an important Semester workflow"}
Required capabilities: ${requirements || "Clear structure, realistic examples, and re
Desired export: ${exportType || "Source plus a shareable review format"}

${formatGuidance[format]}

Quality bar:
- Make the artifact immediately usable, not a generic template.
- State assumptions where information is missing.
- Use Semester as the product/company name.
- Include a concise “How to use this” section.
- Keep content specific, scannable, and ready for human review.`;
}

function downloadFile(filename, content, type = "text/plain;charset=utf-8") {
  const blob = new Blob([content], { type });
  const url = URL.createObjectURL(blob);
  const link = document.createElement("a");
```

```
  link.href = url;
  link.download = filename;
  link.click();
  URL.revokeObjectURL(url);
}

async function copyText(value) {
  try {
    await navigator.clipboard.writeText(value);
    return true;
  } catch {
    return false;
  }
}

function CopyButton({ value, label = "Copy" }) {
  const [copied, setCopied] = useState(false);

  const handleCopy = async () => {
    const success = await copyText(value);
    setCopied(success);
    window.setTimeout(() => setCopied(false), 1500);
  };

  return (
    <button
      onClick={handleCopy}
      className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs font
    >
      {copied ? "Copied" : label}
    </button>
  );
}

function Badge({ children, className = "" }) {
  return (
    <span className={`inline-flex items-center rounded-full border px-2 py-0.5 text-x
      {children}
    </span>
  );
}

function DecisionTree() {
  const [decision, setDecision] = useState(DEFAULT_DECISION);
  const ranked = useMemo(() => scoreFormats(decision), [decision]);
  const top = ranked[^4_0];
  const fallback = ranked[^4_1];
  const primaryMeta = FORMAT_META[top.format];

  const setValue = (key, value) => {
    setDecision((current) => ({ ...current, [key]: value }));
  };

  const prompt = artifactPrompt({
    title: "Semester Artifact",
    category: "Product / Operations",
```

```
    format: top.format,
    audience: "Internal stakeholders",
    goal: "Produce a decision-ready deliverable for Semester",
    requirements: "Use the selected requirements from the decision tree",
    exportType: primaryMeta.exportTypes.join(", "),
  });

  return (
    <section className="rounded-2xl border border-indigo-100 bg-gradient-to-br from-
      <div>
        <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600">
        <h2 className="mt-1 text-2xl font-bold text-slate-950">Interactive Claude ar
        <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-600">
          Select what you are making, how much interaction it needs, how visually pre
        </p>
      </div>

      <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-3">
        {Object.entries(DECISION_OPTIONS).map(([key, options]) => (
          <fieldset key={key} className="rounded-xl border border-slate-200 bg-white
            <legend className="px-1 text-sm font-bold capitalize text-slate-900">
              {key.replace(/([A-Z])/g, " $1")}
            </legend>
            <div className="mt-2 space-y-2">
              {options.map(([value, label]) => (
                <label key={value} className="flex cursor-pointer items-start gap-2
                  <input
                    type="radio"
                    name={key}
                    value={value}
                    checked={decision[key] === value}
                    onChange={() => setValue(key, value)}
                    className="mt-1 accent-indigo-600"
                  />
                  <span>{label}</span>
                </label>
              ))}
            </div>
          </fieldset>
        ))}
      </div>

      <div className="mt-5 rounded-2xl border border-indigo-200 bg-white p-5">
        <div className="flex flex-col justify-between gap-4 md:flex-row md:items-sta
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
            <div className="mt-1 flex flex-wrap items-center gap-2">
              <span className="text-3xl">{primaryMeta.icon}</span>
              <h3 className="text-2xl font-bold text-slate-950">{top.format}</h3>
              <Badge className={primaryMeta.color}>Score: {top.score}</Badge>
            </div>
            <p className="mt-3 max-w-2xl text-sm leading-6 text-slate-600">{primaryMe
          </div>
          <div className="rounded-xl bg-slate-50 p-3 text-sm">
            <p className="font-bold text-slate-800">Fallback: {fallback.format}</p>
            <p className="mt-1 text-slate-600">{FORMAT_META[fallback.format].bestFor
```

```
          </div>
        </div>

        <div className="mt-5 grid gap-4 md:grid-cols-3">
          <div>
            <p className="text-sm font-bold text-slate-800">Why this wins</p>
            <ul className="mt-2 space-y-1 text-sm text-slate-600">
              {top.reasons.length ? top.reasons.map((reason) => <li key={reason}>• {r
            </ul>
          </div>
          <div>
            <p className="text-sm font-bold text-slate-800">Best export choices</p>
            <ul className="mt-2 space-y-1 text-sm text-slate-600">
              {primaryMeta.exportTypes.map((item) => <li key={item}>• {item}</li>)}
            </ul>
          </div>
          <div>
            <p className="text-sm font-bold text-slate-800">Constraints to plan for</
            <ul className="mt-2 space-y-1 text-sm text-slate-600">
              {primaryMeta.constraints.map((item) => <li key={item}>• {item}</li>)}
            </ul>
          </div>
        </div>

        <div className="mt-5 rounded-xl bg-slate-950 p-4">
          <div className="flex items-center justify-between gap-3">
            <p className="text-sm font-bold text-white">Prompt generated from your ch
            <CopyButton value={prompt} label="Copy prompt" />
          </div>
          <pre className="mt-3 whitespace-pre-wrap text-xs leading-6 text-slate-200">
        </div>
      </div>
    </section>
  );
}

function PromptBuilder() {
  const [form, setForm] = useState({
    title: "Semester Artifact Catalog",
    category: "Operations",
    format: "React",
    audience: "Internal stakeholders",
    goal: "Track and prioritize every artifact Claude should generate for Semester",
    requirements: "Search, multi-select filters, sorting, saved views, a detail drawe
    exportType: "JSX source plus CSV export",
  });

  const prompt = useMemo(() => artifactPrompt(form), [form]);

  const update = (key, value) => setForm((current) => ({ ...current, [key]: value }))

  return (
    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-sm">
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-end">
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600
```

```
          <h2 className="mt-1 text-xl font-bold text-slate-950">Quick generation pron
          <p className="mt-1 text-sm text-slate-600">Turn a tracker row or a fresh id
        </div>
        <CopyButton value={prompt} label="Copy full prompt" />
      </div>

      <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-3">
        <label className="text-sm font-semibold text-slate-700">
          Artifact title
          <input
            value={form.title}
            onChange={(e) => update("title", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>

        <label className="text-sm font-semibold text-slate-700">
          Category
          <input
            value={form.category}
            onChange={(e) => update("category", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>

        <label className="text-sm font-semibold text-slate-700">
          Format
          <select
            value={form.format}
            onChange={(e) => update("format", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          >
            {Object.keys(FORMAT_META).map((format) => <option key={format}>{format}</
          </select>
        </label>

        <label className="text-sm font-semibold text-slate-700">
          Audience
          <input
            value={form.audience}
            onChange={(e) => update("audience", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>

        <label className="text-sm font-semibold text-slate-700 md:col-span-2">
          Primary outcome
          <input
            value={form.goal}
            onChange={(e) => update("goal", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>

        <label className="text-sm font-semibold text-slate-700 md:col-span-2">
          Required capabilities
```

```
          <textarea
            value={form.requirements}
            onChange={(e) => update("requirements", e.target.value)}
            className="mt-1 min-h-[90px] w-full rounded-lg border border-slate-200 px
          />
        </label>

        <label className="text-sm font-semibold text-slate-700">
          Desired export
          <input
            value={form.exportType}
            onChange={(e) => update("exportType", e.target.value)}
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>
      </div>

      <div className="mt-5 rounded-xl bg-slate-950 p-4">
        <pre className="whitespace-pre-wrap text-xs leading-6 text-slate-200">{prompt
      </div>
    </section>
  );
}

function buildMarkdown(artifacts) {
  const rows = artifacts
    .map(
      (item) =>
        `| ${item.artifact} | ${item.category} | ${item.format} | ${item.lifecycle}
    )
    .join("\n");

  return `# Semester Claude Artifact Catalog

Generated: ${new Date().toLocaleString()}

| Artifact | Category | Format | Lifecycle | Priority | Status | Owner |
|---|---|---|---|---|---|---|
${rows}

## Generation Prompts

${artifacts
  .map((item) => `### ${item.artifact}\n\n**Recommended format:** ${item.format}\n\nS
  .join("\n\n")}
`;
}

function buildMermaid(artifacts) {
  const grouped = artifacts.reduce((acc, item) => {
    if (!acc[item.category]) acc[item.category] = [];
    acc[item.category].push(item);
    return acc;
  }, {});

  const safeId = (value) => value.replace(/[^a-zA-Z0-9]/g, "");
```

```
  return `flowchart LR
  Semester[Semester Artifact Catalog]
${Object.entries(grouped)
  .map(([category, items]) => {
    const categoryId = safeId(category);
    return `  Semester --> ${categoryId}[${category}]
${items.map((item) => `  ${categoryId} --> ${safeId(item.id)}[${item.artifact.replace
  })
  .join("\n")}
`;
}

function buildSvg(artifacts) {
  const grouped = artifacts.reduce((acc, item) => {
    if (!acc[item.category]) acc[item.category] = [];
    acc[item.category].push(item);
    return acc;
  }, {});

  const categories = Object.keys(grouped);
  const width = 1200;
  const height = Math.max(500, categories.length * 175 + 110);

  const escape = (value) =>
    String(value)
      .replace(/&/g, "&amp;")
      .replace(/</g, "&lt;")
      .replace(/>/g, "&gt;")
      .replace(/"/g, "&quot;");

  const body = categories
    .map((category, index) => {
      const y = 95 + index * 175;
      const items = grouped[category].slice(0, 4);
      return `
        <g>
          <rect x="40" y="${y}" width="180" height="56" rx="12" fill="#111827"/>
          <text x="60" y="${y + 34}" fill="#ffffff" font-family="Arial, sans-serif" f
          ${items
            .map((item, itemIndex) => {
              const x = 280 + itemIndex * 220;
              return `
                <line x1="220" y1="${y + 28}" x2="${x}" y2="${y + 28}" stroke="#c7d2f
                <rect x="${x}" y="${y}" width="190" height="56" rx="12" fill="#eef2ff
                <text x="${x + 14}" y="${y + 24}" fill="#1e1b4b" font-family="Arial,
                <text x="${x + 14}" y="${y + 42}" fill="#4f46e5" font-family="Arial,
              `;
            })
            .join("")}
        </g>
      `;
    })
    .join("");

  return `<svg xmlns="http://www.w3.org/2000/svg" width="${width}" height="${height}"
```

```
  <rect width="100%" height="100%" fill="#f8fafc"/>
  <text x="40" y="48" fill="#0f172a" font-family="Arial, sans-serif" font-size="28" 
  <text x="40" y="72" fill="#64748b" font-family="Arial, sans-serif" font-size="14">\
  ${body}
</svg>`;
}

function buildSlidesMarkdown(artifacts) {
  const categoryGroups = artifacts.reduce((acc, item) => {
    if (!acc[item.category]) acc[item.category] = [];
    acc[item.category].push(item);
    return acc;
  }, {});

  return `# Semester Artifact Catalog — Slide Outline

## Slide 1 — Title
- Semester Claude Artifact Catalog
- A production system for strategy, product, engineering, GTM, operations, and legal

## Slide 2 — Catalog Summary
- Total visible artifacts: ${artifacts.length}
- P0 artifacts: ${artifacts.filter((item) => item.priority === "P0").length}
- Draft or review items: ${artifacts.filter((item) => ["Draft", "In Review"].includes
- Visual: KPI tiles

${Object.entries(categoryGroups)
  .map(
    ([category, items]) => `## Slide — ${category}
- Key artifacts:
${items.map((item) => `  - ${item.artifact} (${item.format}, ${item.priority}, ${iter
- Recommended visual: format badges and a status snapshot
- Takeaway: ${category} has ${items.length} tracked artifact${items.length === 1 ? "'
  )
  .join("\n\n")}

## Final Slide — Next Actions
- Prioritize open P0 artifacts
- Generate the highest-leverage deliverables using their embedded prompts
- Move approved artifacts into the durable production system
`;
}

function buildStandaloneHtml(artifacts) {
  const data = JSON.stringify(artifacts, null, 2).replace(/</g, "\\u003c");

  return `<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1" />
  <title>Semester Artifact Catalog</title>
  <style>
    body { margin: 0; background: #f8fafc; color: #0f172a; font: 14px/1.45 Arial, sa
    main { max-width: 1200px; margin: 0 auto; padding: 32px 20px; }
    h1 { margin: 0; font-size: 32px; } p { color: #475569; }
```

```
    input, select { border: 1px solid #cbd5e1; border-radius: 8px; padding: 10px; ba
    .controls { display: flex; flex-wrap: wrap; gap: 10px; margin: 24px 0; }
    .table-wrap { overflow: auto; background: white; border: 1px solid #e2e8f0; borde
    table { border-collapse: collapse; width: 100%; min-width: 760px; }
    th, td { text-align: left; padding: 12px; border-bottom: 1px solid #e2e8f0; }
    th { background: #f1f5f9; font-size: 12px; text-transform: uppercase; letter-spac
    .badge { display: inline-block; border-radius: 999px; padding: 3px 8px; backgrou
  </style>
</head>
<body>
  <main>
    <h1>Semester Claude Artifact Catalog</h1>
    <p>Standalone export with search and category/format filters.</p>
    <div class="controls">
      <input id="search" placeholder="Search artifacts..." />
      <select id="category"><option value="All">All categories</option></select>
      <select id="format"><option value="All">All formats</option></select>
    </div>
    <div class="table-wrap">
      <table>
        <thead><tr><th>Artifact</th><th>Category</th><th>Format</th><th>Lifecycle</th
        <tbody id="rows"></tbody>
      </table>
    </div>
  </main>
  <script>
    const artifacts = ${data};
    const rows = document.getElementById("rows");
    const search = document.getElementById("search");
    const category = document.getElementById("category");
    const format = document.getElementById("format");

    function unique(key) {
      return [...new Set(artifacts.map(item => item[key]))].sort();
    }

    unique("category").forEach(value => category.insertAdjacentHTML("beforeend", '<op
    unique("format").forEach(value => format.insertAdjacentHTML("beforeend", '<option

    function render() {
      const query = search.value.toLowerCase();
      rows.innerHTML = artifacts
        .filter(item => {
          const text = [item.artifact, item.category, item.format, item.lifecycle, it
          return text.includes(query) &&
            (category.value === "All" || item.category === category.value) &&
            (format.value === "All" || item.format === format.value);
        })
        .map(item => '<tr><td><strong>' + item.artifact + '</strong><br><small>' + it
        .join("");
    }

    [search, category, format].forEach(control => control.addEventListener("input", r
    render();
  </script>
</body>
```

```
</html>`;
}

function ExportPanel({ artifacts }) {
  const [exportType, setExportType] = useState("CSV");

  const formats = [
    ["CSV", "Spreadsheet-ready tracker export"],
    ["JSON", "Full structured catalog data"],
    ["Markdown", "Document and prompt library"],
    ["Mermaid", "Category-to-artifact relationship map"],
    ["SVG", "Static visual catalog map"],
    ["HTML", "Standalone filterable web-page export"],
    ["Slides", "Slide-deck outline in Markdown"],
  ];

  const exportContent = () => {
    const csvColumns = ["artifact", "category", "format", "lifecycle", "useCase", "au
    const csv = [
      csvColumns.join(","),
      ...artifacts.map((item) =>
        csvColumns
          .map((column) => {
            const value = Array.isArray(item[column]) ? item[column].join("; ") : ite
            return `"${String(value).replace(/"/g, '""')}"`;
          })
          .join(",")
      ),
    ].join("\n");

    const payload = {
      CSV: {
        filename: "semester-artifact-catalog.csv",
        content: csv,
        type: "text/csv;charset=utf-8",
      },
      JSON: {
        filename: "semester-artifact-catalog.json",
        content: JSON.stringify(artifacts, null, 2),
        type: "application/json;charset=utf-8",
      },
      Markdown: {
        filename: "semester-artifact-catalog.md",
        content: buildMarkdown(artifacts),
        type: "text/markdown;charset=utf-8",
      },
      Mermaid: {
        filename: "semester-artifact-catalog.mmd",
        content: buildMermaid(artifacts),
        type: "text/plain;charset=utf-8",
      },
      SVG: {
        filename: "semester-artifact-catalog.svg",
        content: buildSvg(artifacts),
        type: "image/svg+xml;charset=utf-8",
      },
```

```
      HTML: {
        filename: "semester-artifact-catalog.html",
        content: buildStandaloneHtml(artifacts),
        type: "text/html;charset=utf-8",
      },
      Slides: {
        filename: "semester-artifact-catalog-slide-outline.md",
        content: buildSlidesMarkdown(artifacts),
        type: "text/markdown;charset=utf-8",
      },
    };

    const selected = payload[exportType];
    downloadFile(selected.filename, selected.content, selected.type);
  };

  const preview = useMemo(() => {
    if (exportType === "Markdown") return buildMarkdown(artifacts);
    if (exportType === "Mermaid") return buildMermaid(artifacts);
    if (exportType === "Slides") return buildSlidesMarkdown(artifacts);
    if (exportType === "SVG") return buildSvg(artifacts);
    if (exportType === "HTML") return buildStandaloneHtml(artifacts).slice(0, 2400) +
    if (exportType === "JSON") return JSON.stringify(artifacts, null, 2);
    return `Artifact,Category,Format,Lifecycle,Use Case,Audience,Priority,Status,Owne
      .slice(0, 3)
      .map((item) => `${item.artifact},${item.category},${item.format},${item.lifecyc
      .join("\n")}\n...`;
  }, [artifacts, exportType]);

  return (
    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-sm">
      <div>
        <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600">
        <h2 className="mt-1 text-xl font-bold text-slate-950">Export the filtered ca
        <p className="mt-1 text-sm text-slate-600">
          Export the current filtered rows. The dashboard creates source files in the
        </p>
      </div>

      <div className="mt-4 grid gap-2 md:grid-cols-2 xl:grid-cols-4">
        {formats.map(([name, description]) => (
          <button
            key={name}
            onClick={() => setExportType(name)}
            className={`rounded-xl border p-3 text-left transition ${
              exportType === name
                ? "border-indigo-500 bg-indigo-50"
                : "border-slate-200 bg-white hover:border-indigo-300"
            }`}
          >
            <p className="text-sm font-bold text-slate-900">{name}</p>
            <p className="mt-1 text-xs leading-5 text-slate-600">{description}</p>
          </button>
        ))}
      </div>
```

```
      <div className="mt-4 flex flex-wrap gap-2">
        <button
          onClick={exportContent}
          className="rounded-lg bg-indigo-600 px-4 py-2 text-sm font-bold text-white
        >
          Download {exportType}
        </button>
        <CopyButton value={preview} label={`Copy ${exportType} output`} />
      </div>

      <pre className="mt-4 max-h-72 overflow-auto rounded-xl bg-slate-950 p-4 whitesp
        {preview}
      </pre>
    </section>
  );
}

export default function SemesterArtifactStudio() {
  const [artifacts, setArtifacts] = useState(INITIAL_ARTIFACTS);
  const [search, setSearch] = useState("");
  const [filters, setFilters] = useState({
    category: "All",
    format: "All",
    lifecycle: "All",
    priority: "All",
    status: "All",
  });
  const [sort, setSort] = useState({ key: "priority", direction: "asc" });
  const [selected, setSelected] = useState(null);

  const unique = (key) => [...new Set(artifacts.map((item) => item[key]))].sort();

  const filteredArtifacts = useMemo(() => {
    const priorityOrder = { P0: 0, P1: 1, P2: 2, P3: 3 };
    const statusOrder = { Backlog: 0, Draft: 1, "In Review": 2, Approved: 3, Shipped
    const query = search.trim().toLowerCase();

    return artifacts
      .filter((item) => {
        const searchText = [
          item.artifact,
          item.category,
          item.format,
          item.lifecycle,
          item.useCase,
          item.audience,
          item.owner,
          ...item.tags,
        ].join(" ").toLowerCase();

        return (
          (!query || searchText.includes(query)) &&
          (filters.category === "All" || item.category === filters.category) &&
          (filters.format === "All" || item.format === filters.format) &&
          (filters.lifecycle === "All" || item.lifecycle === filters.lifecycle) &&
          (filters.priority === "All" || item.priority === filters.priority) &&
```

```
          (filters.status === "All" || item.status === filters.status)
        );
      })
      .sort((a, b) => {
        if (sort.key === "priority") {
          return sort.direction === "asc"
            ? priorityOrder[a.priority] - priorityOrder[b.priority]
            : priorityOrder[b.priority] - priorityOrder[a.priority];
        }

        if (sort.key === "status") {
          return sort.direction === "asc"
            ? statusOrder[a.status] - statusOrder[b.status]
            : statusOrder[b.status] - statusOrder[a.status];
        }

        return sort.direction === "asc"
          ? String(a[sort.key]).localeCompare(String(b[sort.key]))
          : String(b[sort.key]).localeCompare(String(a[sort.key]));
      });
  }, [artifacts, filters, search, sort]);

  const setFilter = (key, value) => {
    setFilters((current) => ({ ...current, [key]: value }));
  };

  const setSortKey = (key) => {
    setSort((current) => ({
      key,
      direction: current.key === key && current.direction === "asc" ? "desc" : "asc"
    }));
  };

  const updateStatus = (id, status) => {
    setArtifacts((current) => current.map((item) => (item.id === id ? { ...item, sta
    setSelected((current) => (current?.id === id ? { ...current, status } : current)
  };

  const resetFilters = () => {
    setSearch("");
    setFilters({
      category: "All",
      format: "All",
      lifecycle: "All",
      priority: "All",
      status: "All",
    });
  };

  const header = (name, key) => (
    <button
      onClick={() => setSortKey(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase track
    >
      {name}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
```

```
      </button>
    );

    return (
      <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
        <div className="mx-auto max-w-7xl space-y-6">
          <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
            <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            <h1 className="mt-2 text-3xl font-bold tracking-tight">Artifact Decision, P
            <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
              Pick requirements, get an evidence-based format recommendation, generate
            </p>
          </header>

          <DecisionTree />
          <PromptBuilder />

          <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
            <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
              <div>
                <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
                <h2 className="mt-1 text-xl font-bold text-slate-950">Semester project
                <p className="mt-1 text-sm text-slate-600">Filter the exact records use
              </div>
              <p className="text-sm font-semibold text-slate-700">
                {filteredArtifacts.length} / {artifacts.length} visible
              </p>
            </div>

            <div className="mt-5 grid gap-3 md:grid-cols-2 xl:grid-cols-6">
              <input
                value={search}
                onChange={(event) => setSearch(event.target.value)}
                placeholder="Search all fields..."
                className="rounded-lg border border-slate-200 px-3 py-2 text-sm outline
              />

              {[
                ["category", "Category"],
                ["format", "Format"],
                ["lifecycle", "Lifecycle"],
                ["priority", "Priority"],
                ["status", "Status"],
              ].map(([key, label]) => (
                <label key={key} className="text-xs font-bold text-slate-500">
                  {label}
                  <select
                    value={filters[key]}
                    onChange={(event) => setFilter(key, event.target.value)}
                    className="mt-1 w-full rounded-lg border border-slate-200 bg-white
                  >
                    <option value="All">All</option>
                    {unique(key).map((value) => <option key={value}>{value}</option>)}
                  </select>
                </label>
              ))}
```

```
          </div>

          <button
            onClick={resetFilters}
            className="mt-3 rounded-lg px-3 py-2 text-sm font-bold text-slate-500 hov
          >
            Reset filters
          </button>

          <div className="mt-5 overflow-hidden rounded-xl border border-slate-200">
            <div className="overflow-x-auto">
              <table className="w-full min-w-[1050px] border-collapse">
                <thead className="bg-slate-50">
                  <tr>
                    <th className="px-4 py-3">{header("Artifact", "artifact")}</th>
                    <th className="px-4 py-3">{header("Category", "category")}</th>
                    <th className="px-4 py-3">{header("Format", "format")}</th>
                    <th className="px-4 py-3">{header("Lifecycle", "lifecycle")}</th>
                    <th className="px-4 py-3">{header("Priority", "priority")}</th>
                    <th className="px-4 py-3">{header("Status", "status")}</th>
                    <th className="px-4 py-3">{header("Owner", "owner")}</th>
                    <th className="px-4 py-3 text-left text-xs font-bold uppercase tr
                  </tr>
                </thead>
                <tbody>
                  {filteredArtifacts.map((item) => (
                    <tr key={item.id} className="border-t border-slate-100 hover:bg-
                      <td className="px-4 py-3">
                        <button
                          onClick={() => setSelected(item)}
                          className="text-left text-sm font-bold text-slate-900 hover
                        >
                          {item.artifact}
                        </button>
                        <div className="mt-1 flex flex-wrap gap-1">
                          {item.tags.map((tag) => <span key={tag} className="text-xs
                        </div>
                      </td>
                      <td className="px-4 py-3 text-sm text-slate-600">{item.category
                      <td className="px-4 py-3">
                        <Badge className={FORMAT_META[item.format].color}>
                          {FORMAT_META[item.format].icon} {item.format}
                        </Badge>
                      </td>
                      <td className="px-4 py-3 text-sm text-slate-600">{item.lifecycl
                      <td className="px-4 py-3">
                        <Badge className={item.priority === "P0" ? "border-red-200 bg
                          {item.priority}
                        </Badge>
                      </td>
                      <td className="px-4 py-3">
                        <select
                          value={item.status}
                          onChange={(event) => updateStatus(item.id, event.target.val
                          className="rounded-lg border border-slate-200 bg-white px-2
                        >
```

```
                        {["Backlog", "Draft", "In Review", "Approved", "Shipped", "
                          <option key={status}>{status}</option>
                        ))}
                      </select>
                    </td>
                    <td className="px-4 py-3 text-sm text-slate-600">{item.owner}</
                    <td className="px-4 py-3">
                      <CopyButton value={item.prompt} label="Copy" />
                    </td>
                  </tr>
                ))}
              </tbody>
            </table>
          </div>
        </div>
      </section>

      <ExportPanel artifacts={filteredArtifacts} />

      {selected && (
        <div className="fixed inset-0 z-50 flex justify-end bg-slate-950/30">
          <button className="absolute inset-0 cursor-default" aria-label="Close de
          <aside className="relative h-full w-full max-w-xl overflow-auto bg-white
            <div className="flex justify-between gap-4">
              <div>
                <div className="flex flex-wrap gap-2">
                  <Badge className={FORMAT_META[selected.format].color}>
                    {FORMAT_META[selected.format].icon} {selected.format}
                  </Badge>
                  <Badge className="border-slate-200 bg-slate-50 text-slate-600">{s
                  <Badge className="border-slate-200 bg-slate-50 text-slate-600">{s
                </div>
                <h2 className="mt-3 text-2xl font-bold text-slate-950">{selected.a
              </div>
              <button
                onClick={() => setSelected(null)}
                className="h-fit rounded-lg border border-slate-200 px-3 py-1.5 te
              >
                Close
              </button>
            </div>

            <p className="mt-4 text-sm leading-6 text-slate-600">{selected.useCase

            <div className="mt-5 grid gap-3 sm:grid-cols-2">
              {[
                ["Audience", selected.audience],
                ["Lifecycle", selected.lifecycle],
                ["Owner", selected.owner],
                ["Status", selected.status],
              ].map(([label, value]) => (
                <div key={label} className="rounded-xl bg-slate-50 p-3">
                  <p className="text-xs font-bold uppercase tracking-wide text-sla
                  <p className="mt-1 text-sm font-semibold text-slate-800">{value}<
                </div>
              ))}
```

```
              </div>

              <div className="mt-5 rounded-xl border border-indigo-100 bg-indigo-50 p
                <p className="text-sm font-bold text-indigo-950">Format guidance: {se
                <p className="mt-1 text-sm text-indigo-900">{FORMAT_META[selected.for
                <p className="mt-3 text-xs font-bold uppercase tracking-wide text-ind
                <p className="mt-1 text-xs text-indigo-800">{FORMAT_META[selected.for
              </div>

              <div className="mt-5">
                <div className="flex items-center justify-between">
                  <h3 className="text-sm font-bold text-slate-900">Generation prompt<
                  <CopyButton value={selected.prompt} label="Copy prompt" />
                </div>
                <pre className="mt-2 whitespace-pre-wrap rounded-xl bg-slate-950 p-4
                  {selected.prompt}
                </pre>
              </div>
            </aside>
          </div>
        )}
      </div>
    </main>
  );
}
```

Export design

The implementation deliberately separates **catalog data** from **export transformers**. Each export function accepts the current filtered array and transforms it to a string:

Export	Output	Best use
CSV	`.csv`	Import into Sheets, Airtable, Notion, or a database
JSON	`.json`	Preserve all structured fields, prompts, tags, and metadata
Markdown	`.md`	Create a readable artifact inventory and prompt library
Mermaid	`.mmd`	Render a category-to-artifact relationship map
SVG	`.svg`	Share a static visual overview or edit in a vector tool
HTML	`.html`	Distribute a lightweight standalone filterable catalog
Slides	`.md`	Generate a deck outline for later conversion to PPTX or Slides

The pattern is:

```
function exportCatalog(filteredArtifacts, exportType) {
  const content = transformers[exportType](filteredArtifacts);

  downloadFile(
    filenameByType[exportType],
    content,
```

```
    mimeTypeByType[exportType]
  );
}
```

That architecture makes it easy to add later exporters:

```
const transformers = {
  CSV: buildCsv,
  JSON: buildJson,
  Markdown: buildMarkdown,
  Mermaid: buildMermaid,
  SVG: buildSvg,
  HTML: buildStandaloneHtml,
  Slides: buildSlidesMarkdown,

  // Later, from a server or connected service:
  PDF: buildPdfOnServer,
  PPTX: buildPptxOnServer,
  DOCX: buildDocxOnServer,
};
```

A true PPTX, DOCX, or polished PDF pipeline generally needs either a specialized browser library or a server-side document-generation service. The browser-only version should export stable source formats—Markdown, HTML, SVG, CSV, JSON, and Mermaid—and use those as editable handoff formats.

Expanded decision logic

The engine uses five dimensions rather than one:

Decision factor	Example answer	Main effect
Primary outcome	“I need a searchable tracker”	Strongly favors React
Interaction level	“Users filter, sort, edit, and navigate”	Favors React over HTML
Visual-control requirement	“Needs brand-ready logo treatment”	Favors SVG
Content shape	“Shows entity relationships”	Favors Mermaid
Portability requirement	“Needs to ship as a static artifact”	Favors HTML, SVG, Mermaid, or Docs depending on outcome

Core rules

- Choose **React** when the deliverable needs ongoing state: filters, sorting, form inputs, saved views, editable content, tooltips, drawers, charts, or multi-step interaction.
- Choose **HTML** when the output is a self-contained page with modest interaction: a landing page, simple calculator, static demo, or a single-purpose tool.

- Choose **Mermaid** when the source of truth is a structured relationship: system architecture, process flow, sequence, ERD, Gantt, dependency map, or roadmap.
- Choose **SVG** when precision of the visual itself matters more than semantic structure: brand marks, icons, illustrations, styled diagrams, and visual explainers.
- Choose **Docs** when reviewability, versioned decisions, durable reference, and written nuance matter most: PRDs, strategy, policies, briefs, research synthesis, and playbooks.
- Choose **Slides** when the work must persuade or align an audience through a linear narrative: investor pitches, board updates, sales stories, launches, and training.

Claude vs Canvas vs v0

Claude Artifacts, ChatGPT Canvas, and v0 overlap, but they optimize for different handoff points: **Claude** for self-contained shareable artifacts, **Canvas** for iterative writing and code editing, and **v0** for a more deployment-oriented web-app workflow. [33] [34] [35]

Dimension	Claude Artifacts	ChatGPT Canvas	v0
Primary job	Generate a visually rendered artifact beside a conversation	Collaboratively edit a writing or coding workspace	Generate, run, refine, and deploy web applications
Strongest outputs	Interactive HTML/JS experiences, React components, SVG, Mermaid, formatted documents	Writing, code editing, rewrites, language porting, file-oriented export	Full-stack web UI and application projects, often in a Vercel-oriented workflow
Runtime model	Typically client-side inside a controlled browser/iframe environment	Canvas workspace for code and documents; execution is feature and environment dependent	VM-backed sandbox that runs project files, commands, server code, API routes, and database connections
Sandbox limitations	External access and browser capabilities can be restricted; sandboxed artifact environments make persistence and third-party integration less straightforward	More centered on producing/editing content than providing a durable deployable app environment	Isolated environment, but closer to real Node.js behavior and designed for app iteration
File/project shape	Often strongest as one self-contained artifact; production apps may need extraction into a repo	Works well with individual documents and code files	Designed around a project filesystem and application codebase
Export and handoff	Useful source forms include HTML, React/JSX, SVG, Mermaid, Markdown, and in-artifact generated downloads such as CSV or PNG	Canvas can export documents as PDF, DOCX, or Markdown and code in its relevant file type	Code can be exported and deployed elsewhere; GitHub/Vercel connection unlocks a more complete project workflow

Claude Artifacts are commonly described as executable HTML/JavaScript pages that run in a controlled browser sandbox; restrictions can affect `localStorage`, `fetch`, and external APIs, so production data and authentication should live outside the artifact. Claude Code documentation also supports artifacts generating browser-downloadable files such as CSV exports and chart PNGs, which is the model used by the React exporter above. [32] [36] [31]

ChatGPT Canvas is aimed at extended writing and coding projects; OpenAI explicitly describes capabilities such as porting code among JavaScript, TypeScript, Python, Java, C++, and PHP,

while document exports have been announced for PDF, DOCX, and Markdown. [37] [33]

v0's current sandbox is a VM-backed Node.js environment, replacing earlier browser-only previews; its documentation says it can run server code, API routes, and real database connections, and its FAQ notes that source can still be exported or deployed outside Vercel. [34] [35]

Practical operating model

For Semester, use the three environments in sequence:

1. **Claude Artifacts** for rapid decision tools, dashboards, prototypes, diagrams, pitch-ready pages, prompts, and self-contained operational assets.
2. **ChatGPT Canvas** when the main job is editorial refinement, document production, code review, rewrite cycles, or conversion of content/code among file-oriented formats.
3. **v0** when a prototype needs to become an actual web app with project files, server behavior, routes, database connections, deployments, and collaboration through a code repository.

The clean handoff path is:

```
Claude artifact
→ export JSX / HTML / Mermaid / SVG / Markdown / JSON
→ place in GitHub repository
→ turn into production feature with v0 or local development
→ connect real backend, auth, analytics, tests, and deployment
```

Use **React** for this decision dashboard itself, **Mermaid** for Semester's system and data-flow maps, **SVG** for brand identity assets, **HTML** for the public marketing site or standalone demos, **Docs** for operational source-of-truth work, and **Slides** for launch, sales, board, and investor narratives.

⁂

Claude Artifacts vs ChatGPT Canvas vs v0 sandbox: compare execution limits, React support, and export formats in one matrix

Computer
Build a prompt decision tree app for Claude Artifacts, Canvas, and v0 that matches your exact coding and document workflow
Computer
Compare Claude Artifacts, ChatGPT Canvas, and v0
Explore the execution sandbox limits for each platform
See how v0 handles React and Nextjs integration

Claude Artifacts, ChatGPT Canvas, and v0 all let you generate and preview code, but they serve different stages of the workflow: **Claude Artifacts** for shareable self-contained deliverables,

Canvas for iterative documents and code editing, and **v0** for project-level React/Next.js applications that can move toward deployment.

For Semester, use Claude Artifacts to create decision tools, diagrams, dashboards, and prototype-like deliverables; use Canvas for editable documents and code refinement; use v0 when the work needs an actual Next.js project, server behavior, repository integration, or Vercel deployment. [48] [49] [50]

One comparison matrix

Dimension	Claude Artifacts	ChatGPT Canvas	v0
Primary role	Produce a polished, shareable artifact beside the chat: page, tool, dashboard, diagram, document, or prototype	Collaborative workspace for writing and coding projects that need iterative editing and execution	AI agent for creating real code, full-stack apps, and agents
Best fit	Self-contained products: calculators, interactive explainers, trackers, product demos, diagrams, visual assets, operating tools	PRDs, policies, reports, content, code review, language conversion, code snippets, and editable documents	Production-oriented web apps, SaaS interfaces, Next.js features, dashboards, authenticated flows, and integrated projects
Typical project shape	Usually a contained artifact, often a page or component rendered in Claude	A document or code-focused canvas, often a single working artifact	A multi-file project with a filesystem, dependencies, commands, routes, and deployable application structure
React support	Supports React-based artifacts; libraries can load from permitted CDNs such as `cdnjs`, `jsDelivr`, Tailwind CDN, `code.jquery.com`, and `unpkg`	Renders React/HTML code in an isolated sandbox; OpenAI says all npm packages and many JavaScript libraries work	Native fit for React and Next.js, with modern tooling such as Next.js, Tailwind, and shadcn/ui
Server-side execution	Do not assume a durable server runtime for the artifact itself; it is strongest for client-side, self-contained work	React/HTML render in an isolated sandbox; Python can run from Canvas, but Canvas is not primarily a full-stack hosting environment	Runs in an isolated VM-backed Node.js sandbox; v0 says this can run server code, API routes, and real database connections
Network/API limits	Artifact environments are constrained. When libraries are used, Anthropic documents a limited set of allowed external library hosts; production secrets and sensitive integrations should remain outside the artifact	Isolated preview environment; suitable for rendering and iteration, but production secret management and deployment belong in a dedicated application environment	Sandbox execution remains isolated, but is deliberately closer to a real development environment and can run commands, tests, platform CLIs, server code, and API routes

Dimension	Claude Artifacts	ChatGPT Canvas	v0
Package/dependency model	Prefer self-contained code or permitted CDN-loaded dependencies; dependency freedom is narrower than a normal project	Canvas supports npm packages and many JavaScript libraries in its sandboxed React/HTML environment	Project dependencies and modern app tooling are central to the product; v0 can manage a project and run it in its sandbox
Persistent data	Treat as transient unless connected to an external system; do not rely on artifact-local state as production storage	Canvas is an editing environment, not a production database layer	Can connect projects to databases and real app infrastructure, although production credentials, schemas, and security still require review
Code execution	Claude's broader code-execution environment is a separate secure container model; Anthropic documents no internet access for runtime package downloads there	Canvas supports Python execution in-browser and renders React/HTML previews in isolation	v0 can execute shell commands in an isolated sandbox to inspect repos, run tests, and use platform CLIs
Export formats	Strong source-oriented handoff: HTML, Markdown, React/JSX-style code, SVG, Mermaid, plus browser-generated downloads such as CSV or PNG	General documents: PDF, Markdown, DOCX. Code: export in its detected file type such as `.py`, `.js`, or `.sql`	Project/code export, repository import/export, Git integration, file management, and deployment-oriented handoff
Single-file constraint	Often a practical design preference: one shareable, self-contained artifact is simplest and most portable	Naturally works well for a document or code file, though it can handle project-like editing patterns	Not single-file by default; intended for full project structures
Production deployment	Export or move source to a normal codebase for real auth, backend, observability, tests, and deployment	Export the document/code and move it into the target codebase or publishing workflow	Closest to production deployment; built around app generation and supports Vercel-oriented workflows
Ideal Semester use	Artifact catalog, decision tree, ROI calculator, product prototype, architecture diagram, launch tool, visual explainer	Strategy docs, legal first drafts, PRDs, board memos, research synthesis, code changes, code conversion	A real Semester web product, admin dashboard, customer portal, authenticated app, API routes, database-backed workflow

Anthropic's documentation notes that Claude artifacts can load React and other JavaScript libraries only from specified approved hosts; if those hosts are blocked, dependent parts of the artifact fail rather than falling back. ChatGPT Canvas renders React/HTML in an isolated sandbox, supports Python execution, and offers document export to PDF, Markdown, and DOCX while code is exported using the detected language extension. v0 positions itself around real full-stack app creation, including Next.js, Tailwind, and shadcn/ui, and its sandbox

documentation says it uses a VM-backed Node.js environment capable of running server code, API routes, and database connections. [49] [50] [51] [52] [53] [54] [48]

Sandbox limits

Claude Artifacts

Claude Artifacts are best considered **client-facing, self-contained outputs**, not a replacement for a full application runtime.

- React can work, but a conservative artifact should avoid assuming arbitrary package installation, private runtime secrets, unrestricted external network calls, or durable backend state.
- If you rely on externally hosted React, charting, or UI libraries, the relevant CDN must be accessible. Anthropic lists approved hosts including `cdnjs.cloudflare.com`, `cdn.jsdelivr.net`, `cdn.tailwindcss.com`, `code.jquery.com`, and `unpkg.com`. [48]
- Keep meaningful app data in Supabase, an API, or another managed backend—not only in browser state or artifact-local state.
- For code execution through Claude's Platform tool, Anthropic documents a separate sandboxed container with no internet access, 5 GiB RAM, 5 GiB workspace storage, one CPU, and per-invocation execution limits. That environment is useful for computation and file generation but is distinct from a deployed application backend. [55]
- Claude Code can publish local `.html` or `.md` files as hosted artifact pages under the relevant availability requirements. [56]

Semester examples

Requirement	Good Claude Artifact?	Better production handoff
Filterable artifact catalog with local sample data	Yes	Export JSX/HTML; persist records in Supabase later
Interactive ROI calculator	Yes	Add analytics and lead capture in your web app
Architecture and data-flow diagrams	Yes	Store Mermaid source in GitHub
Marketing landing page prototype	Yes	Move to Next.js or static site repo for launch
Customer login, billing, multi-tenant permissions	No, not as the final implementation	v0/Next.js + Supabase/Auth + production security review
Security questionnaire or legal draft	Yes, as a draft	Legal/security review and a durable documentation system

ChatGPT Canvas

Canvas is most useful when your core loop is **draft → inspect → revise → export**.

- React and HTML render in an isolated sandbox.

- OpenAI's Help Center says Canvas supports npm packages and many JavaScript libraries for React/HTML rendering. [50]
- Python code can run directly within Canvas, with output shown in the lower console area. [52] [50]
- General text documents export as PDF, Markdown, or DOCX; code canvases export with their appropriate detected extension, such as Python, JavaScript, or SQL. [50]
- Canvas has product availability caveats. For example, OpenAI release notes say Canvas is not supported in some models and that its writing/coding functionality has been integrated into chat blocks for newer model experiences. [52]

For Semester, Canvas is an efficient place to iterate a **PRD**, legal first draft, strategy document, executive memo, data model spec, or standalone code module before handing it to GitHub or v0.

v0

v0 is the strongest choice when the artifact must become an **actual application**.

- v0 describes itself as an AI agent for real code, full-stack apps, and agents, with support for modern tools including Next.js, Tailwind, and shadcn/ui. [49]
- Its current sandbox replaced an older browser-based preview; v0 says the VM-backed Node.js environment can run server code, API routes, and real database connections. [53]
- v0 can run shell commands inside the sandbox for testing interactions, inspecting a repository, running unit tests, and calling platform CLIs such as Vercel and GitHub. [54]
- v0's API/docs also describe repository imports, file uploads, template creation, version control integration, file conflict resolution, export capability, and CI/CD tooling connections. [57]
- The sandbox is still isolated. A preview that works inside it is not automatically a hardened production deployment; test exported code, pin dependencies, validate environment variables, and run builds in the target repository.

React and Next.js

For **React-only prototypes**, all three can be useful—but at different levels.

Need	Best choice	Why
Build a single interactive decision tree from scratch	Claude Artifact	Fast, self-contained, excellent for demonstrating the workflow
Iterate visually on a React component and edit code or copy it to a repository	Canvas	Strong editing loop and code-file export
Build a multi-route product with server components, API routes, auth, database access, tests, and deployment	v0	Its environment is oriented around real Next.js project structure and execution
Turn the Semester tracker into a shared team product	v0	Create a Next.js app with Supabase persistence, role-based access, and Vercel deployment

Need	Best choice	Why
Produce an architecture diagram from the same project data	Claude Artifact	Mermaid/SVG output is a natural fit
Turn product decisions into a polished executive document	Canvas	Document workflows and PDF/DOCX export are stronger fits

Recommended Semester handoff

```
1. Claude Artifact
   Build a fast interactive tracker, calculator, diagram, or prototype.
   Export: JSX, HTML, SVG, Mermaid, JSON, CSV, or Markdown.

2. GitHub
   Store source of truth:
   - /docs for PRDs, Mermaid diagrams, policies, and decisions
   - /apps for the production interface
   - /data or Supabase migrations for persistence

3. v0
   Import or connect the repository.
   Convert the prototype into a Next.js application:
   - App Router routes
   - server actions/API routes
   - Supabase persistence
   - authentication and organization tenancy
   - tests, linting, CI, observability

4. Vercel
   Deploy preview environments and production.
```

A practical Next.js structure for the Semester catalog could be:

```
semester/
├── app/
│   ├── artifacts/
│   │   ├── page.tsx              # Filterable catalog
│   │   ├── [artifactId]/page.tsx # Detail page
│   │   └── export/route.ts       # CSV/JSON/Markdown export
│   ├── api/
│   │   └── artifacts/route.ts    # Optional REST endpoint
│   └── layout.tsx
├── components/
│   ├── artifact-table.tsx
│   ├── artifact-filters.tsx
│   ├── decision-tree.tsx
│   ├── prompt-builder.tsx
│   └── exporter.tsx
├── lib/
│   ├── artifact-schema.ts
│   ├── decision-engine.ts
│   └── exporters.ts
```

```
├── supabase/
│   └── migrations/
│       └── create_artifacts.sql
└── docs/
    ├── product-vision.md
    ├── architecture.mmd
    └── security-data-flow.mmd
```

Decision-tree app spec

The following prompt is tuned for a workflow where Claude Artifacts, Canvas, and v0 each have a defined job:

```
Build a responsive React application named “Semester AI Workflow Router.”

Purpose:
Help a software builder choose whether a task belongs in Claude Artifacts, ChatGPT Ca

Primary users:
- Founder/product builder
- Product designer
- Engineer
- Operations lead
- Marketing or GTM lead

Decision inputs:
1. Deliverable type:
   - Interactive tool or dashboard
   - Product prototype
   - Marketing site or landing page
   - Diagram or architecture map
   - Document or policy
   - Presentation or deck
   - Full-stack application feature
   - Data analysis or generated file

2. Required interaction:
   - None
   - Simple client-side interaction
   - Stateful UI with filters/forms
   - Multi-user or authenticated workflow
   - Server-side logic/API routes
   - Background jobs or database writes

3. Project complexity:
   - One self-contained file
   - A component or small prototype
   - Multi-file project
   - Production application

4. Persistence and integrations:
   - No persistence
   - Browser-only state
   - Import/export files
```

```
   - Database
   - Auth and permissions
   - Third-party APIs
   - Secrets and server-side environment variables

5. Handoff requirement:
   - Share immediately in chat
   - Export HTML/JSX/SVG/Mermaid/Markdown
   - Export PDF/DOCX/code file
   - GitHub repository
   - Vercel deployment

6. Preferred stack:
   - Plain HTML/CSS/JS
   - React
   - Next.js
   - Supabase
   - Unknown

Recommendation logic:
- Recommend Claude Artifacts for self-contained interactive pages, visual explainers
- Recommend ChatGPT Canvas for documents, editable writing, code review, language co
- Recommend v0 for real React/Next.js applications, multi-file projects, Next.js rou
- If a task begins as a Claude Artifact but requires persistence, authentication, se
- Explain that sandbox previews are not production environments and identify the spe

Output:
- Primary platform recommendation
- Secondary platform recommendation
- Confidence score
- Short explanation of why
- Sandbox constraints to consider
- Best initial output format
- Best export format
- Exact suggested workflow
- Ready-to-copy prompt for the selected platform
- “Escalate to production” checklist when v0 is recommended

UI:
- Premium B2B software aesthetic
- Step-by-step form with progress indicator
- Decision summary panel
- Platform comparison table
- Copy buttons for recommendation, prompt, and handoff plan
- Export the completed recommendation as Markdown and JSON
- Use local state and realistic sample scenarios only; no backend required
```

The key boundary is simple: **a sandbox preview proves a concept; a repository, backend, test suite, and deployment pipeline prove a product.**

⁂

Compare Claude Artifacts vs ChatGPT Canvas vs v0 sandbox in a sortable matrix — execution limits, React support, and export formats

Computer
Build a prompt decision tree app for choosing between Claude Artifacts, ChatGPT Canvas, and v0 sandbox based on your project type
Computer
Write the React component code for this decision tree app
How do I deploy a v0 project to Vercel
Compare the code export options for all three tools
Sources
63

Claude Artifacts, ChatGPT Canvas, and v0 overlap on React previews, but their operational boundaries differ sharply: Claude is best for self-contained artifacts, Canvas for iterative documents/code, and v0 for real multi-file React/Next.js apps that you can publish to Vercel.

For your Semester workflow, prototype the decision tree in Claude or Canvas, then use v0 when it needs persistence, authentication, API routes, team sharing, GitHub history, or a real deployment.

Sortable comparison matrix

This component includes the requested sortable matrix plus the decision-tree app. It is intentionally dependency-free: paste it into a React environment such as Claude Artifacts, ChatGPT Canvas, v0, or a normal React project.

```
import React, { useMemo, useState } from "react";

const PLATFORM_DATA = [
  {
    id: "claude-artifacts",
    platform: "Claude Artifacts",
    primaryUse: "Shareable self-contained artifacts, tools, diagrams, prototypes, and
    execution: "Client-side rendered artifact experience; best treated as a contained
    sandboxLimits: "Avoid relying on durable storage, private secrets, unrestricted n
    reactSupport: "Good for self-contained React interfaces and interactive client-si
    projectShape: "Often a single contained artifact or exportable component/page",
    exportFormats: "HTML, JSX-style source, Markdown, SVG, Mermaid, plus browser-gene
    productionFit: "Prototype → export source → GitHub → normal application stack",
    bestFor: "Calculators, sortable trackers, interactive explainers, diagrams, demos
    score: {
      prototype: 5,
      documents: 4,
      diagrams: 5,
      fullStack: 1,
      deployment: 2,
    },
  },
```

```
  {
    id: "chatgpt-canvas",
    platform: "ChatGPT Canvas",
    primaryUse: "Iterative writing and coding workspace for revision, editing, reviev
    execution: "React/HTML previews render in an isolated sandbox; Python can execute
    sandboxLimits: "Preview behavior can depend on workspace network access settings
    reactSupport: "React and HTML preview in a sandbox; OpenAI says many npm packages
    projectShape: "Document or code canvas; strongest for individual files and edit/r
    exportFormats: "Documents: PDF, Markdown (.md), Word (.docx). Code: language-appr
    productionFit: "Export document or code → move into repository, editor, or deploy
    bestFor: "PRDs, strategy docs, policies, research synthesis, code editing, code c
    score: {
      prototype: 3,
      documents: 5,
      diagrams: 3,
      fullStack: 1,
      deployment: 1,
    },
  },
  {
    id: "v0",
    platform: "v0",
    primaryUse: "Real code and full-stack web apps, especially React/Next.js projects
    execution: "VM-backed, isolated Node.js sandbox capable of running server code, A
    sandboxLimits: "Still an isolated development environment; validate dependencies
    reactSupport: "Native fit for React and Next.js. Designed for multi-file projects
    projectShape: "Multi-file project with dependencies, filesystem, routes, integrat
    exportFormats: "Project/code export, GitHub sync, existing-codebase integration,
    productionFit: "Best for repository-backed applications, previews, production dep
    bestFor: "Next.js apps, authenticated workflows, dashboards, API routes, database
    score: {
      prototype: 4,
      documents: 2,
      diagrams: 2,
      fullStack: 5,
      deployment: 5,
    },
  },
];

const WORKFLOW_OPTIONS = {
  deliverable: [
    ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or config
    ["product-prototype", "Clickable product prototype or interface exploration"],
    ["marketing-page", "Marketing site, landing page, one-page demo, or visual explai
    ["diagram", "Architecture, process, sequence, ERD, roadmap, or system diagram"],
    ["document", "PRD, policy, research, strategy, report, or operating document"],
    ["presentation", "Pitch, board update, sales story, launch narrative, or training
    ["full-stack-feature", "Authenticated, data-backed, multi-user product feature"]
    ["analysis", "Python-based analysis, structured research, file generation, or dat
  ],
  interaction: [
    ["none", "No interaction; people mainly read or review"],
    ["simple", "Simple browser interaction: toggles, tabs, calculators, or local data
    ["complex", "Stateful interaction: tables, filters, forms, drawers, editable data
    ["multi-user", "Multiple users, roles, shared records, or collaboration"],
```

```
  ],
  backend: [
    ["none", "No backend; static output or browser-only sample data"],
    ["file-export", "Needs generated downloads such as CSV, Markdown, SVG, or JSON"]
    ["database", "Needs persistent database records"],
    ["server-api", "Needs API routes, server-side logic, webhooks, or third-party ser
    ["auth-secrets", "Needs authentication, permissions, server secrets, billing, or
  ],
  handoff: [
    ["share-now", "Share immediately as a finished artifact"],
    ["doc-export", "Export a document, PDF, DOCX, Markdown, or source file"],
    ["github", "Commit versioned source into GitHub"],
    ["deploy", "Deploy a real web application"],
  ],
};

const DEFAULT_ANSWERS = {
  deliverable: "interactive-tool",
  interaction: "complex",
  backend: "none",
  handoff: "share-now",
};

function getRecommendation(answers) {
  const scores = {
    "claude-artifacts": 0,
    "chatgpt-canvas": 0,
    v0: 0,
  };

  const reasons = {
    "claude-artifacts": [],
    "chatgpt-canvas": [],
    v0: [],
  };

  const add = (platform, points, reason) => {
    scores[platform] += points;
    reasons[platform].push(reason);
  };

  switch (answers.deliverable) {
    case "interactive-tool":
      add("claude-artifacts", 7, "You selected an interactive tool, which suits a sel
      add("v0", 4, "v0 is a strong follow-on when the tool becomes a real product sur
      add("chatgpt-canvas", 2, "Canvas can preview interactive React/HTML but is less
      break;
    case "product-prototype":
      add("claude-artifacts", 6, "Claude Artifacts is efficient for a contained inter
      add("v0", 5, "v0 is strong when the prototype should become a multi-file applic
      add("chatgpt-canvas", 3, "Canvas can render and iterate React/HTML prototypes."
      break;
    case "marketing-page":
      add("claude-artifacts", 7, "A shareable one-page visual artifact is a direct fi
      add("v0", 5, "v0 is a good fit if the page will ship inside a Next.js site.");
      add("chatgpt-canvas", 2, "Canvas helps with copy and page-code iteration.");
```

```
      break;
    case "diagram":
      add("claude-artifacts", 8, "Claude Artifacts is ideal for Mermaid, SVG, and sha
      add("chatgpt-canvas", 3, "Canvas works for diagram source and supporting explan
      add("v0", 1, "v0 is not the primary choice unless the diagram is part of a larg
      break;
    case "document":
      add("chatgpt-canvas", 9, "Canvas is optimized for drafting, revising, and expor
      add("claude-artifacts", 4, "Claude can produce polished standalone document art
      add("v0", 1, "v0 is unnecessary unless the document is part of an application."
      break;
    case "presentation":
      add("chatgpt-canvas", 6, "Canvas fits narrative editing and document-style expo
      add("claude-artifacts", 5, "Claude works well for visual, shareable deck-like a
      add("v0", 2, "v0 only makes sense if the presentation is a web experience.");
      break;
    case "full-stack-feature":
      add("v0", 10, "A full-stack feature needs a project structure, server logic, an
      add("claude-artifacts", 1, "Claude can prototype the interface before implement
      add("chatgpt-canvas", 1, "Canvas can help draft specifications and review modul
      break;
    case "analysis":
      add("chatgpt-canvas", 8, "Canvas supports iterative code and Python execution w
      add("claude-artifacts", 3, "Claude can create a shareable visualization or resu
      add("v0", 3, "v0 can be useful when analysis becomes a deployed app.");
      break;
    default:
      break;
  }

  switch (answers.interaction) {
    case "none":
      add("chatgpt-canvas", 3, "The output is primarily editorial or read-only.");
      add("claude-artifacts", 2, "A contained static artifact remains viable.");
      break;
    case "simple":
      add("claude-artifacts", 5, "Simple client-side interaction fits an artifact wel
      add("chatgpt-canvas", 3, "Canvas can preview lightweight React/HTML interaction
      add("v0", 2, "v0 can handle it, though it may be more infrastructure than neede
      break;
    case "complex":
      add("claude-artifacts", 5, "A stateful client-side interface can work as a prot
      add("v0", 6, "Complex interfaces benefit from a project-level React/Next.js cod
      add("chatgpt-canvas", 3, "Canvas can preview React but is less oriented around
      break;
    case "multi-user":
      add("v0", 10, "Multi-user interaction requires real identity, authorization, pe
      break;
    default:
      break;
  }

  switch (answers.backend) {
    case "none":
      add("claude-artifacts", 4, "No backend is required, favoring a self-contained a
      add("chatgpt-canvas", 3, "An editor/preview workflow can be sufficient.");
```

```
      break;
    case "file-export":
      add("claude-artifacts", 5, "Artifacts are well suited to client-side generated
      add("chatgpt-canvas", 5, "Canvas directly supports document and language-speci
      add("v0", 3, "v0 can also create export features inside a real app.");
      break;
    case "database":
      add("v0", 8, "Persistent records call for a real project with database integra
      add("claude-artifacts", 1, "Use Claude for prototype data only, then hand off.
      break;
    case "server-api":
      add("v0", 9, "Server routes and external services favor v0's application envir
      break;
    case "auth-secrets":
      add("v0", 10, "Authentication, permissions, billing, and secrets require a pro
      break;
    default:
      break;
  }

  switch (answers.handoff) {
    case "share-now":
      add("claude-artifacts", 6, "Immediate sharing favors a finished visual artifac
      add("chatgpt-canvas", 3, "Canvas assets can also be shared.");
      break;
    case "doc-export":
      add("chatgpt-canvas", 7, "Canvas supports direct PDF, DOCX, Markdown, and code
      add("claude-artifacts", 4, "Artifact source/export forms work well for HTML, S
      break;
    case "github":
      add("v0", 7, "v0 is built for repository-backed application workflows.");
      add("claude-artifacts", 3, "Claude output can be exported and committed to a re
      add("chatgpt-canvas", 3, "Canvas code can be exported into a repository.");
      break;
    case "deploy":
      add("v0", 10, "Deployment is v0's strongest handoff path through Vercel.");
      add("claude-artifacts", 1, "Claude should hand off source rather than serve as
      break;
    default:
      break;
  }

  const ranked = Object.entries(scores)
    .map(([id, score]) => ({
      ...PLATFORM_DATA.find((platform) => platform.id === id),
      score,
      reasons: reasons[id],
    }))
    .sort((a, b) => b.score - a.score);

  const primary = ranked[^6_0];
  const secondary = ranked[^6_1];

  const escalation =
    answers.backend === "database" ||
    answers.backend === "server-api" ||
```

```
    answers.backend === "auth-secrets" ||
    answers.interaction === "multi-user" ||
    answers.handoff === "deploy";

  return {
    primary,
    secondary,
    ranked,
    escalation,
    confidence: Math.min(
      96,
      Math.max(62, 68 + (primary.score - secondary.score) * 4 + (escalation && prima
    ),
  };
}

function copyToClipboard(text) {
  return navigator.clipboard?.writeText(text);
}

function CopyButton({ value, label = "Copy" }) {
  const [copied, setCopied] = useState(false);

  const handleClick = async () => {
    try {
      await copyToClipboard(value);
      setCopied(true);
      window.setTimeout(() => setCopied(false), 1400);
    } catch {
      setCopied(false);
    }
  };

  return (
    <button
      onClick={handleClick}
      className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs font
    >
      {copied ? "Copied" : label}
    </button>
  );
}

function Badge({ children, className = "" }) {
  return (
    <span className={`inline-flex items-center rounded-full border px-2 py-0.5 text-x
      {children}
    </span>
  );
}

function PlatformBadge({ platform }) {
  const styles = {
    "Claude Artifacts": "border-amber-200 bg-amber-50 text-amber-800",
    "ChatGPT Canvas": "border-emerald-200 bg-emerald-50 text-emerald-800",
    v0: "border-slate-800 bg-slate-950 text-white",
```

```
  };

  return <Badge className={styles[platform]}>{platform}</Badge>;
}

function exportJson(filename, data) {
  const blob = new Blob([JSON.stringify(data, null, 2)], { type: "application/json;cl
  const href = URL.createObjectURL(blob);
  const anchor = document.createElement("a");
  anchor.href = href;
  anchor.download = filename;
  anchor.click();
  URL.revokeObjectURL(href);
}

function exportMarkdown(filename, content) {
  const blob = new Blob([content], { type: "text/markdown;charset=utf-8" });
  const href = URL.createObjectURL(blob);
  const anchor = document.createElement("a");
  anchor.href = href;
  anchor.download = filename;
  anchor.click();
  URL.revokeObjectURL(href);
}

function generatePrompt(recommendation, answers) {
  const platform = recommendation.primary.platform;
  const fallback = recommendation.secondary.platform;

  const instructions = {
    "Claude Artifacts":
      "Create a polished, self-contained artifact. Keep the result client-side, depen
    "ChatGPT Canvas":
      "Create an editable canvas optimized for iteration and revision. Use clear docu
    v0:
      "Create a production-oriented Next.js application. Use a clean multi-file struc
  };

  return `Build this for Semester.

Recommended platform: ${platform}
Secondary option: ${fallback}
Confidence: ${recommendation.confidence}%

Project type: ${answers.deliverable}
Interaction level: ${answers.interaction}
Backend requirement: ${answers.backend}
Handoff target: ${answers.handoff}

${instructions[platform]}

Required output:
- Explain the architecture and key assumptions.
- Build the primary workflow using realistic sample data.
- Include a concise “how to run or use this” section.
- State the export/handoff path.
```

```
${
  recommendation.escalation
    ? "- Include an escalation-to-production checklist: auth, authorization, persiste
    : ""
}

For Semester, optimize for a clean premium B2B software experience and make the deliv
}

export default function SemesterWorkflowRouter() {
  const [answers, setAnswers] = useState(DEFAULT_ANSWERS);
  const [sort, setSort] = useState({ key: "platform", direction: "asc" });
  const [selectedPlatform, setSelectedPlatform] = useState(null);

  const recommendation = useMemo(() => getRecommendation(answers), [answers]);
  const generatedPrompt = useMemo(
    () => generatePrompt(recommendation, answers),
    [recommendation, answers]
  );

  const sortedPlatforms = useMemo(() => {
    return [...PLATFORM_DATA].sort((a, b) => {
      const aValue = a[sort.key] ?? "";
      const bValue = b[sort.key] ?? "";

      if (typeof aValue === "object") return 0;

      return sort.direction === "asc"
        ? String(aValue).localeCompare(String(bValue))
        : String(bValue).localeCompare(String(aValue));
    });
  }, [sort]);

  const setAnswer = (key, value) => {
    setAnswers((current) => ({ ...current, [key]: value }));
  };

  const toggleSort = (key) => {
    setSort((current) => ({
      key,
      direction: current.key === key && current.direction === "asc" ? "desc" : "asc"
    }));
  };

  const header = (label, key) => (
    <button
      onClick={() => toggleSort(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase tracki
    >
      {label}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
    </button>
  );

  const decisionMarkdown = `# Semester AI Workflow Recommendation
```

```
## Recommendation
- Primary platform: ${recommendation.primary.platform}
- Secondary platform: ${recommendation.secondary.platform}
- Confidence: ${recommendation.confidence}%
- Production escalation required: ${recommendation.escalation ? "Yes" : "No"}

## Requirements
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend: ${answers.backend}
- Handoff: ${answers.handoff}

## Why
${recommendation.primary.reasons.map((reason) => `- ${reason}`).join("\n")}

## Ready-to-use prompt
\`\`\`
${generatedPrompt}
\`\`\`
`;

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            Semester build workflow
          </p>
          <h1 className="mt-2 text-3xl font-bold tracking-tight">
            Claude Artifacts vs Canvas vs v0 Router
          </h1>
          <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
            Compare execution constraints, React fit, export paths, and deployment re
          </p>
        </header>

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Decision tree
            </p>
            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Choose the right environment for the project
            </h2>
          </div>

          <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-4">
            {Object.entries(WORKFLOW_OPTIONS).map(([key, choices]) => (
              <fieldset key={key} className="rounded-xl border border-slate-200 bg-sl
                <legend className="px-1 text-sm font-bold capitalize text-slate-900">
                  {key === "backend" ? "Data and backend" : key}
                </legend>
                <div className="mt-2 space-y-2">
                  {choices.map(([value, label]) => (
                    <label key={value} className="flex cursor-pointer items-start gap
                      <input
```

```
                    type="radio"
                    name={key}
                    value={value}
                    checked={answers[key] === value}
                    onChange={() => setAnswer(key, value)}
                    className="mt-1 accent-indigo-600"
                  />
                  <span>{label}</span>
                </label>
              ))}
            </div>
          </fieldset>
        ))}
      </div>

      <div className="mt-5 rounded-2xl border border-indigo-200 bg-indigo-50 p-5">
        <div className="flex flex-col justify-between gap-4 lg:flex-row lg:items-
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indi
              Primary recommendation
            </p>
            <div className="mt-2 flex flex-wrap items-center gap-2">
              <h3 className="text-2xl font-bold text-slate-950">
                {recommendation.primary.platform}
              </h3>
              <PlatformBadge platform={recommendation.primary.platform} />
              <Badge className="border-indigo-200 bg-white text-indigo-700">
                {recommendation.confidence}% confidence
              </Badge>
            </div>

            <ul className="mt-4 max-w-3xl space-y-2 text-sm leading-6 text-slate-
              {recommendation.primary.reasons.map((reason) => (
                <li key={reason}>• {reason}</li>
              ))}
            </ul>
          </div>

          <div className="rounded-xl border border-indigo-100 bg-white p-4 lg:w-8
            <p className="text-xs font-bold uppercase tracking-wide text-slate-50
              Secondary option
            </p>
            <p className="mt-1 text-base font-bold text-slate-900">
              {recommendation.secondary.platform}
            </p>
            <p className="mt-2 text-sm leading-6 text-slate-600">
              {recommendation.secondary.primaryUse}
            </p>
          </div>
        </div>

        {recommendation.escalation && (
          <div className="mt-5 rounded-xl border border-amber-200 bg-amber-50 p-4
            <p className="text-sm font-bold text-amber-900">
              Production handoff required
            </p>
```

```
              <p className="mt-1 text-sm leading-6 text-amber-800">
                Your choices require persistence, APIs, authentication, secrets, mu
              </p>
            </div>
          )}
        </div>
      </section>

      <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
        <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
              Prompt generator
            </p>
            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Ready-to-copy build prompt
            </h2>
          </div>
          <div className="flex flex-wrap gap-2">
            <CopyButton value={generatedPrompt} label="Copy prompt" />
            <button
              onClick={() => exportMarkdown("semester-workflow-recommendation.md",
              className="rounded-lg bg-slate-900 px-3 py-1.5 text-xs font-bold tex
            >
              Export Markdown
            </button>
            <button
              onClick={() =>
                exportJson("semester-workflow-recommendation.json", {
                  answers,
                  recommendation: {
                    primary: recommendation.primary.platform,
                    secondary: recommendation.secondary.platform,
                    confidence: recommendation.confidence,
                    escalation: recommendation.escalation,
                    reasons: recommendation.primary.reasons,
                  },
                  generatedPrompt,
                })
              }
              className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 te
            >
              Export JSON
            </button>
          </div>
        </div>

        <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-x
          {generatedPrompt}
        </pre>
      </section>

      <section className="overflow-hidden rounded-2xl border border-slate-200 bg-wh
        <div className="border-b border-slate-200 p-5">
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
            Platform matrix
```

```
            </p>
            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Sortable execution, React, and export comparison
            </h2>
            <p className="mt-1 text-sm text-slate-600">
              Click an artifact row for a full operational profile.
            </p>
          </div>

          <div className="overflow-x-auto">
            <table className="w-full min-w-[1450px] border-collapse">
              <thead className="bg-slate-50">
                <tr>
                  <th className="px-4 py-3">{header("Platform", "platform")}</th>
                  <th className="px-4 py-3">{header("Primary use", "primaryUse")}</th
                  <th className="px-4 py-3">{header("Execution", "execution")}</th>
                  <th className="px-4 py-3">{header("React support", "reactSupport")}
                  <th className="px-4 py-3">{header("Project shape", "projectShape")}
                  <th className="px-4 py-3">{header("Export formats", "exportFormats"
                  <th className="px-4 py-3">{header("Production fit", "productionFit"
                  <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                    Details
                  </th>
                </tr>
              </thead>

              <tbody>
                {sortedPlatforms.map((platform) => (
                  <tr
                    key={platform.id}
                    className="border-t border-slate-100 align-top transition hover:b
                  >
                    <td className="px-4 py-4">
                      <div className="font-bold text-slate-950">{platform.platform}</
                      <div className="mt-2 flex gap-1">
                        <Badge className="border-slate-200 bg-slate-50 text-slate-600
                          Prototype {platform.score.prototype}/5
                        </Badge>
                        <Badge className="border-slate-200 bg-slate-50 text-slate-600
                          Deploy {platform.score.deployment}/5
                        </Badge>
                      </div>
                    </td>
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                    <td className="px-4 py-4">
                      <button
                        onClick={() => setSelectedPlatform(platform)}
                        className="rounded-lg border border-slate-200 bg-white px-3 p
                      >
                        Open
                      </button>
```

```
                    </td>
                  </tr>
                ))}
              </tbody>
            </table>
          </div>
        </section>

        {selectedPlatform && (
          <div className="fixed inset-0 z-50 flex justify-end bg-slate-950/30">
            <button
              aria-label="Close platform details"
              className="absolute inset-0 cursor-default"
              onClick={() => setSelectedPlatform(null)}
            />
            <aside className="relative h-full w-full max-w-2xl overflow-y-auto bg-wh
              <div className="flex items-start justify-between gap-4">
                <div>
                  <PlatformBadge platform={selectedPlatform.platform} />
                  <h2 className="mt-3 text-2xl font-bold text-slate-950">
                    {selectedPlatform.platform}
                  </h2>
                </div>
                <button
                  onClick={() => setSelectedPlatform(null)}
                  className="rounded-lg border border-slate-200 px-3 py-1.5 text-sm
                >
                  Close
                </button>
              </div>

              <div className="mt-6 space-y-5">
                {[
                  ["Primary use", selectedPlatform.primaryUse],
                  ["Execution model", selectedPlatform.execution],
                  ["Sandbox limits", selectedPlatform.sandboxLimits],
                  ["React support", selectedPlatform.reactSupport],
                  ["Project shape", selectedPlatform.projectShape],
                  ["Code/export options", selectedPlatform.exportFormats],
                  ["Production handoff", selectedPlatform.productionFit],
                  ["Best use cases", selectedPlatform.bestFor],
                ].map(([label, value]) => (
                  <div key={label}>
                    <h3 className="text-sm font-bold text-slate-900">{label}</h3>
                    <p className="mt-1 text-sm leading-6 text-slate-600">{value}</p>
                  </div>
                ))}
              </div>
            </aside>
          </div>
        )}
      </div>
    </main>
  );
}
```

Execution sandbox limits

The important distinction is not "can it preview code?"—all three can—but **whether the preview is the same thing as a deployable application environment.**

Platform	What executes	Practical limit	Semester implication
Claude Artifacts	Primarily a rendered, self-contained client-side artifact	Do not depend on it as your permanent backend, database, secret store, authentication layer, or unrestricted package/network environment	Great for a first version of the artifact tracker, ROI calculator, visual prototype, or decision tool
ChatGPT Canvas	React/HTML preview in a sandbox; Python can run inside Canvas	External resources and packages can depend on Canvas network settings; Canvas is mainly a revision/export workspace rather than an app-hosting system	Great for PRDs, legal/ops drafts, code iteration, a data-analysis helper, or a single component
v0	VM-backed Node.js sandbox with project files and commands	Still validate build, dependencies, environment variables, permissions, data rules, and production security after preview	Best for turning the Semester tracker into an authenticated, multi-user, Supabase-backed Next.js product

Claude documentation says artifact environments can load React and other libraries from specified sources, including `cdnjs`, jsDelivr, Tailwind CDN, `code.jquery.com`, and `unpkg`; this means a library-dependent artifact can fail if the required host is unavailable or blocked. In the separate Claude code-execution environment, Anthropic documents a secure sandboxed container with no internet access for runtime package downloads, so it should not be confused with a production server. [64] [65]

OpenAI says ChatGPT Canvas renders React/HTML in a sandbox; many npm packages and JavaScript libraries work, but previews needing external packages or web resources can depend on workspace Canvas network-access settings. v0 documents an isolated, VM-backed Node.js sandbox that replaced an earlier browser-only preview and can run server code, API routes, and real database connections. [66] [67] [68]

Code export options

Tool	Code handoff	Document handoff	Best export workflow
Claude Artifacts	Export or copy HTML, React/JSX-style code, SVG, Mermaid, and generated browser files such as CSV/PNG	Markdown or rendered artifact content	Copy source into GitHub; convert a prototype into a proper application project when it needs real infrastructure
ChatGPT Canvas	Exports code based on recognized language, including extensions such as `.js`, `.py`, and `.sql`	PDF, Markdown, and DOCX for general documents	Use Canvas for drafting/revision, then export a file into your repository or documentation system
v0	Export project code, connect/sync GitHub, or pull generated components into an existing codebase	Application source plus repository/deployment artifacts rather than document-first exports	Connect GitHub, work through branches/PRs, and publish through Vercel

ChatGPT Canvas officially supports PDF, Markdown, and Word export for general documents; code canvases detect the language and export with an appropriate extension such as `.py`, `.js`, or `.sql`. Canvas assets—including rendered React/HTML, documents, and code—can also be shared through the Canvas toolbar in supported plans. [69] [70] [66]

v0 can export generated components to an existing codebase and supports bidirectional Git integration; its docs describe connecting a project to GitHub, creating a repository from the current project code, using isolated branches and previews, and publishing after review. [71] [72]

Deploy v0 to Vercel

The fastest route is direct publish from v0. For a durable software workflow, connect GitHub first and publish from a reviewed branch.

Direct publish

1. Build and preview the project in v0.
2. Verify key flows: responsive UI, empty/error states, navigation, and sample data.
3. In v0, select **Share** and open the **Publish** tab.
4. Choose **Publish**.
5. Confirm the domain and deployment visibility.
6. v0 publishes the application on Vercel's platform. [72]

GitHub-backed publish

1. Open the v0 project menu: `...` → **Settings** → **GitHub**.
2. Select **Connect**.
3. Choose the GitHub account or organization under **Git Scope**.
4. Enter a repository name and select **Create Repository**. v0 creates a private repository and pushes the existing project code. [71]
5. Work on an isolated branch in v0 and inspect the branch preview.
6. Review the CI status and code changes.
7. Select **Publish**, confirm the target domain and visibility, then publish. [71]

Before production

Do these even if the preview looks correct:

- Replace mock data with a real data layer, such as Supabase.
- Store keys only in Vercel environment variables; never ship them in client-side code.
- Add authentication and row-level authorization for any shared Semester data.
- Validate server inputs and API responses.
- Add loading, retry, error, and empty states.

- Run typechecking, linting, and production builds.
- Add monitoring, analytics, and error tracking.
- Set a preview-deployment workflow for pull requests.
- Review accessibility, mobile layouts, cookies/privacy, and security assumptions.

Recommended Semester workflow

```
Claude Artifact
  → Build the initial tracker, ROI tool, diagram, or decision tree
  → Export JSX / HTML / Mermaid / SVG / JSON / CSV

ChatGPT Canvas
  → Produce PRDs, legal/operations first drafts, strategy docs, code rewrites
  → Export DOCX / PDF / Markdown / code file

GitHub + v0
  → Create a Next.js project
  → Add Supabase, auth, API routes, persistent data, and tests
  → Publish a preview, review changes, then deploy to Vercel
```

Use the component above as the **front-door decision tool.** When it recommends v0 because you selected a database, server API, auth/secrets, multi-user workflow, or deployment, treat the artifact as a product specification or UI prototype—not the final production implementation.

⁂

Compare Claude Artifacts vs ChatGPT Canvas vs v0 sandbox in a sortable matrix — execution limits, React support, and export formats

Computer
Build a prompt decision tree app for choosing between Claude Artifacts, ChatGPT Canvas, and v0 sandbox based on project scope and tech stack
Computer
Show me the rest of the code block
Add GitHub push steps to the prompt decision tree
Can v0 handle multi-file Next.js apps with Postgres

Yes—**v0 can handle multi-file Next.js applications backed by Postgres**, including server-side routes/actions and database-connected workflows. The right architecture for Semester is: prototype the decision tree in Claude or Canvas if useful, then use v0 with a GitHub repository and a managed Postgres provider such as Supabase, Neon, or Prisma Postgres for the durable app. [83] [84]

The missing code block

Below is the rest of the decision-tree app code, expanded to include:

- A sortable platform matrix
- Claude Artifacts vs ChatGPT Canvas vs v0 comparison
- Project-scope and tech-stack decision logic
- A generated build prompt
- GitHub push instructions that change based on the recommendation
- A production escalation checklist
- JSON and Markdown export of the recommendation

Paste it into a React/Next.js client component, a Claude React artifact, Canvas, or v0. For **Next.js App Router**, save it as `app/workflow-router/page.tsx` and add `"use client";` at the top.

```
"use client";

import React, { useMemo, useState } from "react";

type PlatformId = "claude-artifacts" | "chatgpt-canvas" | "v0";

type Answers = {
  deliverable:
    | "interactive-tool"
    | "product-prototype"
    | "marketing-page"
    | "diagram"
    | "document"
    | "presentation"
    | "full-stack-feature"
    | "analysis";
  interaction: "none" | "simple" | "complex" | "multi-user";
  backend: "none" | "file-export" | "database" | "server-api" | "auth-secrets";
  techStack: "none" | "html" | "react" | "nextjs" | "nextjs-postgres" | "nextjs-supal
  handoff: "share-now" | "doc-export" | "github" | "deploy";
};

type Platform = {
  id: PlatformId;
  platform: string;
  primaryUse: string;
  execution: string;
  sandboxLimits: string;
  reactSupport: string;
  projectShape: string;
  exportFormats: string;
  githubWorkflow: string;
  productionFit: string;
  bestFor: string;
  scores: {
    prototype: number;
    documents: number;
```

```
    diagrams: number;
    fullStack: number;
    deployment: number;
  };
};

const PLATFORM_DATA: Platform[] = [
  {
    id: "claude-artifacts",
    platform: "Claude Artifacts",
    primaryUse:
      "Shareable self-contained artifacts, interactive tools, diagrams, visual expla
    execution:
      "Rendered artifact experience, generally optimized for contained client-side ou
    sandboxLimits:
      "Do not assume durable database storage, server-side secrets, unrestricted API
    reactSupport:
      "Good for self-contained React interfaces, local-state dashboards, calculators
    projectShape:
      "Usually one contained artifact, component, or page that can be copied into a r
    exportFormats:
      "HTML, React/JSX-style source, Markdown, SVG, Mermaid, plus browser-generated e
    githubWorkflow:
      "Copy or export source files, create a repository, then commit the extracted HT
    productionFit:
      "Prototype → export source → GitHub → Next.js or normal application stack.",
    bestFor:
      "Semester artifact catalog prototype, format decision tree, ROI calculator, Mer
    scores: {
      prototype: 5,
      documents: 4,
      diagrams: 5,
      fullStack: 1,
      deployment: 2,
    },
  },
  {
    id: "chatgpt-canvas",
    platform: "ChatGPT Canvas",
    primaryUse:
      "Iterative workspace for documents and code that benefit from editing, revisior
    execution:
      "React and HTML preview in an isolated sandbox; Python can execute in Canvas fo
    sandboxLimits:
      "Treat Canvas as an editing and preview environment, not a durable application
    reactSupport:
      "React and HTML can render in Canvas previews, with support for many npm packag
    projectShape:
      "Document or code canvas, typically strongest for individual files, structured
    exportFormats:
      "Documents: PDF, DOCX, Markdown. Code: language-appropriate export, such as Jav
    githubWorkflow:
      "Export code or Markdown, add it to a local repository, then push through GitHu
    productionFit:
      "Draft/revise/export → GitHub or documentation system → production application
    bestFor:
```

```
      "Semester PRDs, strategy, policies, research synthesis, legal first drafts, co
    scores: {
      prototype: 3,
      documents: 5,
      diagrams: 3,
      fullStack: 1,
      deployment: 1,
    },
  },
  {
    id: "v0",
    platform: "v0",
    primaryUse:
      "Production-oriented React and Next.js applications, multi-file projects, real
    execution:
      "VM-backed isolated Node.js sandbox that can work with multi-file projects, se
    sandboxLimits:
      "The sandbox is still not production. Validate environment variables, package
    reactSupport:
      "Native fit for React and Next.js, including multi-file components, App Router
    projectShape:
      "Multi-file repository-style application with dependencies, routes, components
    exportFormats:
      "Application project code, GitHub repository sync/export, existing-codebase in
    githubWorkflow:
      "Connect GitHub from v0, create or select a repository, work on isolated branc
    productionFit:
      "Best option for repository-backed applications, Postgres/Supabase integration
    bestFor:
      "Semester customer portal, authenticated artifact tracker, team dashboard, Nex
    scores: {
      prototype: 4,
      documents: 2,
      diagrams: 2,
      fullStack: 5,
      deployment: 5,
    },
  },
];

const OPTIONS = {
  deliverable: [
    ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or config
    ["product-prototype", "Clickable product prototype or interface exploration"],
    ["marketing-page", "Marketing site, landing page, one-page demo, or visual expla
    ["diagram", "Architecture, process, ERD, sequence, roadmap, or system diagram"],
    ["document", "PRD, policy, research, strategy, report, or operating document"],
    ["presentation", "Pitch, board update, sales story, launch narrative, or training
    ["full-stack-feature", "Authenticated, data-backed, multi-user product feature"]
    ["analysis", "Python analysis, structured research, file generation, or data clea
  ],
  interaction: [
    ["none", "No interaction; readers mainly review content"],
    ["simple", "Simple client-side interaction: tabs, toggles, calculators, local da
    ["complex", "Stateful UI: tables, filters, forms, drawers, editable workflows"],
    ["multi-user", "Multiple users, shared records, permissions, or collaboration"],
```

```
  ],
  backend: [
    ["none", "No backend; static result or browser-only sample data"],
    ["file-export", "Needs generated CSV, Markdown, SVG, JSON, PDF, or related downlo
    ["database", "Needs persistent database records"],
    ["server-api", "Needs API routes, webhooks, server-side logic, or third-party ser
    ["auth-secrets", "Needs auth, permissions, billing, private APIs, or server secre
  ],
  techStack: [
    ["none", "No code-stack requirement"],
    ["html", "Plain HTML, CSS, and JavaScript"],
    ["react", "React component or client-side application"],
    ["nextjs", "Multi-file Next.js application"],
    ["nextjs-postgres", "Next.js plus Postgres"],
    ["nextjs-supabase", "Next.js plus Supabase/Postgres/Auth"],
  ],
  handoff: [
    ["share-now", "Share immediately as a finished artifact"],
    ["doc-export", "Export PDF, DOCX, Markdown, or a source file"],
    ["github", "Commit versioned source into GitHub"],
    ["deploy", "Deploy a real web application"],
  ],
} as const;

const DEFAULT_ANSWERS: Answers = {
  deliverable: "interactive-tool",
  interaction: "complex",
  backend: "none",
  techStack: "react",
  handoff: "share-now",
};

function getPlatformById(id: PlatformId) {
  return PLATFORM_DATA.find((platform) => platform.id === id)!;
}

function recommendPlatform(answers: Answers) {
  const score: Record<PlatformId, number> = {
    "claude-artifacts": 0,
    "chatgpt-canvas": 0,
    v0: 0,
  };

  const reasons: Record<PlatformId, string[]> = {
    "claude-artifacts": [],
    "chatgpt-canvas": [],
    v0: [],
  };

  const add = (platform: PlatformId, points: number, reason: string) => {
    score[platform] += points;
    reasons[platform].push(reason);
  };

  switch (answers.deliverable) {
    case "interactive-tool":
```

```
      add("claude-artifacts", 7, "A self-contained interactive tool is a direct fit
      add("v0", 4, "v0 is a strong next step if the tool becomes a shared production
      add("chatgpt-canvas", 2, "Canvas can preview React/HTML but is less focused on
      break;
    case "product-prototype":
      add("claude-artifacts", 6, "Claude is fast for a contained interactive prototyp
      add("v0", 5, "v0 is strong if the prototype will evolve into the production app
      add("chatgpt-canvas", 3, "Canvas can iterate and preview React/HTML prototype c
      break;
    case "marketing-page":
      add("claude-artifacts", 7, "A shareable visual page is an excellent Claude Arti
      add("v0", 5, "v0 is appropriate when the page should ship inside a Next.js site
      add("chatgpt-canvas", 2, "Canvas helps with copy and smaller front-end iteratio
      break;
    case "diagram":
      add("claude-artifacts", 8, "Claude is ideal for Mermaid, SVG, visual explainers
      add("chatgpt-canvas", 3, "Canvas works well for diagram source plus explanatory
      add("v0", 1, "v0 is best only if the diagram belongs inside a larger product.")
      break;
    case "document":
      add("chatgpt-canvas", 9, "Canvas is optimized for drafting, revising, and expor
      add("claude-artifacts", 4, "Claude can create polished standalone document arti
      add("v0", 1, "v0 is unnecessary unless the document belongs in an application."
      break;
    case "presentation":
      add("chatgpt-canvas", 6, "Canvas supports an editorial and export-focused prese
      add("claude-artifacts", 5, "Claude is useful for visual, shareable deck-like pr
      add("v0", 2, "v0 makes sense only when the deck itself is an interactive web ex
      break;
    case "full-stack-feature":
      add("v0", 10, "A full-stack feature needs project structure, server logic, and
      add("claude-artifacts", 1, "Claude can still prototype the interaction before i
      add("chatgpt-canvas", 1, "Canvas can help write the specification or review inc
      break;
    case "analysis":
      add("chatgpt-canvas", 8, "Canvas is a strong fit for iterative Python and file-
      add("claude-artifacts", 3, "Claude can package the analysis into a shareable vi
      add("v0", 3, "v0 is useful if analysis becomes an app for ongoing team use.");
      break;
  }

  switch (answers.interaction) {
    case "none":
      add("chatgpt-canvas", 3, "A mostly read-only deliverable favors an editorial wo
      add("claude-artifacts", 2, "A self-contained static artifact remains viable.")
      break;
    case "simple":
      add("claude-artifacts", 5, "Simple browser-side interaction fits a Claude Artif
      add("chatgpt-canvas", 3, "Canvas can preview lightweight React or HTML interact
      add("v0", 2, "v0 can handle this, but may add unnecessary project overhead.");
      break;
    case "complex":
      add("claude-artifacts", 5, "Claude can handle a stateful client-side prototype
      add("v0", 6, "Complex UI benefits from a durable multi-file React/Next.js proje
      add("chatgpt-canvas", 3, "Canvas can preview the code but is less app-lifecycle
      break;
```

```
    case "multi-user":
      add("v0", 10, "Multi-user workflows require identity, authorization, persisten
      break;
  }

  switch (answers.backend) {
    case "none":
      add("claude-artifacts", 4, "No backend is required, favoring a portable self-c
      add("chatgpt-canvas", 3, "A document or code preview workflow can be sufficien
      break;
    case "file-export":
      add("claude-artifacts", 5, "Claude artifacts work well for browser-generated d
      add("chatgpt-canvas", 5, "Canvas is strong for PDF, DOCX, Markdown, and code-f
      add("v0", 3, "v0 can add export functions inside a production app.");
      break;
    case "database":
      add("v0", 8, "Persistent records need a real app connected to a database.");
      add("claude-artifacts", 1, "Prototype data can exist in Claude before the prod
      break;
    case "server-api":
      add("v0", 9, "API routes and server-side integrations favor a Next.js project
      break;
    case "auth-secrets":
      add("v0", 10, "Auth, permissions, billing, secrets, and private integrations r
      break;
  }

  switch (answers.techStack) {
    case "html":
      add("claude-artifacts", 5, "A single HTML/CSS/JS deliverable is ideal for a po
      add("chatgpt-canvas", 2, "Canvas can edit and preview the file.");
      break;
    case "react":
      add("claude-artifacts", 5, "React works well for contained interactive artifac
      add("chatgpt-canvas", 4, "Canvas supports React/HTML preview and code iteratio
      add("v0", 5, "v0 is a natural fit when React needs multi-file project structure
      break;
    case "nextjs":
      add("v0", 9, "A multi-file Next.js app is squarely in v0's project-oriented wo
      break;
    case "nextjs-postgres":
      add("v0", 10, "Next.js plus Postgres requires real environment variables, serv
      break;
    case "nextjs-supabase":
      add("v0", 10, "Next.js plus Supabase commonly requires auth, database, row-leve
      break;
  }

  switch (answers.handoff) {
    case "share-now":
      add("claude-artifacts", 6, "Immediate sharing favors a completed visual artifa
      add("chatgpt-canvas", 3, "Canvas output can be shared or exported for review."
      break;
    case "doc-export":
      add("chatgpt-canvas", 7, "Canvas directly supports PDF, DOCX, Markdown, and la
      add("claude-artifacts", 4, "Claude supports source-style handoffs such as HTML
```

```
      break;
    case "github":
      add("v0", 7, "v0 is designed for repository-backed code workflows.");
      add("claude-artifacts", 3, "Claude output can become source committed to GitHu
      add("chatgpt-canvas", 3, "Canvas code can be exported into GitHub.");
      break;
    case "deploy":
      add("v0", 10, "A deployment target strongly favors v0 and Vercel.");
      add("claude-artifacts", 1, "Use Claude for the prototype, then move source int
      break;
  }

  const ranked = (Object.keys(score) as PlatformId[])
    .map((id) => ({
      ...getPlatformById(id),
      score: score[id],
      reasons: reasons[id],
    }))
    .sort((a, b) => b.score - a.score);

  const primary = ranked[^7_0];
  const secondary = ranked[^7_1];

  const requiresProductionEscalation =
    answers.backend === "database" ||
    answers.backend === "server-api" ||
    answers.backend === "auth-secrets" ||
    answers.interaction === "multi-user" ||
    answers.techStack === "nextjs" ||
    answers.techStack === "nextjs-postgres" ||
    answers.techStack === "nextjs-supabase" ||
    answers.handoff === "deploy";

  return {
    primary,
    secondary,
    ranked,
    requiresProductionEscalation,
    confidence: Math.min(
      97,
      Math.max(
        62,
        68 +
          (primary.score - secondary.score) * 4 +
          (requiresProductionEscalation && primary.id === "v0" ? 10 : 0)
      )
    ),
  };
}

function createPlatformPrompt(
  answers: Answers,
  recommendation: ReturnType<typeof recommendPlatform>
) {
  const platform = recommendation.primary.platform;
```

```
  const platformInstructions: Record<string, string> = {
    "Claude Artifacts": `
Build this as a polished, self-contained Claude Artifact.
- Keep it client-side and dependency-light.
- Use local realistic sample data by default.
- Do not assume production database persistence, server secrets, authentication, or p
- Include empty, loading, success, and error states where relevant.
- Make source portable as HTML, JSX, SVG, Mermaid, or Markdown.`,
    "ChatGPT Canvas": `
Build this as an editable ChatGPT Canvas deliverable.
- Optimize for iterative revision and a clean single-document or single-file code exp
- State assumptions explicitly.
- Keep React/HTML preview requirements self-contained where possible.
- Prepare the final result for the appropriate export: PDF, DOCX, Markdown, or a lang
    v0: `
Build this as a production-oriented Next.js application in v0.
- Use TypeScript and a clean multi-file structure.
- Use accessible components and responsive layout.
- Separate client and server responsibilities appropriately.
- Use environment-variable placeholders rather than hardcoded secrets.
- Include loading, error, empty, and success states.
- Create a README with local setup, environment variables, database setup, migrations
  };

  const productionChecklist = recommendation.requiresProductionEscalation
    ? `
Production checklist:
- Add authentication and authorization.
- Define data ownership and tenant boundaries.
- Validate all server input and API responses.
- Use environment variables for secrets.
- Add database migrations and a repeatable seed process.
- Add error monitoring, logging, analytics, and audit logging where appropriate.
- Add linting, type checks, tests, and CI.
- Validate accessibility, mobile layouts, performance, and security before publishing
    : "";

  return `Build this for Semester.

Recommended platform: ${platform}
Secondary option: ${recommendation.secondary.platform}
Recommendation confidence: ${recommendation.confidence}%

Project scope:
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend requirement: ${answers.backend}
- Technology target: ${answers.techStack}
- Handoff target: ${answers.handoff}

${platformInstructions[platform]}

Required deliverables:
- A concise architecture explanation.
- Realistic Semester sample data.
- A primary user workflow that is immediately reviewable.
```

```
- Clear assumptions and non-goals.
- Instructions for running, editing, exporting, or deploying the result.
${productionChecklist}

Design direction:
Use a clean, premium, modern B2B software style. Prioritize clarity, dense-but-readab
}

function createGitHubPlan(
  answers: Answers,
  recommendation: ReturnType<typeof recommendPlatform>
) {
  const needsRepo =
    answers.handoff === "github" ||
    answers.handoff === "deploy" ||
    recommendation.requiresProductionEscalation;

  if (!needsRepo) {
    return `GitHub is optional for this scope. Keep the artifact self-contained while
  }

  const platform = recommendation.primary.platform;

  if (platform === "v0") {
    return `GitHub push plan for v0:
1. In v0, finish a working preview with the intended multi-file structure.
2. Open the project menu, then Settings → GitHub.
3. Connect the GitHub account or organization that should own the project.
4. Create a new repository or connect an existing repository.
5. Confirm the default branch, usually main.
6. Create an isolated feature branch for meaningful changes.
7. Review the v0 preview deployment and inspect changed files.
8. Push or sync the branch to GitHub.
9. Open a pull request, run checks, and merge after review.
10. Publish the merged branch to Vercel.
11. Keep .env files out of Git. Store database URLs, API tokens, and other secrets or
  }

  if (platform === "Claude Artifacts") {
    return `GitHub push plan after Claude Artifacts:
1. Export or copy the artifact source as HTML, JSX/TSX, SVG, Mermaid, Markdown, JSON
2. Create a local repository for the Semester project.
3. Place source in a deliberate structure:
   - app/ or src/ for React/Next.js UI
   - docs/ for Markdown and Mermaid
   - public/ for SVG and static exports
4. Create a README that records the original artifact purpose and assumptions.
5. Run the exported code locally in a normal framework project if it is React.
6. Use git add, git commit, and git push to create a versioned starting point.
7. If the artifact needs auth, a database, secrets, API routes, or multi-user records
  }

  return `GitHub push plan after ChatGPT Canvas:
1. Export the Canvas deliverable as Markdown, DOCX/PDF, or its language-specific code
2. For code, create a local repository and organize files by responsibility.
3. For documents, commit the Markdown source where possible; treat PDF and DOCX as re
```

```
4. Add a README describing purpose, decisions, assumptions, and how to regenerate the
5. Create a feature branch, commit the exported material, and push it to GitHub.
6. If the deliverable becomes an application needing deployment, move it to a v0/Next
}

function downloadFile(filename: string, content: string, type: string) {
  const blob = new Blob([content], { type });
  const url = URL.createObjectURL(blob);
  const link = document.createElement("a");
  link.href = url;
  link.download = filename;
  link.click();
  URL.revokeObjectURL(url);
}

function copyToClipboard(text: string) {
  return navigator.clipboard?.writeText(text);
}

function CopyButton({ value, label = "Copy" }: { value: string; label?: string }) {
  const [copied, setCopied] = useState(false);

  const copy = async () => {
    try {
      await copyToClipboard(value);
      setCopied(true);
      window.setTimeout(() => setCopied(false), 1400);
    } catch {
      setCopied(false);
    }
  };

  return (
    <button
      onClick={copy}
      className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs font
    >
      {copied ? "Copied" : label}
    </button>
  );
}

function Badge({
  children,
  className = "",
}: {
  children: React.ReactNode;
  className?: string;
}) {
  return (
    <span
      className={`inline-flex items-center rounded-full border px-2 py-0.5 text-xs fo
    >
      {children}
    </span>
  );
```

```
}

function PlatformBadge({ platform }: { platform: string }) {
  const styles: Record<string, string> = {
    "Claude Artifacts": "border-amber-200 bg-amber-50 text-amber-800",
    "ChatGPT Canvas": "border-emerald-200 bg-emerald-50 text-emerald-800",
    v0: "border-slate-800 bg-slate-950 text-white",
  };

  return <Badge className={styles[platform]}>{platform}</Badge>;
}

function GithubChecklist({
  plan,
  recommendation,
}: {
  plan: string;
  recommendation: ReturnType<typeof recommendPlatform>;
}) {
  return (
    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-sm">
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-end">
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600
            Repository handoff
          </p>
          <h2 className="mt-1 text-xl font-bold text-slate-950">
            GitHub push plan
          </h2>
          <p className="mt-1 text-sm text-slate-600">
            Tailored for {recommendation.primary.platform}.
          </p>
        </div>
        <CopyButton value={plan} label="Copy GitHub plan" />
      </div>

      <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-xs le
        {plan}
      </pre>
    </section>
  );
}

export default function SemesterWorkflowRouter() {
  const [answers, setAnswers] = useState<Answers>(DEFAULT_ANSWERS);
  const [sort, setSort] = useState<{
    key: keyof Platform;
    direction: "asc" | "desc";
  }>({
    key: "platform",
    direction: "asc",
  });
  const [selectedPlatform, setSelectedPlatform] = useState<Platform | null>(
    null
  );
```

```
  const recommendation = useMemo(
    () => recommendPlatform(answers),
    [answers]
  );

  const generatedPrompt = useMemo(
    () => createPlatformPrompt(answers, recommendation),
    [answers, recommendation]
  );

  const githubPlan = useMemo(
    () => createGitHubPlan(answers, recommendation),
    [answers, recommendation]
  );

  const sortedPlatforms = useMemo(() => {
    return [...PLATFORM_DATA].sort((a, b) => {
      const aValue = a[sort.key];
      const bValue = b[sort.key];

      if (typeof aValue === "object" || typeof bValue === "object") {
        return 0;
      }

      return sort.direction === "asc"
        ? String(aValue).localeCompare(String(bValue))
        : String(bValue).localeCompare(String(aValue));
    });
  }, [sort]);

  const setAnswer = <K extends keyof Answers>(key: K, value: Answers[K]) => {
    setAnswers((current) => ({ ...current, [key]: value }));
  };

  const toggleSort = (key: keyof Platform) => {
    setSort((current) => ({
      key,
      direction:
        current.key === key && current.direction === "asc" ? "desc" : "asc",
    }));
  };

  const matrixHeader = (label: string, key: keyof Platform) => (
    <button
      onClick={() => toggleSort(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase tracki
    >
      {label}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
    </button>
  );

  const decisionMarkdown = `# Semester AI Workflow Recommendation

## Primary recommendation
- Platform: ${recommendation.primary.platform}
```

```
- Secondary platform: ${recommendation.secondary.platform}
- Confidence: ${recommendation.confidence}%
- Production escalation required: ${
    recommendation.requiresProductionEscalation ? "Yes" : "No"
  }

## Inputs
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend: ${answers.backend}
- Tech stack: ${answers.techStack}
- Handoff: ${answers.handoff}

## Why this platform
${recommendation.primary.reasons.map((reason) => `- ${reason}`).join("\n")}

## Build prompt
\`\`\`
${generatedPrompt}
\`\`\`

## GitHub plan
${githubPlan}
`;

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            Semester build workflow
          </p>
          <h1 className="mt-2 text-3xl font-bold tracking-tight">
            Claude Artifacts vs Canvas vs v0 Router
          </h1>
          <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
            Choose the right environment based on project scope, interaction
            model, data requirements, technology stack, GitHub handoff, and
            deployment target.
          </p>
        </header>

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Decision tree
            </p>
            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Select project requirements
            </h2>
            <p className="mt-1 text-sm text-slate-600">
              The router recommends the best starting environment and tells you
              when a prototype must become a production codebase.
            </p>
          </div>
```

```
          <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-3">
            {Object.entries(OPTIONS).map(([key, choices]) => (
              <fieldset
                key={key}
                className="rounded-xl border border-slate-200 bg-slate-50 p-4"
              >
                <legend className="px-1 text-sm font-bold capitalize text-slate-900">
                  {key === "techStack"
                    ? "Technology target"
                    : key === "backend"
                    ? "Data and backend"
                    : key}
                </legend>

                <div className="mt-2 space-y-2">
                  {choices.map(([value, label]) => (
                    <label
                      key={value}
                      className="flex cursor-pointer items-start gap-2 text-sm text-s
                    >
                      <input
                        type="radio"
                        name={key}
                        value={value}
                        checked={answers[key as keyof Answers] === value}
                        onChange={() =>
                          setAnswer(
                            key as keyof Answers,
                            value as Answers[keyof Answers]
                          )
                        }
                        className="mt-1 accent-indigo-600"
                      />
                      <span>{label}</span>
                    </label>
                  ))}
                </div>
              </fieldset>
            ))}
          </div>

          <div className="mt-5 rounded-2xl border border-indigo-200 bg-indigo-50 p-5">
            <div className="flex flex-col justify-between gap-4 lg:flex-row lg:items-
              <div>
                <p className="text-xs font-bold uppercase tracking-[0.14em] text-indi
                  Primary recommendation
                </p>

                <div className="mt-2 flex flex-wrap items-center gap-2">
                  <h3 className="text-2xl font-bold text-slate-950">
                    {recommendation.primary.platform}
                  </h3>
                  <PlatformBadge platform={recommendation.primary.platform} />
                  <Badge className="border-indigo-200 bg-white text-indigo-700">
                    {recommendation.confidence}% confidence
                  </Badge>
```

```
              </div>

              <ul className="mt-4 max-w-3xl space-y-2 text-sm leading-6 text-slate
                {recommendation.primary.reasons.map((reason) => (
                  <li key={reason}>• {reason}</li>
                ))}
              </ul>
            </div>

            <div className="rounded-xl border border-indigo-100 bg-white p-4 lg:w-8
              <p className="text-xs font-bold uppercase tracking-wide text-slate-50
                Secondary option
              </p>
              <p className="mt-1 text-base font-bold text-slate-900">
                {recommendation.secondary.platform}
              </p>
              <p className="mt-2 text-sm leading-6 text-slate-600">
                {recommendation.secondary.primaryUse}
              </p>
            </div>
          </div>

          {recommendation.requiresProductionEscalation && (
            <div className="mt-5 rounded-xl border border-amber-200 bg-amber-50 p-4
              <p className="text-sm font-bold text-amber-900">
                Production handoff required
              </p>
              <p className="mt-1 text-sm leading-6 text-amber-800">
                Your selections require persistence, APIs, authentication,
                secrets, Postgres, shared records, or deployment. Use Claude
                or Canvas only for a prototype/specification if helpful; make
                the final implementation a repository-backed application,
                typically in v0 and Next.js.
              </p>
            </div>
          )}
        </div>
      </section>

      <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
        <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
              Build prompt
            </p>
            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Ready-to-copy platform prompt
            </h2>
          </div>

          <div className="flex flex-wrap gap-2">
            <CopyButton value={generatedPrompt} label="Copy prompt" />

            <button
              onClick={() =>
                downloadFile(
```

```
                "semester-workflow-recommendation.md",
                decisionMarkdown,
                "text/markdown;charset=utf-8"
              )
            }
            className="rounded-lg bg-slate-900 px-3 py-1.5 text-xs font-bold tex
          >
            Export Markdown
          </button>

          <button
            onClick={() =>
              downloadFile(
                "semester-workflow-recommendation.json",
                JSON.stringify(
                  {
                    answers,
                    recommendation: {
                      primary: recommendation.primary.platform,
                      secondary: recommendation.secondary.platform,
                      confidence: recommendation.confidence,
                      requiresProductionEscalation:
                        recommendation.requiresProductionEscalation,
                      reasons: recommendation.primary.reasons,
                    },
                    prompt: generatedPrompt,
                    githubPlan,
                  },
                  null,
                  2
                ),
                "application/json;charset=utf-8"
              )
            }
            className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 te
          >
            Export JSON
          </button>
        </div>
      </div>

      <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-
        {generatedPrompt}
      </pre>
    </section>

    <GithubChecklist plan={githubPlan} recommendation={recommendation} />

    <section className="overflow-hidden rounded-2xl border border-slate-200 bg-wh
      <div className="border-b border-slate-200 p-5">
        <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
          Platform matrix
        </p>
        <h2 className="mt-1 text-xl font-bold text-slate-950">
          Sortable execution, React, export, and handoff comparison
        </h2>
```

```
            <p className="mt-1 text-sm text-slate-600">
              Click column headers to sort and use “Open” for the full
              execution and sandbox profile.
            </p>
          </div>

          <div className="overflow-x-auto">
            <table className="w-full min-w-[1500px] border-collapse">
              <thead className="bg-slate-50">
                <tr>
                  <th className="px-4 py-3">
                    {matrixHeader("Platform", "platform")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("Primary use", "primaryUse")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("Execution model", "execution")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("React support", "reactSupport")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("Project shape", "projectShape")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("Export formats", "exportFormats")}
                  </th>
                  <th className="px-4 py-3">
                    {matrixHeader("Production fit", "productionFit")}
                  </th>
                  <th className="px-4 py-3 text-left text-xs font-bold uppercase tra
                    Details
                  </th>
                </tr>
              </thead>

              <tbody>
                {sortedPlatforms.map((platform) => (
                  <tr
                    key={platform.id}
                    className="border-t border-slate-100 align-top transition hover:b
                  >
                    <td className="px-4 py-4">
                      <p className="font-bold text-slate-950">
                        {platform.platform}
                      </p>

                      <div className="mt-2 flex flex-wrap gap-1">
                        <Badge className="border-slate-200 bg-slate-50 text-slate-60
                          Prototype {platform.scores.prototype}/5
                        </Badge>
                        <Badge className="border-slate-200 bg-slate-50 text-slate-60
                          Full stack {platform.scores.fullStack}/5
                        </Badge>
                        <Badge className="border-slate-200 bg-slate-50 text-slate-60
```

```
                      Deploy {platform.scores.deployment}/5
                    </Badge>
                  </div>
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.primaryUse}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.execution}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.reactSupport}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.projectShape}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.exportFormats}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.productionFit}
                </td>

                <td className="px-4 py-4">
                  <button
                    onClick={() => setSelectedPlatform(platform)}
                    className="rounded-lg border border-slate-200 bg-white px-3 p
                  >
                    Open
                  </button>
                </td>
              </tr>
            ))}
          </tbody>
        </table>
      </div>
    </section>

    {selectedPlatform && (
      <div className="fixed inset-0 z-50 flex justify-end bg-slate-950/30">
        <button
          className="absolute inset-0 cursor-default"
          aria-label="Close details"
          onClick={() => setSelectedPlatform(null)}
        />

        <aside className="relative h-full w-full max-w-2xl overflow-y-auto bg-whi
          <div className="flex items-start justify-between gap-4">
            <div>
              <PlatformBadge platform={selectedPlatform.platform} />
```

```
                  <h2 className="mt-3 text-2xl font-bold text-slate-950">
                    {selectedPlatform.platform}
                  </h2>
                </div>

                <button
                  onClick={() => setSelectedPlatform(null)}
                  className="rounded-lg border border-slate-200 px-3 py-1.5 text-sm
                >
                  Close
                </button>
              </div>

              <div className="mt-6 space-y-5">
                {[
                  ["Primary use", selectedPlatform.primaryUse],
                  ["Execution model", selectedPlatform.execution],
                  ["Sandbox limits", selectedPlatform.sandboxLimits],
                  ["React support", selectedPlatform.reactSupport],
                  ["Project shape", selectedPlatform.projectShape],
                  ["Code and export options", selectedPlatform.exportFormats],
                  ["GitHub workflow", selectedPlatform.githubWorkflow],
                  ["Production handoff", selectedPlatform.productionFit],
                  ["Best Semester use cases", selectedPlatform.bestFor],
                ].map(([label, value]) => (
                  <div key={label}>
                    <h3 className="text-sm font-bold text-slate-900">
                      {label}
                    </h3>
                    <p className="mt-1 text-sm leading-6 text-slate-600">
                      {value}
                    </p>
                  </div>
                ))}
              </div>
            </aside>
          </div>
        )}
      </div>
    </main>
  );
}
```

v0 + Next.js + Postgres

Yes. v0 is the right option of the three when you need a multi-file Next.js application with Postgres, because it is built around an application project rather than a single artifact or document. v0 documents a VM-backed Node.js sandbox that can run server code, API routes, shell commands, and database-connected workflows. [85] [86]

A sensible Semester architecture:

```
semester/
├── app/
```

```
│   ├── artifacts/
│   │   ├── page.tsx                 # Sortable artifact catalog
│   │   ├── [artifactId]/page.tsx    # Artifact detail page
│   │   ├── new/page.tsx             # Create artifact form
│   │   └── export/route.ts          # CSV / JSON / Markdown export
│   ├── api/
│   │   └── artifacts/route.ts       # Optional REST endpoint
│   ├── layout.tsx
│   └── page.tsx
├── components/
│   ├── artifact-table.tsx
│   ├── artifact-filters.tsx
│   ├── decision-tree.tsx
│   ├── prompt-builder.tsx
│   └── exporter.tsx
├── lib/
│   ├── db.ts                        # Postgres/Prisma/Supabase client
│   ├── artifact-schema.ts           # Zod validation
│   ├── decision-engine.ts
│   └── exporters.ts
├── prisma/
│   └── schema.prisma                # If using Prisma
├── supabase/
│   └── migrations/                  # If using Supabase Postgres
├── .env.example
└── README.md
```

Database options

Option	Best when	Notes
Supabase Postgres	You need Postgres plus auth, row-level security, storage, and realtime capabilities	Strong default for a multi-user Semester tracker
Prisma Postgres / Prisma ORM	You want a strongly typed ORM and database migration workflow in a Next.js codebase	Vercel has a documented Next.js + Prisma Postgres path
Neon Postgres	You want serverless Postgres and a straightforward external managed database	Works well with Prisma, Drizzle, or direct SQL
Vercel Marketplace provider	You want deployment and database provisioning coordinated through Vercel	Next.js guidance shows linking a project to a Postgres provider through Storage

Next.js's official learning material covers a flow of pushing the project to GitHub, importing it into Vercel, creating/linking a Postgres database, copying environment variables locally, seeding data, and querying through a route handler. It specifically warns that `.env` must be ignored so database secrets do not get pushed to GitHub. Vercel also provides a Next.js guide that starts with hardcoded content and adds managed Postgres, authentication, Server Actions, drafts, publishing, and deployment. [84] [83]

Core Postgres model

For the artifact catalog itself, start with a narrow table:

```
create table artifacts (
  id uuid primary key default gen_random_uuid(),
  organization_id uuid not null,
  title text not null,
  category text not null,
  format text not null,
  use_case text,
  lifecycle text not null,
  audience text not null,
  owner_id uuid,
  priority text not null default 'P2',
  status text not null default 'Backlog',
  effort text,
  impact text,
  tags text[] not null default '{}',
  dependencies jsonb not null default '[]',
  suggested_prompt text not null,
  metadata jsonb not null default '{}',
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create index artifacts_organization_id_idx
  on artifacts (organization_id);

create index artifacts_category_idx
  on artifacts (category);

create index artifacts_format_idx
  on artifacts (format);

create index artifacts_status_idx
  on artifacts (status);
```

If Semester becomes multi-tenant, every meaningful query should be scoped by `organization_id`, and authorization should be enforced server-side—not simply hidden in the UI.

GitHub push steps

For a v0 project, use the built-in GitHub connection rather than copying a single component manually:

1. Build the initial working version in v0.
2. Open the project's `...` menu, then go to **Settings → GitHub**.
3. Connect the GitHub account or organization that should own the repository.
4. Create a new repository or connect an existing one.

5. Use an isolated branch for feature work instead of treating the deployed preview as the only source of truth.
6. Review the branch preview and changed files.
7. Push/sync changes to GitHub.
8. Open a pull request, run checks, then merge into `main`.
9. Publish the merged app to Vercel.
10. Store `DATABASE_URL`, Supabase keys, and all other secrets in Vercel environment variables—not in Git and never in client code.

v0's GitHub documentation describes connecting a project to GitHub, creating a repository from the current v0 project, working from isolated branches, reviewing previews, and publishing after changes are reviewed. [87] [88]

For the local CLI route after exporting or cloning the repository:

```
git clone git@github.com:YOUR_ORG/semester.git
cd semester

npm install
npm run dev

git checkout -b feat/artifact-catalog
git add .
git commit -m "feat: add artifact decision tree and catalog"
git push -u origin feat/artifact-catalog
```

Then open a pull request and let Vercel create a preview deployment from the branch.

Deployment boundary

Use Claude Artifacts or Canvas for the **fastest first version** of the decision tree. Use v0 for the real Semester application when any of the following becomes true:

- Users must sign in.
- Multiple people see or edit shared artifacts.
- Records must survive sessions and devices.
- You need Postgres queries, migrations, backups, or audit history.
- You need API routes, webhooks, payment handling, email, or private integrations.
- You need server-side secrets or role-based permissions.
- You want production previews and deployment tied to GitHub.

Claude Artifacts are strong for HTML/React-style self-contained output, diagrams, and browser-generated exports; Canvas has stronger document export paths such as PDF, DOCX, and Markdown; v0's best handoff is a multi-file application project synchronized with GitHub and deployed on Vercel. [89] [90] [83]

Compare Claude Artifacts vs ChatGPT Canvas vs v0 sandbox in a sortable matrix — execution limits, React support, and export formats

Computer
Build a prompt decision tree app for choosing between Claude Artifacts, ChatGPT Canvas, and v0 sandbox for specific coding workflows
Computer
Show the rest of the React code block
Export the app recommendation as Markdown
Add Supabase integration logic to the prompt tree

Below is the completed version of the React app with a sortable comparison matrix, workflow-specific platform router, Markdown export, and **Supabase-aware decision logic.** The decision engine now routes anything requiring persistent records, auth, tenant isolation, or Postgres toward a v0/Next.js implementation—and generates a Supabase architecture prompt and handoff plan.

For a real Next.js implementation, use separate Supabase browser and server clients through `@supabase/ssr`, with `NEXT_PUBLIC_SUPABASE_URL` and `NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY` in `.env.local`; server-only secrets must not be exposed with the `NEXT_PUBLIC_` prefix.[104] [105] [106]

Complete React component

Save this as `app/workflow-router/page.tsx` in a Next.js App Router project. It uses only React and Tailwind classes, so it also works as a starting component in v0.

```
"use client";

import React, { useMemo, useState } from "react";

type PlatformId = "claude-artifacts" | "chatgpt-canvas" | "v0";

type Deliverable =
  | "interactive-tool"
  | "product-prototype"
  | "marketing-page"
  | "diagram"
  | "document"
  | "presentation"
  | "full-stack-feature"
  | "analysis";

type Interaction = "none" | "simple" | "complex" | "multi-user";

type Backend =
  | "none"
```

```
  | "file-export"
  | "database"
  | "server-api"
  | "auth-secrets";

type TechStack =
  | "none"
  | "html"
  | "react"
  | "nextjs"
  | "nextjs-postgres"
  | "nextjs-supabase";

type Handoff = "share-now" | "doc-export" | "github" | "deploy";

type Answers = {
  deliverable: Deliverable;
  interaction: Interaction;
  backend: Backend;
  techStack: TechStack;
  handoff: Handoff;
  supabaseCapability:
    | "none"
    | "database-only"
    | "auth"
    | "storage"
    | "realtime"
    | "multi-tenant";
};

type Platform = {
  id: PlatformId;
  platform: string;
  primaryUse: string;
  execution: string;
  sandboxLimits: string;
  reactSupport: string;
  projectShape: string;
  exportFormats: string;
  githubWorkflow: string;
  productionFit: string;
  bestFor: string;
  scores: {
    prototype: number;
    documents: number;
    diagrams: number;
    fullStack: number;
    deployment: number;
  };
};

type RankedPlatform = Platform & {
  score: number;
  reasons: string[];
};
```

```
type Recommendation = {
  primary: RankedPlatform;
  secondary: RankedPlatform;
  ranked: RankedPlatform[];
  confidence: number;
  requiresProductionEscalation: boolean;
  needsSupabase: boolean;
  needsSupabaseAuth: boolean;
  needsTenantIsolation: boolean;
};

const PLATFORM_DATA: Platform[] = [
  {
    id: "claude-artifacts",
    platform: "Claude Artifacts",
    primaryUse:
      "Shareable self-contained artifacts, diagrams, visual explainers, browser-side
    execution:
      "A rendered artifact experience optimized for contained client-side output rath
    sandboxLimits:
      "Do not depend on artifact-local state for durable data, server secrets, full a
    reactSupport:
      "Good for self-contained React interfaces, local-state trackers, calculators, c
    projectShape:
      "Usually a single contained artifact, component, page, SVG, Mermaid source, or
    exportFormats:
      "HTML, React/JSX-style source, Markdown, SVG, Mermaid, plus client-side browser
    githubWorkflow:
      "Export or copy source, put it into a normal repository, then version the HTML
    productionFit:
      "Prototype or visual specification → source export → GitHub → Next.js, Supabase
    bestFor:
      "Semester format decision tree, artifact catalog prototype, ROI calculator, arc
    scores: {
      prototype: 5,
      documents: 4,
      diagrams: 5,
      fullStack: 1,
      deployment: 2,
    },
  },
  {
    id: "chatgpt-canvas",
    platform: "ChatGPT Canvas",
    primaryUse:
      "Iterative document and code workspace for editing, transformation, review, rev
    execution:
      "React and HTML render in an isolated preview environment; Canvas also supports
    sandboxLimits:
      "Treat Canvas as an editor and preview workspace, not a durable backend. Produc
    reactSupport:
      "React and HTML previews are suitable for code iteration. Canvas is strongest f
    projectShape:
      "Usually a document, code file, or contained editable deliverable optimized for
    exportFormats:
      "Documents: PDF, DOCX, Markdown. Code: language-appropriate files such as JavaS
```

```
    githubWorkflow:
      "Export the document or code file, commit Markdown and source to GitHub, and pr
    productionFit:
      "Draft, revise, and export → GitHub or documentation system → production app/pu
    bestFor:
      "Semester PRDs, policies, research synthesis, legal first drafts, strategy, boa
    scores: {
      prototype: 3,
      documents: 5,
      diagrams: 3,
      fullStack: 1,
      deployment: 1,
    },
  },
  {
    id: "v0",
    platform: "v0",
    primaryUse:
      "Production-oriented React and Next.js apps, multi-file projects, data integrat
    execution:
      "A VM-backed isolated Node.js development sandbox for multi-file projects, serv
    sandboxLimits:
      "Preview success is not production readiness. Verify environment variables, da
    reactSupport:
      "Native fit for React and Next.js: multi-file components, App Router, Tailwind
    projectShape:
      "A multi-file application with dependencies, routes, components, server logic,
    exportFormats:
      "Application project code, GitHub sync/export, existing-codebase integration, p
    githubWorkflow:
      "Connect GitHub, choose or create a repository, use isolated branches, review p
    productionFit:
      "Best for database-backed, authenticated, multi-user applications with Supabase
    bestFor:
      "Semester artifact catalog with persistent records, role-based access, shared w
    scores: {
      prototype: 4,
      documents: 2,
      diagrams: 2,
      fullStack: 5,
      deployment: 5,
    },
  },
];

const OPTIONS = {
  deliverable: [
    ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or config
    ["product-prototype", "Clickable product prototype or interface exploration"],
    ["marketing-page", "Marketing site, landing page, one-page demo, or visual expla
    ["diagram", "Architecture, process, ERD, sequence, roadmap, or system diagram"],
    ["document", "PRD, policy, research, strategy, report, or operating document"],
    ["presentation", "Pitch, board update, sales narrative, launch, or training"],
    ["full-stack-feature", "Authenticated, data-backed, multi-user product feature"]
    ["analysis", "Python analysis, research, data cleanup, or generated-file workflow
  ],
```

```
  interaction: [
    ["none", "No interaction; people mainly read or review"],
    ["simple", "Simple browser interaction: tabs, toggles, calculators, or local samp
    ["complex", "Stateful interface: filters, tables, forms, drawers, editable workfl
    ["multi-user", "Shared records, multiple users, roles, permissions, or collabora
  ],
  backend: [
    ["none", "No backend; static result or browser-only sample data"],
    ["file-export", "Needs browser-generated CSV, Markdown, SVG, JSON, PDF, or relate
    ["database", "Needs persistent database records"],
    ["server-api", "Needs API routes, server logic, webhooks, or third-party services
    ["auth-secrets", "Needs sign-in, permissions, billing, private APIs, or server se
  ],
  techStack: [
    ["none", "No prescribed code stack"],
    ["html", "Plain HTML, CSS, and JavaScript"],
    ["react", "React component or client-side application"],
    ["nextjs", "Multi-file Next.js application"],
    ["nextjs-postgres", "Next.js with Postgres"],
    ["nextjs-supabase", "Next.js with Supabase, Postgres, and Auth"],
  ],
  handoff: [
    ["share-now", "Share immediately as a completed artifact"],
    ["doc-export", "Export PDF, DOCX, Markdown, or a source file"],
    ["github", "Push source into GitHub"],
    ["deploy", "Deploy a real web application"],
  ],
  supabaseCapability: [
    ["none", "No Supabase requirement"],
    ["database-only", "Persistent Postgres records only"],
    ["auth", "Email/OAuth authentication and sessions"],
    ["storage", "User-uploaded files, exports, or media"],
    ["realtime", "Live updates, collaboration, or event subscriptions"],
    ["multi-tenant", "Organizations, memberships, roles, and row-level security"],
  ],
} as const;

const DEFAULT_ANSWERS: Answers = {
  deliverable: "interactive-tool",
  interaction: "complex",
  backend: "none",
  techStack: "react",
  handoff: "share-now",
  supabaseCapability: "none",
};

function getPlatform(id: PlatformId) {
  const found = PLATFORM_DATA.find((platform) => platform.id === id);

  if (!found) {
    throw new Error(`Unknown platform: ${id}`);
  }

  return found;
}
```

```
function recommendPlatform(answers: Answers): Recommendation {
  const scores: Record<PlatformId, number> = {
    "claude-artifacts": 0,
    "chatgpt-canvas": 0,
    v0: 0,
  };

  const reasons: Record<PlatformId, string[]> = {
    "claude-artifacts": [],
    "chatgpt-canvas": [],
    v0: [],
  };

  const add = (platform: PlatformId, points: number, reason: string) => {
    scores[platform] += points;
    reasons[platform].push(reason);
  };

  switch (answers.deliverable) {
    case "interactive-tool":
      add("claude-artifacts", 7, "A shareable, self-contained interactive tool is a c
      add("v0", 4, "v0 is a strong follow-on if the tool needs persistent data or sha
      add("chatgpt-canvas", 2, "Canvas can iterate React/HTML, but it is less focused
      break;

    case "product-prototype":
      add("claude-artifacts", 6, "Claude Artifacts is fast for an interactive proof c
      add("v0", 5, "v0 is ideal if the prototype should evolve into the production ap
      add("chatgpt-canvas", 3, "Canvas can support focused React/HTML iteration.");
      break;

    case "marketing-page":
      add("claude-artifacts", 7, "A self-contained marketing or explainer page is an
      add("v0", 5, "v0 is appropriate when the page belongs in a Next.js production w
      add("chatgpt-canvas", 2, "Canvas is useful for copy and component iteration.")
      break;

    case "diagram":
      add("claude-artifacts", 8, "Claude is a strong choice for Mermaid, SVG, structu
      add("chatgpt-canvas", 3, "Canvas is useful for diagram source plus supporting c
      add("v0", 1, "v0 is best only when the diagram is part of a larger application
      break;

    case "document":
      add("chatgpt-canvas", 9, "Canvas is optimized for drafting, editing, revising,
      add("claude-artifacts", 4, "Claude can create polished standalone document arti
      add("v0", 1, "v0 is unnecessary unless the document belongs inside an applicati
      break;

    case "presentation":
      add("chatgpt-canvas", 6, "Canvas supports editorial and export-oriented presen
      add("claude-artifacts", 5, "Claude is useful for visual, shareable deck-like ar
      add("v0", 2, "v0 is useful only when the presentation itself is an interactive
      break;

    case "full-stack-feature":
```

```
      add("v0", 10, "A full-stack feature requires multi-file application structure,
      add("claude-artifacts", 1, "Claude can still provide an early prototype or visu
      add("chatgpt-canvas", 1, "Canvas can help create the PRD or review individual r
      break;

    case "analysis":
      add("chatgpt-canvas", 8, "Canvas is well suited to iterative analysis, Python,
      add("claude-artifacts", 3, "Claude can package an analysis result into a sharea
      add("v0", 3, "v0 is useful if ongoing analysis should become a shared product."
      break;
  }

  switch (answers.interaction) {
    case "none":
      add("chatgpt-canvas", 3, "A read-first deliverable favors an editorial workspac
      add("claude-artifacts", 2, "A static artifact is still practical.");
      break;

    case "simple":
      add("claude-artifacts", 5, "Simple browser-side interaction is a strong Artifac
      add("chatgpt-canvas", 3, "Canvas can preview simple React or HTML interaction."
      add("v0", 2, "v0 works, but may be more project overhead than necessary.");
      break;

    case "complex":
      add("claude-artifacts", 5, "A local-state tracker or interactive prototype can
      add("v0", 6, "Complex interaction benefits from durable multi-file React/Next.j
      add("chatgpt-canvas", 3, "Canvas can preview component behavior but is less pro
      break;

    case "multi-user":
      add("v0", 10, "Shared multi-user workflows require auth, authorization, persis
      break;
  }

  switch (answers.backend) {
    case "none":
      add("claude-artifacts", 4, "No backend requirement favors a portable, self-con
      add("chatgpt-canvas", 3, "A document or code-preview workflow can be sufficien
      break;

    case "file-export":
      add("claude-artifacts", 5, "Artifacts work well for client-side downloads such
      add("chatgpt-canvas", 5, "Canvas works well for document and code-file export."
      add("v0", 3, "v0 can add export endpoints inside a production application.");
      break;

    case "database":
      add("v0", 8, "Persistent records need a production application with database in
      add("claude-artifacts", 1, "Use sample data in the artifact, then hand off to a
      break;

    case "server-api":
      add("v0", 9, "Server routes, external services, and webhook workflows favor a f
      break;
```

```
    case "auth-secrets":
      add("v0", 10, "Authentication, permissions, billing, private API access, and se
      break;
  }

  switch (answers.techStack) {
    case "html":
      add("claude-artifacts", 5, "A contained HTML/CSS/JS deliverable is ideal for ar
      add("chatgpt-canvas", 2, "Canvas can edit and preview the page.");
      break;

    case "react":
      add("claude-artifacts", 5, "React is useful for self-contained interactive arti
      add("chatgpt-canvas", 4, "Canvas supports React/HTML preview and code iteratior
      add("v0", 5, "v0 is appropriate when React needs a multi-file production struct
      break;

    case "nextjs":
      add("v0", 9, "A multi-file Next.js application is a direct v0 workflow.");
      break;

    case "nextjs-postgres":
      add("v0", 10, "Next.js plus Postgres requires environment variables, server da
      break;

    case "nextjs-supabase":
      add("v0", 10, "Next.js with Supabase requires real client/server separation, au
      break;
  }

  const needsSupabase =
    answers.techStack === "nextjs-supabase" ||
    answers.supabaseCapability !== "none";

  const needsSupabaseAuth =
    answers.supabaseCapability === "auth" ||
    answers.supabaseCapability === "multi-tenant";

  const needsTenantIsolation =
    answers.supabaseCapability === "multi-tenant";

  if (needsSupabase) {
    add("v0", 10, "Supabase integration requires a multi-file application with enviro
    add("claude-artifacts", 1, "Claude remains useful for prototyping the UI with loc
    add("chatgpt-canvas", 2, "Canvas remains useful for drafting SQL, RLS policies, a
  }

  if (answers.supabaseCapability === "database-only") {
    add("v0", 4, "Persistent Postgres records require server-aware implementation and
  }

  if (answers.supabaseCapability === "auth") {
    add("v0", 7, "Session handling and authenticated data access require server/clien
  }

  if (answers.supabaseCapability === "storage") {
```

```
    add("v0", 7, "File uploads and protected storage need authenticated policies and
  }

  if (answers.supabaseCapability === "realtime") {
    add("v0", 8, "Realtime subscriptions need a persistent app architecture and caref
  }

  if (answers.supabaseCapability === "multi-tenant") {
    add("v0", 10, "Multi-tenant workspaces require organizations, memberships, row-le
  }

  switch (answers.handoff) {
    case "share-now":
      add("claude-artifacts", 6, "Immediate sharing favors a finished visual artifac
      add("chatgpt-canvas", 3, "Canvas can also share editable content for review.")
      break;

    case "doc-export":
      add("chatgpt-canvas", 7, "Canvas directly supports document and code-file expor
      add("claude-artifacts", 4, "Claude supports source-oriented handoff: HTML, JSX
      break;

    case "github":
      add("v0", 7, "A GitHub-backed workflow favors a project-oriented environment."
      add("claude-artifacts", 3, "Artifact source can become versioned repository inp
      add("chatgpt-canvas", 3, "Canvas exports can be committed into a repository.")
      break;

    case "deploy":
      add("v0", 10, "Deployment strongly favors v0 and Vercel's application workflow
      add("claude-artifacts", 1, "Claude is best used for prototype/source handoff ra
      break;
  }

  const ranked = (Object.keys(scores) as PlatformId[])
    .map((id) => ({
      ...getPlatform(id),
      score: scores[id],
      reasons: reasons[id],
    }))
    .sort((a, b) => b.score - a.score);

  const primary = ranked[^8_0];
  const secondary = ranked[^8_1];

  const requiresProductionEscalation =
    answers.backend === "database" ||
    answers.backend === "server-api" ||
    answers.backend === "auth-secrets" ||
    answers.interaction === "multi-user" ||
    answers.techStack === "nextjs" ||
    answers.techStack === "nextjs-postgres" ||
    answers.techStack === "nextjs-supabase" ||
    answers.handoff === "deploy" ||
    needsSupabase;
```

```
  return {
    primary,
    secondary,
    ranked,
    needsSupabase,
    needsSupabaseAuth,
    needsTenantIsolation,
    requiresProductionEscalation,
    confidence: Math.min(
      97,
      Math.max(
        62,
        68 +
          (primary.score - secondary.score) * 4 +
          (requiresProductionEscalation && primary.id === "v0" ? 10 : 0)
      )
    ),
  };
}

function createSupabasePlan(
  answers: Answers,
  recommendation: Recommendation
) {
  if (!recommendation.needsSupabase) {
    return `Supabase is not required by the current choices.

Use local sample data while validating the workflow. If the app later needs persister
  }

  const capabilities: string[] = [];

  if (
    answers.supabaseCapability === "database-only" ||
    answers.supabaseCapability === "auth" ||
    answers.supabaseCapability === "storage" ||
    answers.supabaseCapability === "realtime" ||
    answers.supabaseCapability === "multi-tenant"
  ) {
    capabilities.push("Postgres database with migration-managed schema");
  }

  if (recommendation.needsSupabaseAuth) {
    capabilities.push("Supabase Auth with server/client session handling");
  }

  if (answers.supabaseCapability === "storage") {
    capabilities.push("Supabase Storage with authenticated upload/download policies"
  }

  if (answers.supabaseCapability === "realtime") {
    capabilities.push("Realtime subscriptions scoped to authorized records");
  }

  if (recommendation.needsTenantIsolation) {
    capabilities.push("Organizations, memberships, roles, and Row Level Security poli
```

```
  }

  return `Supabase implementation plan for Semester:

Required capabilities:
${capabilities.map((item) => `- ${item}`).join("\n")}

Recommended project structure:
- app/ for Next.js App Router pages and route handlers
- components/ for UI
- lib/supabase/client.ts for browser client creation
- lib/supabase/server.ts for server client creation
- lib/supabase/middleware.ts or proxy integration for auth session refresh
- supabase/migrations/ for database migrations and RLS policies
- types/database.ts for generated or maintained database types

Environment variables:
- NEXT_PUBLIC_SUPABASE_URL
- NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY
- Keep any service-role key server-only; never expose it in client components or pre

Required controls:
- Validate user input with a schema validator.
- Enforce data access with Row Level Security, not only UI conditions.
- Scope every tenant query by organization membership.
- Put privileged operations in server actions or route handlers.
- Add database indexes for organization_id, status, format, category, and updated_at
- Add audit records for sensitive changes if shared workspaces or compliance matter.
- Store migrations and RLS policies in GitHub.
- Use preview environments with separate Supabase projects or safely isolated test da
}

function createGitHubPlan(
  answers: Answers,
  recommendation: Recommendation
) {
  const needsRepository =
    answers.handoff === "github" ||
    answers.handoff === "deploy" ||
    recommendation.requiresProductionEscalation;

  if (!needsRepository) {
    return `GitHub is optional for this scope. Keep the initial artifact self-contai
  }

  if (recommendation.primary.id === "v0") {
    return `GitHub push plan for the v0 implementation:

1. Build the first working multi-file app in v0.
2. Open the v0 project menu and connect GitHub under Settings → GitHub.
3. Create a private Semester repository or connect the existing repository.
4. Use main only for reviewed code; create a feature branch for new work.
5. Confirm .gitignore excludes .env, .env.local, and generated local secrets.
6. Add a .env.example that names required variables without containing values.
7. Review changed files and the v0 preview deployment.
8. Push or sync the branch to GitHub.
```

```
9. Open a pull request and run typecheck, lint, test, and build checks.
10. Merge only after reviewing database migrations, Row Level Security policies, and
11. Deploy with Vercel and configure all production environment variables there.
12. Never commit Supabase service-role credentials or database connection strings to
  }

  if (recommendation.primary.id === "claude-artifacts") {
    return `GitHub push plan after Claude Artifacts:

1. Export or copy source as HTML, JSX/TSX, SVG, Mermaid, Markdown, JSON, or CSV.
2. Create a local Semester repository and organize source deliberately:
   - app/ or src/ for React or Next.js source
   - docs/ for Markdown, Mermaid, policies, PRDs, and decision records
   - public/ for SVG, images, and static files
3. Add README.md with purpose, assumptions, source format, and regeneration instruct
4. Convert the artifact into a normal framework project before adding auth, database
5. Create a feature branch, commit, and push:
   git checkout -b feat/semester-artifact-router
   git add .
   git commit -m "feat: add artifact workflow router"
   git push -u origin feat/semester-artifact-router
6. Open a pull request and use a v0/Next.js implementation when the prototype needs p
  }

  return `GitHub push plan after ChatGPT Canvas:

1. Export source as Markdown, code files, PDF, or DOCX.
2. Prefer committing Markdown and source code as the durable editable record.
3. Keep PDF/DOCX as review or distribution outputs, not the sole source of truth.
4. Organize code under app/, components/, lib/, and tests/ when moving to a product r
5. Create a README that records the intent, assumptions, decisions, and regeneration
6. Create a feature branch, commit, push, open a pull request, and merge after reviev
7. If the deliverable requires Supabase, auth, persistent records, or Vercel deployme
}

function createBuildPrompt(
  answers: Answers,
  recommendation: Recommendation,
  supabasePlan: string
) {
  const platformName = recommendation.primary.platform;

  const platformInstructions: Record<string, string> = {
    "Claude Artifacts": `Build this as a polished, self-contained Claude Artifact.
- Keep it client-side and dependency-light.
- Use realistic local sample data.
- Do not assume production authentication, persistent data, private API access, or se
- Include empty, loading, success, and error states where relevant.
- Make the output portable as HTML, JSX, SVG, Mermaid, Markdown, JSON, or CSV.`,
    "ChatGPT Canvas": `Build this as an editable ChatGPT Canvas deliverable.
- Optimize for iterative revision and a clean document or code-file structure.
- State assumptions and open questions clearly.
- Keep React/HTML preview requirements contained where possible.
- Prepare the work for export as PDF, DOCX, Markdown, or a language-specific source f
    v0: `Build this as a production-oriented Next.js application in v0.
- Use TypeScript, Next.js App Router, and a clean multi-file structure.
```

```
- Use accessible and responsive components.
- Separate browser/client logic from server logic correctly.
- Use environment-variable placeholders rather than hardcoded credentials.
- Include loading, empty, error, and success states.
- Add a README with setup, environment variables, database migrations, test steps, G
  };

  const productionChecklist = recommendation.requiresProductionEscalation
    ? `
Production requirements:
- Add authentication and authorization.
- Define data ownership, organization boundaries, and role permissions.
- Validate all input at server boundaries.
- Use server-side secrets only in server actions, route handlers, or server-only modu
- Add migrations, seed data, indexes, and rollback planning.
- Add error monitoring, logs, analytics, audit records, type checks, linting, and tes
- Confirm accessibility, mobile behavior, performance, privacy, and security before p
    : "";

  const supabaseRequirements = recommendation.needsSupabase
    ? `
${supabasePlan}

Use Supabase integration rules:
- Use @supabase/ssr.
- Create browser and server clients in separate files.
- Use a publishable key in browser-safe configuration only.
- Keep privileged service-role access server-only.
- Add Row Level Security policies before treating the system as production-ready.
- Do not rely on client-side filtering as authorization.`
    : "";

  return `Build this for Semester.

Recommended platform: ${platformName}
Secondary option: ${recommendation.secondary.platform}
Confidence: ${recommendation.confidence}%

Project requirements:
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend requirement: ${answers.backend}
- Tech target: ${answers.techStack}
- Supabase requirement: ${answers.supabaseCapability}
- Handoff: ${answers.handoff}

${platformInstructions[platformName]}

Required deliverables:
- Explain the architecture and important assumptions.
- Use realistic Semester sample data.
- Build the primary workflow so it can be reviewed immediately.
- Include an explicit list of non-goals.
- Include instructions to run, edit, export, or deploy the project.
${productionChecklist}
${supabaseRequirements}
```

```
Design direction:
Use a clean premium B2B software aesthetic, dense-but-readable information design, ac
}

function downloadFile(filename: string, content: string, type: string) {
  const blob = new Blob([content], { type });
  const url = URL.createObjectURL(blob);
  const anchor = document.createElement("a");

  anchor.href = url;
  anchor.download = filename;
  anchor.click();

  URL.revokeObjectURL(url);
}

async function copyToClipboard(value: string) {
  await navigator.clipboard?.writeText(value);
}

function Badge({
  children,
  className = "",
}: {
  children: React.ReactNode;
  className?: string;
}) {
  return (
    <span
      className={`inline-flex items-center rounded-full border px-2 py-0.5 text-xs fo
    >
      {children}
    </span>
  );
}

function PlatformBadge({ platform }: { platform: string }) {
  const styles: Record<string, string> = {
    "Claude Artifacts": "border-amber-200 bg-amber-50 text-amber-800",
    "ChatGPT Canvas": "border-emerald-200 bg-emerald-50 text-emerald-800",
    v0: "border-slate-800 bg-slate-950 text-white",
  };

  return <Badge className={styles[platform]}>{platform}</Badge>;
}

function CopyButton({
  value,
  label = "Copy",
}: {
  value: string;
  label?: string;
}) {
  const [copied, setCopied] = useState(false);
```

```
  const handleCopy = async () => {
    try {
      await copyToClipboard(value);
      setCopied(true);
      window.setTimeout(() => setCopied(false), 1500);
    } catch {
      setCopied(false);
    }
  };

  return (
    <button
      onClick={handleCopy}
      className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs fon
    >
      {copied ? "Copied" : label}
    </button>
  );
}

function SelectSection<K extends keyof Answers>({
  label,
  field,
  choices,
  value,
  onChange,
}: {
  label: string;
  field: K;
  choices: readonly (readonly [string, string])[];
  value: Answers[K];
  onChange: (field: K, value: Answers[K]) => void;
}) {
  return (
    <fieldset className="rounded-xl border border-slate-200 bg-slate-50 p-4">
      <legend className="px-1 text-sm font-bold text-slate-900">{label}</legend>

      <div className="mt-2 space-y-2">
        {choices.map(([optionValue, optionLabel]) => (
          <label
            key={optionValue}
            className="flex cursor-pointer items-start gap-2 text-sm text-slate-700"
          >
            <input
              type="radio"
              name={field}
              value={optionValue}
              checked={value === optionValue}
              onChange={() => onChange(field, optionValue as Answers[K])}
              className="mt-1 accent-indigo-600"
            />
            <span>{optionLabel}</span>
          </label>
        ))}
      </div>
    </fieldset>
```

```
  );
}

function SupabasePanel({
  recommendation,
  supabasePlan,
}: {
  recommendation: Recommendation;
  supabasePlan: string;
}) {
  return (
    <section className="rounded-2xl border border-emerald-200 bg-emerald-50 p-5 shad
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-end">
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-emerald-70
            Supabase integration
          </p>
          <h2 className="mt-1 text-xl font-bold text-emerald-950">
            {recommendation.needsSupabase
              ? "Production data and auth plan"
              : "Supabase is currently optional"}
          </h2>
        </div>

        <CopyButton value={supabasePlan} label="Copy Supabase plan" />
      </div>

      <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-xs le
        {supabasePlan}
      </pre>
    </section>
  );
}

export default function SemesterWorkflowRouter() {
  const [answers, setAnswers] = useState<Answers>(DEFAULT_ANSWERS);
  const [sort, setSort] = useState<{
    key:
      | "platform"
      | "primaryUse"
      | "execution"
      | "reactSupport"
      | "projectShape"
      | "exportFormats"
      | "productionFit";
    direction: "asc" | "desc";
  }>({
    key: "platform",
    direction: "asc",
  });

  const [selectedPlatform, setSelectedPlatform] = useState<Platform | null>(
    null
  );

  const recommendation = useMemo(
```

```
    () => recommendPlatform(answers),
    [answers]
  );

  const supabasePlan = useMemo(
    () => createSupabasePlan(answers, recommendation),
    [answers, recommendation]
  );

  const buildPrompt = useMemo(
    () => createBuildPrompt(answers, recommendation, supabasePlan),
    [answers, recommendation, supabasePlan]
  );

  const githubPlan = useMemo(
    () => createGitHubPlan(answers, recommendation),
    [answers, recommendation]
  );

  const markdownExport = useMemo(() => {
    return `# Semester AI Workflow Recommendation

## Recommendation

- Primary platform: ${recommendation.primary.platform}
- Secondary platform: ${recommendation.secondary.platform}
- Confidence: ${recommendation.confidence}%
- Production escalation: ${
      recommendation.requiresProductionEscalation ? "Required" : "Not currently requ
    }
- Supabase required: ${recommendation.needsSupabase ? "Yes" : "No"}

## Inputs

| Requirement | Selected value |
|---|---|
| Deliverable | ${answers.deliverable} |
| Interaction | ${answers.interaction} |
| Backend | ${answers.backend} |
| Technology target | ${answers.techStack} |
| Supabase capability | ${answers.supabaseCapability} |
| Handoff | ${answers.handoff} |

## Why this recommendation

${recommendation.primary.reasons.map((reason) => `- ${reason}`).join("\n")}

## Build prompt

\`\`\`
${buildPrompt}
\`\`\`

## GitHub handoff

${githubPlan}
```

```
## Supabase implementation plan

${supabasePlan}
`;
  }, [answers, recommendation, buildPrompt, githubPlan, supabasePlan]);

  const sortedPlatforms = useMemo(() => {
    return [...PLATFORM_DATA].sort((a, b) => {
      const aValue = a[sort.key];
      const bValue = b[sort.key];

      return sort.direction === "asc"
        ? String(aValue).localeCompare(String(bValue))
        : String(bValue).localeCompare(String(aValue));
    });
  }, [sort]);

  const updateAnswer = <K extends keyof Answers>(
    field: K,
    value: Answers[K]
  ) => {
    setAnswers((current) => ({ ...current, [field]: value }));
  };

  const toggleSort = (key: typeof sort.key) => {
    setSort((current) => ({
      key,
      direction:
        current.key === key && current.direction === "asc" ? "desc" : "asc",
    }));
  };

  const matrixHeader = (label: string, key: typeof sort.key) => (
    <button
      onClick={() => toggleSort(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase tracki
    >
      {label}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
    </button>
  );

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            Semester build workflow
          </p>

          <h1 className="mt-2 text-3xl font-bold tracking-tight">
            Claude Artifacts vs Canvas vs v0 Router
          </h1>

          <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
```

```
            Choose the right workspace based on project scope, coding workflow,
            persistence, Supabase requirements, GitHub handoff, and deployment.
          </p>
        </header>

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Project decision tree
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Select what the project needs
            </h2>

            <p className="mt-1 text-sm text-slate-600">
              The recommendation shifts to v0 when the project requires a real
              Next.js architecture, Postgres persistence, Supabase Auth, RLS,
              multi-tenancy, server routes, or deployment.
            </p>
          </div>

          <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-3">
            <SelectSection
              label="Deliverable"
              field="deliverable"
              choices={OPTIONS.deliverable}
              value={answers.deliverable}
              onChange={updateAnswer}
            />

            <SelectSection
              label="Interaction"
              field="interaction"
              choices={OPTIONS.interaction}
              value={answers.interaction}
              onChange={updateAnswer}
            />

            <SelectSection
              label="Data and backend"
              field="backend"
              choices={OPTIONS.backend}
              value={answers.backend}
              onChange={updateAnswer}
            />

            <SelectSection
              label="Technology target"
              field="techStack"
              choices={OPTIONS.techStack}
              value={answers.techStack}
              onChange={updateAnswer}
            />

            <SelectSection
```

```
            label="Supabase capability"
            field="supabaseCapability"
            choices={OPTIONS.supabaseCapability}
            value={answers.supabaseCapability}
            onChange={updateAnswer}
          />

          <SelectSection
            label="Handoff"
            field="handoff"
            choices={OPTIONS.handoff}
            value={answers.handoff}
            onChange={updateAnswer}
          />
        </div>

        <div className="mt-5 rounded-2xl border border-indigo-200 bg-indigo-50 p-5"
          <div className="flex flex-col justify-between gap-4 lg:flex-row lg:items-
            <div>
              <p className="text-xs font-bold uppercase tracking-[0.14em] text-indi
                Primary recommendation
              </p>

              <div className="mt-2 flex flex-wrap items-center gap-2">
                <h3 className="text-2xl font-bold text-slate-950">
                  {recommendation.primary.platform}
                </h3>

                <PlatformBadge platform={recommendation.primary.platform} />

                <Badge className="border-indigo-200 bg-white text-indigo-700">
                  {recommendation.confidence}% confidence
                </Badge>
              </div>

              <ul className="mt-4 max-w-3xl space-y-2 text-sm leading-6 text-slate-
                {recommendation.primary.reasons.map((reason) => (
                  <li key={reason}>• {reason}</li>
                ))}
              </ul>
            </div>

            <div className="rounded-xl border border-indigo-100 bg-white p-4 lg:w-8
              <p className="text-xs font-bold uppercase tracking-wide text-slate-50
                Secondary option
              </p>

              <p className="mt-1 text-base font-bold text-slate-900">
                {recommendation.secondary.platform}
              </p>

              <p className="mt-2 text-sm leading-6 text-slate-600">
                {recommendation.secondary.primaryUse}
              </p>
            </div>
          </div>
```

```
            {recommendation.requiresProductionEscalation && (
              <div className="mt-5 rounded-xl border border-amber-200 bg-amber-50 p-4
                <p className="text-sm font-bold text-amber-900">
                  Production handoff required
                </p>

                <p className="mt-1 text-sm leading-6 text-amber-800">
                  This project needs infrastructure beyond a self-contained
                  artifact: persistent records, server logic, Supabase, auth,
                  tenant boundaries, private integrations, or deployment. Use
                  Claude or Canvas for prototypes and specifications, then
                  implement the durable version in a repository-backed v0 and
                  Next.js project.
                </p>
              </div>
            )}
          </div>
        </section>

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
            <div>
              <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
                Ready-to-copy build prompt
              </p>

              <h2 className="mt-1 text-xl font-bold text-slate-950">
                Platform-specific implementation brief
              </h2>
            </div>

            <div className="flex flex-wrap gap-2">
              <CopyButton value={buildPrompt} label="Copy prompt" />

              <button
                onClick={() =>
                  downloadFile(
                    "semester-ai-workflow-recommendation.md",
                    markdownExport,
                    "text/markdown;charset=utf-8"
                  )
                }
                className="rounded-lg bg-slate-900 px-3 py-1.5 text-xs font-bold tex
              >
                Export Markdown
              </button>

              <button
                onClick={() =>
                  downloadFile(
                    "semester-ai-workflow-recommendation.json",
                    JSON.stringify(
                      {
                        answers,
                        recommendation: {
```

```
                      primary: recommendation.primary.platform,
                      secondary: recommendation.secondary.platform,
                      confidence: recommendation.confidence,
                      needsSupabase: recommendation.needsSupabase,
                      needsSupabaseAuth: recommendation.needsSupabaseAuth,
                      needsTenantIsolation:
                        recommendation.needsTenantIsolation,
                      requiresProductionEscalation:
                        recommendation.requiresProductionEscalation,
                      reasons: recommendation.primary.reasons,
                    },
                    buildPrompt,
                    githubPlan,
                    supabasePlan,
                  },
                  null,
                  2
                ),
                "application/json;charset=utf-8"
              )
            }
            className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 te
          >
            Export JSON
          </button>
        </div>
      </div>

      <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-x
        {buildPrompt}
      </pre>
    </section>

    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
            GitHub handoff
          </p>

          <h2 className="mt-1 text-xl font-bold text-slate-950">
            Version-control and deployment plan
          </h2>
        </div>

        <CopyButton value={githubPlan} label="Copy GitHub plan" />
      </div>

      <pre className="mt-4 whitespace-pre-wrap rounded-xl bg-slate-950 p-4 text-x
        {githubPlan}
      </pre>
    </section>

    <SupabasePanel
      recommendation={recommendation}
      supabasePlan={supabasePlan}
```

```
        />

        <section className="overflow-hidden rounded-2xl border border-slate-200 bg-wh
          <div className="border-b border-slate-200 p-5">
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Sortable platform matrix
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Execution limits, React support, and export formats
            </h2>

            <p className="mt-1 text-sm text-slate-600">
              Sort the table by any column, then open a platform for full
              implementation and sandbox details.
            </p>
          </div>

          <div className="overflow-x-auto">
            <table className="w-full min-w-[1500px] border-collapse">
              <thead className="bg-slate-50">
                <tr>
                  <th className="px-4 py-3">
                    {matrixHeader("Platform", "platform")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("Primary use", "primaryUse")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("Execution model", "execution")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("React support", "reactSupport")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("Project shape", "projectShape")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("Export formats", "exportFormats")}
                  </th>

                  <th className="px-4 py-3">
                    {matrixHeader("Production fit", "productionFit")}
                  </th>

                  <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                    Details
                  </th>
                </tr>
              </thead>
```

```
                <tbody>
                  {sortedPlatforms.map((platform) => (
                    <tr
                      key={platform.id}
                      className="border-t border-slate-100 align-top transition hover:b
                    >
                      <td className="px-4 py-4">
                        <p className="font-bold text-slate-950">
                          {platform.platform}
                        </p>

                        <div className="mt-2 flex flex-wrap gap-1">
                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Prototype {platform.scores.prototype}/5
                          </Badge>

                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Full stack {platform.scores.fullStack}/5
                          </Badge>

                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Deploy {platform.scores.deployment}/5
                          </Badge>
                        </div>
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.primaryUse}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.execution}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.reactSupport}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.projectShape}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.exportFormats}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.productionFit}
                      </td>

                      <td className="px-4 py-4">
                        <button
                          onClick={() => setSelectedPlatform(platform)}
                          className="rounded-lg border border-slate-200 bg-white px-3 p
                        >
                          Open
```

```
                    </button>
                  </td>
                </tr>
              ))}
            </tbody>
          </table>
        </div>
      </section>

      {selectedPlatform && (
        <div className="fixed inset-0 z-50 flex justify-end bg-slate-950/30">
          <button
            aria-label="Close platform detail panel"
            className="absolute inset-0 cursor-default"
            onClick={() => setSelectedPlatform(null)}
          />

          <aside className="relative h-full w-full max-w-2xl overflow-y-auto bg-wh
            <div className="flex items-start justify-between gap-4">
              <div>
                <PlatformBadge platform={selectedPlatform.platform} />

                <h2 className="mt-3 text-2xl font-bold text-slate-950">
                  {selectedPlatform.platform}
                </h2>
              </div>

              <button
                onClick={() => setSelectedPlatform(null)}
                className="rounded-lg border border-slate-200 px-3 py-1.5 text-sm
              >
                Close
              </button>
            </div>

            <div className="mt-6 space-y-5">
              {[
                ["Primary use", selectedPlatform.primaryUse],
                ["Execution model", selectedPlatform.execution],
                ["Sandbox limits", selectedPlatform.sandboxLimits],
                ["React support", selectedPlatform.reactSupport],
                ["Project shape", selectedPlatform.projectShape],
                ["Code and export options", selectedPlatform.exportFormats],
                ["GitHub workflow", selectedPlatform.githubWorkflow],
                ["Production handoff", selectedPlatform.productionFit],
                ["Best Semester use cases", selectedPlatform.bestFor],
              ].map(([label, value]) => (
                <div key={label}>
                  <h3 className="text-sm font-bold text-slate-900">
                    {label}
                  </h3>

                  <p className="mt-1 text-sm leading-6 text-slate-600">
                    {value}
                  </p>
                </div>
```

```
                ))}
              </div>
            </aside>
          </div>
        )}
      </div>
    </main>
  );
}
```

Supabase client files

When the router recommends **v0 + Next.js + Supabase**, add the following files rather than putting database access directly into the client component.

Environment variables

```
# .env.local
NEXT_PUBLIC_SUPABASE_URL=https://YOUR_PROJECT.supabase.co
NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY=YOUR_PUBLISHABLE_KEY
```

The Supabase docs recommend separate browser and server clients for Next.js SSR. The browser client is for Client Components; the server client is for Server Components, Server Actions, and Route Handlers. [107] [104]

Browser client

```
// lib/supabase/client.ts
import { createBrowserClient } from "@supabase/ssr";

export function createClient() {
  return createBrowserClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!
  );
}
```

Server client

```
// lib/supabase/server.ts
import { createServerClient } from "@supabase/ssr";
import { cookies } from "next/headers";

export async function createClient() {
  const cookieStore = await cookies();

  return createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
```

```
      cookies: {
        getAll() {
          return cookieStore.getAll();
        },
        setAll(cookiesToSet) {
          try {
            cookiesToSet.forEach(({ name, value, options }) => {
              cookieStore.set(name, value, options);
            });
          } catch {
            // A Server Component cannot always write cookies.
            // Refresh sessions in middleware/proxy as needed.
          }
        },
      },
    }
  );
}
```

Server Action example

```
// app/artifacts/actions.ts
"use server";

import { revalidatePath } from "next/cache";
import { createClient } from "@/lib/supabase/server";

type CreateArtifactInput = {
  title: string;
  category: string;
  format: string;
  lifecycle: string;
  priority: string;
  suggestedPrompt: string;
  organizationId: string;
};

export async function createArtifact(input: CreateArtifactInput) {
  const supabase = await createClient();

  const { data: authData, error: authError } =
    await supabase.auth.getUser();

  if (authError || !authData.user) {
    throw new Error("You must be signed in to create an artifact.");
  }

  const { error } = await supabase.from("artifacts").insert({
    organization_id: input.organizationId,
    title: input.title,
    category: input.category,
    format: input.format,
    lifecycle: input.lifecycle,
    priority: input.priority,
    suggested_prompt: input.suggestedPrompt,
```

```
    created_by: authData.user.id,
  });

  if (error) {
    throw new Error(error.message);
  }

  revalidatePath("/artifacts");
}
```

Schema and RLS

For Semester's artifact catalog, persist records in Postgres but enforce organization membership with **Row Level Security**. UI filters are not authorization.

```
create table public.organizations (
  id uuid primary key default gen_random_uuid(),
  name text not null,
  created_at timestamptz not null default now()
);

create table public.organization_members (
  organization_id uuid not null references public.organizations(id) on delete cascade
  user_id uuid not null references auth.users(id) on delete cascade,
  role text not null check (role in ('owner', 'admin', 'member', 'viewer')),
  created_at timestamptz not null default now(),
  primary key (organization_id, user_id)
);

create table public.artifacts (
  id uuid primary key default gen_random_uuid(),
  organization_id uuid not null references public.organizations(id) on delete cascade
  created_by uuid not null references auth.users(id),
  title text not null,
  category text not null,
  format text not null,
  use_case text,
  lifecycle text not null,
  audience text not null default 'Internal',
  priority text not null default 'P2',
  status text not null default 'Backlog',
  owner_name text,
  tags text[] not null default '{}',
  suggested_prompt text not null,
  metadata jsonb not null default '{}',
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create index artifacts_organization_id_idx
  on public.artifacts (organization_id);

create index artifacts_category_idx
  on public.artifacts (category);
```

```
create index artifacts_format_idx
  on public.artifacts (format);

create index artifacts_status_idx
  on public.artifacts (status);

create index artifacts_updated_at_idx
  on public.artifacts (updated_at desc);

alter table public.organizations enable row level security;
alter table public.organization_members enable row level security;
alter table public.artifacts enable row level security;

create policy "Members can view organization artifacts"
on public.artifacts
for select
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = artifacts.organization_id
      and membership.user_id = auth.uid()
  )
);

create policy "Members can create organization artifacts"
on public.artifacts
for insert
to authenticated
with check (
  created_by = auth.uid()
  and exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = artifacts.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin', 'member')
  )
);

create policy "Editors can update organization artifacts"
on public.artifacts
for update
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = artifacts.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin', 'member')
  )
)
with check (
```

```
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = artifacts.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin', 'member')
  )
);

create policy "Admins can delete organization artifacts"
on public.artifacts
for delete
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = artifacts.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin')
  )
);
```

How the routing changes

The decision tree now follows these practical rules:

Requirement chosen	Recommendation
Single-page prototype, diagram, calculator, or local-data tracker	Claude Artifacts
PRD, policy, strategy memo, research, code review, or exportable document	ChatGPT Canvas
React app with local state but no backend	Claude Artifacts, Canvas, or v0 depending on whether you need quick sharing versus project structure
Next.js application	v0
Postgres, Supabase database, server actions, APIs, or webhooks	v0
Supabase Auth, Storage, Realtime, or multi-tenant teams	v0 + Next.js + Supabase
GitHub workflow and production deployment	v0 + GitHub + Vercel

For Semester, the likely production path is:

```
Claude Artifact
  → Validate the decision-tree UX and artifact-catalog interaction
  → Export initial JSX / HTML / Mermaid / Markdown

ChatGPT Canvas
  → Create the product requirements, RLS policy explanation,
```

```
    operating docs, legal first drafts, and implementation notes
  → Export Markdown or code files

v0 + GitHub + Vercel + Supabase
  → Build the multi-file Next.js app
  → Add persistent artifact records and organization membership
  → Add auth, Row Level Security, exports, audit trail, and deployment
```

Supabase's official Next.js guidance says that `NEXT_PUBLIC_*` variables are intended for browser exposure while other environment variables remain server-only by default in Next.js. Its starter/docs also use `@supabase/ssr` to create separate browser and server clients for client components, server components, Server Actions, and Route Handlers. [105] [106] [104]

⁂

Claude Artifacts vs ChatGPT Canvas vs v0 sandbox: sortable feature matrix for execution limits, React support, and export formats

Computer
Build a prompt decision tree app for choosing between Claude Artifacts, ChatGPT Canvas, and v0 based on your specific project scope
Computer
Show me the rest of the React component code
Add a feature to copy the generated Supabase prompt
Export this whole app layout as a markdown document

Here is the final missing section: it adds a **Copy Supabase Prompt** control and exports the **entire app layout/specification** as a Markdown document—not merely the current recommendation.

The implementation keeps the app self-contained for prototype use, while the Supabase prompt intentionally routes persistent, authenticated, multi-tenant work to a v0/Next.js implementation. That is the correct boundary: Claude Artifacts and Canvas are strong for preview and iteration; v0 is the better target for a deployable app with a real backend. [120] [121]

Add this helper

Add this function near the other generators, after `createBuildPrompt`:

```
function createSupabasePrompt(
  answers: Answers,
  recommendation: Recommendation
) {
  if (!recommendation.needsSupabase) {
    return `Supabase is not required for the current project choices.

Build the first version with local sample data only. If this project later needs pers
  }
```

```
  const needsAuth = recommendation.needsSupabaseAuth;
  const needsTenancy = recommendation.needsTenantIsolation;
  const needsStorage = answers.supabaseCapability === "storage";
  const needsRealtime = answers.supabaseCapability === "realtime";

  return `Build the Semester project as a production-oriented Next.js App Router appl

Project requirements:
- Deliverable: ${answers.deliverable}
- Interaction model: ${answers.interaction}
- Backend requirement: ${answers.backend}
- Technology target: ${answers.techStack}
- Supabase capability: ${answers.supabaseCapability}
- Handoff requirement: ${answers.handoff}

Stack:
- Next.js with App Router and TypeScript
- Tailwind CSS
- Supabase Postgres
- @supabase/ssr for browser and server clients
- Vercel deployment
- GitHub repository with branch-based preview deployments

Required file structure:
- app/ for pages, layouts, route handlers, and server actions
- components/ for reusable client and server UI components
- lib/supabase/client.ts for createBrowserClient
- lib/supabase/server.ts for createServerClient
- lib/supabase/middleware.ts or proxy integration for auth-session refresh
- lib/validation/ for Zod validation schemas
- lib/db/ for query and domain helpers
- supabase/migrations/ for SQL migrations and RLS policies
- types/database.ts for database types
- .env.example with variable names only
- README.md with setup, migration, test, GitHub, and Vercel deployment instructions

Environment variables:
- NEXT_PUBLIC_SUPABASE_URL
- NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY
- Never expose service-role credentials to the browser.
- Do not use NEXT_PUBLIC_ for secrets.
- Store production secrets in Vercel environment variables.

Database requirements:
- Create an artifacts table with:
  id, organization_id, created_by, title, category, format, use_case,
  lifecycle, audience, priority, status, owner_name, tags,
  suggested_prompt, metadata, created_at, updated_at.
${needsTenancy ? `- Create organizations and organization_members tables.
- Support owner, admin, member, and viewer roles.
- Scope every artifact record to organization_id.
- Add Row Level Security policies that enforce organization membership.
- Never rely on client-side UI logic alone for authorization.` : ""}
${needsAuth ? `- Use Supabase Auth for sign-up, sign-in, sign-out, and session-aware
- Protect authenticated routes on the server.
```

```
- Fetch the current user on the server before privileged mutations.` : ""}
${needsStorage ? `- Add Supabase Storage buckets for artifact exports and uploaded s
- Add object-storage policies so users can access only authorized organization asset
${needsRealtime ? `- Add Realtime only for records that benefit from live collaborat
- Scope channels to authorized organization data and handle reconnect/error states.`

Security and quality requirements:
- Enable Row Level Security on all exposed tables.
- Validate every write with Zod before database access.
- Enforce authorization in server actions and route handlers.
- Use database migrations committed to GitHub.
- Add indexes for organization_id, category, format, status, priority, and updated_a
- Use server-side operations for sensitive or privileged actions.
- Add loading, empty, error, and success states.
- Add typecheck, lint, and production build scripts.
- Add a test strategy for authorization and organization-scoped access.
- Add a basic audit-log strategy for sensitive changes.

Build the user interface as a polished, responsive B2B dashboard for Semester:
- Sortable and filterable artifact catalog
- Detail drawer for artifact metadata and generation prompts
- Prompt decision tree
- Copy-to-clipboard controls
- Markdown and JSON export
- Organization-aware records
- Clear permissions-aware UI states
- Accessible keyboard navigation and readable status/priority badges.`;
}
```

Supabase's Next.js SSR guidance recommends `@supabase/ssr` for separate browser/server client creation, and its Next.js setup requires browser-safe public environment variables while sensitive values remain server-only. [122] [123] [124]

Add Supabase copy control

Inside `SemesterWorkflowRouter`, directly after the existing `supabasePlan` declaration, add:

```
const supabasePrompt = useMemo(
  () => createSupabasePrompt(answers, recommendation),
  [answers, recommendation]
);
```

Then replace your current `SupabasePanel` component with this version:

```
function SupabasePanel({
  recommendation,
  supabasePlan,
  supabasePrompt,
}: {
  recommendation: Recommendation;
  supabasePlan: string;
  supabasePrompt: string;
}) {
```

```
  return (
    <section className="rounded-2xl border border-emerald-200 bg-emerald-50 p-5 shado
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-end">
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-emerald-70
            Supabase integration
          </p>

          <h2 className="mt-1 text-xl font-bold text-emerald-950">
            {recommendation.needsSupabase
              ? "Production data, auth, and authorization plan"
              : "Supabase is currently optional"}
          </h2>

          <p className="mt-1 max-w-3xl text-sm leading-6 text-emerald-900">
            The generated prompt is designed for v0 or a normal Next.js project.
            It includes server/client Supabase boundaries, database structure,
            RLS requirements, GitHub handoff, and Vercel deployment guardrails.
          </p>
        </div>

        <div className="flex flex-wrap gap-2">
          <CopyButton value={supabasePlan} label="Copy Supabase plan" />
          <CopyButton value={supabasePrompt} label="Copy Supabase prompt" />
        </div>
      </div>

      <div className="mt-5 grid gap-4 xl:grid-cols-2">
        <div>
          <p className="text-sm font-bold text-emerald-950">
            Implementation plan
          </p>

          <pre className="mt-2 max-h-[440px] overflow-auto whitespace-pre-wrap rounde
            {supabasePlan}
          </pre>
        </div>

        <div>
          <p className="text-sm font-bold text-emerald-950">
            Ready-to-paste v0 / Next.js prompt
          </p>

          <pre className="mt-2 max-h-[440px] overflow-auto whitespace-pre-wrap rounde
            {supabasePrompt}
          </pre>
        </div>
      </div>
    </section>
  );
}
```

Finally, replace the existing `SupabasePanel` call in the main render with:

```
<SupabasePanel
  recommendation={recommendation}
  supabasePlan={supabasePlan}
  supabasePrompt={supabasePrompt}
/>
```

Export whole layout

Add the following helper above the main component. It exports a complete Markdown specification of the **router app itself**: product purpose, UI layout, matrix data, decision logic, generated recommendation, Supabase plan, GitHub plan, and source-style component map.

```
function createWholeAppMarkdown(
  answers: Answers,
  recommendation: Recommendation,
  buildPrompt: string,
  githubPlan: string,
  supabasePlan: string,
  supabasePrompt: string
) {
  const matrixRows = PLATFORM_DATA.map(
    (platform) => `| ${platform.platform} | ${platform.primaryUse} | ${platform.execu
  ).join("\n");

  const decisionGroups = Object.entries(OPTIONS)
    .map(([group, choices]) => {
      const rows = choices
        .map(([value, label]) => `| \`${value}\` | ${label} |`)
        .join("\n");

      return `### ${group}

| Value | Meaning |
|---|---|
${rows}`;
    })
    .join("\n\n");

  const recommendationReasons = recommendation.primary.reasons
    .map((reason) => `- ${reason}`)
    .join("\n");

  return `# Semester AI Workflow Router

## Purpose

A sortable feature matrix and interactive decision-tree application that helps a sof

1. Claude Artifacts
2. ChatGPT Canvas
3. v0

The app evaluates project scope, interaction complexity, persistence, backend needs,
```

Main UI Layout

\`\`\`text
SemesterWorkflowRouter
├── Header
│   ├── Product label
│   ├── App title
│   └── Purpose statement
├── Project Decision Tree
│   ├── Deliverable selector
│   ├── Interaction selector
│   ├── Backend selector
│   ├── Technology target selector
│   ├── Supabase capability selector
│   └── Handoff selector
├── Recommendation Card
│   ├── Primary recommendation
│   ├── Secondary option
│   ├── Confidence score
│   ├── Decision reasons
│   └── Production escalation warning
├── Build Prompt Panel
│   ├── Generated platform-specific prompt
│   ├── Copy prompt button
│   ├── Export current recommendation as Markdown
│   └── Export current recommendation as JSON
├── GitHub Handoff Panel
│   ├── Branch/repository/deployment plan
│   └── Copy GitHub plan button
├── Supabase Integration Panel
│   ├── Supabase implementation plan
│   ├── Copy Supabase plan button
│   ├── Ready-to-paste Supabase prompt
│   └── Copy Supabase prompt button
├── Sortable Platform Matrix
│   ├── Platform
│   ├── Primary use
│   ├── Execution model
│   ├── React support
│   ├── Project shape
│   ├── Export formats
│   ├── Production fit
│   └── Detail drawer trigger
└── Platform Detail Drawer
    ├── Sandbox limits
    ├── React support
    ├── Export options
    ├── GitHub workflow
    └── Best Semester use cases
\`\`\`

Feature Matrix

Platform	Primary use	Execution model	React support	Export formats	Produc

```
${matrixRows}

## Decision Inputs

${decisionGroups}

## Current Selection

| Requirement | Current selection |
|---|---|
| Deliverable | ${answers.deliverable} |
| Interaction | ${answers.interaction} |
| Backend | ${answers.backend} |
| Technology target | ${answers.techStack} |
| Supabase capability | ${answers.supabaseCapability} |
| Handoff | ${answers.handoff} |

## Current Recommendation

- **Primary platform:** ${recommendation.primary.platform}
- **Secondary platform:** ${recommendation.secondary.platform}
- **Confidence:** ${recommendation.confidence}%
- **Needs production escalation:** ${recommendation.requiresProductionEscalation ? "
- **Needs Supabase:** ${recommendation.needsSupabase ? "Yes" : "No"}
- **Needs Supabase Auth:** ${recommendation.needsSupabaseAuth ? "Yes" : "No"}
- **Needs tenant isolation:** ${recommendation.needsTenantIsolation ? "Yes" : "No"}

### Why

${recommendationReasons}

## Generated Build Prompt

\`\`\`text
${buildPrompt}
\`\`\`

## GitHub Handoff Plan

\`\`\`text
${githubPlan}
\`\`\`

## Supabase Implementation Plan

\`\`\`text
${supabasePlan}
\`\`\`

## Generated Supabase Prompt

\`\`\`text
${supabasePrompt}
\`\`\`

## Component Architecture
```

```
\`\`\`text
app/workflow-router/page.tsx
├── SemesterWorkflowRouter
├── SelectSection
├── SupabasePanel
├── PlatformBadge
├── Badge
├── CopyButton
├── createSupabasePrompt
├── createSupabasePlan
├── createBuildPrompt
├── createGitHubPlan
├── recommendPlatform
├── createWholeAppMarkdown
└── downloadFile
\`\`\`

## Production Handoff

For a durable Semester application:

\`\`\`text
Claude Artifact or Canvas
  → prototype UX, strategy, diagrams, and document drafts
  → export JSX / HTML / Mermaid / SVG / Markdown

GitHub
  → store source, migrations, RLS policies, documentation, and tests
  → use branches and pull requests

v0 + Next.js
  → production UI, routes, server actions, forms, and dashboard logic

Supabase
  → Postgres, authentication, organization membership, RLS, storage, realtime

Vercel
  → preview deployments, environment variables, and production deployment
\`\`\`
`;
}
```

Then add this memo inside `SemesterWorkflowRouter`, after `markdownExport`:

```
const wholeAppMarkdown = useMemo(
  () =>
    createWholeAppMarkdown(
      answers,
      recommendation,
      buildPrompt,
      githubPlan,
      supabasePlan,
      supabasePrompt
    ),
```

```
  [
    answers,
    recommendation,
    buildPrompt,
    githubPlan,
    supabasePlan,
    supabasePrompt,
  ]
);
```

Add a new button beside your existing Markdown and JSON export buttons:

```
<button
  onClick={() =>
    downloadFile(
      "semester-ai-workflow-router-layout.md",
      wholeAppMarkdown,
      "text/markdown;charset=utf-8"
    )
  }
  className="rounded-lg border border-indigo-200 bg-indigo-50 px-3 py-1.5 text-xs for
>
  Export whole app layout
</button>
```

This exports a Markdown artifact containing the current recommendation **and** the application's complete product/layout specification, decision-tree inputs, platform matrix, component hierarchy, GitHub plan, Supabase plan, and generated Supabase prompt.

Final button group

Your completed build-prompt action area should look like this:

```
<div className="flex flex-wrap gap-2">
  <CopyButton value={buildPrompt} label="Copy prompt" />

  <button
    onClick={() =>
      downloadFile(
        "semester-ai-workflow-recommendation.md",
        markdownExport,
        "text/markdown;charset=utf-8"
      )
    }
    className="rounded-lg bg-slate-900 px-3 py-1.5 text-xs font-bold text-white hover
  >
    Export recommendation
  </button>

  <button
    onClick={() =>
      downloadFile(
        "semester-ai-workflow-router-layout.md",
```

```
        wholeAppMarkdown,
        "text/markdown;charset=utf-8"
      )
    }
    className="rounded-lg border border-indigo-200 bg-indigo-50 px-3 py-1.5 text-xs f
  >
    Export whole app layout
  </button>

  <button
    onClick={() =>
      downloadFile(
        "semester-ai-workflow-recommendation.json",
        JSON.stringify(
          {
            answers,
            recommendation: {
              primary: recommendation.primary.platform,
              secondary: recommendation.secondary.platform,
              confidence: recommendation.confidence,
              needsSupabase: recommendation.needsSupabase,
              needsSupabaseAuth: recommendation.needsSupabaseAuth,
              needsTenantIsolation: recommendation.needsTenantIsolation,
              requiresProductionEscalation:
                recommendation.requiresProductionEscalation,
              reasons: recommendation.primary.reasons,
            },
            buildPrompt,
            githubPlan,
            supabasePlan,
            supabasePrompt,
          },
          null,
          2
        ),
        "application/json;charset=utf-8"
      )
    }
    className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs font-t
  >
    Export JSON
  </button>
</div>
```

Platform boundary

Platform	Best initial output	Export/handoff	Do not use as final implementation when
Claude Artifacts	Single-file React tool, HTML page, SVG, Mermaid diagram, interactive prototype	Export/copy source to GitHub	You need real auth, durable records, server secrets, database access, multi-tenancy, or deployment
ChatGPT Canvas	Editable document, code file, analysis, policy, PRD, strategy memo	PDF, DOCX, Markdown, language-specific source	You need an ongoing application runtime or server-integrated product

Platform	Best initial output	Export/handoff	Do not use as final implementation when
v0	Multi-file React/Next.js application	GitHub sync, Vercel preview, production deployment	You only need a short-lived document or lightweight artifact
Supabase	Postgres, Auth, Storage, Realtime, organization data, Row Level Security	Migrations and policies committed to GitHub	You merely need local mock data for a prototype

Claude Design's current export options include ZIP, PDF, PPTX, Google Slides, standalone HTML, handoff to Claude Code/local coding agents, and sends to platforms including v0 and Vercel. The practical workflow remains: create the fast interactive artifact or document first, then use GitHub + v0 + Supabase when the work needs production persistence, permissions, and deployment.[120]

⁂

Sortable comparison matrix: Claude Artifacts vs ChatGPT Canvas vs v0 sandbox — execution limits, React support, and export formats compared

Computer
Build a prompt decision tree web app that maps your exact workflow to Claude Artifacts, ChatGPT Canvas, or v0 sandbox based on your tech stack
Computer
Show me the full decision tree app code
Add a feature matrix table to the app
Export the code as a single HTML file

Below is a complete **single-file HTML application**—not a React component—that you can save as `semester-ai-workflow-router.html` and open directly in a browser. It includes:

- A sortable comparison matrix for Claude Artifacts, ChatGPT Canvas, and v0
- Execution limits, React support, project shape, and export-format comparisons
- A requirements-based decision tree that chooses the best platform
- Tech-stack and backend rules, including Next.js, Postgres, and Supabase
- A generated platform-specific implementation prompt
- A feature matrix table
- Copy buttons
- Browser downloads for the current recommendation as Markdown/JSON
- A button that exports the entire app source as a single HTML file

Claude Artifacts can create interactive pages, dashboards, designs, decks, and documents, and Claude documents export to common formats such as PowerPoint, PDF, and HTML; published

Claude Code artifacts use HTML, HTM, or Markdown source and can generate viewer downloads such as CSV or PNG. [133] [134]

Full standalone HTML

Save the complete block below as `semester-ai-workflow-router.html`:

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <meta
    name="viewport"
    content="width=device-width, initial-scale=1"
  />
  <meta
    name="description"
    content="A sortable platform comparison matrix and workflow decision tree for Cla
  />
  <title>Semester AI Workflow Router</title>

  <style>
    :root {
      --bg: #f8fafc;
      --surface: #ffffff;
      --surface-muted: #f1f5f9;
      --border: #e2e8f0;
      --border-strong: #cbd5e1;
      --text: #0f172a;
      --text-muted: #64748b;
      --dark: #0f172a;
      --dark-2: #172554;
      --indigo: #4f46e5;
      --indigo-light: #eef2ff;
      --indigo-border: #c7d2fe;
      --green-light: #ecfdf5;
      --green-border: #a7f3d0;
      --green-text: #047857;
      --amber-light: #fffbeb;
      --amber-border: #fde68a;
      --amber-text: #92400e;
      --rose-light: #fff1f2;
      --rose-border: #fecdd3;
      --rose-text: #be123c;
      --shadow: 0 10px 30px rgba(15, 23, 42, 0.08);
      --radius: 18px;
      --radius-sm: 10px;
    }

    * {
      box-sizing: border-box;
    }

    html {
      scroll-behavior: smooth;
```

```
}

body {
  margin: 0;
  min-width: 320px;
  background: var(--bg);
  color: var(--text);
  font-family:
    Inter,
    ui-sans-serif,
    system-ui,
    -apple-system,
    BlinkMacSystemFont,
    "Segoe UI",
    sans-serif;
  line-height: 1.5;
}

button,
input,
select {
  font: inherit;
}

button {
  cursor: pointer;
}

.page {
  width: min(1440px, calc(100% - 32px));
  margin: 0 auto;
  padding: 32px 0 56px;
}

.hero {
  background:
    radial-gradient(circle at top right, rgba(99, 102, 241, 0.28), transparent 38
    linear-gradient(135deg, #020617, #0f172a 48%, #1e1b4b);
  border-radius: var(--radius);
  padding: 32px;
  color: #fff;
  box-shadow: var(--shadow);
}

.eyebrow {
  margin: 0;
  color: #a5b4fc;
  font-size: 11px;
  font-weight: 800;
  letter-spacing: 0.16em;
  text-transform: uppercase;
}

h1,
h2,
h3,
```

```
    p {
      margin-top: 0;
    }

    h1 {
      max-width: 920px;
      margin: 8px 0 0;
      font-size: clamp(28px, 4vw, 44px);
      line-height: 1.08;
      letter-spacing: -0.04em;
    }

    .hero-copy {
      max-width: 820px;
      margin: 14px 0 0;
      color: #cbd5e1;
      font-size: 15px;
      line-height: 1.7;
    }

    .hero-stats {
      display: grid;
      grid-template-columns: repeat(4, minmax(0, 1fr));
      gap: 12px;
      margin-top: 28px;
    }

    .hero-stat {
      border: 1px solid rgba(255, 255, 255, 0.12);
      border-radius: 14px;
      padding: 14px;
      background: rgba(255, 255, 255, 0.08);
    }

    .hero-stat strong {
      display: block;
      font-size: 22px;
    }

    .hero-stat span {
      display: block;
      margin-top: 3px;
      color: #cbd5e1;
      font-size: 12px;
    }

    .section {
      margin-top: 24px;
      border: 1px solid var(--border);
      border-radius: var(--radius);
      background: var(--surface);
      box-shadow: 0 3px 16px rgba(15, 23, 42, 0.04);
    }

    .section-header {
      display: flex;
```

```
    align-items: flex-end;
    justify-content: space-between;
    gap: 20px;
    padding: 22px 24px 0;
  }

  .section-title {
    margin: 4px 0 0;
    font-size: 22px;
    letter-spacing: -0.02em;
  }

  .section-copy {
    max-width: 850px;
    margin: 8px 0 0;
    color: var(--text-muted);
    font-size: 14px;
    line-height: 1.65;
  }

  .section-body {
    padding: 24px;
  }

  .decision-grid {
    display: grid;
    grid-template-columns: repeat(3, minmax(0, 1fr));
    gap: 16px;
  }

  .field-card {
    border: 1px solid var(--border);
    border-radius: 14px;
    background: #f8fafc;
    padding: 16px;
  }

  .field-card h3 {
    margin: 0 0 12px;
    color: #1e293b;
    font-size: 14px;
  }

  .choice-list {
    display: grid;
    gap: 9px;
  }

  .choice {
    display: flex;
    align-items: flex-start;
    gap: 9px;
    color: #334155;
    font-size: 13px;
    line-height: 1.4;
    cursor: pointer;
```

```
}

.choice input {
  margin: 2px 0 0;
  accent-color: var(--indigo);
}

.recommendation {
  display: grid;
  grid-template-columns: minmax(0, 1.7fr) minmax(260px, 0.7fr);
  gap: 20px;
  margin-top: 20px;
  border: 1px solid var(--indigo-border);
  border-radius: 16px;
  padding: 20px;
  background: linear-gradient(135deg, var(--indigo-light), #fff);
}

.recommendation-label {
  margin: 0;
  color: var(--indigo);
  font-size: 11px;
  font-weight: 800;
  letter-spacing: 0.14em;
  text-transform: uppercase;
}

.recommendation-title-row {
  display: flex;
    align-items: center;
  flex-wrap: wrap;
  gap: 9px;
  margin-top: 6px;
}

.recommendation-title {
  margin: 0;
  font-size: 28px;
  letter-spacing: -0.03em;
}

.badge {
  display: inline-flex;
  align-items: center;
  border: 1px solid;
  border-radius: 999px;
  padding: 3px 9px;
  font-size: 11px;
  font-weight: 800;
  white-space: nowrap;
}

.badge-indigo {
  border-color: var(--indigo-border);
  background: #fff;
  color: var(--indigo);
```

```
}

.badge-claude {
  border-color: #fde68a;
  background: #fffbeb;
  color: #92400e;
}

.badge-canvas {
  border-color: #a7f3d0;
  background: #ecfdf5;
  color: #047857;
}

.badge-v0 {
  border-color: #0f172a;
  background: #0f172a;
  color: #fff;
}

.reason-list {
  display: grid;
  gap: 7px;
  margin: 16px 0 0;
  padding: 0;
  list-style: none;
  color: #334155;
  font-size: 14px;
  line-height: 1.5;
}

.reason-list li::before {
  content: "•";
  margin-right: 8px;
  color: var(--indigo);
  font-weight: 900;
}

.secondary-card {
  border: 1px solid var(--indigo-border);
  border-radius: 12px;
  padding: 16px;
  background: rgba(255, 255, 255, 0.86);
}

.secondary-card p:last-child {
  margin-bottom: 0;
}

.secondary-label {
  margin-bottom: 4px;
  color: var(--text-muted);
  font-size: 11px;
  font-weight: 800;
  letter-spacing: 0.12em;
  text-transform: uppercase;
```

```
}

.warning {
  margin-top: 16px;
  border: 1px solid var(--amber-border);
  border-radius: 12px;
  padding: 14px;
  background: var(--amber-light);
  color: var(--amber-text);
  font-size: 14px;
  line-height: 1.6;
}

.warning strong {
  display: block;
  margin-bottom: 4px;
}

.button-row {
  display: flex;
  flex-wrap: wrap;
  gap: 8px;
}

.button {
  border: 1px solid var(--border-strong);
  border-radius: 9px;
  padding: 9px 12px;
  background: #fff;
  color: #334155;
  font-size: 12px;
  font-weight: 800;
  transition: 160ms ease;
}

.button:hover {
  border-color: #a5b4fc;
  color: var(--indigo);
  transform: translateY(-1px);
}

.button-primary {
  border-color: var(--dark);
  background: var(--dark);
  color: #fff;
}

.button-primary:hover {
  border-color: #334155;
  background: #334155;
  color: #fff;
}

.button-indigo {
  border-color: var(--indigo);
  background: var(--indigo);
```

```
  color: #fff;
}

.button-indigo:hover {
  border-color: #4338ca;
  background: #4338ca;
  color: #fff;
}

.button-soft {
  border-color: var(--indigo-border);
  background: var(--indigo-light);
  color: #4338ca;
}

.button-soft:hover {
  background: #e0e7ff;
  color: #3730a3;
}

.prompt-grid {
  display: grid;
  grid-template-columns: minmax(0, 1fr) minmax(0, 1fr);
  gap: 18px;
  margin-top: 16px;
}

.code-panel {
  min-width: 0;
}

.code-panel-title {
  display: flex;
  align-items: center;
  justify-content: space-between;
  gap: 10px;
  margin-bottom: 8px;
}

.code-panel-title h3 {
  margin: 0;
  font-size: 14px;
}

pre {
  max-height: 430px;
  overflow: auto;
  margin: 0;
  border-radius: 12px;
  padding: 16px;
  background: #020617;
  color: #dbeafe;
  font-family:
    "SFMono-Regular",
    Consolas,
    "Liberation Mono",
```

```
      Menlo,
      monospace;
    font-size: 12px;
    line-height: 1.65;
    white-space: pre-wrap;
    word-break: break-word;
  }

  .matrix-wrap {
    overflow-x: auto;
    padding: 0 24px 24px;
  }

  table {
    width: 100%;
    min-width: 1500px;
    border-collapse: collapse;
  }

  thead {
    background: #f8fafc;
  }

  th,
  td {
    border-top: 1px solid var(--border);
    padding: 15px;
    vertical-align: top;
    text-align: left;
  }

  th {
    border-top: 0;
    color: var(--text-muted);
    font-size: 11px;
    font-weight: 800;
    letter-spacing: 0.05em;
    text-transform: uppercase;
  }

  th button {
    border: 0;
    padding: 0;
    background: transparent;
    color: inherit;
    font-size: inherit;
    font-weight: inherit;
    letter-spacing: inherit;
    text-transform: inherit;
  }

  th button:hover {
    color: var(--indigo);
  }

  td {
```

```
      max-width: 290px;
      color: #475569;
      font-size: 13px;
      line-height: 1.6;
    }

    .platform-name {
      color: var(--text);
      font-size: 14px;
      font-weight: 800;
    }

    .score-row {
      display: flex;
      flex-wrap: wrap;
      gap: 4px;
      margin-top: 8px;
    }

    .mini-badge {
      border: 1px solid var(--border);
      border-radius: 999px;
      padding: 2px 6px;
      background: #f8fafc;
      color: #64748b;
      font-size: 10px;
      font-weight: 700;
    }

    .feature-table {
      min-width: 1000px;
    }

    .feature-status {
      font-size: 12px;
      font-weight: 800;
    }

    .feature-high {
      color: #047857;
    }

    .feature-medium {
      color: #b45309;
    }

    .feature-low {
      color: #b91c1c;
    }

    .modal {
      position: fixed;
      z-index: 20;
      inset: 0;
      display: none;
      justify-content: flex-end;
```

```
    background: rgba(2, 6, 23, 0.4);
  }

  .modal.open {
    display: flex;
  }

  .drawer {
    width: min(640px, 100%);
    height: 100%;
    overflow-y: auto;
    padding: 28px;
    background: #fff;
    box-shadow: -20px 0 50px rgba(2, 6, 23, 0.18);
  }

  .drawer-header {
    display: flex;
    align-items: flex-start;
    justify-content: space-between;
    gap: 16px;
  }

  .drawer-section {
    margin-top: 24px;
  }

  .drawer-section h3 {
    margin-bottom: 6px;
    font-size: 14px;
  }

  .drawer-section p {
    margin-bottom: 0;
    color: #475569;
    font-size: 14px;
    line-height: 1.65;
  }

  .footer-note {
    margin: 20px 0 0;
    color: #64748b;
    font-size: 12px;
    line-height: 1.6;
  }

  @media (max-width: 1080px) {
    .decision-grid {
      grid-template-columns: repeat(2, minmax(0, 1fr));
    }

    .hero-stats {
      grid-template-columns: repeat(2, minmax(0, 1fr));
    }
  }
```

```
    @media (max-width: 760px) {
      .page {
        width: min(100% - 20px, 1440px);
        padding-top: 10px;
      }

      .hero,
      .section-body {
        padding: 18px;
      }

      .section-header {
        align-items: flex-start;
        flex-direction: column;
        padding: 18px 18px 0;
      }

      .decision-grid,
      .recommendation,
      .prompt-grid {
        grid-template-columns: 1fr;
      }

      .matrix-wrap {
        padding: 0 18px 18px;
      }

      .hero-stats {
        grid-template-columns: 1fr 1fr;
      }
    }
  </style>
</head>

<body>
  <main class="page">
    <header class="hero">
      <p class="eyebrow">Semester build workflow</p>

      <h1>Claude Artifacts vs ChatGPT Canvas vs v0</h1>

      <p class="hero-copy">
        Compare execution boundaries, React support, export paths, and project
        shape. Then use the workflow decision tree to choose the right starting
        environment for a specific Semester deliverable.
      </p>

      <div class="hero-stats">
        <div class="hero-stat">
          <strong>3</strong>
          <span>Platforms compared</span>
        </div>
        <div class="hero-stat">
          <strong>6</strong>
          <span>Decision dimensions</span>
        </div>
```

```
        <div class="hero-stat">
          <strong>7</strong>
          <span>Project workflow types</span>
        </div>
        <div class="hero-stat">
          <strong>HTML</strong>
          <span>Standalone export</span>
        </div>
      </div>
    </header>

    <section class="section">
      <div class="section-header">
        <div>
          <p class="eyebrow" style="color:#4f46e5;">Decision tree</p>
          <h2 class="section-title">Map project scope to the right platform</h2>
          <p class="section-copy">
            Select the project characteristics that matter. The scoring logic
            recommends Claude Artifacts for portable, self-contained work;
            Canvas for document and code iteration; and v0 for real Next.js
            applications, Postgres, Supabase, authentication, GitHub, and Vercel depl
          </p>
        </div>
      </div>

      <div class="section-body">
        <div id="decision-grid" class="decision-grid"></div>

        <div id="recommendation" class="recommendation"></div>
      </div>
    </section>

    <section class="section">
      <div class="section-header">
        <div>
          <p class="eyebrow" style="color:#4f46e5;">Generated handoff</p>
          <h2 class="section-title">Platform prompt, GitHub plan, and export</h2>
          <p class="section-copy">
            The recommendation creates a build prompt and a repository handoff
            plan. Export the current recommendation as Markdown or JSON, or
            download this complete application as a standalone HTML file.
          </p>
        </div>

        <div class="button-row">
          <button id="export-markdown" class="button button-primary">
            Export recommendation
          </button>

          <button id="export-json" class="button">
            Export JSON
          </button>

          <button id="export-html" class="button button-soft">
            Export full HTML app
          </button>
```

```
        </div>
      </div>

      <div class="section-body">
        <div class="prompt-grid">
          <div class="code-panel">
            <div class="code-panel-title">
              <h3>Ready-to-copy build prompt</h3>
              <button id="copy-build-prompt" class="button">Copy prompt</button>
            </div>

            <pre id="build-prompt-output"></pre>
          </div>

          <div class="code-panel">
            <div class="code-panel-title">
              <h3>GitHub and production handoff</h3>
              <button id="copy-github-plan" class="button">Copy plan</button>
            </div>

            <pre id="github-plan-output"></pre>
          </div>
        </div>

        <p class="footer-note">
          This browser-only prototype stores selections in memory. For a shared
          Semester workspace, move the decision data into a Next.js project,
          store records in Supabase/Postgres, enforce organization-scoped access
          with Row Level Security, and deploy with GitHub plus Vercel.
        </p>
      </div>
    </section>

    <section class="section">
      <div class="section-header">
        <div>
          <p class="eyebrow" style="color:#4f46e5;">Feature matrix</p>
          <h2 class="section-title">Capability comparison</h2>
          <p class="section-copy">
            This is a fast operating view of what each environment is best
            positioned to do. “High” means a natural primary fit, not merely
            that the task is technically possible.
          </p>
        </div>
      </div>

      <div class="matrix-wrap">
        <table class="feature-table">
          <thead>
            <tr>
              <th>Feature</th>
              <th>Claude Artifacts</th>
              <th>ChatGPT Canvas</th>
              <th>v0</th>
            </tr>
          </thead>
```

```
          <tbody id="feature-matrix-body"></tbody>
        </table>
      </div>
    </section>

    <section class="section">
      <div class="section-header">
        <div>
          <p class="eyebrow" style="color:#4f46e5;">Sortable platform matrix</p>
          <h2 class="section-title">
            Execution limits, React support, and export formats
          </h2>
          <p class="section-copy">
            Click a header to sort. Use the detail button to review sandbox
            constraints, recommended handoff, and ideal Semester use cases.
          </p>
        </div>
      </div>

      <div class="matrix-wrap">
        <table>
          <thead>
            <tr>
              <th><button data-sort="platform">Platform ↕</button></th>
              <th><button data-sort="primaryUse">Primary use ↕</button></th>
              <th><button data-sort="execution">Execution model ↕</button></th>
              <th><button data-sort="reactSupport">React support ↕</button></th>
              <th><button data-sort="projectShape">Project shape ↕</button></th>
              <th><button data-sort="exportFormats">Export formats ↕</button></th>
              <th><button data-sort="productionFit">Production fit ↕</button></th>
              <th>Details</th>
            </tr>
          </thead>

          <tbody id="platform-matrix-body"></tbody>
        </table>
      </div>
    </section>
  </main>

  <div id="detail-modal" class="modal" aria-hidden="true">
    <aside
      class="drawer"
      role="dialog"
      aria-modal="true"
      aria-labelledby="drawer-title"
    >
      <div class="drawer-header">
        <div>
          <div id="drawer-badge"></div>
          <h2 id="drawer-title" class="section-title"></h2>
        </div>

        <button id="close-drawer" class="button">Close</button>
      </div>
```

```
    <div id="drawer-content"></div>
  </aside>
</div>

<script>
  const PLATFORM_DATA = [
    {
      id: "claude-artifacts",
      platform: "Claude Artifacts",
      primaryUse:
        "Shareable self-contained artifacts, interactive tools, diagrams, visual ex
      execution:
        "Contained rendered artifact experience. Best treated as a client-side arti
      sandboxLimits:
        "Do not rely on it as the final home for durable records, server secrets, p
      reactSupport:
        "Good for contained React-style interactive tools, trackers, calculators, l
      projectShape:
        "Usually a single contained artifact, page, component, HTML file, SVG, Merm
      exportFormats:
        "HTML, React/JSX-style source, Markdown, SVG, Mermaid, plus browser-generat
      githubWorkflow:
        "Export or copy source into GitHub. Store HTML/JSX in app or src, Mermaid/M
      productionFit:
        "Prototype or visual specification → export source → GitHub → Next.js/Supab
      bestFor:
        "Semester artifact catalog prototype, format decision tree, ROI calculator
      scores: {
        prototype: 5,
        documents: 4,
        diagrams: 5,
        fullStack: 1,
        deployment: 2
      }
    },
    {
      id: "chatgpt-canvas",
      platform: "ChatGPT Canvas",
      primaryUse:
        "Iterative document and code workspace for writing, editing, revision, tran
      execution:
        "React and HTML preview in an isolated workspace environment. Python can su
      sandboxLimits:
        "Treat Canvas as a drafting and preview environment rather than a durable b
      reactSupport:
        "Useful for iterating React/HTML and individual code files. Strongest for e
      projectShape:
        "Typically an editable document, code file, or contained work item optimize
      exportFormats:
        "Documents: PDF, DOCX, Markdown. Code: language-specific files such as Java
      githubWorkflow:
        "Export Markdown/source, commit editable source to GitHub, and treat PDF/DO
      productionFit:
        "Draft/revise/export → GitHub or documentation system → production codebase
      bestFor:
```

```
      "Semester PRDs, strategy, policies, legal first drafts, research synthesis
    scores: {
      prototype: 3,
      documents: 5,
      diagrams: 3,
      fullStack: 1,
      deployment: 1
    }
  },
  {
    id: "v0",
    platform: "v0",
    primaryUse:
      "Production-oriented React and Next.js apps, multi-file projects, backend
    execution:
      "VM-backed isolated Node.js development environment for multi-file projects
    sandboxLimits:
      "A preview is still not production. Verify package versions, environment va
    reactSupport:
      "Native fit for React and Next.js, including multi-file components, App Rou
    projectShape:
      "Multi-file repository-style project with components, routes, dependencies
    exportFormats:
      "Application project code, GitHub sync/export, existing-codebase integratio
    githubWorkflow:
      "Connect or create a GitHub repository, work in branches, review preview de
    productionFit:
      "Best for database-backed, authenticated, multi-user Next.js applications w
    bestFor:
      "Semester production artifact catalog, shared team dashboard, authenticated
    scores: {
      prototype: 4,
      documents: 2,
      diagrams: 2,
      fullStack: 5,
      deployment: 5
    }
  }
];

const FEATURE_MATRIX = [
  {
    feature: "Self-contained interactive prototype",
    claude: ["High", "feature-high"],
    canvas: ["Medium", "feature-medium"],
    v0: ["High", "feature-high"]
  },
  {
    feature: "PRDs, policies, strategy, research, and editing",
    claude: ["High", "feature-high"],
    canvas: ["High", "feature-high"],
    v0: ["Low", "feature-low"]
  },
  {
    feature: "Mermaid, SVG, and visual explainers",
    claude: ["High", "feature-high"],
```

```
      canvas: ["Medium", "feature-medium"],
      v0: ["Medium", "feature-medium"]
    },
    {
      feature: "React component experimentation",
      claude: ["High", "feature-high"],
      canvas: ["High", "feature-high"],
      v0: ["High", "feature-high"]
    },
    {
      feature: "Multi-file Next.js application",
      claude: ["Low", "feature-low"],
      canvas: ["Low", "feature-low"],
      v0: ["High", "feature-high"]
    },
    {
      feature: "Server routes and server-side secrets",
      claude: ["Low", "feature-low"],
      canvas: ["Low", "feature-low"],
      v0: ["High", "feature-high"]
    },
    {
      feature: "Postgres or Supabase persistence",
      claude: ["Low", "feature-low"],
      canvas: ["Low", "feature-low"],
      v0: ["High", "feature-high"]
    },
    {
      feature: "Authentication and multi-tenant authorization",
      claude: ["Low", "feature-low"],
      canvas: ["Low", "feature-low"],
      v0: ["High", "feature-high"]
    },
    {
      feature: "Document export",
      claude: ["Medium", "feature-medium"],
      canvas: ["High", "feature-high"],
      v0: ["Low", "feature-low"]
    },
    {
      feature: "GitHub workflow and Vercel deployment",
      claude: ["Medium", "feature-medium"],
      canvas: ["Medium", "feature-medium"],
      v0: ["High", "feature-high"]
    }
  ];

  const DECISION_OPTIONS = {
    deliverable: {
      label: "Deliverable",
      choices: [
        ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or
        ["product-prototype", "Clickable product prototype or interface explorati
        ["marketing-page", "Marketing site, landing page, one-page demo, or visual
        ["diagram", "Architecture, process, ERD, sequence, roadmap, or system diag
        ["document", "PRD, policy, research, strategy, report, or operating docume
```

```
        ["presentation", "Pitch, board update, sales narrative, launch, or training
        ["full-stack-feature", "Authenticated, data-backed, multi-user product fea
        ["analysis", "Python analysis, research, data cleanup, or generated-file wo
      ]
    },
    interaction: {
      label: "Interaction",
      choices: [
        ["none", "No interaction; people mainly read or review"],
        ["simple", "Simple client-side interaction: tabs, toggles, calculators, sar
        ["complex", "Stateful interface: filters, tables, forms, drawers, editable
        ["multi-user", "Shared records, multiple users, roles, permissions, or coll
      ]
    },
    backend: {
      label: "Data and backend",
      choices: [
        ["none", "No backend; static result or browser-only sample data"],
        ["file-export", "Needs browser-generated CSV, Markdown, SVG, JSON, PDF, or
        ["database", "Needs persistent database records"],
        ["server-api", "Needs API routes, server logic, webhooks, or third-party se
        ["auth-secrets", "Needs sign-in, permissions, billing, private APIs, or ser
      ]
    },
    techStack: {
      label: "Technology target",
      choices: [
        ["none", "No prescribed code stack"],
        ["html", "Plain HTML, CSS, and JavaScript"],
        ["react", "React component or client-side application"],
        ["nextjs", "Multi-file Next.js application"],
        ["nextjs-postgres", "Next.js with Postgres"],
        ["nextjs-supabase", "Next.js with Supabase, Postgres, and Auth"]
      ]
    },
    handoff: {
      label: "Handoff",
      choices: [
        ["share-now", "Share immediately as a completed artifact"],
        ["doc-export", "Export PDF, DOCX, Markdown, or source files"],
        ["github", "Push versioned source into GitHub"],
        ["deploy", "Deploy a real web application"]
      ]
    },
    persistence: {
      label: "Persistence and access",
      choices: [
        ["none", "No persistence; local sample data is enough"],
        ["database", "Persistent artifact/catalog records"],
        ["auth", "User accounts and session-aware access"],
        ["multi-tenant", "Organizations, memberships, roles, and tenant isolation"
        ["storage", "Uploaded files, exports, screenshots, or generated assets"]
      ]
    }
  };
```

```
const DEFAULT_ANSWERS = {
  deliverable: "interactive-tool",
  interaction: "complex",
  backend: "none",
  techStack: "react",
  handoff: "share-now",
  persistence: "none"
};

let answers = { ...DEFAULT_ANSWERS };
let sortState = {
  key: "platform",
  direction: "asc"
};

function getPlatform(id) {
  return PLATFORM_DATA.find((platform) => platform.id === id);
}

function escapeHtml(value) {
  return String(value)
    .replaceAll("&", "&amp;")
    .replaceAll("<", "&lt;")
    .replaceAll(">", "&gt;")
    .replaceAll('"', "&quot;")
    .replaceAll("'", "&#039;");
}

function platformBadge(platform) {
  const classMap = {
    "Claude Artifacts": "badge-claude",
    "ChatGPT Canvas": "badge-canvas",
    "v0": "badge-v0"
  };

  return `<span class="badge ${classMap[platform]}">${escapeHtml(platform)}</spa
}

function addScore(scores, reasons, platform, points, reason) {
  scores[platform] += points;
  reasons[platform].push(reason);
}

function recommendPlatform() {
  const scores = {
    "claude-artifacts": 0,
    "chatgpt-canvas": 0,
    "v0": 0
  };

  const reasons = {
    "claude-artifacts": [],
    "chatgpt-canvas": [],
    "v0": []
  };
```

```
  const add = (platform, points, reason) =>
    addScore(scores, reasons, platform, points, reason);

  switch (answers.deliverable) {
    case "interactive-tool":
      add("claude-artifacts", 7, "A self-contained interactive tool is a direct C
      add("v0", 4, "v0 is a strong follow-on when the tool becomes a durable appl
      add("chatgpt-canvas", 2, "Canvas can iterate code, but it is less oriented
      break;

    case "product-prototype":
      add("claude-artifacts", 6, "Claude Artifacts can rapidly validate an intera
      add("v0", 5, "v0 is strong when the prototype should become the real applic
      add("chatgpt-canvas", 3, "Canvas can support focused React/HTML prototype i
      break;

    case "marketing-page":
      add("claude-artifacts", 7, "A polished, self-contained visual page is well
      add("v0", 5, "v0 becomes the better fit when the page ships as part of a Ne
      add("chatgpt-canvas", 2, "Canvas can support copy and smaller code iteratio
      break;

    case "diagram":
      add("claude-artifacts", 8, "Claude is well suited to Mermaid, SVG, diagrams
      add("chatgpt-canvas", 3, "Canvas can hold diagram source and the associated
      add("v0", 1, "v0 is appropriate only if the diagram is part of a larger pro
      break;

    case "document":
      add("chatgpt-canvas", 9, "Canvas is optimized for drafting, revising, and e
      add("claude-artifacts", 4, "Claude can create polished document artifacts."
      add("v0", 1, "v0 is unnecessary unless the document needs to live inside an
      break;

    case "presentation":
      add("chatgpt-canvas", 6, "Canvas supports an editorial, revision-first pres
      add("claude-artifacts", 5, "Claude can make visual deck-like deliverables."
      add("v0", 2, "v0 makes sense only if the presentation is an interactive web
      break;

    case "full-stack-feature":
      add("v0", 10, "A full-stack feature requires multi-file structure, server l
      add("claude-artifacts", 1, "Claude can still prototype the interaction befo
      add("chatgpt-canvas", 1, "Canvas can help create the specification or revie
      break;

    case "analysis":
      add("chatgpt-canvas", 8, "Canvas is strong for iterative analysis, Python,
      add("claude-artifacts", 3, "Claude can package analysis results into a shar
      add("v0", 3, "v0 is useful if recurring analysis should become a shared app
      break;
  }

  switch (answers.interaction) {
    case "none":
      add("chatgpt-canvas", 3, "A read-first deliverable favors an editorial worl
```

```
      add("claude-artifacts", 2, "A static artifact is still viable.");
      break;

    case "simple":
      add("claude-artifacts", 5, "Simple browser-side interaction fits an artifac
      add("chatgpt-canvas", 3, "Canvas can preview lightweight React or HTML inte
      add("v0", 2, "v0 can handle it, though it can be more project overhead.");
      break;

    case "complex":
      add("claude-artifacts", 5, "A stateful local prototype or tracker can work
      add("v0", 6, "Complex workflows benefit from durable multi-file React/Next
      add("chatgpt-canvas", 3, "Canvas can preview components but is less focused
      break;

    case "multi-user":
      add("v0", 10, "Shared workflows need identity, authorization, persistence,
      break;
  }

  switch (answers.backend) {
    case "none":
      add("claude-artifacts", 4, "No backend favors a portable and self-contained
      add("chatgpt-canvas", 3, "A document or preview workflow can be sufficient
      break;

    case "file-export":
      add("claude-artifacts", 5, "Artifacts can produce client-side downloads suc
      add("chatgpt-canvas", 5, "Canvas is strong for document and source-code exp
      add("v0", 3, "v0 can add export endpoints to a production application.");
      break;

    case "database":
      add("v0", 8, "Persistent data requires a project with a real database integ
      add("claude-artifacts", 1, "Use mock data in the artifact, then hand it off
      break;

    case "server-api":
      add("v0", 9, "Server routes, API integrations, and webhooks favor a real Ne
      break;

    case "auth-secrets":
      add("v0", 10, "Authentication, authorization, billing, private APIs, and se
      break;
  }

  switch (answers.techStack) {
    case "html":
      add("claude-artifacts", 5, "A contained HTML/CSS/JS deliverable is a natura
      add("chatgpt-canvas", 2, "Canvas can edit and preview the page.");
      break;

    case "react":
      add("claude-artifacts", 5, "React is a good fit for contained interactive a
      add("chatgpt-canvas", 4, "Canvas can preview and iteratively edit React/HTM
      add("v0", 5, "v0 is ideal when React must become a multi-file project.");
```

```
      break;

    case "nextjs":
      add("v0", 9, "A multi-file Next.js app is a direct v0 workflow.");
      break;

    case "nextjs-postgres":
      add("v0", 10, "Next.js plus Postgres requires environment variables, server
      break;

    case "nextjs-supabase":
      add("v0", 10, "Next.js plus Supabase requires client/server boundaries, au
      break;
  }

  switch (answers.persistence) {
    case "none":
      break;

    case "database":
      add("v0", 8, "Persistent data should live in a real database-backed app.")
      break;

    case "auth":
      add("v0", 9, "Authentication requires a durable application and server-awar
      break;

    case "multi-tenant":
      add("v0", 10, "Organization workspaces require roles, membership, tenant is
      break;

    case "storage":
      add("v0", 8, "Uploaded files and protected storage require production polic
      break;
  }

  switch (answers.handoff) {
    case "share-now":
      add("claude-artifacts", 6, "Immediate sharing favors a completed artifact."
      add("chatgpt-canvas", 3, "Canvas can also share or export reviewable work."
      break;

    case "doc-export":
      add("chatgpt-canvas", 7, "Canvas is strong for PDF, DOCX, Markdown, and sou
      add("claude-artifacts", 4, "Claude supports source-oriented handoffs such a
      break;

    case "github":
      add("v0", 7, "A repository-backed workflow is a primary v0 use case.");
      add("claude-artifacts", 3, "Artifact source can be exported and versioned i
      add("chatgpt-canvas", 3, "Canvas source can be exported into a repository."
      break;

    case "deploy":
      add("v0", 10, "Production deployment strongly favors v0 and Vercel.");
      add("claude-artifacts", 1, "Claude should hand off source instead of servir
```

```
          break;
      }

      const ranked = Object.keys(scores)
        .map((id) => ({
          ...getPlatform(id),
          score: scores[id],
          reasons: reasons[id]
        }))
        .sort((a, b) => b.score - a.score);

      const primary = ranked[^10_0];
      const secondary = ranked[^10_1];

      const productionEscalation =
        answers.backend === "database" ||
        answers.backend === "server-api" ||
        answers.backend === "auth-secrets" ||
        answers.interaction === "multi-user" ||
        answers.techStack === "nextjs" ||
        answers.techStack === "nextjs-postgres" ||
        answers.techStack === "nextjs-supabase" ||
        answers.persistence !== "none" ||
        answers.handoff === "deploy";

      const confidence = Math.min(
        97,
        Math.max(
          62,
          68 +
            (primary.score - secondary.score) * 4 +
            (productionEscalation && primary.id === "v0" ? 10 : 0)
        )
      );

      return {
        primary,
        secondary,
        ranked,
        productionEscalation,
        confidence
      };
    }

    function createBuildPrompt(recommendation) {
      const platform = recommendation.primary.platform;

      const platformDirections = {
        "Claude Artifacts": `Build this as a polished, self-contained Claude Artifac
- Keep it client-side and dependency-light.
- Use realistic local sample data.
- Do not assume a production database, full authentication, server secrets, or priva
- Include empty, loading, success, and error states where relevant.
- Make the result portable as HTML, JSX, SVG, Mermaid, Markdown, JSON, or CSV.`,

        "ChatGPT Canvas": `Build this as an editable ChatGPT Canvas deliverable.
```

```
- Optimize for iterative revision and a clean document or code-file structure.
- State assumptions and open questions clearly.
- Keep React/HTML preview requirements contained where possible.
- Prepare the final output for PDF, DOCX, Markdown, or language-specific source expor

        "v0": `Build this as a production-oriented Next.js application in v0.
- Use TypeScript, App Router, accessible responsive components, and a clean multi-fil
- Separate browser/client behavior from server logic.
- Use environment-variable placeholders and never hardcode secrets.
- Include loading, empty, error, and success states.
- Include README setup, testing, GitHub workflow, database, and Vercel deployment ins
      };

      const productionRequirements = recommendation.productionEscalation
        ? `
Production requirements:
- Add authentication and authorization where needed.
- Define data ownership and organization/tenant boundaries.
- Validate input at server boundaries.
- Store secrets in server-only environment variables.
- Add migrations, indexes, seed data, rollback planning, and tests.
- Add monitoring, error reporting, logging, analytics, and audit records where appro
- Confirm accessibility, mobile behavior, privacy, and security before release.`
        : "";

      const supabaseRequirements =
        answers.techStack === "nextjs-supabase" ||
        answers.persistence === "database" ||
        answers.persistence === "auth" ||
        answers.persistence === "multi-tenant" ||
        answers.persistence === "storage"
          ? `
Supabase implementation requirements:
- Use Supabase Postgres for persistent records.
- Use separate browser and server clients.
- Keep service-role access server-only.
- Add Row Level Security for every exposed table.
- Scope organization data through organization_id.
- Do not use client-side UI state as authorization.
- Store SQL migrations and RLS policies in GitHub.`
          : "";

      return `Build this for Semester.

Recommended platform: ${platform}
Secondary option: ${recommendation.secondary.platform}
Recommendation confidence: ${recommendation.confidence}%

Project requirements:
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend: ${answers.backend}
- Technology target: ${answers.techStack}
- Persistence and access: ${answers.persistence}
- Handoff: ${answers.handoff}
```

```
${platformDirections[platform]}

Required deliverables:
- Explain architecture and important assumptions.
- Include realistic Semester sample data.
- Build the primary workflow so it is immediately reviewable.
- List non-goals and known constraints.
- Include exact run, edit, export, GitHub, and deployment instructions.
${productionRequirements}
${supabaseRequirements}

Design direction:
Create a clean, premium B2B software interface. Use accessible controls, readable in
    }

    function createGithubPlan(recommendation) {
      const repositoryNeeded =
        answers.handoff === "github" ||
        answers.handoff === "deploy" ||
        recommendation.productionEscalation;

      if (!repositoryNeeded) {
        return `GitHub is optional for this scope.

Keep this initial version self-contained while validating the idea. Move the source
      }

      if (recommendation.primary.id === "v0") {
        return `GitHub plan for v0:

1. Build the first working multi-file project in v0.
2. Connect the v0 project to the appropriate GitHub account or organization.
3. Create a repository or connect an existing Semester repository.
4. Use main only for reviewed changes; create feature branches for meaningful work.
5. Add .env.example with variable names only.
6. Confirm .env and .env.local are ignored by Git.
7. Review the preview deployment and changed files.
8. Push or sync the feature branch to GitHub.
9. Open a pull request and run lint, typecheck, tests, and production build.
10. Review migrations, Row Level Security, and environment variable changes before me
11. Deploy through Vercel after approval.
12. Never commit API secrets, database URLs, service-role keys, or credentials.`;
      }

      if (recommendation.primary.id === "claude-artifacts") {
        return `GitHub plan after Claude Artifacts:

1. Export or copy the artifact source as HTML, JSX/TSX, SVG, Mermaid, Markdown, JSON
2. Create a Semester repository and structure it intentionally:
   - app/ or src/ for React and Next.js code
   - docs/ for PRDs, decisions, Markdown, and Mermaid diagrams
   - public/ for SVG and static assets
3. Add README.md with artifact purpose, assumptions, and regeneration instructions.
4. Create a feature branch:
   git checkout -b feat/semester-workflow-router
5. Commit and push:
```

```
   git add .
   git commit -m "feat: add workflow router prototype"
   git push -u origin feat/semester-workflow-router
6. If the tool needs auth, data persistence, API routes, secrets, or multi-user acces
      }

      return `GitHub plan after ChatGPT Canvas:

1. Export Markdown and source code as the primary editable record.
2. Treat PDF and DOCX as review/distribution outputs, not the only source of truth.
3. Create a repository and organize content:
   - docs/ for Markdown and decisions
   - app/ and components/ if code becomes a web app
   - scripts/ for Python or utility scripts
4. Add a README explaining purpose, assumptions, and regeneration steps.
5. Create a feature branch, commit, push, and open a pull request.
6. If the project requires data, auth, organization access, or deployment, move into
    }

    function createMarkdownExport(recommendation, buildPrompt, githubPlan) {
      return `# Semester AI Workflow Recommendation

## Recommendation

- **Primary platform:** ${recommendation.primary.platform}
- **Secondary platform:** ${recommendation.secondary.platform}
- **Confidence:** ${recommendation.confidence}%
- **Production escalation required:** ${recommendation.productionEscalation ? "Yes"

## Selected workflow inputs

| Requirement | Selection |
|---|---|
| Deliverable | ${answers.deliverable} |
| Interaction | ${answers.interaction} |
| Backend | ${answers.backend} |
| Technology target | ${answers.techStack} |
| Persistence and access | ${answers.persistence} |
| Handoff | ${answers.handoff} |

## Why this was recommended

${recommendation.primary.reasons.map((reason) => `- ${reason}`).join("\n")}

## Ready-to-copy implementation prompt

\`\`\`text
${buildPrompt}
\`\`\`

## GitHub and production handoff

\`\`\`text
${githubPlan}
\`\`\`
```

```
## Platform summary

| Platform | Primary use | Export options | Production handoff |
|---|---|---|---|
${PLATFORM_DATA.map(
  (platform) =>
    `| ${platform.platform} | ${platform.primaryUse} | ${platform.exportFormats} | $
).join("\n")}

## Product boundary

- Use **Claude Artifacts** for fast, self-contained interactive prototypes, diagrams
- Use **ChatGPT Canvas** for document and code iteration, editing, analysis, and file
- Use **v0** for multi-file React/Next.js applications, Postgres or Supabase persiste
`;
    }

    function renderDecisionGrid() {
      const grid = document.getElementById("decision-grid");

      grid.innerHTML = Object.entries(DECISION_OPTIONS)
        .map(([field, config]) => {
          const choices = config.choices
            .map(
              ([value, label]) => `
                <label class="choice">
                  <input
                    type="radio"
                    name="${field}"
                    value="${value}"
                    ${answers[field] === value ? "checked" : ""}
                  />
                  <span>${escapeHtml(label)}</span>
                </label>
              `
            )
            .join("");

          return `
            <section class="field-card">
              <h3>${escapeHtml(config.label)}</h3>
              <div class="choice-list">${choices}</div>
            </section>
          `;
        })
        .join("");

      grid.querySelectorAll("input[type=radio]").forEach((input) => {
        input.addEventListener("change", (event) => {
          answers[event.target.name] = event.target.value;
          render();
        });
      });
    }

    function renderRecommendation(recommendation) {
```

```
  const target = document.getElementById("recommendation");
  const reasons = recommendation.primary.reasons.length
    ? recommendation.primary.reasons
        .map((reason) => `<li>${escapeHtml(reason)}</li>`)
        .join("")
    : "<li>Best overall fit for the selected workflow.</li>";

  const warning = recommendation.productionEscalation
    ? `
      <div class="warning">
        <strong>Production handoff required</strong>
        Your choices require infrastructure beyond a self-contained artifact:
        persistent records, authentication, server logic, Supabase/Postgres,
        organizational tenancy, private integrations, or deployment. Use
        Claude or Canvas for early validation, then implement the durable
        version in a GitHub-backed v0/Next.js project.
      </div>
    `
    : "";

  target.innerHTML = `
    <div>
      <p class="recommendation-label">Primary recommendation</p>

      <div class="recommendation-title-row">
        <h3 class="recommendation-title">
          ${escapeHtml(recommendation.primary.platform)}
        </h3>

        ${platformBadge(recommendation.primary.platform)}

        <span class="badge badge-indigo">
          ${recommendation.confidence}% confidence
        </span>
      </div>

      <ul class="reason-list">
        ${reasons}
      </ul>

      ${warning}
    </div>

    <aside class="secondary-card">
      <p class="secondary-label">Secondary option</p>
      <p style="margin:0;font-size:17px;font-weight:800;color:#0f172a;">
        ${escapeHtml(recommendation.secondary.platform)}
      </p>
      <p style="margin-top:8px;color:#64748b;font-size:13px;line-height:1.6;">
        ${escapeHtml(recommendation.secondary.primaryUse)}
      </p>
    </aside>
  `;
}

function renderFeatureMatrix() {
```

```
  const tbody = document.getElementById("feature-matrix-body");

  tbody.innerHTML = FEATURE_MATRIX.map(
    (row) => `
      <tr>
        <td class="platform-name">${escapeHtml(row.feature)}</td>
        <td><span class="feature-status ${row.claude[^10_1]}">${row.claude[^10_0
        <td><span class="feature-status ${row.canvas[^10_1]}">${row.canvas[^10_0
        <td><span class="feature-status ${row.v0[^10_1]}">${row.v0[^10_0]}</span>
      </tr>
    `
  ).join("");
}

function renderPlatformMatrix() {
  const sorted = [...PLATFORM_DATA].sort((a, b) => {
    const aValue = String(a[sortState.key] || "");
    const bValue = String(b[sortState.key] || "");

    return sortState.direction === "asc"
      ? aValue.localeCompare(bValue)
      : bValue.localeCompare(aValue);
  });

  const tbody = document.getElementById("platform-matrix-body");

  tbody.innerHTML = sorted
    .map(
      (platform) => `
        <tr>
          <td>
            <div class="platform-name">${escapeHtml(platform.platform)}</div>

            <div class="score-row">
              <span class="mini-badge">Prototype ${platform.scores.prototype}/5</
              <span class="mini-badge">Documents ${platform.scores.documents}/5</
              <span class="mini-badge">Diagrams ${platform.scores.diagrams}/5</sp
              <span class="mini-badge">Full stack ${platform.scores.fullStack}/5<
              <span class="mini-badge">Deploy ${platform.scores.deployment}/5</sp
            </div>
          </td>

          <td>${escapeHtml(platform.primaryUse)}</td>
          <td>${escapeHtml(platform.execution)}</td>
          <td>${escapeHtml(platform.reactSupport)}</td>
          <td>${escapeHtml(platform.projectShape)}</td>
          <td>${escapeHtml(platform.exportFormats)}</td>
          <td>${escapeHtml(platform.productionFit)}</td>

          <td>
            <button
              class="button"
              data-open-platform="${platform.id}"
            >
              Open
            </button>
```

```
            </td>
          </tr>
        `
      )
      .join("");

    tbody.querySelectorAll("[data-open-platform]").forEach((button) => {
      button.addEventListener("click", () => {
        const platform = getPlatform(button.dataset.openPlatform);
        openDrawer(platform);
      });
    });
  }

  function openDrawer(platform) {
    const modal = document.getElementById("detail-modal");
    const title = document.getElementById("drawer-title");
    const badge = document.getElementById("drawer-badge");
    const content = document.getElementById("drawer-content");

    title.textContent = platform.platform;
    badge.innerHTML = platformBadge(platform.platform);

    content.innerHTML = [
      ["Primary use", platform.primaryUse],
      ["Execution model", platform.execution],
      ["Sandbox limits", platform.sandboxLimits],
      ["React support", platform.reactSupport],
      ["Project shape", platform.projectShape],
      ["Code and export options", platform.exportFormats],
      ["GitHub workflow", platform.githubWorkflow],
      ["Production handoff", platform.productionFit],
      ["Best Semester use cases", platform.bestFor]
    ]
      .map(
        ([label, value]) => `
          <section class="drawer-section">
            <h3>${escapeHtml(label)}</h3>
            <p>${escapeHtml(value)}</p>
          </section>
        `
      )
      .join("");

    modal.classList.add("open");
    modal.setAttribute("aria-hidden", "false");
  }

  function closeDrawer() {
    const modal = document.getElementById("detail-modal");
    modal.classList.remove("open");
    modal.setAttribute("aria-hidden", "true");
  }

  async function copyText(value, button) {
    try {
```

```
      await navigator.clipboard.writeText(value);
      const original = button.textContent;
      button.textContent = "Copied";
      setTimeout(() => {
        button.textContent = original;
      }, 1400);
    } catch {
      window.prompt("Copy the text below:", value);
    }
  }

  function downloadFile(filename, content, mimeType) {
    const blob = new Blob([content], {
      type: mimeType
    });

    const url = URL.createObjectURL(blob);
    const anchor = document.createElement("a");

    anchor.href = url;
    anchor.download = filename;
    anchor.click();

    URL.revokeObjectURL(url);
  }

  function exportCurrentHtml() {
    const source = "<!doctype html>\\n" + document.documentElement.outerHTML;

    downloadFile(
      "semester-ai-workflow-router.html",
      source,
      "text/html;charset=utf-8"
    );
  }

  function render() {
    const recommendation = recommendPlatform();
    const buildPrompt = createBuildPrompt(recommendation);
    const githubPlan = createGithubPlan(recommendation);

    renderDecisionGrid();
    renderRecommendation(recommendation);
    renderFeatureMatrix();
    renderPlatformMatrix();

    document.getElementById("build-prompt-output").textContent = buildPrompt;
    document.getElementById("github-plan-output").textContent = githubPlan;

    document
      .getElementById("copy-build-prompt")
      .replaceWith(
        createCopyButton(
          "copy-build-prompt",
          "Copy prompt",
          buildPrompt
```

```
      )
    );

  document
    .getElementById("copy-github-plan")
    .replaceWith(
      createCopyButton(
        "copy-github-plan",
        "Copy plan",
        githubPlan
      )
    );

  document
    .getElementById("export-markdown")
    .replaceWith(
      createActionButton(
        "export-markdown",
        "Export recommendation",
        "button button-primary",
        () => {
          downloadFile(
            "semester-ai-workflow-recommendation.md",
            createMarkdownExport(recommendation, buildPrompt, githubPlan),
            "text/markdown;charset=utf-8"
          );
        }
      )
    );

  document
    .getElementById("export-json")
    .replaceWith(
      createActionButton(
        "export-json",
        "Export JSON",
        "button",
        () => {
          downloadFile(
            "semester-ai-workflow-recommendation.json",
            JSON.stringify(
              {
                answers,
                recommendation: {
                  primary: recommendation.primary.platform,
                  secondary: recommendation.secondary.platform,
                  confidence: recommendation.confidence,
                  productionEscalation: recommendation.productionEscalation,
                  reasons: recommendation.primary.reasons
                },
                buildPrompt,
                githubPlan
              },
              null,
              2
            ),
```

```
              "application/json;charset=utf-8"
            );
          }
        )
      );

    document
      .getElementById("export-html")
      .replaceWith(
        createActionButton(
          "export-html",
          "Export full HTML app",
          "button button-soft",
          exportCurrentHtml
        )
      );
  }

  function createCopyButton(id, label, value) {
    const button = document.createElement("button");
    button.id = id;
    button.className = "button";
    button.textContent = label;
    button.addEventListener("click", () => copyText(value, button));
    return button;
  }

  function createActionButton(id, label, className, handler) {
    const button = document.createElement("button");
    button.id = id;
    button.className = className;
    button.textContent = label;
    button.addEventListener("click", handler);
    return button;
  }

  document.addEventListener("click", (event) => {
    const sortButton = event.target.closest("[data-sort]");

    if (sortButton) {
      const key = sortButton.dataset.sort;

      sortState = {
        key,
        direction:
          sortState.key === key && sortState.direction === "asc"
            ? "desc"
            : "asc"
      };

      renderPlatformMatrix();
    }
  });

  document
    .getElementById("close-drawer")
```

```
      .addEventListener("click", closeDrawer);

    document
      .getElementById("detail-modal")
      .addEventListener("click", (event) => {
        if (event.target.id === "detail-modal") {
          closeDrawer();
        }
      });

    document.addEventListener("keydown", (event) => {
      if (event.key === "Escape") {
        closeDrawer();
      }
    });

    render();
  </script>
</body>
</html>
```

How the decision tree works

The scoring logic considers six dimensions:

Input	Why it matters	Strongest effect
Deliverable type	Determines whether the core work is visual, editorial, interactive, or full stack	Documents favor Canvas; diagrams/tools favor Claude; product features favor v0
Interaction complexity	Distinguishes a static or simple tool from a stateful multi-user product	Complex local UI can use Claude; multi-user behavior goes to v0
Backend need	Identifies whether server-side work is needed	Database, API, auth, or secrets route to v0
Tech stack	Identifies project shape	Plain HTML favors Claude; Next.js/Postgres/Supabase favor v0
Handoff target	Distinguishes immediate sharing, file export, GitHub, and deployment	Document export favors Canvas; deployment favors v0
Persistence/access	Detects whether local state is sufficient	Database, auth, storage, and multi-tenancy require a real backend workflow

Export behavior

The standalone app includes three browser-only export actions:

- **Export recommendation:** downloads the current decision, reasons, build prompt, GitHub plan, and platform summary as Markdown.
- **Export JSON:** downloads the selected decision inputs and machine-readable recommendation.
- **Export full HTML app:** serializes the current page source and downloads a standalone `.html` file.

The exported HTML is a snapshot of the full interface and contains no external dependencies, bundler requirement, framework runtime, or backend requirement. It is suitable for a local browser, a static host, a GitHub repository, or an initial handoff to a v0/Next.js project.

Production boundary

Use this file as a product-spec and prototype asset. When Semester needs shared saved recommendations, organization-level workspaces, persistent artifact records, roles, approvals, audit history, or real API integrations, move the same decision data into a v0-built Next.js app and store it in Supabase/Postgres.

Claude's current Artifact feature supports interactive pages alongside documents, dashboards, designs, and decks; it also supports common exports including HTML, PDF, PowerPoint, and Google Slides-related outputs. Claude Code artifact documentation additionally states that published artifact sources are HTML/HTM/Markdown and can offer viewer downloads such as CSV or PNG. [134] [133]

⁂

Build a prompt decision tree web app that maps your exact coding or writing workflow to Claude Artifacts, ChatGPT Canvas, or v0 sandbox

Computer
Prompt-to-tool decision tree: test Claude Artifacts, ChatGPT Canvas, and v0 sandbox against 15 real-world prompts to see which wins
Computer
Show me how to add Supabase auth to this app
Add a feature checklist view to the app
Export this app as a React component for Nextjs

Below is a production-oriented **Next.js React export** of the decision-tree app, plus Supabase Auth integration and a feature-checklist view. It evaluates 15 real-world prompts, recommends Claude Artifacts, ChatGPT Canvas, or v0, and lets authenticated users save their recommendations to Supabase.

For a real shared Semester application, use Next.js App Router with cookie-based Supabase Auth, separate browser/server clients through `@supabase/ssr`, and server-side authorization checks. Supabase's current Next.js guidance explicitly supports this model and provides a `with-supabase` starter with App Router, TypeScript, Tailwind, and cookie-based Auth. [144] [145] [146]

Project structure

```
semester-workflow-router/
├── app/
│   ├── auth/
│   │   ├── sign-in/page.tsx
```

```
│   │   ├── sign-up/page.tsx
│   │   └── confirm/route.ts
│   ├── workflow-router/
│   │   ├── actions.ts
│   │   └── page.tsx
│   ├── layout.tsx
│   └── page.tsx
├── components/
│   ├── auth-button.tsx
│   ├── feature-checklist.tsx
│   └── workflow-router.tsx
├── lib/
│   └── supabase/
│       ├── client.ts
│       ├── middleware.ts
│       └── server.ts
├── supabase/
│   └── migrations/
│       └── 001_create_workflow_recommendations.sql
├── middleware.ts
├── .env.example
└── package.json
```

Install and configure

```
npx create-next-app@latest semester-workflow-router --ts --tailwind --app
cd semester-workflow-router

npm install @supabase/ssr @supabase/supabase-js
```

Create `.env.local`:

```
NEXT_PUBLIC_SUPABASE_URL=https://YOUR_PROJECT.supabase.co
NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY=YOUR_PUBLISHABLE_KEY
```

Use the browser-safe URL and publishable key in `NEXT_PUBLIC_*` variables. Keep any service-role key server-only and do not commit `.env.local`. Supabase's quickstart uses this App Router configuration, while Next.js keeps non-`NEXT_PUBLIC_` variables server-only by default.[146] [147]

Supabase clients

`lib/supabase/client.ts`

```
import { createBrowserClient } from "@supabase/ssr";

export function createClient() {
  return createBrowserClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!
```

```
  );
}
```

`lib/supabase/server.ts`

```
import { createServerClient } from "@supabase/ssr";
import { cookies } from "next/headers";

export async function createClient() {
  const cookieStore = await cookies();

  return createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
      cookies: {
        getAll() {
          return cookieStore.getAll();
        },

        setAll(cookiesToSet) {
          try {
            cookiesToSet.forEach(({ name, value, options }) => {
              cookieStore.set(name, value, options);
            });
          } catch {
            // Server Components cannot always set cookies.
            // Session refresh happens through middleware.
          }
        },
      },
    }
  );
}
```

`lib/supabase/middleware.ts`

```
import { createServerClient } from "@supabase/ssr";
import { NextResponse, type NextRequest } from "next/server";

export async function updateSession(request: NextRequest) {
  let response = NextResponse.next({
    request,
  });

  const supabase = createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
      cookies: {
        getAll() {
          return request.cookies.getAll();
        },
```

```
        setAll(cookiesToSet) {
          cookiesToSet.forEach(({ name, value }) =>
            request.cookies.set(name, value)
          );

          response = NextResponse.next({
            request,
          });

          cookiesToSet.forEach(({ name, value, options }) =>
            response.cookies.set(name, value, options)
          );
        },
      },
    }
  );

  await supabase.auth.getUser();

  return response;
}
```

`middleware.ts`

```
import type { NextRequest } from "next/server";
import { updateSession } from "@/lib/supabase/middleware";

export async function middleware(request: NextRequest) {
  return updateSession(request);
}

export const config = {
  matcher: [
    "/((?!_next/static|_next/image|favicon.ico|.*\\.(?:svg|png|jpg|jpeg|gif|webp)$).*
  ],
};
```

Supabase's SSR package provides distinct browser and server client creation functions, and its SSR documentation explains that sessions are stored in cookies so they are available to both client and server rendering. [145] [144]

Database migration

`supabase/migrations/001_create_workflow_recommendations.sql`

```
create table public.workflow_recommendations (
  id uuid primary key default gen_random_uuid(),
  user_id uuid not null references auth.users(id) on delete cascade,
  title text not null default 'Untitled workflow decision',
  inputs jsonb not null,
  recommendation jsonb not null,
```

```
  build_prompt text not null,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create index workflow_recommendations_user_id_idx
  on public.workflow_recommendations(user_id);

create index workflow_recommendations_created_at_idx
  on public.workflow_recommendations(created_at desc);

alter table public.workflow_recommendations enable row level security;

create policy "Users can view their own workflow recommendations"
on public.workflow_recommendations
for select
to authenticated
using (user_id = auth.uid());

create policy "Users can create their own workflow recommendations"
on public.workflow_recommendations
for insert
to authenticated
with check (user_id = auth.uid());

create policy "Users can update their own workflow recommendations"
on public.workflow_recommendations
for update
to authenticated
using (user_id = auth.uid())
with check (user_id = auth.uid());

create policy "Users can delete their own workflow recommendations"
on public.workflow_recommendations
for delete
to authenticated
using (user_id = auth.uid());
```

This model saves each recommendation as structured JSON plus the generated prompt. The Row Level Security policies ensure users can only access their own records. For a future Semester team workspace, add `organization_id`, organization membership, role checks, and organization-scoped RLS policies.

Server action

`app/workflow-router/actions.ts`

```
"use server";

import { revalidatePath } from "next/cache";
import { createClient } from "@/lib/supabase/server";

type SaveRecommendationInput = {
```

```
  title: string;
  inputs: Record<string, string>;
  recommendation: Record<string, unknown>;
  buildPrompt: string;
};

export async function saveRecommendation(input: SaveRecommendationInput) {
  const supabase = await createClient();

  const {
    data: { user },
    error: authError,
  } = await supabase.auth.getUser();

  if (authError || !user) {
    throw new Error("You must be signed in to save a workflow recommendation.");
  }

  const { error } = await supabase
    .from("workflow_recommendations")
    .insert({
      user_id: user.id,
      title: input.title.trim() || "Untitled workflow decision",
      inputs: input.inputs,
      recommendation: input.recommendation,
      build_prompt: input.buildPrompt,
    });

  if (error) {
    throw new Error(error.message);
  }

  revalidatePath("/workflow-router");

  return { success: true };
}
```

Full decision-tree component

`components/workflow-router.tsx`

```
"use client";

import { useMemo, useState } from "react";
import { saveRecommendation } from "@/app/workflow-router/actions";

type PlatformId = "claude-artifacts" | "chatgpt-canvas" | "v0";

type Answers = {
  deliverable:
    | "interactive-tool"
    | "product-prototype"
    | "marketing-page"
    | "diagram"
```

```
    | "document"
    | "presentation"
    | "full-stack-feature"
    | "analysis";
  interaction: "none" | "simple" | "complex" | "multi-user";
  backend: "none" | "file-export" | "database" | "server-api" | "auth-secrets";
  techStack:
    | "none"
    | "html"
    | "react"
    | "nextjs"
    | "nextjs-postgres"
    | "nextjs-supabase";
  persistence:
    | "none"
    | "database"
    | "auth"
    | "multi-tenant"
    | "storage";
  handoff: "share-now" | "doc-export" | "github" | "deploy";
};

type Platform = {
  id: PlatformId;
  platform: string;
  primaryUse: string;
  execution: string;
  sandboxLimits: string;
  reactSupport: string;
  projectShape: string;
  exportFormats: string;
  productionFit: string;
  bestFor: string;
  scores: {
    prototype: number;
    documents: number;
    diagrams: number;
    fullStack: number;
    deployment: number;
  };
};

type RankedPlatform = Platform & {
  score: number;
  reasons: string[];
};

type Recommendation = {
  primary: RankedPlatform;
  secondary: RankedPlatform;
  ranked: RankedPlatform[];
  confidence: number;
  needsProductionHandoff: boolean;
  needsSupabase: boolean;
};
```

```
type RealWorldPrompt = {
  id: number;
  prompt: string;
  category: string;
  answers: Answers;
  expectedWinner: PlatformId;
};

const DEFAULT_ANSWERS: Answers = {
  deliverable: "interactive-tool",
  interaction: "complex",
  backend: "none",
  techStack: "react",
  persistence: "none",
  handoff: "share-now",
};

const PLATFORM_DATA: Platform[] = [
  {
    id: "claude-artifacts",
    platform: "Claude Artifacts",
    primaryUse:
      "Shareable self-contained artifacts, interactive tools, diagrams, visual expla
    execution:
      "Contained client-side artifact experience; strongest for a self-contained resu
    sandboxLimits:
      "Do not treat it as the final home for durable records, secrets, complete authe
    reactSupport:
      "Good for local-state React interfaces, trackers, calculators, decision trees,
    projectShape:
      "Usually one contained artifact, a component, HTML page, SVG, Mermaid diagram,
    exportFormats:
      "HTML, JSX-style source, Markdown, SVG, Mermaid, and browser-generated files su
    productionFit:
      "Prototype → source export → GitHub → production Next.js application when infra
    bestFor:
      "Semester decision-tree prototypes, artifact catalogs with mock data, ROI calcu
    scores: {
      prototype: 5,
      documents: 4,
      diagrams: 5,
      fullStack: 1,
      deployment: 2,
    },
  },
  {
    id: "chatgpt-canvas",
    platform: "ChatGPT Canvas",
    primaryUse:
      "Editable workspace for writing, code iteration, research, Python analysis, rev
    execution:
      "Isolated workspace preview for React/HTML and supported coding workflows; suit
    sandboxLimits:
      "Do not use it as a production database, authentication, secret-management, API
    reactSupport:
      "Useful for editing and previewing React/HTML components and focused files. Str
```

```
    projectShape:
      "Document, code file, research artifact, analysis, or focused component prepare
    exportFormats:
      "Documents: PDF, DOCX, Markdown. Code: language-specific source such as JavaScr
    productionFit:
      "Draft/revise/export → GitHub, docs, or an application codebase.",
    bestFor:
      "Semester PRDs, strategy, policies, research synthesis, legal drafts, code refa
    scores: {
      prototype: 3,
      documents: 5,
      diagrams: 3,
      fullStack: 1,
      deployment: 1,
    },
  },
  {
    id: "v0",
    platform: "v0",
    primaryUse:
      "Production-oriented React and Next.js applications, multi-file project work, c
    execution:
      "VM-backed Node.js development sandbox for multi-file projects, server logic, r
    sandboxLimits:
      "Preview success is not production readiness. Verify migrations, environment va
    reactSupport:
      "Native fit for React and Next.js: App Router, Tailwind, multi-file components
    projectShape:
      "Repository-style project with dependencies, components, pages, API routes, ser
    exportFormats:
      "Project code, GitHub sync/export, preview deployments, existing-codebase integ
    productionFit:
      "Best for Postgres/Supabase applications, authenticated workflows, multi-user p
    bestFor:
      "Semester production tracker, authenticated team dashboard, multi-tenant worksp
    scores: {
      prototype: 4,
      documents: 2,
      diagrams: 2,
      fullStack: 5,
      deployment: 5,
    },
  },
];

const FEATURE_CHECKLIST = [
  {
    feature: "Self-contained interactive prototype",
    claude: "High",
    canvas: "Medium",
    v0: "High",
  },
  {
    feature: "PRDs, policies, strategy, research, and editing",
    claude: "High",
    canvas: "High",
```

```
    v0: "Low",
  },
  {
    feature: "Mermaid, SVG, and visual explainers",
    claude: "High",
    canvas: "Medium",
    v0: "Medium",
  },
  {
    feature: "React component experimentation",
    claude: "High",
    canvas: "High",
    v0: "High",
  },
  {
    feature: "Multi-file Next.js app",
    claude: "Low",
    canvas: "Low",
    v0: "High",
  },
  {
    feature: "Server routes and private server secrets",
    claude: "Low",
    canvas: "Low",
    v0: "High",
  },
  {
    feature: "Postgres or Supabase persistence",
    claude: "Low",
    canvas: "Low",
    v0: "High",
  },
  {
    feature: "Authentication and row-level permissions",
    claude: "Low",
    canvas: "Low",
    v0: "High",
  },
  {
    feature: "Document-oriented export",
    claude: "Medium",
    canvas: "High",
    v0: "Low",
  },
  {
    feature: "GitHub and Vercel production workflow",
    claude: "Medium",
    canvas: "Medium",
    v0: "High",
  },
];

const REAL_WORLD_PROMPTS: RealWorldPrompt[] = [
  {
    id: 1,
    category: "Product",
```

```
    prompt:
      "Build a sortable artifact catalog with 100 sample rows, client-side filters, p
    answers: {
      deliverable: "interactive-tool",
      interaction: "complex",
      backend: "file-export",
      techStack: "react",
      persistence: "none",
      handoff: "share-now",
    },
    expectedWinner: "claude-artifacts",
  },
  {
    id: 2,
    category: "Product",
    prompt:
      "Write a detailed PRD for Semester's primary workflow, including acceptance cri
    answers: {
      deliverable: "document",
      interaction: "none",
      backend: "none",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 3,
    category: "Engineering",
    prompt:
      "Generate a Mermaid system architecture diagram for a Next.js app, Supabase Aut
    answers: {
      deliverable: "diagram",
      interaction: "none",
      backend: "none",
      techStack: "none",
      persistence: "none",
      handoff: "share-now",
    },
    expectedWinner: "claude-artifacts",
  },
  {
    id: 4,
    category: "Engineering",
    prompt:
      "Build an authenticated Next.js App Router dashboard backed by Supabase Postgre
    answers: {
      deliverable: "full-stack-feature",
      interaction: "multi-user",
      backend: "auth-secrets",
      techStack: "nextjs-supabase",
      persistence: "multi-tenant",
      handoff: "deploy",
    },
    expectedWinner: "v0",
```

```
  },
  {
    id: 5,
    category: "Brand",
    prompt:
      "Create six editable SVG logo mark concepts for Semester with clear visual rati
    answers: {
      deliverable: "diagram",
      interaction: "none",
      backend: "none",
      techStack: "html",
      persistence: "none",
      handoff: "share-now",
    },
    expectedWinner: "claude-artifacts",
  },
  {
    id: 6,
    category: "GTM",
    prompt:
      "Draft a launch strategy, messaging architecture, email sequence, press release
    answers: {
      deliverable: "document",
      interaction: "none",
      backend: "file-export",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 7,
    category: "Finance",
    prompt:
      "Create a Python workflow that cleans a CSV export, calculates monthly retentio
    answers: {
      deliverable: "analysis",
      interaction: "none",
      backend: "file-export",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 8,
    category: "Marketing",
    prompt:
      "Create a polished interactive HTML landing page prototype for Semester with pr
    answers: {
      deliverable: "marketing-page",
      interaction: "simple",
      backend: "none",
      techStack: "html",
```

```
      persistence: "none",
      handoff: "share-now",
    },
    expectedWinner: "claude-artifacts",
  },
  {
    id: 9,
    category: "Product",
    prompt:
      "Build a customer-facing ROI calculator with saved scenarios, signed-in users,
    answers: {
      deliverable: "interactive-tool",
      interaction: "multi-user",
      backend: "auth-secrets",
      techStack: "nextjs-supabase",
      persistence: "multi-tenant",
      handoff: "deploy",
    },
    expectedWinner: "v0",
  },
  {
    id: 10,
    category: "Legal",
    prompt:
      "Draft a first version of Terms of Service, a Privacy Policy, and a Data Proces
    answers: {
      deliverable: "document",
      interaction: "none",
      backend: "none",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 11,
    category: "Operations",
    prompt:
      "Build a shared operating dashboard where department leads update quarterly OKR
    answers: {
      deliverable: "full-stack-feature",
      interaction: "multi-user",
      backend: "database",
      techStack: "nextjs-postgres",
      persistence: "multi-tenant",
      handoff: "deploy",
    },
    expectedWinner: "v0",
  },
  {
    id: 12,
    category: "Sales",
    prompt:
      "Create a sales deck with a category narrative, product demo flow, objection ha
    answers: {
```

```
      deliverable: "presentation",
      interaction: "none",
      backend: "none",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 13,
    category: "Design",
    prompt:
      "Create a clickable product prototype for a new workflow with sample data, emp
    answers: {
      deliverable: "product-prototype",
      interaction: "complex",
      backend: "none",
      techStack: "react",
      persistence: "none",
      handoff: "share-now",
    },
    expectedWinner: "claude-artifacts",
  },
  {
    id: 14,
    category: "Security",
    prompt:
      "Create an internal security data-flow document and threat model for an upcomi
    answers: {
      deliverable: "document",
      interaction: "none",
      backend: "none",
      techStack: "none",
      persistence: "none",
      handoff: "doc-export",
    },
    expectedWinner: "chatgpt-canvas",
  },
  {
    id: 15,
    category: "Engineering",
    prompt:
      "Build a production admin console with audit logs, role controls, server-side A
    answers: {
      deliverable: "full-stack-feature",
      interaction: "multi-user",
      backend: "auth-secrets",
      techStack: "nextjs-supabase",
      persistence: "multi-tenant",
      handoff: "deploy",
    },
    expectedWinner: "v0",
  },
];
```

```
function getPlatform(id: PlatformId) {
  const platform = PLATFORM_DATA.find((item) => item.id === id);

  if (!platform) {
    throw new Error(`Missing platform ${id}`);
  }

  return platform;
}

function recommendPlatform(answers: Answers): Recommendation {
  const scores: Record<PlatformId, number> = {
    "claude-artifacts": 0,
    "chatgpt-canvas": 0,
    v0: 0,
  };

  const reasons: Record<PlatformId, string[]> = {
    "claude-artifacts": [],
    "chatgpt-canvas": [],
    v0: [],
  };

  const add = (id: PlatformId, points: number, reason: string) => {
    scores[id] += points;
    reasons[id].push(reason);
  };

  switch (answers.deliverable) {
    case "interactive-tool":
      add("claude-artifacts", 7, "A self-contained interactive tool is a direct Arti
      add("v0", 4, "v0 is the right follow-on if the tool becomes shared and persiste
      add("chatgpt-canvas", 2, "Canvas can preview code but is less focused on finish
      break;
    case "product-prototype":
      add("claude-artifacts", 6, "Artifacts are fast for interactive product prototyp
      add("v0", 5, "v0 is ideal if the prototype turns into the production app.");
      add("chatgpt-canvas", 3, "Canvas supports focused React/HTML iteration.");
      break;
    case "marketing-page":
      add("claude-artifacts", 7, "A polished one-page visual output suits an Artifac
      add("v0", 5, "v0 is better when the page ships inside a Next.js website.");
      add("chatgpt-canvas", 2, "Canvas is useful for copy and smaller front-end edits
      break;
    case "diagram":
      add("claude-artifacts", 8, "Artifacts are excellent for Mermaid, SVG, and visua
      add("chatgpt-canvas", 3, "Canvas can support diagram source plus analysis.");
      add("v0", 1, "v0 is better only if the diagram is part of a bigger app.");
      break;
    case "document":
      add("chatgpt-canvas", 9, "Canvas is optimized for drafting, revising, and expor
      add("claude-artifacts", 4, "Artifacts can still create polished standalone docu
      add("v0", 1, "v0 is unnecessary unless the document belongs in an app.");
      break;
    case "presentation":
      add("chatgpt-canvas", 6, "Canvas suits editorial and export-first narrative wor
```

```
      add("claude-artifacts", 5, "Artifacts can create shareable visual presentation
      add("v0", 2, "v0 is useful only for an interactive web presentation.");
      break;
    case "full-stack-feature":
      add("v0", 10, "Full-stack work requires project structure, server logic, persis
      add("claude-artifacts", 1, "Artifacts can provide a useful UI prototype.");
      add("chatgpt-canvas", 1, "Canvas can help write specs and review code.");
      break;
    case "analysis":
      add("chatgpt-canvas", 8, "Canvas suits iterative Python, research, and file-ge
      add("claude-artifacts", 3, "Artifacts can package analysis into a shareable vis
      add("v0", 3, "v0 is useful if analysis evolves into a shared app.");
      break;
  }

  switch (answers.interaction) {
    case "none":
      add("chatgpt-canvas", 3, "Read-first deliverables favor an editing workspace."
      add("claude-artifacts", 2, "Static artifacts remain useful.");
      break;
    case "simple":
      add("claude-artifacts", 5, "Simple client-side interaction is a strong Artifac
      add("chatgpt-canvas", 3, "Canvas can preview basic React/HTML interaction.");
      add("v0", 2, "v0 works but can add project overhead.");
      break;
    case "complex":
      add("claude-artifacts", 5, "A local-state prototype can still work as an Artifa
      add("v0", 6, "Complex UI gains from multi-file React/Next.js architecture.");
      add("chatgpt-canvas", 3, "Canvas supports code preview but is less lifecycle-or
      break;
    case "multi-user":
      add("v0", 10, "Shared workflows require identity, authorization, persistence, a
      break;
  }

  switch (answers.backend) {
    case "none":
      add("claude-artifacts", 4, "No backend favors a self-contained deliverable.");
      add("chatgpt-canvas", 3, "Canvas can handle a document/code-preview workflow."
      break;
    case "file-export":
      add("claude-artifacts", 5, "Artifacts work well for browser-generated files suc
      add("chatgpt-canvas", 5, "Canvas supports document and source-file exports.");
      add("v0", 3, "v0 can add exports to a real product.");
      break;
    case "database":
      add("v0", 8, "Persistent data requires a real database-backed application.");
      break;
    case "server-api":
      add("v0", 9, "Server routes, APIs, and webhooks favor v0/Next.js.");
      break;
    case "auth-secrets":
      add("v0", 10, "Auth, permissions, secrets, and billing require production appli
      break;
  }
```

```
  switch (answers.techStack) {
    case "html":
      add("claude-artifacts", 5, "Standalone HTML is a natural Artifact handoff.");
      add("chatgpt-canvas", 2, "Canvas can edit and preview the HTML.");
      break;
    case "react":
      add("claude-artifacts", 5, "Contained React tools work well as Artifacts.");
      add("chatgpt-canvas", 4, "Canvas supports React editing and preview.");
      add("v0", 5, "v0 is ideal when React becomes a multi-file codebase.");
      break;
    case "nextjs":
      add("v0", 9, "A multi-file Next.js project is a v0 workflow.");
      break;
    case "nextjs-postgres":
      add("v0", 10, "Next.js plus Postgres needs migrations, server access, environme
      break;
    case "nextjs-supabase":
      add("v0", 10, "Next.js plus Supabase needs browser/server clients, Auth, RLS, a
      break;
  }

  switch (answers.persistence) {
    case "database":
      add("v0", 8, "Persistent records require a production data layer.");
      break;
    case "auth":
      add("v0", 9, "Authentication requires a durable application and session-aware s
      break;
    case "multi-tenant":
      add("v0", 10, "Multi-tenancy requires organizations, memberships, roles, and se
      break;
    case "storage":
      add("v0", 8, "Protected uploads and files require storage policies and authoriz
      break;
  }

  switch (answers.handoff) {
    case "share-now":
      add("claude-artifacts", 6, "Immediate sharing favors a completed artifact.");
      add("chatgpt-canvas", 3, "Canvas can share or export reviewable work.");
      break;
    case "doc-export":
      add("chatgpt-canvas", 7, "Canvas is strongest for PDF, DOCX, Markdown, and code
      add("claude-artifacts", 4, "Artifacts offer HTML, JSX, Mermaid, SVG, and browse
      break;
    case "github":
      add("v0", 7, "Repository-backed code workflow is a central v0 use case.");
      add("claude-artifacts", 3, "Artifact source can be versioned after export.");
      add("chatgpt-canvas", 3, "Canvas code/doc exports can be committed.");
      break;
    case "deploy":
      add("v0", 10, "Deployment strongly favors v0 and Vercel.");
      break;
  }

  const ranked = (Object.keys(scores) as PlatformId[])
```

```
    .map((id) => ({
      ...getPlatform(id),
      score: scores[id],
      reasons: reasons[id],
    }))
    .sort((a, b) => b.score - a.score);

  const primary = ranked[^11_0];
  const secondary = ranked[^11_1];

  const needsProductionHandoff =
    answers.backend === "database" ||
    answers.backend === "server-api" ||
    answers.backend === "auth-secrets" ||
    answers.interaction === "multi-user" ||
    answers.techStack === "nextjs" ||
    answers.techStack === "nextjs-postgres" ||
    answers.techStack === "nextjs-supabase" ||
    answers.persistence !== "none" ||
    answers.handoff === "deploy";

  const needsSupabase =
    answers.techStack === "nextjs-supabase" ||
    answers.persistence !== "none";

  return {
    primary,
    secondary,
    ranked,
    needsProductionHandoff,
    needsSupabase,
    confidence: Math.min(
      97,
      Math.max(
        62,
        68 +
          (primary.score - secondary.score) * 4 +
          (needsProductionHandoff && primary.id === "v0" ? 10 : 0)
      )
    ),
  };
}

function createBuildPrompt(
  answers: Answers,
  recommendation: Recommendation
) {
  const platformInstructions: Record<string, string> = {
    "Claude Artifacts": `Build this as a polished, self-contained Claude Artifact.
- Keep the deliverable client-side and dependency-light.
- Use realistic local sample data.
- Do not assume a durable database, full authentication, private APIs, or server-side
- Include empty, loading, success, and error states.
- Keep source portable as HTML, JSX, Mermaid, SVG, Markdown, JSON, or CSV.`,
    "ChatGPT Canvas": `Build this as an editable ChatGPT Canvas deliverable.
- Optimize for a clear document or code-file workflow.
```

```
- State assumptions and open questions.
- Keep preview requirements contained.
- Prepare it for document or language-specific source export.
- Use the canvas for revision and review, then hand off durable source to GitHub.`,
    v0: `Build this as a production-oriented Next.js App Router application in v0.
- Use TypeScript, Tailwind, accessible components, and a clean multi-file structure.
- Separate Client Components from server logic.
- Use environment variable placeholders, never hardcoded credentials.
- Include loading, empty, error, and success states.
- Add README instructions for setup, GitHub, database migrations, testing, and Vercel
  };

  const supabaseBlock = recommendation.needsSupabase
    ? `
Supabase requirements:
- Use @supabase/ssr with separate browser and server client files.
- Use Supabase Postgres for persistent data.
- Enable Row Level Security on exposed tables.
- Keep service-role credentials server-only.
- Use server actions or route handlers for sensitive writes.
- Validate writes before database access.
- Scope data by user_id and organization_id when multi-tenant behavior is required.
- Store migrations and RLS policies in GitHub.`
    : "";

  const productionBlock = recommendation.needsProductionHandoff
    ? `
Production requirements:
- Add server-side authorization checks.
- Add schema validation.
- Add database migrations, indexes, and seed data.
- Add linting, type checking, tests, and production build verification.
- Add monitoring, logging, error handling, and audit controls where needed.
- Review privacy, security, accessibility, and mobile behavior before release.`
    : "";

  return `Build this for Semester.

Recommended platform: ${recommendation.primary.platform}
Secondary option: ${recommendation.secondary.platform}
Confidence: ${recommendation.confidence}%

Workflow:
- Deliverable: ${answers.deliverable}
- Interaction: ${answers.interaction}
- Backend: ${answers.backend}
- Technology: ${answers.techStack}
- Persistence: ${answers.persistence}
- Handoff: ${answers.handoff}

${platformInstructions[recommendation.primary.platform]}

Required output:
- Explain architecture and assumptions.
- Use realistic Semester data and terminology.
- Include the primary workflow and a clear non-goals section.
```

```
- Include instructions to run, edit, export, and hand off the deliverable.
${supabaseBlock}
${productionBlock}

Design direction:
Use a premium B2B software aesthetic with clear hierarchy, accessible controls, reada
}

function downloadFile(filename: string, content: string, type: string) {
  const blob = new Blob([content], { type });
  const url = URL.createObjectURL(blob);
  const link = document.createElement("a");

  link.href = url;
  link.download = filename;
  link.click();

  URL.revokeObjectURL(url);
}

async function copyText(value: string) {
  await navigator.clipboard.writeText(value);
}

function getBadgeClass(platform: string) {
  if (platform === "Claude Artifacts") {
    return "border-amber-200 bg-amber-50 text-amber-800";
  }

  if (platform === "ChatGPT Canvas") {
    return "border-emerald-200 bg-emerald-50 text-emerald-800";
  }

  return "border-slate-800 bg-slate-950 text-white";
}

function getStatusClass(value: string) {
  if (value === "High") {
    return "border-emerald-200 bg-emerald-50 text-emerald-700";
  }

  if (value === "Medium") {
    return "border-amber-200 bg-amber-50 text-amber-700";
  }

  return "border-rose-200 bg-rose-50 text-rose-700";
}

function Badge({
  children,
  className = "",
}: {
  children: React.ReactNode;
  className?: string;
}) {
  return (
```

```
    <span
      className={`inline-flex items-center rounded-full border px-2 py-0.5 text-xs fo
    >
      {children}
    </span>
  );
}

function CopyButton({
  value,
  label,
}: {
  value: string;
  label: string;
}) {
  const [copied, setCopied] = useState(false);

  const handleCopy = async () => {
    try {
      await copyText(value);
      setCopied(true);
      window.setTimeout(() => setCopied(false), 1400);
    } catch {
      setCopied(false);
    }
  };

  return (
    <button
      onClick={handleCopy}
      className="rounded-lg border border-slate-200 bg-white px-3 py-1.5 text-xs font
    >
      {copied ? "Copied" : label}
    </button>
  );
}

function FeatureChecklistView() {
  const [checked, setChecked] = useState<Record<string, boolean>>({});

  const completed = Object.values(checked).filter(Boolean).length;
  const total = FEATURE_CHECKLIST.length;

  return (
    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-sm">
      <div className="flex flex-col justify-between gap-3 md:flex-row md:items-end">
        <div>
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600
            Feature checklist
          </p>
          <h2 className="mt-1 text-xl font-bold text-slate-950">
            Evaluate your project requirements
          </h2>
          <p className="mt-1 text-sm text-slate-600">
            Mark the capabilities your Semester project actually needs. High
            capability indicates the platform is a natural primary fit.
```

```
          </p>
        </div>

        <Badge className="border-indigo-200 bg-indigo-50 text-indigo-700">
          {completed} / {total} checked
        </Badge>
      </div>

      <div className="mt-5 overflow-x-auto">
        <table className="w-full min-w-[900px] border-collapse">
          <thead className="bg-slate-50">
            <tr>
              <th className="w-12 px-4 py-3 text-left text-xs font-bold uppercase tra
                Use
              </th>
              <th className="px-4 py-3 text-left text-xs font-bold uppercase tracking
                Feature
              </th>
              <th className="px-4 py-3 text-left text-xs font-bold uppercase tracking
                Claude Artifacts
              </th>
              <th className="px-4 py-3 text-left text-xs font-bold uppercase tracking
                ChatGPT Canvas
              </th>
              <th className="px-4 py-3 text-left text-xs font-bold uppercase tracking
                v0
              </th>
            </tr>
          </thead>

          <tbody>
            {FEATURE_CHECKLIST.map((item) => (
              <tr key={item.feature} className="border-t border-slate-100">
                <td className="px-4 py-3">
                  <input
                    type="checkbox"
                    checked={Boolean(checked[item.feature])}
                    onChange={(event) =>
                      setChecked((current) => ({
                        ...current,
                        [item.feature]: event.target.checked,
                      }))
                    }
                    className="h-4 w-4 accent-indigo-600"
                  />
                </td>

                <td className="px-4 py-3 text-sm font-semibold text-slate-800">
                  {item.feature}
                </td>

                <td className="px-4 py-3">
                  <Badge className={getStatusClass(item.claude)}>
                    {item.claude}
                  </Badge>
                </td>
```

```
                <td className="px-4 py-3">
                  <Badge className={getStatusClass(item.canvas)}>
                    {item.canvas}
                  </Badge>
                </td>

                <td className="px-4 py-3">
                  <Badge className={getStatusClass(item.v0)}>
                    {item.v0}
                  </Badge>
                </td>
              </tr>
            ))}
          </tbody>
        </table>
      </div>
    </section>
  );
}

export function WorkflowRouter({
  userId,
}: {
  userId?: string;
}) {
  const [answers, setAnswers] = useState<Answers>(DEFAULT_ANSWERS);
  const [title, setTitle] = useState("Semester workflow decision");
  const [sort, setSort] = useState<{
    key:
      | "platform"
      | "primaryUse"
      | "execution"
      | "reactSupport"
      | "projectShape"
      | "exportFormats"
      | "productionFit";
    direction: "asc" | "desc";
  }>({
    key: "platform",
    direction: "asc",
  });

  const [selectedPromptId, setSelectedPromptId] = useState<number | null>(
    null
  );
  const [saveState, setSaveState] = useState<
    "idle" | "saving" | "saved" | "error"
  >("idle");

  const recommendation = useMemo(
    () => recommendPlatform(answers),
    [answers]
  );

  const buildPrompt = useMemo(
```

```
    () => createBuildPrompt(answers, recommendation),
    [answers, recommendation]
  );

  const sortedPlatforms = useMemo(() => {
    return [...PLATFORM_DATA].sort((a, b) => {
      const aValue = String(a[sort.key]);
      const bValue = String(b[sort.key]);

      return sort.direction === "asc"
        ? aValue.localeCompare(bValue)
        : bValue.localeCompare(aValue);
    });
  }, [sort]);

  const promptTestResults = useMemo(
    () =>
      REAL_WORLD_PROMPTS.map((item) => {
        const result = recommendPlatform(item.answers);

        return {
          ...item,
          winner: result.primary.id,
          winnerName: result.primary.platform,
          matchedExpectedWinner: result.primary.id === item.expectedWinner,
          confidence: result.confidence,
        };
      }),
    []
  );

  const updateAnswer = <K extends keyof Answers>(
    key: K,
    value: Answers[K]
  ) => {
    setAnswers((current) => ({
      ...current,
      [key]: value,
    }));
  };

  const toggleSort = (key: typeof sort.key) => {
    setSort((current) => ({
      key,
      direction:
        current.key === key && current.direction === "asc" ? "desc" : "asc",
    }));
  };

  const usePromptScenario = (scenario: RealWorldPrompt) => {
    setAnswers(scenario.answers);
    setSelectedPromptId(scenario.id);
    window.scrollTo({
      top: 0,
      behavior: "smooth",
    });
```

```
  };

  const exportMarkdown = () => {
    const markdown = `# Semester AI Workflow Recommendation

## Current recommendation

- Primary platform: ${recommendation.primary.platform}
- Secondary platform: ${recommendation.secondary.platform}
- Confidence: ${recommendation.confidence}%
- Production handoff required: ${
      recommendation.needsProductionHandoff ? "Yes" : "No"
    }
- Supabase recommended: ${recommendation.needsSupabase ? "Yes" : "No"}

## Project inputs

| Input | Selected value |
|---|---|
| Deliverable | ${answers.deliverable} |
| Interaction | ${answers.interaction} |
| Backend | ${answers.backend} |
| Technology | ${answers.techStack} |
| Persistence | ${answers.persistence} |
| Handoff | ${answers.handoff} |

## Why

${recommendation.primary.reasons.map((reason) => `- ${reason}`).join("\n")}

## Build prompt

\`\`\`text
${buildPrompt}
\`\`\`

## Platform comparison

| Platform | Primary use | React support | Export formats | Production fit |
|---|---|---|---|---|
${PLATFORM_DATA.map(
  (platform) =>
    `| ${platform.platform} | ${platform.primaryUse} | ${platform.reactSupport} | ${p
).join("\n")}

## Feature checklist

| Feature | Claude Artifacts | ChatGPT Canvas | v0 |
|---|---|---|---|
${FEATURE_CHECKLIST.map(
  (item) =>
    `| ${item.feature} | ${item.claude} | ${item.canvas} | ${item.v0} |`
).join("\n")}
`;

    downloadFile(
```

```
      "semester-workflow-recommendation.md",
      markdown,
      "text/markdown;charset=utf-8"
    );
  };

  const saveCurrentRecommendation = async () => {
    if (!userId) {
      setSaveState("error");
      return;
    }

    setSaveState("saving");

    try {
      await saveRecommendation({
        title,
        inputs: answers,
        recommendation: {
          primary: recommendation.primary.platform,
          secondary: recommendation.secondary.platform,
          confidence: recommendation.confidence,
          reasons: recommendation.primary.reasons,
          needsProductionHandoff: recommendation.needsProductionHandoff,
          needsSupabase: recommendation.needsSupabase,
        },
        buildPrompt,
      });

      setSaveState("saved");
      window.setTimeout(() => setSaveState("idle"), 1800);
    } catch {
      setSaveState("error");
    }
  };

  const inputGroups: Array<{
    key: keyof Answers;
    label: string;
    options: Array<[Answers[keyof Answers], string]>;
  }> = [
    {
      key: "deliverable",
      label: "Deliverable",
      options: [
        ["interactive-tool", "Interactive tool, tracker, dashboard, calculator, or co
        ["product-prototype", "Clickable product prototype or interface exploration"
        ["marketing-page", "Marketing site, landing page, one-page demo, or visual ex
        ["diagram", "Architecture, process, ERD, sequence, roadmap, or system diagram
        ["document", "PRD, policy, research, strategy, report, or operating document"
        ["presentation", "Pitch, board update, sales narrative, launch, or training"
        ["full-stack-feature", "Authenticated, data-backed, multi-user product featu
        ["analysis", "Python analysis, research, data cleanup, or generated-file work
      ],
    },
    {
```

```
      key: "interaction",
      label: "Interaction",
      options: [
        ["none", "No interaction; people mainly read or review"],
        ["simple", "Simple client-side interaction: tabs, toggles, calculators, or sa
        ["complex", "Stateful UI: filters, tables, forms, drawers, and editable work
        ["multi-user", "Shared records, multiple users, roles, permissions, or collab
      ],
    },
    {
      key: "backend",
      label: "Data and backend",
      options: [
        ["none", "No backend; static content or browser-only sample data"],
        ["file-export", "Needs CSV, Markdown, SVG, JSON, PDF, or related downloads"]
        ["database", "Needs persistent database records"],
        ["server-api", "Needs API routes, webhooks, server logic, or external service
        ["auth-secrets", "Needs auth, private APIs, permissions, billing, or server s
      ],
    },
    {
      key: "techStack",
      label: "Technology target",
      options: [
        ["none", "No prescribed code stack"],
        ["html", "Plain HTML, CSS, and JavaScript"],
        ["react", "React component or client-side application"],
        ["nextjs", "Multi-file Next.js application"],
        ["nextjs-postgres", "Next.js with Postgres"],
        ["nextjs-supabase", "Next.js with Supabase, Postgres, and Auth"],
      ],
    },
    {
      key: "persistence",
      label: "Persistence and access",
      options: [
        ["none", "No persistence; sample data is sufficient"],
        ["database", "Persistent records"],
        ["auth", "User accounts and session-aware access"],
        ["multi-tenant", "Organizations, memberships, roles, and tenant isolation"],
        ["storage", "Uploaded files, source assets, screenshots, or exports"],
      ],
    },
    {
      key: "handoff",
      label: "Handoff",
      options: [
        ["share-now", "Share immediately as a finished artifact"],
        ["doc-export", "Export PDF, DOCX, Markdown, or source"],
        ["github", "Push versioned source into GitHub"],
        ["deploy", "Deploy a production web application"],
      ],
    },
  ];

  const header = (label: string, key: typeof sort.key) => (
```

```
      <button
        onClick={() => toggleSort(key)}
        className="flex items-center gap-1 text-left text-xs font-bold uppercase tracki
      >
        {label}
        {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
      </button>
    );

    return (
      <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
        <div className="mx-auto max-w-7xl space-y-6">
          <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
            <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
              Semester build workflow
            </p>

            <h1 className="mt-2 text-3xl font-bold tracking-tight">
              Claude Artifacts vs Canvas vs v0 Router
            </h1>

            <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
              Map an exact coding or writing workflow to the best AI workspace,
              compare platform limits, test 15 real-world prompts, and save
              durable decisions to Supabase.
            </p>
          </header>

          <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
            <div>
              <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
                Project decision tree
              </p>

              <h2 className="mt-1 text-xl font-bold text-slate-950">
                Choose project requirements
              </h2>

              <p className="mt-1 text-sm text-slate-600">
                The router selects v0 when your project needs a real Next.js app,
                Postgres/Supabase, authentication, multi-tenant access, private
                integrations, GitHub workflow, or deployment.
              </p>
            </div>

            <div className="mt-5 grid gap-4 md:grid-cols-2 xl:grid-cols-3">
              {inputGroups.map((group) => (
                <fieldset
                  key={group.key}
                  className="rounded-xl border border-slate-200 bg-slate-50 p-4"
                >
                  <legend className="px-1 text-sm font-bold text-slate-900">
                    {group.label}
                  </legend>

                  <div className="mt-2 space-y-2">
```

```
                {group.options.map(([value, label]) => (
                  <label
                    key={String(value)}
                    className="flex cursor-pointer items-start gap-2 text-sm text-s
                  >
                    <input
                      type="radio"
                      name={group.key}
                      checked={answers[group.key] === value}
                      onChange={() =>
                        updateAnswer(group.key, value as never)
                      }
                      className="mt-1 accent-indigo-600"
                    />

                    <span>{label}</span>
                  </label>
                ))}
              </div>
            </fieldset>
          ))}
        </div>

        <div className="mt-5 rounded-2xl border border-indigo-200 bg-indigo-50 p-5"
          <div className="flex flex-col justify-between gap-4 lg:flex-row lg:items-
            <div>
              <p className="text-xs font-bold uppercase tracking-[0.14em] text-indi
                Primary recommendation
              </p>

              <div className="mt-2 flex flex-wrap items-center gap-2">
                <h3 className="text-2xl font-bold text-slate-950">
                  {recommendation.primary.platform}
                </h3>

                <Badge
                  className={getBadgeClass(
                    recommendation.primary.platform
                  )}
                >
                  {recommendation.primary.platform}
                </Badge>

                <Badge className="border-indigo-200 bg-white text-indigo-700">
                  {recommendation.confidence}% confidence
                </Badge>
              </div>

              <ul className="mt-4 space-y-2 text-sm leading-6 text-slate-700">
                {recommendation.primary.reasons.map((reason) => (
                  <li key={reason}>• {reason}</li>
                ))}
              </ul>
            </div>

            <aside className="rounded-xl border border-indigo-100 bg-white p-4 lg:w
```

```
              <p className="text-xs font-bold uppercase tracking-wide text-slate-50
                Secondary option
              </p>

              <p className="mt-1 text-base font-bold text-slate-900">
                {recommendation.secondary.platform}
              </p>

              <p className="mt-2 text-sm leading-6 text-slate-600">
                {recommendation.secondary.primaryUse}
              </p>
            </aside>
          </div>

          {recommendation.needsProductionHandoff && (
            <div className="mt-5 rounded-xl border border-amber-200 bg-amber-50 p-4
              <p className="text-sm font-bold text-amber-900">
                Production handoff required
              </p>

              <p className="mt-1 text-sm leading-6 text-amber-800">
                Your choices require a durable application boundary:
                persistent data, database access, authentication, server
                routes, tenant access, secrets, or deployment. Prototype in
                Claude or Canvas if helpful, then move into a v0/Next.js
                codebase with Supabase and GitHub.
              </p>
            </div>
          )}
        </div>
      </section>

      <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
        <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
              Generated build prompt
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Copy, export, or save the recommendation
            </h2>
          </div>

          <div className="flex flex-wrap gap-2">
            <CopyButton value={buildPrompt} label="Copy prompt" />

            <button
              onClick={exportMarkdown}
              className="rounded-lg bg-slate-900 px-3 py-1.5 text-xs font-bold tex
            >
              Export Markdown
            </button>
          </div>
        </div>
```

```
          <pre className="mt-4 max-h-[520px] overflow-auto whitespace-pre-wrap rounde
            {buildPrompt}
          </pre>

          <div className="mt-5 flex flex-col gap-3 border-t border-slate-100 pt-5 md
            <label className="flex-1 text-sm font-bold text-slate-700">
              Saved recommendation title
              <input
                value={title}
                onChange={(event) => setTitle(event.target.value)}
                className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2
              />
            </label>

            <button
              onClick={saveCurrentRecommendation}
              disabled={saveState === "saving"}
              className="rounded-lg bg-indigo-600 px-4 py-2 text-sm font-bold text-wh
            >
              {saveState === "saving"
                ? "Saving..."
                : userId
                ? "Save to Supabase"
                : "Sign in to save"}
            </button>
          </div>

          {saveState === "saved" && (
            <p className="mt-3 text-sm font-semibold text-emerald-700">
              Recommendation saved to Supabase.
            </p>
          )}

          {saveState === "error" && (
            <p className="mt-3 text-sm font-semibold text-rose-700">
              {userId
                ? "The recommendation could not be saved. Check Supabase schema, Auth
                : "Sign in before saving recommendations."}
            </p>
          )}
        </section>

        <FeatureChecklistView />

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Prompt-to-tool test suite
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Test 15 real-world prompts
            </h2>

            <p className="mt-1 text-sm text-slate-600">
              Each scenario applies the same decision engine. Click “Use
```

```
            scenario" to load that workflow into the decision tree.
          </p>
        </div>

        <div className="mt-5 overflow-x-auto">
          <table className="w-full min-w-[1100px] border-collapse">
            <thead className="bg-slate-50">
              <tr>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  #
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Category
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Prompt
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Winner
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Confidence
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Test
                </th>
              </tr>
            </thead>

            <tbody>
              {promptTestResults.map((item) => (
                <tr
                  key={item.id}
                  className={`border-t border-slate-100 ${
                    selectedPromptId === item.id ? "bg-indigo-50" : ""
                  }`}
                >
                  <td className="px-4 py-3 text-sm font-bold text-slate-700">
                    {item.id}
                  </td>

                  <td className="px-4 py-3 text-sm text-slate-600">
                    {item.category}
                  </td>

                  <td className="max-w-xl px-4 py-3 text-sm leading-6 text-slate-70
                    {item.prompt}
                  </td>

                  <td className="px-4 py-3">
                    <Badge className={getBadgeClass(item.winnerName)}>
                      {item.winnerName}
                    </Badge>
                  </td>

                  <td className="px-4 py-3 text-sm font-semibold text-slate-700">
```

```
                    {item.confidence}%
                  </td>

                  <td className="px-4 py-3">
                    <button
                      onClick={() => usePromptScenario(item)}
                      className="rounded-lg border border-slate-200 bg-white px-3 p
                    >
                      Use scenario
                    </button>

                    <p
                      className={`mt-2 text-xs font-bold ${
                        item.matchedExpectedWinner
                          ? "text-emerald-700"
                          : "text-rose-700"
                      }`}
                    >
                      {item.matchedExpectedWinner
                        ? "Expected result"
                        : "Review scoring"}
                    </p>
                  </td>
                </tr>
              ))}
            </tbody>
          </table>
        </div>
      </section>

      <section className="overflow-hidden rounded-2xl border border-slate-200 bg-wh
        <div className="border-b border-slate-200 p-5">
          <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
            Sortable comparison matrix
          </p>

          <h2 className="mt-1 text-xl font-bold text-slate-950">
            Execution limits, React support, and export formats
          </h2>
        </div>

        <div className="overflow-x-auto">
          <table className="w-full min-w-[1450px] border-collapse">
            <thead className="bg-slate-50">
              <tr>
                <th className="px-4 py-3">
                  {header("Platform", "platform")}
                </th>
                <th className="px-4 py-3">
                  {header("Primary use", "primaryUse")}
                </th>
                <th className="px-4 py-3">
                  {header("Execution model", "execution")}
                </th>
                <th className="px-4 py-3">
                  {header("React support", "reactSupport")}
```

```
                    </th>
                    <th className="px-4 py-3">
                      {header("Project shape", "projectShape")}
                    </th>
                    <th className="px-4 py-3">
                      {header("Export formats", "exportFormats")}
                    </th>
                    <th className="px-4 py-3">
                      {header("Production fit", "productionFit")}
                    </th>
                  </tr>
                </thead>

                <tbody>
                  {sortedPlatforms.map((platform) => (
                    <tr
                      key={platform.id}
                      className="border-t border-slate-100 align-top hover:bg-indigo-50
                    >
                      <td className="px-4 py-4">
                        <p className="font-bold text-slate-950">
                          {platform.platform}
                        </p>

                        <div className="mt-2 flex flex-wrap gap-1">
                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Prototype {platform.scores.prototype}/5
                          </Badge>
                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Docs {platform.scores.documents}/5
                          </Badge>
                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Full stack {platform.scores.fullStack}/5
                          </Badge>
                          <Badge className="border-slate-200 bg-slate-50 text-slate-600
                            Deploy {platform.scores.deployment}/5
                          </Badge>
                        </div>
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.primaryUse}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.execution}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.reactSupport}
                      </td>

                      <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                        {platform.projectShape}
                      </td>
```

```
                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                      {platform.exportFormats}
                    </td>

                    <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                      {platform.productionFit}
                    </td>
                  </tr>
                ))}
              </tbody>
            </table>
          </div>
        </section>
      </div>
    </main>
  );
}
```

Next.js page

app/workflow-router/page.tsx

```
import { WorkflowRouter } from "@/components/workflow-router";
import { createClient } from "@/lib/supabase/server";

export default async function WorkflowRouterPage() {
  const supabase = await createClient();

  const {
    data: { user },
  } = await supabase.auth.getUser();

  return <WorkflowRouter userId={user?.id} />;
}
```

Authentication UI

components/auth-button.tsx

```
import Link from "next/link";
import { createClient } from "@/lib/supabase/server";

export async function AuthButton() {
  const supabase = await createClient();

  const {
    data: { user },
  } = await supabase.auth.getUser();

  if (!user) {
    return (
```

```
      <Link
        href="/auth/sign-in"
        className="rounded-lg border border-slate-200 bg-white px-3 py-2 text-sm fon
      >
        Sign in
      </Link>
    );
  }

  return (
    <form action="/auth/sign-out" method="post">
      <button className="rounded-lg bg-slate-900 px-3 py-2 text-sm font-bold text-wh
        Sign out
      </button>
    </form>
  );
}
```

app/auth/sign-in/page.tsx

```
"use client";

import { useState } from "react";
import { createClient } from "@/lib/supabase/client";

export default function SignInPage() {
  const [email, setEmail] = useState("");
  const [status, setStatus] = useState<"idle" | "loading" | "sent" | "error">(
    "idle"
  );

  const signIn = async (event: React.FormEvent<HTMLFormElement>) => {
    event.preventDefault();
    setStatus("loading");

    const supabase = createClient();

    const { error } = await supabase.auth.signInWithOtp({
      email,
      options: {
        emailRedirectTo: `${window.location.origin}/workflow-router`,
      },
    });

    setStatus(error ? "error" : "sent");
  };

  return (
    <main className="min-h-screen bg-slate-50 p-6">
      <form
        onSubmit={signIn}
        className="mx-auto mt-24 max-w-md rounded-2xl border border-slate-200 bg-whi
      >
        <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-600">
          Semester
```

```
        </p>

        <h1 className="mt-2 text-2xl font-bold text-slate-950">
          Sign in to save workflow decisions
        </h1>

        <p className="mt-2 text-sm leading-6 text-slate-600">
          Enter your email and we will send you a magic sign-in link.
        </p>

        <label className="mt-5 block text-sm font-bold text-slate-700">
          Email address
          <input
            required
            type="email"
            value={email}
            onChange={(event) => setEmail(event.target.value)}
            placeholder="you@example.com"
            className="mt-1 w-full rounded-lg border border-slate-200 px-3 py-2 font-
          />
        </label>

        <button
          disabled={status === "loading"}
          className="mt-5 w-full rounded-lg bg-indigo-600 px-4 py-2.5 text-sm font-bo
        >
          {status === "loading" ? "Sending..." : "Send magic link"}
        </button>

        {status === "sent" && (
          <p className="mt-4 text-sm font-semibold text-emerald-700">
            Check your email for the sign-in link.
          </p>
        )}

        {status === "error" && (
          <p className="mt-4 text-sm font-semibold text-rose-700">
            We could not send the sign-in link. Verify your Supabase Auth setup.
          </p>
        )}
      </form>
    </main>
  );
}
```

Add Supabase Auth safely

1. In Supabase, enable your desired login method—email magic link is the simplest first option.
2. Add the local and production callback URLs in **Authentication → URL Configuration**:
   - `http://localhost:3000/workflow-router`
   - Your Vercel production URL plus `/workflow-router`

3. Add the public Supabase URL and publishable key to `.env.local` and Vercel environment variables.
4. Apply the migration so saved decisions have a table and Row Level Security policies.
5. Verify user identity with `supabase.auth.getUser()` in server actions and Server Components before reads/writes.
6. Never place a Supabase service-role key in a Client Component, browser environment variable, or repository.

Supabase recommends cookie-based SSR integration for Next.js and specifically distinguishes `createBrowserClient` for client code from `createServerClient` for server code. Its official quickstart provides a Next.js template with cookie Auth, TypeScript, and Tailwind; Vercel also offers Supabase-auth templates for Next.js App Router.[148] [144] [145] [146]

How the test suite routes prompts

The 15 scenarios deliberately demonstrate the operating boundary:

Prompt family	Typical winner	Why
Sortable client-side tracker with sample data	Claude Artifacts	High-value interactive artifact with no durable backend requirement
PRD, policy, strategy, legal first draft, research	ChatGPT Canvas	Revision, structured writing, and document export are the primary workflow
Mermaid or SVG architecture/visual system map	Claude Artifacts	Best fit for fast visual and diagram outputs
Python cleanup, CSV analysis, generated reports	ChatGPT Canvas	Analysis and file-oriented coding workflow
Authenticated Next.js dashboard with Supabase	v0	Requires project files, server/client boundaries, database, Auth, RLS, and deployment
Multi-tenant team workspace	v0	Requires roles, organization membership, server checks, and Postgres persistence
Marketing-page prototype	Claude Artifacts	Shareable standalone visual output is sufficient
Production landing site connected to a real codebase	v0	Requires a maintainable Next.js project and deployment pipeline

Recommended deployment path

```
Claude Artifacts
  → Prototype the decision-tree UX, visual explainers, diagrams, and local-data tool
  → Export JSX, HTML, Mermaid, SVG, Markdown, or JSON

ChatGPT Canvas
  → Create PRDs, research, legal/operations first drafts, code refinements, and analy
  → Export Markdown, PDF, DOCX, SQL, Python, or source code
```

```
v0 + GitHub
  → Build the multi-file Next.js production application
  → Add client/server Supabase integration
  → Add migrations, RLS, Auth, tests, environment variables, and preview deployments

Vercel + Supabase
  → Deploy the application
  → Use Vercel environment variables
  → Keep user/session data in Supabase Auth and persistent records in Supabase Postgr
```

Supabase and Vercel describe this pairing as a standard Next.js App Router path: Supabase supplies Postgres, Auth, Storage, Edge Functions, and Realtime, while Vercel provides application deployment; their starter/template flow uses cookie-based Auth with TypeScript and Tailwind. [149] [150] [148]

⁂

Interactive prompt-routing tool: compare Claude Artifacts, ChatGPT Canvas, and v0 sandbox across 12 workflow types

Computer
Benchmark test suite: grade Claude Artifacts, ChatGPT Canvas, and v0 sandbox on 10 identical code-generation prompts
Computer
Show the database migration code
Show the workflow-router page code
Show the Supabase client files

Below are the database migration, the server-rendered `workflow-router` page, and the Supabase client files for a Next.js App Router implementation. The app can support a 12-workflow router and persist benchmark runs for 10 identical prompts.

Use `@supabase/ssr`, not the deprecated Next.js Auth Helpers package. Supabase's current migration guidance recommends `createBrowserClient` and `createServerClient`, with cookie-backed sessions available to both browser and server rendering; a middleware/proxy pattern refreshes those sessions before the app renders. [161] [162]

Database migration

Save this as:

```
supabase/migrations/001_create_workflow_router.sql
```

```
create extension if not exists pgcrypto;

-- Optional team/organization layer. Keep it even if the first version is
```

```
-- individual-only: it makes Semester multi-tenant capable later.
create table public.organizations (
  id uuid primary key default gen_random_uuid(),
  name text not null check (char_length(trim(name)) > 0),
  slug text unique,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create table public.organization_members (
  organization_id uuid not null
    references public.organizations(id)
    on delete cascade,
  user_id uuid not null
    references auth.users(id)
    on delete cascade,
  role text not null default 'member'
    check (role in ('owner', 'admin', 'member', 'viewer')),
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),
  primary key (organization_id, user_id)
);

-- A saved output from the prompt-routing decision tree.
create table public.workflow_recommendations (
  id uuid primary key default gen_random_uuid(),

  -- Nullable initially allows a private, personal recommendation history.
  -- Make this NOT NULL once every record belongs to a workspace.
  organization_id uuid
    references public.organizations(id)
    on delete cascade,

  user_id uuid not null
    references auth.users(id)
    on delete cascade,

  title text not null default 'Untitled workflow decision'
    check (char_length(trim(title)) > 0),

  -- The current answers from the six decision-tree dimensions.
  -- Example:
  -- {
  --   "deliverable": "full-stack-feature",
  --   "interaction": "multi-user",
  --   "backend": "auth-secrets",
  --   "techStack": "nextjs-supabase",
  --   "persistence": "multi-tenant",
  --   "handoff": "deploy"
  -- }
  inputs jsonb not null default '{}'::jsonb,

  -- The calculated result.
  -- Example:
  -- {
  --   "primary": "v0",
```

```
  --   "secondary": "Claude Artifacts",
  --   "confidence": 97,
  --   "reasons": ["..."],
  --   "needsProductionHandoff": true,
  --   "needsSupabase": true
  -- }
  recommendation jsonb not null default '{}'::jsonb,

  build_prompt text not null,

  tags text[] not null default '{}',

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

-- A benchmark suite defines one comparable set of prompts.
create table public.benchmark_suites (
  id uuid primary key default gen_random_uuid(),

  organization_id uuid
    references public.organizations(id)
    on delete cascade,

  created_by uuid not null
    references auth.users(id)
    on delete cascade,

  title text not null
    check (char_length(trim(title)) > 0),

  description text,

  benchmark_scope text not null default 'code-generation'
    check (
      benchmark_scope in (
        'code-generation',
        'writing',
        'analysis',
        'design',
        'mixed'
      )
    ),

  status text not null default 'draft'
    check (status in ('draft', 'active', 'archived')),

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

-- One of the 10 identical prompts in a suite.
create table public.benchmark_prompts (
  id uuid primary key default gen_random_uuid(),

  suite_id uuid not null
```

```
    references public.benchmark_suites(id)
    on delete cascade,

  prompt_number integer not null
    check (prompt_number > 0),

  title text not null
    check (char_length(trim(title)) > 0),

  category text not null default 'Engineering',

  prompt_text text not null
    check (char_length(trim(prompt_text)) > 0),

  requirements jsonb not null default '{}'::jsonb,

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (suite_id, prompt_number)
);

-- A benchmark run represents executing the same prompt against a tool.
create table public.benchmark_runs (
  id uuid primary key default gen_random_uuid(),

  suite_id uuid not null
    references public.benchmark_suites(id)
    on delete cascade,

  prompt_id uuid not null
    references public.benchmark_prompts(id)
    on delete cascade,

  organization_id uuid
    references public.organizations(id)
    on delete cascade,

  created_by uuid not null
    references auth.users(id)
    on delete cascade,

  platform text not null
    check (platform in ('claude-artifacts', 'chatgpt-canvas', 'v0')),

  run_status text not null default 'planned'
    check (
      run_status in (
        'planned',
        'running',
        'completed',
        'blocked',
        'discarded'
      )
    ),
```

```
  -- Optional metadata for reproducibility.
  model_name text,
  model_version text,
  sandbox_notes text,

  -- Preserve the exact text that was executed.
  executed_prompt text not null,

  -- Link to an artifact, Canvas share link, GitHub PR, v0 deployment,
  -- or exported project/document when available.
  output_url text,

  output_summary text,

  execution_seconds numeric(10, 2)
    check (execution_seconds is null or execution_seconds >= 0),

  -- Integer scoring standardizes comparison.
  correctness_score smallint
    check (correctness_score between 0 and 5),

  ui_quality_score smallint
    check (ui_quality_score between 0 and 5),

  code_quality_score smallint
    check (code_quality_score between 0 and 5),

  maintainability_score smallint
    check (maintainability_score between 0 and 5),

  export_handoff_score smallint
    check (export_handoff_score between 0 and 5),

  sandbox_fit_score smallint
    check (sandbox_fit_score between 0 and 5),

  overall_score numeric(4, 2)
    generated always as (
      case
        when correctness_score is null
          or ui_quality_score is null
          or code_quality_score is null
          or maintainability_score is null
          or export_handoff_score is null
          or sandbox_fit_score is null
        then null
        else round(
          (
            correctness_score +
            ui_quality_score +
            code_quality_score +
            maintainability_score +
            export_handoff_score +
            sandbox_fit_score
          )::numeric / 6,
          2
```

```
        )
      end
    ) stored,

  rubric_notes text,

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (suite_id, prompt_id, platform)
);

-- Helpful indexes for catalog, recommendation history, and benchmark dashboards.
create index workflow_recommendations_user_id_created_at_idx
  on public.workflow_recommendations (user_id, created_at desc);

create index workflow_recommendations_organization_id_created_at_idx
  on public.workflow_recommendations (organization_id, created_at desc);

create index benchmark_suites_organization_id_created_at_idx
  on public.benchmark_suites (organization_id, created_at desc);

create index benchmark_prompts_suite_id_prompt_number_idx
  on public.benchmark_prompts (suite_id, prompt_number);

create index benchmark_runs_suite_id_platform_idx
  on public.benchmark_runs (suite_id, platform);

create index benchmark_runs_prompt_id_platform_idx
  on public.benchmark_runs (prompt_id, platform);

create index benchmark_runs_organization_id_created_at_idx
  on public.benchmark_runs (organization_id, created_at desc);

-- Generic updated_at trigger.
create or replace function public.set_updated_at()
returns trigger
language plpgsql
security invoker
set search_path = public
as $$
begin
  new.updated_at = now();
  return new;
end;
$$;

create trigger organizations_set_updated_at
before update on public.organizations
for each row
execute function public.set_updated_at();

create trigger organization_members_set_updated_at
before update on public.organization_members
for each row
execute function public.set_updated_at();
```

```
create trigger workflow_recommendations_set_updated_at
before update on public.workflow_recommendations
for each row
execute function public.set_updated_at();

create trigger benchmark_suites_set_updated_at
before update on public.benchmark_suites
for each row
execute function public.set_updated_at();

create trigger benchmark_prompts_set_updated_at
before update on public.benchmark_prompts
for each row
execute function public.set_updated_at();

create trigger benchmark_runs_set_updated_at
before update on public.benchmark_runs
for each row
execute function public.set_updated_at();

-- Enable Row Level Security.
alter table public.organizations enable row level security;
alter table public.organization_members enable row level security;
alter table public.workflow_recommendations enable row level security;
alter table public.benchmark_suites enable row level security;
alter table public.benchmark_prompts enable row level security;
alter table public.benchmark_runs enable row level security;

-- Organizations: a member can see its workspace.
create policy "Organization members can view organizations"
on public.organizations
for select
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = organizations.id
      and membership.user_id = auth.uid()
  )
);

create policy "Authenticated users can create organizations"
on public.organizations
for insert
to authenticated
with check (true);

create policy "Organization owners and admins can update organizations"
on public.organizations
for update
to authenticated
using (
  exists (
    select 1
```

```
    from public.organization_members membership
    where membership.organization_id = organizations.id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin')
  )
)
with check (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = organizations.id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin')
  )
);

-- Membership visibility.
create policy "Organization members can view memberships"
on public.organization_members
for select
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = organization_members.organization_id
      and membership.user_id = auth.uid()
  )
);

create policy "Owners and admins can manage memberships"
on public.organization_members
for all
to authenticated
using (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = organization_members.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin')
  )
)
with check (
  exists (
    select 1
    from public.organization_members membership
    where membership.organization_id = organization_members.organization_id
      and membership.user_id = auth.uid()
      and membership.role in ('owner', 'admin')
  )
);

-- Personal records OR organization-scoped records:
-- - User-owned private record: organization_id is null and user_id matches.
-- - Shared record: caller must be a member of that organization.
```

```
create policy "Users can view allowed workflow recommendations"
on public.workflow_recommendations
for select
to authenticated
using (
  user_id = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = workflow_recommendations.organization_id
        and membership.user_id = auth.uid()
    )
  )
);

create policy "Users can create their own workflow recommendations"
on public.workflow_recommendations
for insert
to authenticated
with check (
  user_id = auth.uid()
  and (
    organization_id is null
    or exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = workflow_recommendations.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
);

create policy "Owners can update their private recommendations and editors can update
on public.workflow_recommendations
for update
to authenticated
using (
  user_id = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = workflow_recommendations.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
)
with check (
  user_id = auth.uid()
  or (
    organization_id is not null
```

```
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = workflow_recommendations.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
);

create policy "Owners can delete their private recommendations and admins can delete
on public.workflow_recommendations
for delete
to authenticated
using (
  user_id = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = workflow_recommendations.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin')
    )
  )
);

-- Benchmark suites: creator can always access own suites;
-- workspace members can access organization-scoped suites.
create policy "Users can view allowed benchmark suites"
on public.benchmark_suites
for select
to authenticated
using (
  created_by = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = benchmark_suites.organization_id
        and membership.user_id = auth.uid()
    )
  )
);

create policy "Authenticated users can create benchmark suites"
on public.benchmark_suites
for insert
to authenticated
with check (
  created_by = auth.uid()
  and (
    organization_id is null
    or exists (
```

```
      select 1
      from public.organization_members membership
      where membership.organization_id = benchmark_suites.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
);

create policy "Creators and workspace editors can update benchmark suites"
on public.benchmark_suites
for update
to authenticated
using (
  created_by = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = benchmark_suites.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
)
with check (
  created_by = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = benchmark_suites.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin', 'member')
    )
  )
);

create policy "Creators and workspace admins can delete benchmark suites"
on public.benchmark_suites
for delete
to authenticated
using (
  created_by = auth.uid()
  or (
    organization_id is not null
    and exists (
      select 1
      from public.organization_members membership
      where membership.organization_id = benchmark_suites.organization_id
        and membership.user_id = auth.uid()
        and membership.role in ('owner', 'admin')
    )
  )
```

```
);

-- Benchmark prompt visibility is inherited from the suite.
create policy "Users can view benchmark prompts from accessible suites"
on public.benchmark_prompts
for select
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_prompts.suite_id
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
          )
        )
      )
  )
);

create policy "Editors can manage prompts for accessible benchmark suites"
on public.benchmark_prompts
for all
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_prompts.suite_id
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
              and membership.role in ('owner', 'admin', 'member')
          )
        )
      )
  )
)
with check (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_prompts.suite_id
```

```
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
              and membership.role in ('owner', 'admin', 'member')
          )
        )
      )
  )
);

-- Benchmark run visibility and write permissions are inherited from the suite.
create policy "Users can view benchmark runs from accessible suites"
on public.benchmark_runs
for select
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_runs.suite_id
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
          )
        )
      )
  )
);

create policy "Editors can manage benchmark runs from accessible suites"
on public.benchmark_runs
for all
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_runs.suite_id
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
```

```
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
              and membership.role in ('owner', 'admin', 'member')
          )
        )
      )
  )
)
with check (
  created_by = auth.uid()
  and exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_runs.suite_id
      and (
        suite.created_by = auth.uid()
        or (
          suite.organization_id is not null
          and exists (
            select 1
            from public.organization_members membership
            where membership.organization_id = suite.organization_id
              and membership.user_id = auth.uid()
              and membership.role in ('owner', 'admin', 'member')
          )
        )
      )
  )
);
```

Notes on the migration

- The benchmark schema keeps the **identical prompt** in `benchmark_prompts` and creates one run per platform in `benchmark_runs`, enforced by `unique (suite_id, prompt_id, platform)`.
- `overall_score` is generated from six 0–5 rubric scores: correctness, UI quality, code quality, maintainability, export/handoff, and sandbox fit.
- Start with individual records by leaving `organization_id` null; add organization membership when the Semester team needs shared benchmark suites.
- RLS checks membership in the database. Never rely only on hiding buttons in the UI.

Benchmark seed: 10 identical prompts

Add this after creating a suite, or keep it in a separate seed migration after replacing the suite UUID:

```
-- Replace this with a real benchmark_suites.id.
-- Example workflow:
-- 1. Insert a suite through the app.
-- 2. Copy the returned id.
```

```
-- 3. Insert these ten prompts.
--
-- insert into public.benchmark_prompts (
--   suite_id,
--   prompt_number,
--   title,
--   category,
--   prompt_text,
--   requirements
-- )
-- values
--   (
--     'YOUR_SUITE_UUID',
--     1,
--     'Sortable catalog',
--     'React UI',
--     'Build a responsive React dashboard that displays 100 artifact records. Includ
--     '{"requiresReact":true,"requiresExport":true,"requiresBackend":false}'::jsonb
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     2,
--     'Next.js authentication',
--     'Full stack',
--     'Build a Next.js App Router application with email magic-link authentication,
--     '{"requiresNextjs":true,"requiresAuth":true,"requiresServer":true}'::jsonb
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     3,
--     'Supabase artifact tracker',
--     'Full stack',
--     'Build a multi-file Next.js artifact tracker backed by Supabase Postgres. Incl
--     '{"requiresNextjs":true,"requiresDatabase":true,"requiresRLS":true,"requiresMu
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     4,
--     'Landing page',
--     'Marketing',
--     'Build a polished responsive B2B SaaS landing page with hero, product workflow
--     '{"requiresHTML":true,"requiresResponsiveUI":true,"requiresBackend":false}'::j
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     5,
--     'Data visualization dashboard',
--     'React UI',
--     'Build a React dashboard with realistic sample SaaS metrics, KPI cards, filter
--     '{"requiresReact":true,"requiresState":true,"requiresCharts":true}'::jsonb
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     6,
--     'CSV analysis script',
--     'Python',
```

```
--     'Write a Python script that reads a CSV of subscription events, computes montl
--     '{"requiresPython":true,"requiresFileIO":true,"requiresAnalysis":true}'::jsonl
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     7,
--     'API route',
--     'Backend',
--     'Build a Next.js route handler for creating artifact records. Validate input,
--     '{"requiresNextjs":true,"requiresAPI":true,"requiresAuth":true,"requiresValida
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     8,
--     'File upload workflow',
--     'Full stack',
--     'Build a secure Next.js file upload workflow with Supabase Storage. Require au
--     '{"requiresNextjs":true,"requiresStorage":true,"requiresAuth":true,"requiresRl
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     9,
--     'Mermaid architecture map',
--     'Diagram',
--     'Create a Mermaid architecture diagram for a multi-tenant Next.js app using Su
--     '{"requiresMermaid":true,"requiresDocumentation":true,"requiresBackend":false}
--   ),
--   (
--     'YOUR_SUITE_UUID',
--     10,
--     'Technical design document',
--     'Engineering documentation',
--     'Write a technical design document for a multi-tenant artifact catalog. Includ
--     '{"requiresDocumentation":true,"requiresArchitecture":true,"requiresPlanning"
--   );
```

Workflow-router page

Save this as:

```
app/workflow-router/page.tsx
```

This is a **Server Component**: it retrieves the signed-in user and the user's latest saved decisions on the server, then passes serializable data to the client-side interactive router.

```
import Link from "next/link";
import { createClient } from "@/lib/supabase/server";
import { WorkflowRouter } from "@/components/workflow-router";

type SavedRecommendation = {
  id: string;
  title: string;
  inputs: Record<string, string>;
```

```
  recommendation: {
    primary?: string;
    secondary?: string;
    confidence?: number;
    reasons?: string[];
    needsProductionHandoff?: boolean;
    needsSupabase?: boolean;
  };
  build_prompt: string;
  created_at: string;
};

export default async function WorkflowRouterPage() {
  const supabase = await createClient();

  const {
    data: { user },
  } = await supabase.auth.getUser();

  const { data: savedRecommendations, error } = user
    ? await supabase
        .from("workflow_recommendations")
        .select(
          "id, title, inputs, recommendation, build_prompt, created_at"
        )
        .eq("user_id", user.id)
        .order("created_at", { ascending: false })
        .limit(12)
    : {
        data: [],
        error: null,
      };

  if (error) {
    console.error("Unable to load saved workflow recommendations:", error);
  }

  const normalizedRecommendations: SavedRecommendation[] =
    (savedRecommendations ?? []).map((item) => ({
      id: item.id,
      title: item.title,
      inputs: (item.inputs ?? {}) as Record<string, string>,
      recommendation: (item.recommendation ?? {}) as SavedRecommendation["recommenda
      build_prompt: item.build_prompt,
      created_at: item.created_at,
    }));

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            Semester build workflow
          </p>

          <div className="mt-2 flex flex-col justify-between gap-4 md:flex-row md:ite
```

```
            <div>
              <h1 className="text-3xl font-bold tracking-tight">
                AI Workflow Router
              </h1>

              <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
                Route coding, writing, product, design, analysis, and production
                work to Claude Artifacts, ChatGPT Canvas, or v0—then save the
                decision and benchmark identical prompts across all three.
              </p>
            </div>

            <div className="rounded-xl border border-white/10 bg-white/10 px-4 py-3 t
              {user ? (
                <>
                  <p className="font-semibold text-white">
                    Signed in
                  </p>
                  <p className="mt-1 truncate text-xs text-slate-300">
                    {user.email}
                  </p>
                </>
              ) : (
                <>
                  <p className="font-semibold text-white">
                    Prototype mode
                  </p>
                  <p className="mt-1 text-xs text-slate-300">
                    Sign in to save recommendations and benchmarks.
                  </p>
                </>
              )}
            </div>
          </div>
        </header>

        {!user && (
          <section className="rounded-2xl border border-amber-200 bg-amber-50 p-5">
            <h2 className="text-base font-bold text-amber-950">
              Save and benchmark features require sign-in
            </h2>

            <p className="mt-2 text-sm leading-6 text-amber-900">
              You can use the decision tree without an account. Sign in with
              Supabase Auth to save workflow decisions, create benchmark suites,
              record runs, and share them with a Semester organization later.
            </p>

            <Link
              href="/auth/sign-in"
              className="mt-4 inline-flex rounded-lg bg-amber-900 px-3 py-2 text-sm t
            >
              Sign in
            </Link>
          </section>
        )}
```

```
        <WorkflowRouter
          userId={user?.id}
          userEmail={user?.email ?? null}
          initialRecommendations={normalizedRecommendations}
        />
      </div>
    </main>
  );
}
```

Supabase client files

1. Browser client

Save as:

```
lib/supabase/client.ts
```

```
import { createBrowserClient } from "@supabase/ssr";

export function createClient() {
  return createBrowserClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!
  );
}
```

Use this client only in Client Components, browser event handlers, and client-side UI code.

2. Server client

Save as:

```
lib/supabase/server.ts
```

```
import { createServerClient } from "@supabase/ssr";
import { cookies } from "next/headers";

export async function createClient() {
  const cookieStore = await cookies();

  return createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
      cookies: {
        getAll() {
          return cookieStore.getAll();
```

```
        },

        setAll(cookiesToSet) {
          try {
            cookiesToSet.forEach(({ name, value, options }) => {
              cookieStore.set(name, value, options);
            });
          } catch {
            /*
             * In a Server Component, cookie writes can be unavailable.
             * The middleware/proxy session refresh handles session updates
             * before render and writes the returned cookies to the response.
             */
          }
        },
      },
    }
  );
}
```

Use this in Server Components, Server Actions, and Route Handlers. It can read the same cookie-backed auth session created in the browser.

3. Session-refresh middleware helper

Save as:

```
lib/supabase/middleware.ts
```

```
import { createServerClient } from "@supabase/ssr";
import { NextResponse, type NextRequest } from "next/server";

export async function updateSession(request: NextRequest) {
  let response = NextResponse.next({
    request,
  });

  const supabase = createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
      cookies: {
        getAll() {
          return request.cookies.getAll();
        },

        setAll(cookiesToSet) {
          cookiesToSet.forEach(({ name, value }) => {
            request.cookies.set(name, value);
          });

          response = NextResponse.next({
            request,
```

```
          });

          cookiesToSet.forEach(({ name, value, options }) => {
            response.cookies.set(name, value, options);
          });
        },
      },
    }
  );

  /*
   * Do not remove this call.
   * It refreshes and validates the auth session before protected pages render.
   */
  await supabase.auth.getUser();

  return response;
}
```

4. Root middleware

Save as:

```
middleware.ts
```

```
import type { NextRequest } from "next/server";
import { updateSession } from "@/lib/supabase/middleware";

export async function middleware(request: NextRequest) {
  return updateSession(request);
}

export const config = {
  matcher: [
    "/((?!_next/static|_next/image|favicon.ico|.*\\.(?:svg|png|jpg|jpeg|gif|webp)$).*
  ],
};
```

5. Environment file

Save this locally as:

```
.env.local
```

```
NEXT_PUBLIC_SUPABASE_URL=https://YOUR_PROJECT.supabase.co
NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY=YOUR_PUBLISHABLE_KEY
```

Commit only the template:

.env.example

```
NEXT_PUBLIC_SUPABASE_URL=
NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY=
```

Do not put a service-role secret in a `NEXT_PUBLIC_` variable. Next.js embeds `NEXT_PUBLIC_*` values into browser-delivered code, while non-prefixed environment variables remain server-only. [163]

Auth route example

For magic-link confirmation, add:

app/auth/confirm/route.ts

```
import { type NextRequest, NextResponse } from "next/server";
import { createServerClient } from "@supabase/ssr";

export async function GET(request: NextRequest) {
  const requestUrl = new URL(request.url);
  const tokenHash = requestUrl.searchParams.get("token_hash");
  const type = requestUrl.searchParams.get("type");
  const next = requestUrl.searchParams.get("next") ?? "/workflow-router";

  const response = NextResponse.redirect(new URL(next, requestUrl.origin));

  if (!tokenHash || !type) {
    return NextResponse.redirect(
      new URL("/auth/sign-in?error=missing_token", requestUrl.origin)
    );
  }

  const supabase = createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
    {
      cookies: {
        getAll() {
          return request.cookies.getAll();
        },

        setAll(cookiesToSet) {
          cookiesToSet.forEach(({ name, value, options }) => {
            response.cookies.set(name, value, options);
          });
        },
      },
    }
  );

  const { error } = await supabase.auth.verifyOtp({
```

```
    type: type as "magiclink",
    token_hash: tokenHash,
  });

  if (error) {
    return NextResponse.redirect(
      new URL("/auth/sign-in?error=verification_failed", requestUrl.origin)
    );
  }

  return response;
}
```

Benchmark rubric

For the 10 identical prompts, score each platform on the same six dimensions:

Score	Meaning
0	Missing, unusable, or fails the stated requirement
1	Barely addresses the requirement
2	Partially works but has major omissions
3	Usable baseline with some meaningful gaps
4	Strong and close to production or publication quality
5	Excellent: complete, coherent, robust, and well matched to the platform
Dimension	What to grade
---	---
Correctness	Does it satisfy the stated requirements?
UI quality	Is the interaction/design clear, accessible, and polished where relevant?
Code quality	Is the code coherent, typed, structured, and free of obvious defects?
Maintainability	Is the result easy to revise, test, and evolve?
Export/handoff	Can you use the resulting file/code/document in the next workflow stage?
Sandbox fit	Does the task actually fit the platform rather than fighting its constraints?

The database's generated `overall_score` averages these six scores automatically. This makes the benchmark a tool-choice study, not merely a subjective output gallery.

Security boundary

Claude Artifacts can rapidly generate self-contained browser artifacts and lightweight interactive work, but sandbox boundaries mean it should not be the final system for private production data, durable authentication, or backend persistence. ChatGPT Canvas is strongest for revision-centric writing, code, and export; v0 is the appropriate runtime-oriented destination for the Next.js/Supabase portions of the workflow. Supabase's current SSR package

consolidates earlier framework-specific Auth Helpers and uses cookie-backed browser/server clients, with middleware refreshing the session before a server-rendered request is handled. [162] [164] [161]

⁂

Sortable benchmark matrix: Claude Artifacts vs ChatGPT Canvas vs v0 Sandbox across 12 workflows — scoring code quality, rendering, and state management

Computer
Build a benchmark test suite harness that grades Claude Artifacts, ChatGPT Canvas, and v0 sandbox across 12 distinct code-generation tasks
Computer
Show me the middleware code for session refreshing
Show me the UI component for the 12-workflow router
Add benchmark grading logic to the Supabase schema

Below is a production-oriented benchmark layer for the Semester workflow router: a **12-workflow sortable matrix**, a reusable **Supabase session-refresh middleware**, a client-side router UI, and database grading logic that computes weighted benchmark scores.

The core distinction remains: Claude Artifacts is strongest for self-contained interactive artifacts and diagrams, ChatGPT Canvas for document/code iteration and file exports, and v0 for multi-file Next.js apps with real state, server logic, data, and deployment. Vercel Sandbox runs generated or untrusted code in isolated Linux microVMs, which is why it is a better fit for full project execution than a browser-only prototype environment. [177]

Session refresh middleware

Supabase's current Next.js SSR guidance uses a middleware/proxy layer to refresh expired session cookies **before** Server Components render. Call `supabase.auth.getUser()` inside the request flow; do not rely on client-side session state for authorization. [178] [179]

`lib/supabase/middleware.ts`

```
import { createServerClient } from "@supabase/ssr";
import { NextResponse, type NextRequest } from "next/server";

export async function updateSession(request: NextRequest) {
  let response = NextResponse.next({
    request,
  });

  const supabase = createServerClient(
    process.env.NEXT_PUBLIC_SUPABASE_URL!,
    process.env.NEXT_PUBLIC_SUPABASE_PUBLISHABLE_KEY!,
```

```
    {
      cookies: {
        getAll() {
          return request.cookies.getAll();
        },

        setAll(cookiesToSet) {
          cookiesToSet.forEach(({ name, value }) => {
            request.cookies.set(name, value);
          });

          response = NextResponse.next({
            request,
          });

          cookiesToSet.forEach(({ name, value, options }) => {
            response.cookies.set(name, value, options);
          });
        },
      },
    }
  );

  /*
   * Do not remove this call.
   * It validates the current user and refreshes an expiring Supabase Auth
   * access token, then propagates updated cookies onto the response.
   */
  await supabase.auth.getUser();

  return response;
}
```

Root proxy/middleware

For current Next.js conventions, name the file `proxy.ts` if your version uses the Proxy convention; many existing projects still use `middleware.ts`. Keep one approach, not both.

```
import type { NextRequest } from "next/server";
import { updateSession } from "@/lib/supabase/middleware";

export async function proxy(request: NextRequest) {
  return updateSession(request);
}

export const config = {
  matcher: [
    "/((?!_next/static|_next/image|favicon.ico|.*\\.(?:svg|png|jpg|jpeg|gif|webp)$).*
  ],
};
```

If your project uses the earlier middleware convention:

```
import type { NextRequest } from "next/server";
import { updateSession } from "@/lib/supabase/middleware";

export async function middleware(request: NextRequest) {
  return updateSession(request);
}

export const config = {
  matcher: [
    "/((?!_next/static|_next/image|favicon.ico|.*\\.(?:svg|png|jpg|jpeg|gif|webp)$).
  ],
};
```

Benchmark grading schema

This migration adds a reusable grading model for **12 workflow types** and platform-specific benchmark runs. It supports raw manual scores, weighted computed scores, evaluator notes, and a sortable leader-board query.

Save as:

```
supabase/migrations/002_add_benchmark_grading.sql
```

```
create extension if not exists pgcrypto;

-- Keep the platform choice constrained and normalized.
do $$
begin
  create type public.ai_platform as enum (
    'claude-artifacts',
    'chatgpt-canvas',
    'v0'
  );
exception
  when duplicate_object then null;
end $$;

-- The 12 workflow types tested in this benchmark.
do $$
begin
  create type public.workflow_type as enum (
    'interactive-tool',
    'product-prototype',
    'marketing-page',
    'diagram',
    'document',
    'presentation',
    'data-analysis',
    'react-component',
    'nextjs-feature',
    'database-workflow',
    'authentication-workflow',
```

```
    'multi-tenant-saas'
  );
exception
  when duplicate_object then null;
end $$;

-- A benchmark suite may contain the complete 12-workflow set or a subset.
create table if not exists public.benchmark_suites (
  id uuid primary key default gen_random_uuid(),
  organization_id uuid,
  created_by uuid not null references auth.users(id) on delete cascade,
  title text not null,
  description text,
  status text not null default 'draft'
    check (status in ('draft', 'active', 'completed', 'archived')),
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

-- Each benchmark task holds an identical task specification that gets used
-- against all three platforms.
create table if not exists public.benchmark_tasks (
  id uuid primary key default gen_random_uuid(),
  suite_id uuid not null references public.benchmark_suites(id) on delete cascade,

  workflow workflow_type not null,
  task_number integer not null check (task_number between 1 and 12),

  title text not null,
  category text not null,
  task_prompt text not null,

  -- Machine-readable requirements help keep grading reproducible.
  requirements jsonb not null default '{}'::jsonb,

  -- The expected grading emphasis for this task:
  -- e.g. {"code_quality": 0.30, "rendering": 0.20, ...}
  rubric_weights jsonb not null default '{
    "correctness": 0.25,
    "code_quality": 0.20,
    "rendering": 0.15,
    "state_management": 0.15,
    "maintainability": 0.10,
    "handoff": 0.10,
    "sandbox_fit": 0.05
  }'::jsonb,

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (suite_id, task_number),
  unique (suite_id, workflow)
);

-- One run for a platform against an identical benchmark task.
create table if not exists public.benchmark_runs (
```

```
  id uuid primary key default gen_random_uuid(),

  suite_id uuid not null references public.benchmark_suites(id) on delete cascade,
  task_id uuid not null references public.benchmark_tasks(id) on delete cascade,

  organization_id uuid,
  created_by uuid not null references auth.users(id) on delete cascade,

  platform public.ai_platform not null,

  status text not null default 'planned'
    check (status in ('planned', 'running', 'completed', 'blocked', 'discarded')),

  -- Exact prompt and context used for repeatability.
  executed_prompt text not null,
  model_name text,
  model_version text,
  sandbox_notes text,

  -- Link to Claude artifact, Canvas share, GitHub PR, v0 project,
  -- deployed preview, or stored output artifact.
  output_url text,
  output_summary text,

  execution_seconds numeric(10, 2)
    check (execution_seconds is null or execution_seconds >= 0),

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (suite_id, task_id, platform)
);

-- Individual grading events allow more than one evaluator without losing
-- the underlying observations.
create table if not exists public.benchmark_grades (
  id uuid primary key default gen_random_uuid(),

  run_id uuid not null references public.benchmark_runs(id) on delete cascade,
  graded_by uuid not null references auth.users(id) on delete cascade,

  -- Every value is 0 through 5:
  -- 0 = missing or fails
  -- 3 = usable baseline
  -- 5 = excellent / robust / well-matched
  correctness_score smallint not null check (correctness_score between 0 and 5),
  code_quality_score smallint not null check (code_quality_score between 0 and 5),
  rendering_score smallint not null check (rendering_score between 0 and 5),
  state_management_score smallint not null check (state_management_score between 0 ar
  maintainability_score smallint not null check (maintainability_score between 0 and
  handoff_score smallint not null check (handoff_score between 0 and 5),
  sandbox_fit_score smallint not null check (sandbox_fit_score between 0 and 5),

  grader_notes text,
  evidence jsonb not null default '{}'::jsonb,
```

```
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (run_id, graded_by)
);

-- Helpful indexes for matrix and leaderboard queries.
create index if not exists benchmark_tasks_suite_workflow_idx
  on public.benchmark_tasks(suite_id, workflow);

create index if not exists benchmark_runs_suite_platform_idx
  on public.benchmark_runs(suite_id, platform);

create index if not exists benchmark_runs_task_platform_idx
  on public.benchmark_runs(task_id, platform);

create index if not exists benchmark_grades_run_id_idx
  on public.benchmark_grades(run_id);

-- Generic timestamp handler.
create or replace function public.set_updated_at()
returns trigger
language plpgsql
security invoker
set search_path = public
as $$
begin
  new.updated_at = now();
  return new;
end;
$$;

drop trigger if exists benchmark_suites_set_updated_at on public.benchmark_suites;
create trigger benchmark_suites_set_updated_at
before update on public.benchmark_suites
for each row
execute function public.set_updated_at();

drop trigger if exists benchmark_tasks_set_updated_at on public.benchmark_tasks;
create trigger benchmark_tasks_set_updated_at
before update on public.benchmark_tasks
for each row
execute function public.set_updated_at();

drop trigger if exists benchmark_runs_set_updated_at on public.benchmark_runs;
create trigger benchmark_runs_set_updated_at
before update on public.benchmark_runs
for each row
execute function public.set_updated_at();

drop trigger if exists benchmark_grades_set_updated_at on public.benchmark_grades;
create trigger benchmark_grades_set_updated_at
before update on public.benchmark_grades
for each row
execute function public.set_updated_at();
```

```
-- Weighted score by evaluator and run.
-- We use the task's rubric_weights JSON so individual tasks can emphasize
-- different criteria, e.g. diagrams emphasize rendering and handoff, while
-- multi-tenant work emphasizes correctness/state/auth architecture.
create or replace view public.benchmark_grade_scores as
select
  grade.id as grade_id,
  grade.run_id,
  grade.graded_by,
  run.platform,
  run.task_id,
  task.suite_id,
  task.workflow,
  task.task_number,
  task.title as task_title,

  grade.correctness_score,
  grade.code_quality_score,
  grade.rendering_score,
  grade.state_management_score,
  grade.maintainability_score,
  grade.handoff_score,
  grade.sandbox_fit_score,

  round(
    (
      grade.correctness_score *
        coalesce((task.rubric_weights ->> 'correctness')::numeric, 0.25) +
      grade.code_quality_score *
        coalesce((task.rubric_weights ->> 'code_quality')::numeric, 0.20) +
      grade.rendering_score *
        coalesce((task.rubric_weights ->> 'rendering')::numeric, 0.15) +
      grade.state_management_score *
        coalesce((task.rubric_weights ->> 'state_management')::numeric, 0.15) +
      grade.maintainability_score *
        coalesce((task.rubric_weights ->> 'maintainability')::numeric, 0.10) +
      grade.handoff_score *
        coalesce((task.rubric_weights ->> 'handoff')::numeric, 0.10) +
      grade.sandbox_fit_score *
        coalesce((task.rubric_weights ->> 'sandbox_fit')::numeric, 0.05)
    ),
    2
  ) as weighted_score_out_of_5,

  round(
    (
      grade.correctness_score *
        coalesce((task.rubric_weights ->> 'correctness')::numeric, 0.25) +
      grade.code_quality_score *
        coalesce((task.rubric_weights ->> 'code_quality')::numeric, 0.20) +
      grade.rendering_score *
        coalesce((task.rubric_weights ->> 'rendering')::numeric, 0.15) +
      grade.state_management_score *
        coalesce((task.rubric_weights ->> 'state_management')::numeric, 0.15) +
      grade.maintainability_score *
        coalesce((task.rubric_weights ->> 'maintainability')::numeric, 0.10) +
```

```
      grade.handoff_score *
        coalesce((task.rubric_weights ->> 'handoff')::numeric, 0.10) +
      grade.sandbox_fit_score *
        coalesce((task.rubric_weights ->> 'sandbox_fit')::numeric, 0.05)
    ) * 20,
    1
  ) as weighted_score_out_of_100,

  grade.grader_notes,
  grade.evidence,
  grade.created_at
from public.benchmark_grades grade
join public.benchmark_runs run
  on run.id = grade.run_id
join public.benchmark_tasks task
  on task.id = run.task_id;

-- Average all evaluators for each platform/task pair.
create or replace view public.benchmark_task_leaderboard as
select
  suite_id,
  workflow,
  task_number,
  task_title,
  platform,

  round(avg(weighted_score_out_of_5), 2) as average_score_out_of_5,
  round(avg(weighted_score_out_of_100), 1) as average_score_out_of_100,

  round(avg(correctness_score), 2) as average_correctness,
  round(avg(code_quality_score), 2) as average_code_quality,
  round(avg(rendering_score), 2) as average_rendering,
  round(avg(state_management_score), 2) as average_state_management,
  round(avg(maintainability_score), 2) as average_maintainability,
  round(avg(handoff_score), 2) as average_handoff,
  round(avg(sandbox_fit_score), 2) as average_sandbox_fit,

  count(*) as grader_count
from public.benchmark_grade_scores
group by
  suite_id,
  workflow,
  task_number,
  task_title,
  platform;

-- Overall platform result across all tasks in a suite.
create or replace view public.benchmark_platform_leaderboard as
select
  suite_id,
  platform,

  round(avg(average_score_out_of_5), 2) as suite_average_out_of_5,
  round(avg(average_score_out_of_100), 1) as suite_average_out_of_100,

  round(avg(average_correctness), 2) as average_correctness,
```

```
  round(avg(average_code_quality), 2) as average_code_quality,
  round(avg(average_rendering), 2) as average_rendering,
  round(avg(average_state_management), 2) as average_state_management,
  round(avg(average_maintainability), 2) as average_maintainability,
  round(avg(average_handoff), 2) as average_handoff,
  round(avg(average_sandbox_fit), 2) as average_sandbox_fit,

  count(*) as task_platform_result_count
from public.benchmark_task_leaderboard
group by suite_id, platform;

-- Row Level Security.
alter table public.benchmark_suites enable row level security;
alter table public.benchmark_tasks enable row level security;
alter table public.benchmark_runs enable row level security;
alter table public.benchmark_grades enable row level security;

-- Initial simple policy model:
-- creators own their suites and all related tasks/runs/grades.
-- Replace/extend with organization membership checks for team workspaces.
create policy "Creators can manage benchmark suites"
on public.benchmark_suites
for all
to authenticated
using (created_by = auth.uid())
with check (created_by = auth.uid());

create policy "Suite creators can manage benchmark tasks"
on public.benchmark_tasks
for all
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_tasks.suite_id
      and suite.created_by = auth.uid()
  )
)
with check (
  exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_tasks.suite_id
      and suite.created_by = auth.uid()
  )
);

create policy "Suite creators can manage benchmark runs"
on public.benchmark_runs
for all
to authenticated
using (
  exists (
    select 1
    from public.benchmark_suites suite
```

```
    where suite.id = benchmark_runs.suite_id
      and suite.created_by = auth.uid()
  )
)
with check (
  created_by = auth.uid()
  and exists (
    select 1
    from public.benchmark_suites suite
    where suite.id = benchmark_runs.suite_id
      and suite.created_by = auth.uid()
  )
);

create policy "Users can create and read their own benchmark grades"
on public.benchmark_grades
for all
to authenticated
using (
  graded_by = auth.uid()
  or exists (
    select 1
    from public.benchmark_runs run
    join public.benchmark_suites suite on suite.id = run.suite_id
    where run.id = benchmark_grades.run_id
      and suite.created_by = auth.uid()
  )
)
with check (
  graded_by = auth.uid()
);
```

Scoring model

The weighted score is out of 100:

$$\text{Score} = 20 \times \sum_{i} (\text{criterion score}_i \times \text{criterion weight}_i)$$

Default weights:

Criterion	Default weight	What it measures
Correctness	25%	Did the output satisfy the task requirements?
Code quality	20%	Structure, types, errors, clarity, and defects
Rendering	15%	Visual output, responsiveness, UX, and polish
State management	15%	Filters, forms, async state, persistence boundaries, and predictable behavior
Maintainability	10%	Modularity, readability, extensibility, and testability
Handoff	10%	Quality of export, source, repository, or deployment handoff
Sandbox fit	5%	Whether the task suits the platform's execution model

For database, authentication, and multi-tenant tasks, increase `correctness`, `state_management`, and `sandbox_fit`; for interactive design work, increase `rendering`; for docs, raise `handoff` and lower `state_management`.

Seed the 12 workflows

Insert this after creating a benchmark suite. Replace `YOUR_SUITE_UUID` with the suite ID.

```
insert into public.benchmark_tasks (
  suite_id,
  task_number,
  workflow,
  title,
  category,
  task_prompt,
  requirements,
  rubric_weights
)
values
  (
    'YOUR_SUITE_UUID',
    1,
    'interactive-tool',
    'Sortable artifact tracker',
    'React UI',
    'Build a responsive client-side artifact tracker with 100 sample records, search
    '{"react": true, "clientState": true, "csvExport": true, "backend": false}'::jso
    '{"correctness":0.25,"code_quality":0.20,"rendering":0.20,"state_management":0.2
  ),
  (
    'YOUR_SUITE_UUID',
    2,
    'product-prototype',
    'Interactive onboarding prototype',
    'Product design',
    'Build a clickable product onboarding prototype with an empty state, a multi-ste
    '{"react": true, "prototype": true, "statefulWorkflow": true}'::jsonb,
    '{"correctness":0.20,"code_quality":0.15,"rendering":0.30,"state_management":0.2
  ),
  (
    'YOUR_SUITE_UUID',
    3,
    'marketing-page',
    'B2B SaaS landing page',
    'Marketing',
    'Build a polished responsive B2B SaaS landing page with navigation, hero, produc
    '{"responsive": true, "marketing": true, "backend": false}'::jsonb,
    '{"correctness":0.20,"code_quality":0.15,"rendering":0.35,"state_management":0.0
  ),
  (
    'YOUR_SUITE_UUID',
    4,
    'diagram',
    'Multi-tenant system architecture',
    'Engineering',
```

```
    'Create a Mermaid architecture diagram for a Next.js application using Supabase A
    '{"mermaid": true, "architecture": true, "documentation": true}'::jsonb,
    '{"correctness":0.30,"code_quality":0.05,"rendering":0.30,"state_management":0.05
  ),
  (
    'YOUR_SUITE_UUID',
    5,
    'document',
    'Technical design document',
    'Engineering documentation',
    'Write a technical design document for a multi-tenant artifact catalog. Include c
    '{"documentation": true, "technicalDesign": true}'::jsonb,
    '{"correctness":0.35,"code_quality":0.05,"rendering":0.10,"state_management":0.05
  ),
  (
    'YOUR_SUITE_UUID',
    6,
    'presentation',
    'Product launch narrative',
    'GTM',
    'Create a slide-by-slide product launch narrative for a B2B SaaS feature. Cover a
    '{"slides": true, "gtm": true, "narrative": true}'::jsonb,
    '{"correctness":0.25,"code_quality":0.05,"rendering":0.25,"state_management":0.05
  ),
  (
    'YOUR_SUITE_UUID',
    7,
    'data-analysis',
    'Subscription CSV analysis',
    'Analytics',
    'Write a Python script that reads subscription events from CSV, computes monthly
    '{"python": true, "csv": true, "analysis": true, "files": true}'::jsonb,
    '{"correctness":0.30,"code_quality":0.25,"rendering":0.05,"state_management":0.10
  ),
  (
    'YOUR_SUITE_UUID',
    8,
    'react-component',
    'Metric dashboard component',
    'React UI',
    'Build a reusable TypeScript React dashboard component with KPI cards, loading ar
    '{"react": true, "typescript": true, "component": true}'::jsonb,
    '{"correctness":0.25,"code_quality":0.25,"rendering":0.20,"state_management":0.20
  ),
  (
    'YOUR_SUITE_UUID',
    9,
    'nextjs-feature',
    'Authenticated route handler',
    'Next.js',
    'Build a Next.js App Router route handler for creating artifact records. Require
    '{"nextjs": true, "api": true, "validation": true, "auth": true}'::jsonb,
    '{"correctness":0.30,"code_quality":0.25,"rendering":0.05,"state_management":0.15
  ),
  (
    'YOUR_SUITE_UUID',
```

```
    10,
    'database-workflow',
    'Supabase artifact CRUD',
    'Full stack',
    'Build a Next.js App Router artifact catalog backed by Supabase Postgres. Include
    '{"nextjs": true, "supabase": true, "postgres": true, "rls": true}'::jsonb,
    '{"correctness":0.30,"code_quality":0.20,"rendering":0.10,"state_management":0.20
  ),
  (
    'YOUR_SUITE_UUID',
    11,
    'authentication-workflow',
    'Cookie-based Supabase Auth',
    'Authentication',
    'Build Supabase Auth for Next.js App Router using separate browser/server clients
    '{"nextjs": true, "supabaseAuth": true, "ssr": true, "cookies": true}'::jsonb,
    '{"correctness":0.35,"code_quality":0.20,"rendering":0.05,"state_management":0.20
  ),
  (
    'YOUR_SUITE_UUID',
    12,
    'multi-tenant-saas',
    'Organization-scoped workspace',
    'SaaS architecture',
    'Build a multi-tenant Next.js workspace with organizations, memberships, owner/ad
    '{"nextjs": true, "multiTenant": true, "supabase": true, "rls": true, "auth": tru
    '{"correctness":0.35,"code_quality":0.20,"rendering":0.10,"state_management":0.20
```

12-workflow router UI

Save as:

```
components/workflow-router-12.tsx
```

This is a client component. It includes:

- A 12-workflow selector
- Project-requirement scoring
- A sortable platform benchmark matrix
- An editable grading form
- Benchmark scorecards across code quality, rendering, and state management
- A recommendation panel that responds to the selected workflow

```
"use client";

import { useMemo, useState } from "react";

type PlatformId = "claude-artifacts" | "chatgpt-canvas" | "v0";

type WorkflowId =
```

```
  | "interactive-tool"
  | "product-prototype"
  | "marketing-page"
  | "diagram"
  | "document"
  | "presentation"
  | "data-analysis"
  | "react-component"
  | "nextjs-feature"
  | "database-workflow"
  | "authentication-workflow"
  | "multi-tenant-saas";

type Platform = {
  id: PlatformId;
  name: string;
  execution: string;
  reactSupport: string;
  exportFormats: string;
  limits: string;
  baseScores: {
    codeQuality: number;
    rendering: number;
    stateManagement: number;
    sandboxFit: number;
  };
};

type Workflow = {
  id: WorkflowId;
  number: number;
  title: string;
  category: string;
  description: string;
  requirements: {
    requiresRendering: boolean;
    requiresState: boolean;
    requiresServer: boolean;
    requiresDatabase: boolean;
    requiresAuth: boolean;
    requiresExport: boolean;
    requiresMultiFile: boolean;
  };
};

type Grade = {
  codeQuality: number;
  rendering: number;
  stateManagement: number;
  correctness: number;
  maintainability: number;
  handoff: number;
  sandboxFit: number;
};

const PLATFORMS: Platform[] = [
```

```
  {
    id: "claude-artifacts",
    name: "Claude Artifacts",
    execution:
      "Contained rendered artifact experience, strongest for self-contained client-s
    reactSupport:
      "Strong for lightweight React-style local-state prototypes, interactive pages,
    exportFormats:
      "HTML, JSX-style source, Markdown, SVG, Mermaid, CSV/PNG-style browser exports
    limits:
      "Do not rely on it for durable persistence, full auth, private server secrets,
    baseScores: {
      codeQuality: 4,
      rendering: 5,
      stateManagement: 3,
      sandboxFit: 5,
    },
  },
  {
    id: "chatgpt-canvas",
    name: "ChatGPT Canvas",
    execution:
      "Isolated document/code workspace suited to editing, revision, Python analysis
    reactSupport:
      "Useful for React/HTML code iteration and focused files, but less oriented towa
    exportFormats:
      "PDF, DOCX, Markdown, and language-specific code files such as JS, TS, Python,
    limits:
      "Not a durable backend, authentication system, database host, or deployment run
    baseScores: {
      codeQuality: 4,
      rendering: 3,
      stateManagement: 2,
      sandboxFit: 4,
    },
  },
  {
    id: "v0",
    name: "v0",
    execution:
      "VM-backed Node.js sandbox suited to multi-file projects, server logic, databas
    reactSupport:
      "Native fit for React and Next.js App Router, including server/client boundarie
    exportFormats:
      "Project code, GitHub sync, preview deployments, Vercel deployment, and existin
    limits:
      "Still validate migrations, environment variables, authorization, tests, secur
    baseScores: {
      codeQuality: 5,
      rendering: 4,
      stateManagement: 5,
      sandboxFit: 5,
    },
  },
];
```

```
const WORKFLOWS: Workflow[] = [
  {
    id: "interactive-tool",
    number: 1,
    title: "Sortable artifact tracker",
    category: "React UI",
    description:
      "A client-side tracker with filters, sorting, a detail drawer, sample data, and
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: true,
      requiresMultiFile: false,
    },
  },
  {
    id: "product-prototype",
    number: 2,
    title: "Interactive onboarding prototype",
    category: "Product Design",
    description:
      "A clickable onboarding flow with empty, error, success, and completion states
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: false,
      requiresMultiFile: false,
    },
  },
  {
    id: "marketing-page",
    number: 3,
    title: "B2B SaaS landing page",
    category: "Marketing",
    description:
      "A polished responsive site with a hero, product sections, proof, FAQ, and CTA
    requirements: {
      requiresRendering: true,
      requiresState: false,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: false,
      requiresMultiFile: false,
    },
  },
  {
    id: "diagram",
    number: 4,
    title: "System architecture map",
```

```
    category: "Engineering",
    description:
      "A Mermaid or SVG map of services, databases, auth, integrations, and trust bou
    requirements: {
      requiresRendering: true,
      requiresState: false,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: true,
      requiresMultiFile: false,
    },
  },
  {
    id: "document",
    number: 5,
    title: "Technical design document",
    category: "Documentation",
    description:
      "A structured technical specification with data model, API design, risks, and r
    requirements: {
      requiresRendering: false,
      requiresState: false,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: true,
      requiresMultiFile: false,
    },
  },
  {
    id: "presentation",
    number: 6,
    title: "Product launch narrative",
    category: "GTM",
    description:
      "A presentation covering positioning, launch plan, sales enablement, metrics, a
    requirements: {
      requiresRendering: true,
      requiresState: false,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: true,
      requiresMultiFile: false,
    },
  },
  {
    id: "data-analysis",
    number: 7,
    title: "Subscription CSV analysis",
    category: "Analytics",
    description:
      "A Python workflow that computes retention and churn metrics, then writes repor
    requirements: {
      requiresRendering: false,
```

```
      requiresState: false,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: true,
      requiresMultiFile: false,
    },
  },
  {
    id: "react-component",
    number: 8,
    title: "Reusable React metric dashboard",
    category: "React UI",
    description:
      "A typed dashboard component with KPI cards, filters, tables, dialogs, and mocl
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: false,
      requiresDatabase: false,
      requiresAuth: false,
      requiresExport: false,
      requiresMultiFile: false,
    },
  },
  {
    id: "nextjs-feature",
    number: 9,
    title: "Authenticated route handler",
    category: "Next.js",
    description:
      "A typed route handler with validation, auth, organization checks, and structu
    requirements: {
      requiresRendering: false,
      requiresState: true,
      requiresServer: true,
      requiresDatabase: false,
      requiresAuth: true,
      requiresExport: false,
      requiresMultiFile: true,
    },
  },
  {
    id: "database-workflow",
    number: 10,
    title: "Supabase artifact CRUD",
    category: "Full Stack",
    description:
      "A Next.js catalog backed by Postgres with migrations, RLS, server actions, and
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: true,
      requiresDatabase: true,
      requiresAuth: true,
      requiresExport: false,
```

```
      requiresMultiFile: true,
    },
  },
  {
    id: "authentication-workflow",
    number: 11,
    title: "Cookie-based Supabase Auth",
    category: "Authentication",
    description:
      "Browser/server clients, session refresh, protected routes, magic links, and s
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: true,
      requiresDatabase: true,
      requiresAuth: true,
      requiresExport: false,
      requiresMultiFile: true,
    },
  },
  {
    id: "multi-tenant-saas",
    number: 12,
    title: "Organization-scoped SaaS workspace",
    category: "SaaS Architecture",
    description:
      "Organizations, memberships, roles, RLS, audit logs, protected APIs, and admin
    requirements: {
      requiresRendering: true,
      requiresState: true,
      requiresServer: true,
      requiresDatabase: true,
      requiresAuth: true,
      requiresExport: false,
      requiresMultiFile: true,
    },
  },
];

const DEFAULT_GRADES: Record<PlatformId, Grade> = {
  "claude-artifacts": {
    codeQuality: 4,
    rendering: 5,
    stateManagement: 3,
    correctness: 4,
    maintainability: 3,
    handoff: 4,
    sandboxFit: 5,
  },
  "chatgpt-canvas": {
    codeQuality: 4,
    rendering: 3,
    stateManagement: 2,
    correctness: 4,
    maintainability: 4,
    handoff: 5,
```

```
    sandboxFit: 4,
  },
  v0: {
    codeQuality: 5,
    rendering: 4,
    stateManagement: 5,
    correctness: 5,
    maintainability: 5,
    handoff: 5,
    sandboxFit: 5,
  },
};

function getPlatformStyle(name: string) {
  if (name === "Claude Artifacts") {
    return "border-amber-200 bg-amber-50 text-amber-800";
  }

  if (name === "ChatGPT Canvas") {
    return "border-emerald-200 bg-emerald-50 text-emerald-800";
  }

  return "border-slate-900 bg-slate-950 text-white";
}

function calculateWorkflowScore(platform: Platform, workflow: Workflow) {
  let score = 0;
  const reasons: string[] = [];

  if (workflow.requirements.requiresRendering) {
    score += platform.baseScores.rendering * 4;
    reasons.push("Rendering quality matters for this workflow.");
  }

  if (workflow.requirements.requiresState) {
    score += platform.baseScores.stateManagement * 4;
    reasons.push("State management is required.");
  }

  if (workflow.requirements.requiresServer) {
    if (platform.id === "v0") {
      score += 20;
      reasons.push("Server-side execution is required.");
    } else {
      score -= 12;
    }
  }

  if (workflow.requirements.requiresDatabase) {
    if (platform.id === "v0") {
      score += 20;
      reasons.push("Database integration is required.");
    } else {
      score -= 15;
    }
  }
```

```
  if (workflow.requirements.requiresAuth) {
    if (platform.id === "v0") {
      score += 20;
      reasons.push("Authentication and authorization are required.");
    } else {
      score -= 15;
    }
  }

  if (workflow.requirements.requiresMultiFile) {
    if (platform.id === "v0") {
      score += 15;
      reasons.push("A multi-file project structure is required.");
    } else {
      score -= 10;
    }
  }

  if (workflow.requirements.requiresExport) {
    if (platform.id === "chatgpt-canvas") {
      score += 15;
      reasons.push("Document/code export is a major requirement.");
    }

    if (platform.id === "claude-artifacts") {
      score += 12;
      reasons.push("Artifact source and browser export are useful.");
    }
  }

  score += platform.baseScores.codeQuality * 2;
  score += platform.baseScores.sandboxFit * 2;

  return {
    score,
    reasons,
  };
}

function getRecommendation(workflow: Workflow) {
  const ranked = PLATFORMS.map((platform) => {
    const result = calculateWorkflowScore(platform, workflow);

    return {
      platform,
      score: result.score,
      reasons: result.reasons,
    };
  }).sort((a, b) => b.score - a.score);

  return {
    primary: ranked[^13_0],
    secondary: ranked[^13_1],
    all: ranked,
  };
```

```
}

function weightedGradeScore(grade: Grade) {
  const weighted =
    grade.correctness * 0.25 +
    grade.codeQuality * 0.2 +
    grade.rendering * 0.15 +
    grade.stateManagement * 0.15 +
    grade.maintainability * 0.1 +
    grade.handoff * 0.1 +
    grade.sandboxFit * 0.05;

  return Number((weighted * 20).toFixed(1));
}

function Badge({
  children,
  className = "",
}: {
  children: React.ReactNode;
  className?: string;
}) {
  return (
    <span
      className={`inline-flex items-center rounded-full border px-2 py-0.5 text-xs fo
    >
      {children}
    </span>
  );
}

function ScoreCell({
  value,
  onChange,
}: {
  value: number;
  onChange: (value: number) => void;
}) {
  return (
    <select
      value={value}
      onChange={(event) => onChange(Number(event.target.value))}
      className="rounded-lg border border-slate-200 bg-white px-2 py-1 text-xs font-s
    >
      {[0, 1, 2, 3, 4, 5].map((score) => (
        <option key={score} value={score}>
          {score}/5
        </option>
      ))}
    </select>
  );
}

export function WorkflowRouter12() {
  const [selectedWorkflowId, setSelectedWorkflowId] =
    useState<WorkflowId>("interactive-tool");
```

```
  const [sort, setSort] = useState<{
    key: "name" | "codeQuality" | "rendering" | "stateManagement" | "sandboxFit";
    direction: "asc" | "desc";
  }>({
    key: "name",
    direction: "asc",
  });

  const [grades, setGrades] =
    useState<Record<PlatformId, Grade>>(DEFAULT_GRADES);

  const selectedWorkflow = useMemo(
    () => WORKFLOWS.find((workflow) => workflow.id === selectedWorkflowId)!,
    [selectedWorkflowId]
  );

  const recommendation = useMemo(
    () => getRecommendation(selectedWorkflow),
    [selectedWorkflow]
  );

  const sortedPlatforms = useMemo(() => {
    return [...PLATFORMS].sort((a, b) => {
      const getValue = (platform: Platform) => {
        if (sort.key === "name") {
          return platform.name;
        }

        const field =
          sort.key === "codeQuality"
            ? "codeQuality"
            : sort.key === "rendering"
            ? "rendering"
            : sort.key === "stateManagement"
            ? "stateManagement"
            : "sandboxFit";

        return platform.baseScores[field];
      };

      const aValue = getValue(a);
      const bValue = getValue(b);

      if (typeof aValue === "number" && typeof bValue === "number") {
        return sort.direction === "asc" ? aValue - bValue : bValue - aValue;
      }

      return sort.direction === "asc"
        ? String(aValue).localeCompare(String(bValue))
        : String(bValue).localeCompare(String(aValue));
    });
  }, [sort]);

  const updateGrade = (
    platformId: PlatformId,
```

```
    field: keyof Grade,
    value: number
  ) => {
    setGrades((current) => ({
      ...current,
      [platformId]: {
        ...current[platformId],
        [field]: value,
      },
    }));
  };

  const toggleSort = (key: typeof sort.key) => {
    setSort((current) => ({
      key,
      direction:
        current.key === key && current.direction === "asc" ? "desc" : "asc",
    }));
  };

  const exportBenchmarkMarkdown = () => {
    const markdown = `# Semester AI Platform Benchmark

## Selected workflow

- Workflow: ${selectedWorkflow.title}
- Category: ${selectedWorkflow.category}
- Description: ${selectedWorkflow.description}

## Router result

- Primary recommendation: ${recommendation.primary.platform.name}
- Secondary recommendation: ${recommendation.secondary.platform.name}

## Grading matrix

| Platform | Correctness | Code quality | Rendering | State management | Maintainabil
|---|---:|---:|---:|---:|---:|---:|---:|---:|
${PLATFORMS.map((platform) => {
  const grade = grades[platform.id];

  return `| ${platform.name} | ${grade.correctness} | ${grade.codeQuality} | ${grade
}).join("\n")}

## Evaluation rubric

- Correctness: requirement satisfaction
- Code quality: structure, type safety, errors, readability
- Rendering: visual quality, responsiveness, interaction clarity
- State management: predictable UI/data state and appropriate persistence boundary
- Maintainability: modularity, testability, and ease of iteration
- Handoff: exports, repository compatibility, and deployment path
- Sandbox fit: whether the workflow suits the platform
`;

    const blob = new Blob([markdown], {
```

```
      type: "text/markdown;charset=utf-8",
    });

    const url = URL.createObjectURL(blob);
    const anchor = document.createElement("a");

    anchor.href = url;
    anchor.download = "semester-platform-benchmark.md";
    anchor.click();

    URL.revokeObjectURL(url);
  };

  const header = (
    label: string,
    key: typeof sort.key
  ) => (
    <button
      onClick={() => toggleSort(key)}
      className="flex items-center gap-1 text-left text-xs font-bold uppercase track
    >
      {label}
      {sort.key === key ? (sort.direction === "asc" ? "↑" : "↓") : "↕"}
    </button>
  );

  return (
    <main className="min-h-screen bg-slate-50 p-4 text-slate-900 md:p-8">
      <div className="mx-auto max-w-7xl space-y-6">
        <header className="rounded-2xl bg-gradient-to-br from-slate-950 via-slate-900
          <p className="text-xs font-bold uppercase tracking-[0.16em] text-indigo-300
            Semester benchmark lab
          </p>

          <h1 className="mt-2 text-3xl font-bold tracking-tight">
            Claude Artifacts vs Canvas vs v0
          </h1>

          <p className="mt-2 max-w-3xl text-sm leading-6 text-slate-300">
            A 12-workflow router and benchmark harness for scoring code quality,
            rendering, state management, export handoff, and sandbox fit.
          </p>
        </header>

        <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
              Workflow router
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Choose one of 12 coding and content workflows
            </h2>
          </div>

          <div className="mt-5 grid gap-3 md:grid-cols-2 xl:grid-cols-3">
```

```
            {WORKFLOWS.map((workflow) => {
              const isSelected = workflow.id === selectedWorkflow.id;

              return (
                <button
                  key={workflow.id}
                  onClick={() => setSelectedWorkflowId(workflow.id)}
                  className={`rounded-xl border p-4 text-left transition ${
                    isSelected
                      ? "border-indigo-500 bg-indigo-50 shadow-sm"
                      : "border-slate-200 bg-white hover:border-indigo-300 hover:bg-s
                  }`}
                >
                  <div className="flex items-start justify-between gap-3">
                    <Badge
                      className={
                        isSelected
                          ? "border-indigo-200 bg-white text-indigo-700"
                          : "border-slate-200 bg-slate-50 text-slate-600"
                      }
                    >
                      {workflow.number}
                    </Badge>

                    <span className="text-xs font-bold text-slate-400">
                      {workflow.category}
                    </span>
                  </div>

                  <h3 className="mt-3 text-sm font-bold text-slate-950">
                    {workflow.title}
                  </h3>

                  <p className="mt-2 text-xs leading-5 text-slate-600">
                    {workflow.description}
                  </p>
                </button>
              );
            })}
          </div>

          <div className="mt-5 rounded-2xl border border-indigo-200 bg-indigo-50 p-5"
            <div className="flex flex-col justify-between gap-4 lg:flex-row lg:items-
              <div>
                <p className="text-xs font-bold uppercase tracking-[0.14em] text-indi
                  Router recommendation
                </p>

                <div className="mt-2 flex flex-wrap items-center gap-2">
                  <h3 className="text-2xl font-bold text-slate-950">
                    {recommendation.primary.platform.name}
                  </h3>

                  <Badge
                    className={getPlatformStyle(
                      recommendation.primary.platform.name
```

```
                  )}
                >
                  Primary
                </Badge>

                <Badge className="border-indigo-200 bg-white text-indigo-700">
                  Workflow score {recommendation.primary.score}
                </Badge>
              </div>

              <ul className="mt-4 space-y-2 text-sm leading-6 text-slate-700">
                {recommendation.primary.reasons.length ? (
                  recommendation.primary.reasons.map((reason) => (
                    <li key={reason}>• {reason}</li>
                  ))
                ) : (
                  <li>• Best overall baseline for the selected workflow.</li>
                )}
              </ul>
            </div>

            <aside className="rounded-xl border border-indigo-100 bg-white p-4 lg:w
              <p className="text-xs font-bold uppercase tracking-wide text-slate-50
                Secondary option
              </p>

              <p className="mt-1 text-base font-bold text-slate-900">
                {recommendation.secondary.platform.name}
              </p>

              <p className="mt-2 text-sm leading-6 text-slate-600">
                {recommendation.secondary.platform.primaryUse}
              </p>
            </aside>
          </div>
        </div>
      </section>

      <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
        <div className="flex flex-col justify-between gap-3 md:flex-row md:items-en
          <div>
            <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo
              Sortable platform benchmark matrix
            </p>

            <h2 className="mt-1 text-xl font-bold text-slate-950">
              Execution limits, React support, and baseline platform fit
            </h2>
          </div>

          <button
            onClick={exportBenchmarkMarkdown}
            className="rounded-lg bg-slate-900 px-3 py-2 text-xs font-bold text-whi
          >
            Export benchmark Markdown
          </button>
```

```
          </div>

          <div className="mt-5 overflow-x-auto">
            <table className="w-full min-w-[1220px] border-collapse">
              <thead className="bg-slate-50">
                <tr>
                  <th className="px-4 py-3">{header("Platform", "name")}</th>
                  <th className="px-4 py-3">
                    {header("Code quality", "codeQuality")}
                  </th>
                  <th className="px-4 py-3">
                    {header("Rendering", "rendering")}
                  </th>
                  <th className="px-4 py-3">
                    {header("State management", "stateManagement")}
                  </th>
                  <th className="px-4 py-3">
                    {header("Sandbox fit", "sandboxFit")}
                  </th>
                  <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                    Execution
                  </th>
                  <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                    React support
                  </th>
                  <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                    Exports
                  </th>
                </tr>
              </thead>

              <tbody>
                {sortedPlatforms.map((platform) => (
                  <tr
                    key={platform.id}
                    className="border-t border-slate-100 align-top hover:bg-indigo-50
                  >
                    <td className="px-4 py-4">
                      <p className="font-bold text-slate-950">
                        {platform.name}
                      </p>

                      <p className="mt-2 text-xs leading-5 text-slate-500">
                        {platform.limits}
                      </p>
                    </td>

                    <td className="px-4 py-4">
                      <Badge className="border-slate-200 bg-slate-50 text-slate-700">
                        {platform.baseScores.codeQuality}/5
                      </Badge>
                    </td>

                    <td className="px-4 py-4">
                      <Badge className="border-slate-200 bg-slate-50 text-slate-700">
                        {platform.baseScores.rendering}/5
```

```
                  </Badge>
                </td>

                <td className="px-4 py-4">
                  <Badge className="border-slate-200 bg-slate-50 text-slate-700">
                    {platform.baseScores.stateManagement}/5
                  </Badge>
                </td>

                <td className="px-4 py-4">
                  <Badge className="border-slate-200 bg-slate-50 text-slate-700">
                    {platform.baseScores.sandboxFit}/5
                  </Badge>
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.execution}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.reactSupport}
                </td>

                <td className="max-w-xs px-4 py-4 text-sm leading-6 text-slate-60
                  {platform.exportFormats}
                </td>
              </tr>
            ))}
          </tbody>
        </table>
      </div>
    </section>

    <section className="rounded-2xl border border-slate-200 bg-white p-5 shadow-s
      <div>
        <p className="text-xs font-bold uppercase tracking-[0.14em] text-indigo-6
          Manual grading harness
        </p>

        <h2 className="mt-1 text-xl font-bold text-slate-950">
          Score the same workflow across all three platforms
        </h2>

        <p className="mt-1 text-sm text-slate-600">
          Enter evaluator scores from 0 to 5. The component calculates a
          weighted result out of 100 using the same dimensions stored in the
          Supabase grading schema.
        </p>
      </div>

      <div className="mt-5 overflow-x-auto">
        <table className="w-full min-w-[1200px] border-collapse">
          <thead className="bg-slate-50">
            <tr>
              <th className="px-4 py-3 text-left text-xs font-bold uppercase tra
                Platform
```

```
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Correctness
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Code quality
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Rendering
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  State
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Maintainability
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Handoff
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Sandbox fit
                </th>
                <th className="px-4 py-3 text-left text-xs font-bold uppercase trac
                  Weighted
                </th>
              </tr>
            </thead>

            <tbody>
              {PLATFORMS.map((platform) => {
                const grade = grades[platform.id];

                return (
                  <tr
                    key={platform.id}
                    className="border-t border-slate-100"
                  >
                    <td className="px-4 py-3">
                      <Badge className={getPlatformStyle(platform.name)}>
                        {platform.name}
                      </Badge>
                    </td>

                    <td className="px-4 py-3">
                      <ScoreCell
                        value={grade.correctness}
                        onChange={(value) =>
                          updateGrade(platform.id, "correctness", value)
                        }
                      />
                    </td>

                    <td className="px-4 py-3">
                      <ScoreCell
                        value={grade.codeQuality}
                        onChange={(value) =>
```

```
                        updateGrade(platform.id, "codeQuality", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <ScoreCell
                      value={grade.rendering}
                      onChange={(value) =>
                        updateGrade(platform.id, "rendering", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <ScoreCell
                      value={grade.stateManagement}
                      onChange={(value) =>
                        updateGrade(platform.id, "stateManagement", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <ScoreCell
                      value={grade.maintainability}
                      onChange={(value) =>
                        updateGrade(platform.id, "maintainability", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <ScoreCell
                      value={grade.handoff}
                      onChange={(value) =>
                        updateGrade(platform.id, "handoff", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <ScoreCell
                      value={grade.sandboxFit}
                      onChange={(value) =>
                        updateGrade(platform.id, "sandboxFit", value)
                      }
                    />
                  </td>

                  <td className="px-4 py-3">
                    <Badge className="border-indigo-200 bg-indigo-50 text-indigo-
                      {weightedGradeScore(grade)} / 100
                    </Badge>
                  </td>
                </tr>
```

```
                  );
                })}
              </tbody>
            </table>
          </div>
        </section>
      </div>
    </main>
  );
}
```

Persist a grade

Use a Server Action for grades rather than inserting directly from the client. This ensures the authenticated evaluator is derived on the server.

```
"use server";

import { revalidatePath } from "next/cache";
import { createClient } from "@/lib/supabase/server";

type GradeInput = {
  runId: string;
  correctnessScore: number;
  codeQualityScore: number;
  renderingScore: number;
  stateManagementScore: number;
  maintainabilityScore: number;
  handoffScore: number;
  sandboxFitScore: number;
  graderNotes?: string;
  evidence?: Record<string, unknown>;
};

export async function saveBenchmarkGrade(input: GradeInput) {
  const supabase = await createClient();

  const {
    data: { user },
    error: authError,
  } = await supabase.auth.getUser();

  if (authError || !user) {
    throw new Error("You must be signed in to grade a benchmark run.");
  }

  const scoreValues = [
    input.correctnessScore,
    input.codeQualityScore,
    input.renderingScore,
    input.stateManagementScore,
    input.maintainabilityScore,
    input.handoffScore,
    input.sandboxFitScore,
```

```
  ];

  if (
    scoreValues.some(
      (score) => !Number.isInteger(score) || score < 0 || score > 5
    )
  ) {
    throw new Error("Every benchmark score must be an integer from 0 to 5.");
  }

  const { error } = await supabase.from("benchmark_grades").upsert(
    {
      run_id: input.runId,
      graded_by: user.id,
      correctness_score: input.correctnessScore,
      code_quality_score: input.codeQualityScore,
      rendering_score: input.renderingScore,
      state_management_score: input.stateManagementScore,
      maintainability_score: input.maintainabilityScore,
      handoff_score: input.handoffScore,
      sandbox_fit_score: input.sandboxFitScore,
      grader_notes: input.graderNotes ?? null,
      evidence: input.evidence ?? {},
    },
    {
      onConflict: "run_id,graded_by",
    }
  );

  if (error) {
    throw new Error(error.message);
  }

  revalidatePath("/benchmark");
  return { success: true };
}
```

Recommended evaluation workflow

1. Create one benchmark suite for the 12 standardized tasks.
2. Run the **exact same prompt** in Claude Artifacts, Canvas, and v0.
3. Record the actual output location, model/version, time, and sandbox notes.
4. Grade each run independently using the 0–5 rubric.
5. Use `benchmark_task_leaderboard` for per-workflow results and `benchmark_platform_leaderboard` for aggregated platform results.
6. Keep the raw artifact, export, project, or preview URL attached to every run so ratings can be audited.

This approach keeps subjective evaluation explicit while preserving the evidence necessary to revise the scoring later.

⁂

Claude Artifacts vs ChatGPT Canvas vs v0 Sandbox: a 12-workflow benchmark matrix scoring code quality, rendering, and state management

Computer
Build a test harness app that runs automated prompts against Claude, ChatGPT Canvas, and v0 Sandbox to score code output and state persistence
Computer
Show the rest of the benchmark matrix code
Add the 12 workflows to the sortable matrix
Show the test suite harness configuration
Sources
195

A robust benchmark should separate **routing guidance** from **actual execution results**: the matrix can recommend a platform for each of 12 workflows, while the harness stores reproducible runs, raw outputs, evaluator scores, and state-persistence checks. Fully automating all three products may require each platform's supported API, export, or connected workflow; do not assume their interactive sandboxes expose identical programmatic execution interfaces.

For Semester, the most reliable design is: normalize each task into a test specification, run it through approved platform-specific adapters, store all evidence in Supabase, then grade code quality, rendering, state management, and persistence from the resulting output. v0's sandbox is built around executing untrusted or agent-generated code in an isolated environment, making it a natural target for multi-file project tests; Claude Artifacts and Canvas are better represented by artifact/document/code outputs plus explicit export and preview evidence. [196] [197]

Benchmark matrix design

Use these 12 workflows as the canonical benchmark set:

#	Workflow	Primary capability under test	Likely best fit
1	Sortable artifact tracker	Client-side filtering, local state, CSV export	Claude Artifacts
2	Interactive onboarding prototype	UI rendering, local multi-step state	Claude Artifacts
3	B2B SaaS landing page	Responsive rendering and visual polish	Claude Artifacts
4	System architecture diagram	Mermaid/SVG rendering and export	Claude Artifacts
5	Technical design document	Structured writing, editing, export	ChatGPT Canvas
6	Product-launch presentation	Linear narrative, slide/document handoff	ChatGPT Canvas
7	Subscription CSV analysis	Python/data output and report generation	ChatGPT Canvas
8	Reusable React dashboard component	Component quality, TypeScript, local state	v0 or Claude Artifacts

#	Workflow	Primary capability under test	Likely best fit
9	Authenticated Next.js route handler	Server code, validation, auth boundaries	v0
10	Supabase artifact CRUD	Database schema, RLS, server actions, UI state	v0
11	Cookie-based Supabase Auth	SSR sessions, middleware, protected routes	v0
12	Multi-tenant SaaS workspace	Organizations, roles, RLS, audit trail, deployment	v0

The key benchmark rule: **all three platforms receive the same canonical task prompt and acceptance criteria**. The platform adapter may wrap that prompt with necessary platform-specific execution instructions, but it must preserve the required outputs and test criteria.

Harness configuration

Save this as:

```
benchmark/benchmark.config.ts
```

```
export type PlatformId =
  | "claude-artifacts"
  | "chatgpt-canvas"
  | "v0";

export type WorkflowId =
  | "interactive-tool"
  | "product-prototype"
  | "marketing-page"
  | "diagram"
  | "technical-document"
  | "presentation"
  | "data-analysis"
  | "react-component"
  | "nextjs-route-handler"
  | "supabase-crud"
  | "supabase-auth"
  | "multi-tenant-saas";

export type RubricWeights = {
  correctness: number;
  codeQuality: number;
  rendering: number;
  stateManagement: number;
  maintainability: number;
  handoff: number;
  sandboxFit: number;
  persistence: number;
};

export type BenchmarkTask = {
  id: WorkflowId;
  number: number;
  title: string;
```

```
  category: string;
  prompt: string;
  requirements: {
    react?: boolean;
    typescript?: boolean;
    html?: boolean;
    mermaid?: boolean;
    python?: boolean;
    nextjs?: boolean;
    supabase?: boolean;
    database?: boolean;
    auth?: boolean;
    rls?: boolean;
    storage?: boolean;
    serverCode?: boolean;
    localState?: boolean;
    persistentState?: boolean;
    export?: boolean;
    multiFile?: boolean;
  };
  acceptanceCriteria: string[];
  rubricWeights: RubricWeights;
  recommendedPlatform: PlatformId;
};

export type PlatformCapabilities = {
  id: PlatformId;
  name: string;
  supportsClientRendering: boolean;
  supportsLocalState: boolean;
  supportsMultiFileProjects: boolean;
  supportsServerCode: boolean;
  supportsDatabaseWorkflow: boolean;
  supportsAuthWorkflow: boolean;
  supportsNativeDocumentExport: boolean;
  supportsProjectExport: boolean;
  supportsDeployWorkflow: boolean;
  statePersistence: "none" | "local-preview" | "project-backed";
  executionModel: string;
};

export const RUBRIC_DEFAULTS: RubricWeights = {
  correctness: 0.22,
  codeQuality: 0.18,
  rendering: 0.15,
  stateManagement: 0.15,
  maintainability: 0.1,
  handoff: 0.08,
  sandboxFit: 0.07,
  persistence: 0.05,
};

export const PLATFORM_CAPABILITIES: PlatformCapabilities[] = [
  {
    id: "claude-artifacts",
    name: "Claude Artifacts",
```

```
    supportsClientRendering: true,
    supportsLocalState: true,
    supportsMultiFileProjects: false,
    supportsServerCode: false,
    supportsDatabaseWorkflow: false,
    supportsAuthWorkflow: false,
    supportsNativeDocumentExport: true,
    supportsProjectExport: true,
    supportsDeployWorkflow: false,
    statePersistence: "local-preview",
    executionModel:
      "Self-contained artifact/client-side preview and export workflow.",
  },
  {
    id: "chatgpt-canvas",
    name: "ChatGPT Canvas",
    supportsClientRendering: true,
    supportsLocalState: true,
    supportsMultiFileProjects: false,
    supportsServerCode: false,
    supportsDatabaseWorkflow: false,
    supportsAuthWorkflow: false,
    supportsNativeDocumentExport: true,
    supportsProjectExport: true,
    supportsDeployWorkflow: false,
    statePersistence: "local-preview",
    executionModel:
      "Document/code editing workspace with isolated rendering and export workflow."
  },
  {
    id: "v0",
    name: "v0 Sandbox",
    supportsClientRendering: true,
    supportsLocalState: true,
    supportsMultiFileProjects: true,
    supportsServerCode: true,
    supportsDatabaseWorkflow: true,
    supportsAuthWorkflow: true,
    supportsNativeDocumentExport: false,
    supportsProjectExport: true,
    supportsDeployWorkflow: true,
    statePersistence: "project-backed",
    executionModel:
      "Multi-file Node.js/Next.js project sandbox with server, database, and deployme
  },
];

export const BENCHMARK_TASKS: BenchmarkTask[] = [
  {
    id: "interactive-tool",
    number: 1,
    title: "Sortable artifact tracker",
    category: "React UI",
    recommendedPlatform: "claude-artifacts",
    prompt: `Build a responsive client-side artifact tracker with 100 sample records
- Full-text search
```

```
- Multi-select category and format filters
- Sortable columns
- Status and priority badges
- Editable status
- A detail drawer
- Local state only
- CSV export
- Keyboard-accessible controls
- Empty, loading, and error states
Do not use a backend or external UI library.`,
    requirements: {
      react: true,
      typescript: true,
      localState: true,
      export: true,
    },
    acceptanceCriteria: [
      "Search filters across artifact title, category, owner, and tags",
      "At least two multi-select filters work together",
      "Table sort changes row ordering",
      "CSV export contains filtered rows",
      "UI has accessible labels and keyboard-focusable controls",
      "No server-side dependency is required",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      rendering: 0.2,
      stateManagement: 0.22,
      persistence: 0.01,
    },
  },
  {
    id: "product-prototype",
    number: 2,
    title: "Interactive onboarding prototype",
    category: "Product Design",
    recommendedPlatform: "claude-artifacts",
    prompt: `Build a clickable onboarding prototype for a B2B SaaS product. Include:
- Welcome screen
- Four-step setup flow
- Progress indicator
- Validation errors
- Empty state
- Success state
- Back/next navigation
- Responsive layout
- Realistic sample data
Use local component state and do not require a backend.`,
    requirements: {
      react: true,
      localState: true,
    },
    acceptanceCriteria: [
      "All setup steps are reachable",
      "Back/next buttons preserve entered state",
      "Validation blocks invalid continuation",
```

```
      "Completion state is visible after final step",
      "Layout is responsive",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      rendering: 0.28,
      stateManagement: 0.23,
      persistence: 0.01,
    },
  },
  {
    id: "marketing-page",
    number: 3,
    title: "B2B SaaS landing page",
    category: "Marketing",
    recommendedPlatform: "claude-artifacts",
    prompt: `Build a polished responsive B2B SaaS landing page. Include:
- Navigation
- Hero
- Product workflow section
- Benefits
- Product screenshots/placeholders
- Customer proof
- FAQ
- Primary conversion CTA
- Footer
Use semantic accessible HTML and responsive CSS.`,
    requirements: {
      html: true,
    },
    acceptanceCriteria: [
      "Semantic page landmarks exist",
      "Navigation and CTA links are present",
      "Mobile layout remains usable",
      "Visual hierarchy is clear",
      "No console errors are emitted",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      rendering: 0.35,
      stateManagement: 0.03,
      persistence: 0.01,
    },
  },
  {
    id: "diagram",
    number: 4,
    title: "Multi-tenant system architecture",
    category: "Engineering",
    recommendedPlatform: "claude-artifacts",
    prompt: `Create a Mermaid architecture diagram for a multi-tenant Next.js applica
- Supabase Auth
- Postgres
- Supabase Storage
- Row Level Security
- Stripe billing
```

```
- Webhooks
- Vercel deployment
- Observability
- Audit logs
Show trust boundaries, main data flows, and external dependencies.`,
    requirements: {
      mermaid: true,
      export: true,
    },
    acceptanceCriteria: [
      "Valid Mermaid source is provided",
      "All required systems appear",
      "Data flow and trust boundaries are labelled",
      "Diagram remains readable at normal zoom",
      "Source can be copied into a repository",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.3,
      rendering: 0.3,
      handoff: 0.15,
      stateManagement: 0.02,
      persistence: 0.01,
    },
  },
  {
    id: "technical-document",
    number: 5,
    title: "Technical design document",
    category: "Engineering Documentation",
    recommendedPlatform: "chatgpt-canvas",
    prompt: `Write a technical design document for a multi-tenant artifact catalog. I
- Context
- Goals and non-goals
- User workflows
- Architecture
- Data model
- Authorization and Row Level Security
- API design
- Risks and failure modes
- Observability
- Rollout
- Test plan
- Open questions`,
    requirements: {
      export: true,
    },
    acceptanceCriteria: [
      "Every requested section is included",
      "Tradeoffs are explicit",
      "Security and authorization assumptions are called out",
      "Document is readable and review-ready",
      "Source can be exported cleanly",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
```

```
      correctness: 0.34,
      handoff: 0.25,
      maintainability: 0.16,
      rendering: 0.07,
      stateManagement: 0.02,
      persistence: 0.01,
    },
  },
  {
    id: "presentation",
    number: 6,
    title: "Product launch narrative",
    category: "GTM",
    recommendedPlatform: "chatgpt-canvas",
    prompt: `Create a slide-by-slide product launch narrative for a B2B SaaS feature
- Target audience
- Problem
- Positioning
- Product walkthrough
- Evidence/proof
- Launch channels
- Sales enablement
- Timeline
- Metrics
- Risks
- Speaker notes`,
    requirements: {
      export: true,
    },
    acceptanceCriteria: [
      "Narrative has a clear beginning, middle, and end",
      "Every slide has a single key message",
      "Speaker notes support delivery",
      "Metrics and risks are explicit",
      "Presentation can be exported or handed off",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      rendering: 0.24,
      handoff: 0.24,
      correctness: 0.25,
      stateManagement: 0.02,
      persistence: 0.01,
    },
  },
  {
    id: "data-analysis",
    number: 7,
    title: "Subscription CSV analysis",
    category: "Analytics",
    recommendedPlatform: "chatgpt-canvas",
    prompt: `Write a Python script that:
- Reads subscription events from CSV
- Computes monthly active customers
- Computes gross logo churn
- Computes gross revenue churn
```

```
- Computes net revenue retention
- Writes a cleaned summary CSV
- Produces a short Markdown report
Handle missing values and malformed rows safely.`,
    requirements: {
      python: true,
      export: true,
    },
    acceptanceCriteria: [
      "Script handles a valid CSV input",
      "Malformed rows are handled or reported safely",
      "All requested metrics are computed",
      "CSV and Markdown outputs are produced",
      "Code is readable and modular",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.32,
      codeQuality: 0.25,
      handoff: 0.12,
      rendering: 0.03,
      stateManagement: 0.08,
      persistence: 0.01,
    },
  },
  {
    id: "react-component",
    number: 8,
    title: "Reusable React metric dashboard",
    category: "React UI",
    recommendedPlatform: "v0",
    prompt: `Build a reusable TypeScript React metric dashboard component with:
- KPI cards
- Local filters
- Data table
- Detail modal
- Realistic mock data
- Loading state
- Empty state
- Error state
- Accessible controls
Do not use an external UI library.`,
    requirements: {
      react: true,
      typescript: true,
      localState: true,
    },
    acceptanceCriteria: [
      "Component has typed props or data model",
      "Filters change visible data",
      "Modal opens and closes accessibly",
      "All state variants render",
      "Code can be moved into an existing React app",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
```

```
      codeQuality: 0.25,
      rendering: 0.2,
      stateManagement: 0.22,
      persistence: 0.01,
    },
  },
  {
    id: "nextjs-route-handler",
    number: 9,
    title: "Authenticated Next.js route handler",
    category: "Next.js",
    recommendedPlatform: "v0",
    prompt: `Build a Next.js App Router route handler for creating artifact records.
- Require authenticated user access
- Validate request data
- Enforce organization membership
- Return typed JSON errors
- Include request/response examples
- Avoid leaking database errors to clients`,
    requirements: {
      nextjs: true,
      serverCode: true,
      auth: true,
      multiFile: true,
    },
    acceptanceCriteria: [
      "Authentication is checked server-side",
      "Input validation exists",
      "Organization authorization is enforced",
      "Errors use appropriate status codes",
      "Examples are documented",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.32,
      codeQuality: 0.25,
      stateManagement: 0.16,
      sandboxFit: 0.12,
      rendering: 0.02,
      persistence: 0.01,
    },
  },
  {
    id: "supabase-crud",
    number: 10,
    title: "Supabase artifact CRUD",
    category: "Full Stack",
    recommendedPlatform: "v0",
    prompt: `Build a Next.js App Router artifact catalog backed by Supabase Postgres
- Migration SQL
- Row Level Security
- Server Actions
- Typed queries
- Create/edit/delete workflows
- Search and filters
- Schema validation
```

```
- Loading/error states
- Organization-scoped records`,
    requirements: {
      nextjs: true,
      supabase: true,
      database: true,
      auth: true,
      rls: true,
      serverCode: true,
      persistentState: true,
      multiFile: true,
    },
    acceptanceCriteria: [
      "Schema contains tenant/organization scoping",
      "RLS policies exist",
      "Mutations are validated",
      "CRUD UI handles async states",
      "Server-side authorization is not delegated to UI",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.32,
      codeQuality: 0.2,
      stateManagement: 0.2,
      sandboxFit: 0.1,
      rendering: 0.08,
      persistence: 0.05,
    },
  },
  {
    id: "supabase-auth",
    number: 11,
    title: "Cookie-based Supabase Auth",
    category: "Authentication",
    recommendedPlatform: "v0",
    prompt: `Build Supabase Auth for Next.js App Router using:
- Separate browser and server clients
- Session-refresh middleware/proxy
- Magic-link sign-in
- Protected routes
- Sign-out
- Secure environment variable guidance
- No service-role key in client code`,
    requirements: {
      nextjs: true,
      supabase: true,
      database: true,
      auth: true,
      serverCode: true,
      persistentState: true,
      multiFile: true,
    },
    acceptanceCriteria: [
      "Browser and server clients are separated",
      "Sessions refresh before protected server rendering",
      "Server validates authenticated identity",
```

```
      "Secret-handling guidance is correct",
      "Sign-in and sign-out flows are complete",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.35,
      codeQuality: 0.2,
      stateManagement: 0.2,
      sandboxFit: 0.08,
      rendering: 0.04,
      persistence: 0.05,
    },
  },
  {
    id: "multi-tenant-saas",
    number: 12,
    title: "Organization-scoped SaaS workspace",
    category: "SaaS Architecture",
    recommendedPlatform: "v0",
    prompt: `Build a multi-tenant Next.js workspace with:
- Organizations
- Memberships
- Owner/admin/member/viewer roles
- Supabase Auth
- Postgres tables
- Row Level Security
- Server-side authorization
- Audit logs
- Protected APIs
- Responsive admin dashboard`,
    requirements: {
      nextjs: true,
      supabase: true,
      database: true,
      auth: true,
      rls: true,
      serverCode: true,
      persistentState: true,
      multiFile: true,
    },
    acceptanceCriteria: [
      "Organizations and memberships are modeled",
      "RLS enforces tenant isolation",
      "Role rules are explicit",
      "Server-side authorization exists",
      "Audit events are considered",
      "Dashboard reflects access constraints",
    ],
    rubricWeights: {
      ...RUBRIC_DEFAULTS,
      correctness: 0.35,
      codeQuality: 0.2,
      stateManagement: 0.2,
      sandboxFit: 0.08,
      rendering: 0.06,
      persistence: 0.05,
```

```
    },
  },
];
```

Adapter interface

The harness must not fake execution. Each adapter should either call an approved API/workflow or return an explicit `unsupported`/`manual` result.

Save as:

```
benchmark/adapters/types.ts
```

```
import type { BenchmarkTask, PlatformId } from "../benchmark.config";

export type RunStatus =
  | "queued"
  | "running"
  | "completed"
  | "manual-review-required"
  | "unsupported"
  | "failed";

export type BenchmarkRunResult = {
  platform: PlatformId;
  taskId: string;
  status: RunStatus;

  executedPrompt: string;

  outputText?: string;
  outputUrl?: string;

  sourceFiles?: Array<{
    path: string;
    content: string;
    language?: string;
  }>;

  consoleOutput?: string;
  executionSeconds?: number;

  persistenceEvidence?: {
    tested: boolean;
    persistedAcrossRefresh?: boolean;
    storageMode?: "none" | "local" | "database" | "session" | "project";
    notes?: string;
  };

  limitations?: string[];
  error?: string;
};
```

```
export interface BenchmarkAdapter {
  readonly platform: PlatformId;

  canRun(task: BenchmarkTask): {
    supported: boolean;
    reason?: string;
    manualReviewRequired?: boolean;
  };

  run(task: BenchmarkTask): Promise<BenchmarkRunResult>;
}
```

Capability guard

```
import type { BenchmarkTask, PlatformId } from "../benchmark.config";
import type { BenchmarkAdapter } from "./types";

export function requireCapability(
  platform: PlatformId,
  task: BenchmarkTask
) {
  const requiresBackend =
    task.requirements.serverCode ||
    task.requirements.database ||
    task.requirements.auth ||
    task.requirements.rls ||
    task.requirements.persistentState;

  if (
    platform !== "v0" &&
    requiresBackend
  ) {
    return {
      supported: false,
      manualReviewRequired: false,
      reason:
        "This task requires production-style server, database, authentication, or pe
    };
  }

  return {
    supported: true,
  };
}
```

v0 adapter skeleton

This is deliberately a harness configuration skeleton, not a claim that an undocumented endpoint should be called. Connect it to your approved v0 project/API/CLI workflow.

```
import type { BenchmarkAdapter, BenchmarkRunResult } from "./types";
import type { BenchmarkTask } from "../benchmark.config";
```

```
import { requireCapability } from "./capability-guard";

export class V0Adapter implements BenchmarkAdapter {
  readonly platform = "v0" as const;

  canRun(task: BenchmarkTask) {
    return requireCapability(this.platform, task);
  }

  async run(task: BenchmarkTask): Promise<BenchmarkRunResult> {
    const capability = this.canRun(task);

    if (!capability.supported) {
      return {
        platform: this.platform,
        taskId: task.id,
        status: "unsupported",
        executedPrompt: task.prompt,
        limitations: [capability.reason ?? "Unsupported task."],
      };
    }

    /*
     * Replace this block with your approved v0 integration:
     * - create/select a benchmark project or branch
     * - submit task.prompt
     * - wait for generated project or preview
     * - capture output URL, source file manifest, logs, and elapsed time
     * - run test/persistence probe if the generated app is executable
     */
    return {
      platform: this.platform,
      taskId: task.id,
      status: "manual-review-required",
      executedPrompt: task.prompt,
      limitations: [
        "Connect this adapter to an approved v0 API, project automation, or manual be
      ],
    };
  }
}
```

Claude Artifact adapter skeleton

```
import type { BenchmarkAdapter, BenchmarkRunResult } from "./types";
import type { BenchmarkTask } from "../benchmark.config";
import { requireCapability } from "./capability-guard";

export class ClaudeArtifactsAdapter implements BenchmarkAdapter {
  readonly platform = "claude-artifacts" as const;

  canRun(task: BenchmarkTask) {
    return requireCapability(this.platform, task);
  }
```

```
  async run(task: BenchmarkTask): Promise<BenchmarkRunResult> {
    const capability = this.canRun(task);

    if (!capability.supported) {
      return {
        platform: this.platform,
        taskId: task.id,
        status: "unsupported",
        executedPrompt: task.prompt,
        limitations: [capability.reason ?? "Unsupported task."],
      };
    }

    /*
     * Use an approved Claude workflow/API or mark as manual:
     * - submit the canonical prompt
     * - collect HTML/JSX/SVG/Mermaid/document source
     * - collect share/export URL if available
     * - record whether the artifact rendered
     * - run client-side static checks on exported source
     */
    return {
      platform: this.platform,
      taskId: task.id,
      status: "manual-review-required",
      executedPrompt: task.prompt,
      limitations: [
        "Connect to an approved Claude Artifact creation/export workflow. Do not trea
      ],
    };
  }
}
```

Canvas adapter skeleton

```
import type { BenchmarkAdapter, BenchmarkRunResult } from "./types";
import type { BenchmarkTask } from "../benchmark.config";
import { requireCapability } from "./capability-guard";

export class ChatGPTCanvasAdapter implements BenchmarkAdapter {
  readonly platform = "chatgpt-canvas" as const;

  canRun(task: BenchmarkTask) {
    return requireCapability(this.platform, task);
  }

  async run(task: BenchmarkTask): Promise<BenchmarkRunResult> {
    const capability = this.canRun(task);

    if (!capability.supported) {
      return {
        platform: this.platform,
        taskId: task.id,
        status: "unsupported",
        executedPrompt: task.prompt,
```

```
        limitations: [capability.reason ?? "Unsupported task."],
      };
    }

    /*
     * Use a supported OpenAI workflow/API or mark as manual:
     * - create the canvas/code/document prompt
     * - export code/document output
     * - capture rendered preview or exported artifact
     * - attach source file and review notes
     */
    return {
      platform: this.platform,
      taskId: task.id,
      status: "manual-review-required",
      executedPrompt: task.prompt,
      limitations: [
        "Connect to an approved Canvas generation/export workflow. Record exported so
      ],
    };
  }
}
```

Automated scoring probes

For outputs that become a project or exported source files, use deterministic checks **in addition to human review**. Never infer architecture quality merely from the generated text.

```
export type StaticProbeResult = {
  passed: boolean;
  score: number;
  evidence: string[];
};

export function scoreSourceStructure(
  files: Array<{ path: string; content: string }>
): StaticProbeResult {
  const evidence: string[] = [];

  const hasReadme = files.some((file) =>
    file.path.toLowerCase().includes("readme")
  );

  const hasTypeScript = files.some((file) =>
    /\.(ts|tsx)$/.test(file.path)
  );

  const hasErrorState = files.some((file) =>
    /error|ErrorBoundary|setError|throw new Error/i.test(file.content)
  );

  const hasLoadingState = files.some((file) =>
    /loading|isLoading|pending|Suspense/i.test(file.content)
  );
```

```
  const hasValidation = files.some((file) =>
    /zod|safeParse|parse\(|validate/i.test(file.content)
  );

  if (hasReadme) evidence.push("README detected");
  if (hasTypeScript) evidence.push("TypeScript source detected");
  if (hasErrorState) evidence.push("Error-state handling detected");
  if (hasLoadingState) evidence.push("Loading-state handling detected");
  if (hasValidation) evidence.push("Validation-related code detected");

  const score = [
    hasReadme,
    hasTypeScript,
    hasErrorState,
    hasLoadingState,
    hasValidation,
  ].filter(Boolean).length;

  return {
    passed: score >= 3,
    score,
    evidence,
  };
}

export function scorePersistenceProbe(input: {
  requiresPersistentState: boolean;
  output: {
    persistenceEvidence?: {
      tested: boolean;
      persistedAcrossRefresh?: boolean;
      storageMode?: string;
      notes?: string;
    };
  };
}): StaticProbeResult {
  if (!input.requiresPersistentState) {
    return {
      passed: true,
      score: 5,
      evidence: ["Persistent state is not required for this workflow."],
    };
  }

  const evidence = input.output.persistenceEvidence;

  if (!evidence?.tested) {
    return {
      passed: false,
      score: 0,
      evidence: ["Persistence was required but no persistence test was recorded."],
    };
  }

  if (!evidence.persistedAcrossRefresh) {
```

```
    return {
      passed: false,
      score: 1,
      evidence: [
        `Persistence test failed or was incomplete. Storage mode: ${evidence.storageM
      ],
    };
  }

  return {
    passed: true,
    score: evidence.storageMode === "database" ? 5 : 3,
    evidence: [
      `State persisted across refresh via ${evidence.storageMode ?? "recorded storage
      evidence.notes ?? "No additional notes.",
    ],
  };
}
```

Benchmark execution configuration

```
import {
  BENCHMARK_TASKS,
  PLATFORM_CAPABILITIES,
  type PlatformId,
} from "./benchmark.config";

export type BenchmarkExecutionConfig = {
  suiteName: string;
  runPlatforms: PlatformId[];
  workflows: string[];
  enforceSamePrompt: boolean;
  enforceFreshSession: boolean;
  captureSourceFiles: boolean;
  capturePreviewUrl: boolean;
  captureConsoleOutput: boolean;
  runStaticChecks: boolean;
  runPersistenceProbe: boolean;
  requireHumanReview: boolean;
  timeoutSeconds: number;
};

export const SEMESTER_BENCHMARK_CONFIG: BenchmarkExecutionConfig = {
  suiteName: "Semester AI Workspace Benchmark — 12 Workflows",
  runPlatforms: [
    "claude-artifacts",
    "chatgpt-canvas",
    "v0",
  ],
  workflows: BENCHMARK_TASKS.map((task) => task.id),
  enforceSamePrompt: true,
  enforceFreshSession: true,
  captureSourceFiles: true,
  capturePreviewUrl: true,
  captureConsoleOutput: true,
```

```
  runStaticChecks: true,
  runPersistenceProbe: true,
  requireHumanReview: true,
  timeoutSeconds: 600,
};

export function validateConfig(config: BenchmarkExecutionConfig) {
  const errors: string[] = [];

  if (!config.enforceSamePrompt) {
    errors.push(
      "Benchmark invalid: all platforms must receive the same canonical prompt."
    );
  }

  if (!config.requireHumanReview) {
    errors.push(
      "Benchmark incomplete: static checks do not replace human review."
    );
  }

  if (config.runPersistenceProbe && !config.enforceFreshSession) {
    errors.push(
      "Persistence testing requires a fresh-session or refresh boundary."
    );
  }

  for (const platformId of config.runPlatforms) {
    const platform = PLATFORM_CAPABILITIES.find(
      (item) => item.id === platformId
    );

    if (!platform) {
      errors.push(`Unknown platform: ${platformId}`);
    }
  }

  return errors;
}
```

What can be automated

Benchmark area	Automate?	Recommended evidence
Canonical prompt consistency	Yes	Persist exact `executed_prompt` per run
Output/source capture	Usually	HTML, JSX/TSX, Markdown, Mermaid, project-file manifest
Static code checks	Yes	TypeScript, lint, build, source-pattern probes
Rendering verification	Partly	Screenshot, preview URL, console logs, human visual review

Benchmark area	Automate?	Recommended evidence
State-management behavior	Partly	Scripted interaction test plus manual inspection
Persistence across reload/session	Yes for deployable projects; limited for sandbox previews	Refresh/session test, DB row check, storage evidence
Auth/RLS correctness	Partly	Automated tests plus security review
Code quality	Partly	Lint/type/build plus evaluator rubric
Design quality	No, not reliably	Human review with documented rubric
Platform suitability	No, not entirely	Rubric score plus architecture evidence

The database schema is designed around that distinction: **automated probes create evidence, while human evaluators grade what cannot be reliably inferred.**

Practical scoring interpretation

- **Claude Artifacts** should score strongly on workflows 1–4: client-side tools, prototypes, visual pages, diagrams, and shareable artifacts.
- **ChatGPT Canvas** should score strongly on workflows 5–7: technical documents, presentations, and Python/data-file outputs.
- **v0** should score strongly on workflows 8–12, especially when code requires a multi-file Next.js structure, server logic, Supabase/Postgres, Auth, RLS, persistent records, or multi-tenant permissions.

Do not treat that expected pattern as results. The purpose of the harness is to record actual results, attach the generated evidence, and reveal where a particular tool/model/version performs differently than the expected platform fit.

⁂

1. https://academy.claude.com/courses/claude-101/creating-with-artifacts
2. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
3. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf
4. https://www.codecademy.com/article/how-to-use-claude-artifacts-create-share-and-remix-ai-content
5. https://beginnersinai.org/claude-artifacts-guide/
6. https://learning.northeastern.edu/ai-student-guides-visual-learning-with-claude/
7. https://www.reddit.com/r/ClaudeAI/comments/1w88gld/what_are_good_examples_for_artifacts/
8. https://www.getmasset.com/resources/claude-artifacts-for-marketers
9. https://go9x.com/blog/claude-artifacts-examples
10. https://www.totalum.app/blog/claude-artifacts-alternative-2026
11. https://code.claude.com/docs/en/artifacts?stixel_click=eyJzIjoiODNjNjhjNGQtYzk1YS00MmM0LTgxYjctNzU2NWU1Nzg3YzEzIn0=

12. https://support.claude.com/en/articles/9487310-what-are-artifacts-and-how-do-i-use-them%23h_8fd83d1dd6
13. https://p0stman.com/guides/claude-artifacts-limitations
14. https://fast.io/resources/claude-artifacts-guide/
15. https://academy.claude.com/courses/claude-101/creating-with-artifacts
16. https://albato.com/blog/publications/how-to-use-claude-artifacts-guide
17. https://simonwillison.net/2024/Oct/21/claude-artifacts/
18. https://www.reddit.com/r/ClaudeAI/comments/1tb8al4/claude_artifacts_basically_killed_google_slides/
19. https://deckary.com/blog/claude-artifacts-presentations
20. https://www.linkedin.com/posts/christopher-duffy-caio_how-to-create-and-customise-an-artifact-in-activity-7382488637461929984-oANg
21. https://code.claude.com/docs/en/artifacts
22. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
23. https://dev.to/hira_jabeen_ccaa191c13070/ultimate-claude-artifacts-guide-45k3
24. https://www.codecademy.com/article/how-to-use-claude-artifacts-create-share-and-remix-ai-content
25. https://aiwiki.ai/wiki/claude_artifacts
26. https://github.com/mostafaebrahimi/artifact-exporter-for-claude
27. https://albato.com/blog/publications/how-to-use-claude-artifacts-guide
28. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
29. https://p0stman.com/guides/claude-artifacts-limitations
30. https://www.getmasset.com/resources/claude-artifacts-for-marketers
31. https://simonwillison.net/tags/claude-artifacts/
32. https://www.shareduo.com/blog/claude-artifacts
33. https://openai.com/index/introducing-canvas/
34. https://v0.app/docs/sandbox
35. https://v0.app/docs/faqs
36. https://code.claude.com/docs/en/artifacts
37. https://x.com/OpenAI/status/1933305323672252475
38. https://www.rapidevelopers.com/v0-issues/resolving-build-errors-in-exported-v0-projects
39. https://github.com/claudio-silva/claude-artifact-runner
40. https://www.rapidevelopers.com/v0-issues/exporting-and-sharing-v0-projects-across-environments
41. https://www.reddit.com/r/ClaudeAI/comments/1hv82fg/question_on_exporting_using_react_artifacts/
42. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
43. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
44. https://www.getmasset.com/resources/claude-artifacts-for-marketers
45. https://p0stman.com/guides/claude-artifacts-limitations
46. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf

47. https://www.appstuck.com/blog/v0-not-working-fix-the-most-common-errors-2026
48. https://docs.anthropic.com/en/docs/claude-code/corporate-proxy
49. https://v0.dev/docs
50. https://help.openai.com/es-419/articles/9930697-qué-es-la-función-de-canvas-en-chatgpt-y-cómo-la-uso
51. https://docs.anthropic.com/en/docs/claude-code/desktop
52. https://help.openai.com/es-es/articles/6825453-chatgpt-release-notes
53. https://v0.app/docs/sandbox
54. https://api2.v0.dev/docs/agentic-features
55. https://docs.anthropic.com/en/docs/agents-and-tools/tool-use/code-execution-tool
56. https://docs.anthropic.com/en/docs/claude-code/sdk/sdk-typescript
57. https://v0.dev/docs/v0-model-api
58. https://docs.anthropic.com/en/release-notes/overview
59. https://docs.anthropic.com/en/docs/claude-code/sdk
60. https://docs.anthropic.com/en/docs/agents-and-tools/tool-use/web-fetch-tool
61. https://docs.anthropic.com/en/docs/claude-code/memory
62. https://docs.anthropic.com/en/release-notes/claude-code
63. https://docs.anthropic.com/en/docs/claude-code/hooks
64. https://docs.anthropic.com/en/docs/claude-code/corporate-proxy
65. https://docs.anthropic.com/en/docs/agents-and-tools/tool-use/code-execution-tool
66. https://help.openai.com/en/articles/9930697-using-canvas-in-chatgpt
67. https://v0.app/docs/sandbox
68. https://api2.v0.dev/docs/agentic-features
69. https://help.openai.com/en/articles/6825453-chatgpt-release-not
70. https://help.openai.com/en/articles/10128477-chatgpt-enterprise-edu-release-notesOpenAI
71. https://v0.dev/docs/github
72. https://chat.v0.dev/docs/faqs.mdx
73. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf
74. https://v0.dev/docs/design-systems
75. https://help.openai.com/en/articles/10128477-chatgpt-enterprise-edu-release-notesGoogle
76. https://help.openai.com/en/articles/9930697-what-is-the-canvas-feature-in-chatgpt-and-how-do-i-use-it&rut=abc3b0f17817b5bba0db1aa06b04d192fadeea43d8cefd274497bd76329e8130
77. https://help.openai.com/resources/translation-view-redirect?articleId=10128477&routeLanguage=cs-cz&redirectTo=/en/articles/10128477-chatgpt-enterprise-a-edu-poznámky-k-vydání
78. https://help.openai.com/resources/translation-view-redirect?articleId=10128477&routeLanguage=pl-pl&redirectTo=/en/articles/10128477-chatgpt-enterprise-i-edu-informacje-o-wersji
79. https://help.openai.com/es-es/articles/6825453-chatgpt-release-notes
80. https://v0.dev/docs

81. https://v0.dev/docs/v0-model-api
82. https://help.openai.com/es-419/articles/9930697-qué-es-la-función-de-canvas-en-chatgpt-y-cómo-la-uso
83. https://nextjs.org/learn/dashboard-app/setting-up-your-database
84. https://vercel.com/kb/guide/nextjs-prisma-postgres
85. https://v0.app/docs/sandbox
86. https://api2.v0.dev/docs/agentic-features
87. https://v0.dev/docs/github
88. https://chat.v0.dev/docs/faqs.mdx
89. https://help.openai.com/en/articles/9930697-using-canvas-in-chatgpt
90. https://unmarkdown.com/blog/claude-artifacts-vs-chatgpt-canvas
91. https://instapods.com/blog/claude-artifacts-vs-chatgpt-canvas/
92. https://github.com/vercel/next.js/discussions/71534
93. https://www.qwe.edu.pl/tutorial/claude-artifacts-interactive-content-tutorial/
94. https://github.com/vercel/postgres-next-starter
95. https://github.com/orgs/community/discussions/141404
96. https://www.reddit.com/r/ChatGPTCoding/comments/1dsx7cb/chatgpt_artifacts/
97. https://github.com/orgs/community/discussions/172355
98. https://www.reddit.com/r/nextjs/comments/1qb9bsw/nextjs_prisma_migrations_in_github_actions_but/
99. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
100. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
101. https://simonwillison.net/tags/claude-artifacts/
102. https://github.com/claudio-silva/claude-artifact-runner
103. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf
104. https://supabase.com/docs/guides/auth/server-side/creating-a-client
105. https://supabase.com/docs/guides/getting-started/tutorials/with-nextjs
106. https://nextjs.org/docs/pages/guides/environment-variables
107. https://supabase.com/docs/guides/getting-started/quickstarts/nextjs
108. https://github.com/supabase/server/blob/main/docs/ssr-frameworks.md
109. https://stackoverflow.com/questions/78615007/how-to-create-a-shareable-supbase-server-client
110. https://www.jigz.dev/blogs/supabase-server-vs-browser-client-best-use-cases-in-next-js
111. https://www.reddit.com/r/Supabase/comments/17wjtie/nextjs_supabasessr_oauth_am_i_doing_this_right/
112. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
113. https://simonwillison.net/tags/claude-artifacts/
114. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
115. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf

116. https://supabase.com/partners/catalog/vercel
117. https://developer.paddle.com/sdks/starter-kits/nextjs
118. https://vercel.com/templates/next.js/supabase
119. https://www.npmjs.com/package/@supabase/ssr
120. https://support.claude.com/en/articles/14604416-get-started-with-claude-design
121. https://livemy.app/blog/deploy-claude-artifacts
122. https://supabase.com/docs/guides/auth/server-side/creating-a-client
123. https://supabase.com/docs/guides/getting-started/tutorials/with-nextjs
124. https://nextjs.org/docs/pages/guides/environment-variables
125. https://simonwillison.net/tags/claude-artifacts/
126. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
127. https://github.com/claudio-silva/claude-artifact-runner
128. https://instapods.com/blog/claude-artifacts-vs-chatgpt-canvas/
129. https://www.shareduo.com/blog/claude-artifacts-vs-chatgpt-canvas
130. https://www.ai-toolbox.co/claude-management-and-productivity/how-to-use-claude-artifacts-guide-2026
131. https://www.reddit.com/r/ClaudeAI/comments/1qqbc5s/psa_why_your_external_images_break_in_claude/
132. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
133. https://code.claude.com/docs/zh-CN/artifacts
134. https://claude.com/features/artifacts
135. https://dev.to/hira_jabeen_ccaa191c13070/ultimate-claude-artifacts-guide-45k3
136. https://instapods.com/blog/claude-artifacts-vs-chatgpt-canvas/
137. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf
138. https://platform.claude.com/docs/en/home
139. https://bestremotetools.com/how-to-use-claude-artifacts-for-rapid-prototyping-react-components/
140. https://code.claude.com/docs/en/artifacts
141. https://support.claude.com/en/articles/14604416-get-started-with-claude-design
142. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them
143. https://www.shareduo.com/blog/claude-artifacts-vs-chatgpt-canvas
144. https://supabase.com/docs/guides/auth/server-side
145. https://supabase.com/docs/guides/auth/server-side/migrating-to-ssr-from-auth-helpers
146. https://supabase.com/docs/guides/auth/quickstarts/nextjs
147. https://nextjs.org/docs/pages/guides/environment-variables
148. https://vercel.com/templates/supabase-auth
149. https://supabase.com/blog/supabase-vercel-partnership
150. https://vercel.com/marketplace/supabase
151. https://dev.to/jais_mukesh/managing-supabase-auth-state-across-server-client-components-in-nextjs-2h2b

152. https://github.com/wpcodevo/nextjs14-supabase-ssr-authentication
153. https://supabase.com/docs/guides/auth/server-side/creating-a-client
154. https://vercel.com/templates/next.js/supabase
155. https://www.npmjs.com/package/@supabase/ssr
156. https://www.shareduo.com/blog/claude-artifacts-vs-chatgpt-canvas
157. https://www.reddit.com/r/Supabase/comments/17wjtie/nextjs_supabasessr_oauth_am_i_doing_this_right/
158. https://instapods.com/blog/claude-artifacts-vs-chatgpt-canvas/
159. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf
160. https://v0.app/community/Q8ZxIpTnhbZ
161. https://supabase.com/docs/guides/troubleshooting/how-to-migrate-from-supabase-auth-helpers-to-ssr-package-5NRunM
162. https://github.com/supabase/ssr
163. https://nextjs.org/docs/pages/guides/environment-variables
164. https://valueaddvc.com/blog/claude-artifacts-the-feature-thats-turning-claude-into-a-mini-app-builder
165. https://supabase.com/docs/guides/getting-started/quickstarts/nextjs
166. https://supabase.com/docs/guides/auth/server-side/migrating-to-ssr-from-auth-helpers
167. https://academy.claude.com/courses/claude-101/creating-with-artifacts
168. https://simonwillison.net/tags/claude-artifacts/
169. https://www.netlify.com/knowledge-base/deploy-your-claude-artifacts-to-netlify/
170. https://www.jigz.dev/blogs/supabase-server-vs-browser-client-best-use-cases-in-next-js
171. https://www.reddit.com/r/Supabase/comments/17wjtie/nextjs_supabasessr_oauth_am_i_doing_this_right/
172. https://nextjs.org/
173. https://nextjs.org/learn
174. https://v0.app/docs/sandbox
175. https://supabase.com/docs/guides/auth/server-side
176. https://supabase.com/docs/guides/auth/server-side/creating-a-client
177. https://vercel.com/docs/sandbox
178. https://supabase.com/docs/guides/troubleshooting/how-do-you-troubleshoot-nextjs---supabase-auth-issues-riMCZV
179. https://github.com/orgs/supabase/discussions/28069
180. https://www.majidpro.com/blog/nextjs-supabase-auth-ssr
181. https://www.iloveblogs.blog/guides/supabase-auth-complete-session-middleware-guide
182. https://www.faisalkarkoh.com/blog/v0-vercel-review-ui-generation-production
183. https://v0.app/docs/sandbox
184. https://supabase.com/docs/guides/auth/server-side/creating-a-client
185. https://nextjs.org/
186. https://nextjs.org/learn

187. https://github.com/claudio-silva/claude-artifact-runner

188. https://www.shareduo.com/blog/claude-artifacts-vs-chatgpt-canvas

189. https://www.reddit.com/r/Supabase/comments/17wjtie/nextjs_supabasessr_oauth_am_i_doing_this_right/

190. https://info.lse.ac.uk/staff/divisions/Eden-Centre/Assets-EC/Documents/Claude-Guides-Dec-2025/Guide-Creating-Claude-Artifacts-V1.0-011225.pdf

191. https://academy.claude.com/courses/claude-101/creating-with-artifacts

192. https://learning.northeastern.edu/ai-student-guides-visual-learning-with-claude/

193. https://support.claude.com/en/articles/17153992-what-are-artifacts-and-how-do-i-use-them

194. https://www.reddit.com/r/ClaudeAI/comments/1w88gld/what_are_good_examples_for_artifacts/

195. https://egghead.io/lessons/supabase-dynamically-render-ui-based-on-user-session-with-ssr-in-next-js-client-components

196. https://vercel.com/docs/sandbox

197. https://valueaddvc.com/blog/claude-artifacts-the-feature-thats-turning-claude-into-a-mini-app-builder