

Agenda.

→ Access Modifiers.

→ Constructors

 → Default Constructor

 → Parameterized Constructor

→ Shallow (vs) Deep Copy.

Class Student {

 name

 age

 batch

 pSP


 ==
 ==
 ==
 ==

==

Student **st** = new Student ()

 ↓
reference

 ↓
Object creation

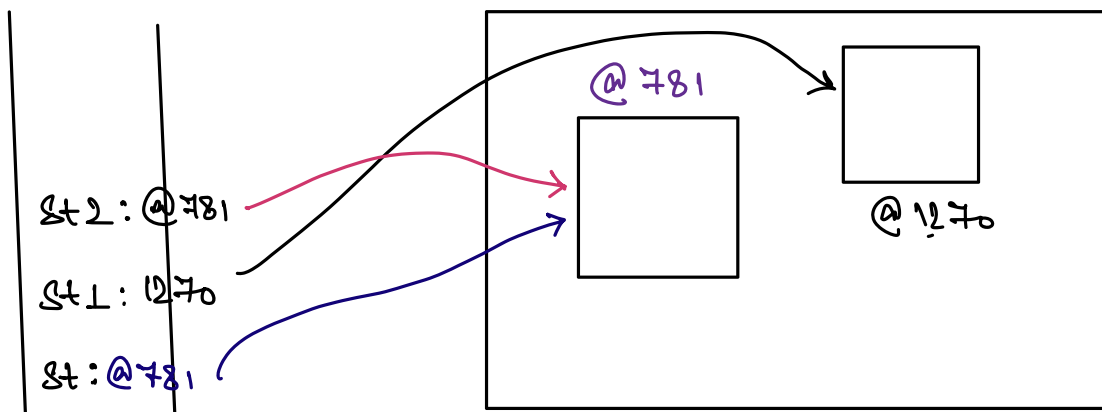

Student st1 = new Student();

Student st2 = st;
@481

st2.age = 25


st.age = 26.

Access Modifiers.

Public
Protected
Default
Private.

Encapsulation.

→ Holds the attrs together.
↳ Class.
→ Protects the Attrs.
↳ Access Modifier.

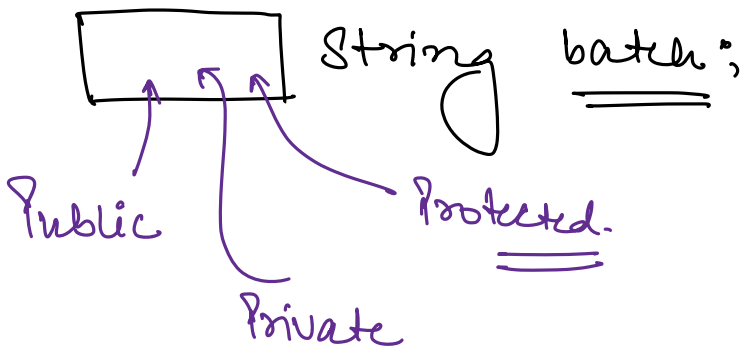String bater;
Public
Protected.
Private

	Class	Package	Outside Package within the child.	Anywhere
Public	✓	✓	✓	✓
Protected	✓	✓	✓	✗
Default	✓	✓	✗	✗
Private	✓	✗	✗	✗

⇒ Constructors

Student st = new Student();

new
↓
Associates
memory.

↓
Constructor.

↓
helps to initialize
the fields.

⇒ Default / Empty
Constructor.

⇒ Constructor with
No parameters

Class Student {

name

age

batch

psp

≡

Default Constructor is provided by language if and only if we don't write our own constructor.

→ Initialize all the attributes to their default values.

Student st = new Student();