

Experiment - 8: 3D Transformation

Ques : Perform 3d Transformation on a square

Code : -

```
#include <windows.h>

#include <math.h>

#include <GL/glut.h>

#include <stdio.h>

#include <stdlib.h>


typedef float Matrix4x4 [4][4];

Matrix4x4 theMatrix;

float ptsIni[8][3]={80,80,-100},{180,80,-100},{180,180,-100},{80,180,-100},{60,60,0},{160,60,0},{160,160,0},{60,160,0}};

//Realign above line while execution

// Initial Co-ordinates of the Cube to be Transformed

float ptsFin[8][3];

float refptX,refptY,refptZ;           //Reference points

float TransDistX,TransDistY,TransDistZ;    //Translations along Axes

float ScaleX,ScaleY,ScaleZ;           //Scaling Factors along Axes

float Alpha,Beta,Gamma,Theta;         //Rotation angles about Axes

float A,B,C;                          //Arbitrary Line Attributes

float aa,bb,cc;                       //Arbitrary Line Attributes

float x1,y1,z1,x2,y2,z2;

int choice,choiceRot,choiceRef;

void matrixSetIdentity(Matrix4x4 m) // Initialises the matrix as Unit Matrix
{
    int i, j;
```

```

for (i=0; i<4; i++)
for (j=0; j<4; j++)
m[i][j] = (i == j);
}

```

```

void matrixPreMultiply(Matrix4x4 a , Matrix4x4 b)
{
// Multiplies matrix a times b, putting result in b

int i,j;

Matrix4x4 tmp;

for (i = 0; i < 4; i++)
for (j = 0; j < 4; j++)

tmp[i][j]=a[i][0]*b[0][j]+a[i][1]*b[1][j]+a[i][2]*b[2][j]+a[i][3]*b[3][j];

for (i = 0; i < 4; i++)
for (j = 0; j < 4; j++)

theMatrix[i][j] = tmp[i][j];
}

```

```

void Translate(int tx, int ty, int tz)
{
Matrix4x4 m;

matrixSetIdentity(m);

m[0][3] = tx;
m[1][3] = ty;
m[2][3] = tz;

matrixPreMultiply(m, theMatrix);
}

```

```

void Scale(float sx , float sy ,float sz)
{
Matrix4x4 m;

matrixSetIdentity(m);

```

```

m[0][0] = sx;
m[0][3] = (1 - sx)*refptX;
m[1][1] = sy;
m[1][3] = (1 - sy)*refptY;
m[2][2] = sz;
m[2][3] = (1 - sy)*refptZ;
matrixPreMultiply(m , theMatrix);
}

void RotateX(float angle)
{
    Matrix4x4 m;
    matrixSetIdentity(m);
    angle = angle*22/1260;
    m[1][1] = cos(angle);
    m[1][2] = -sin(angle);
    m[2][1] = sin(angle);
    m[2][2] = cos(angle);
    matrixPreMultiply(m , theMatrix);
}

void RotateY(float angle)
{
    Matrix4x4 m;
    matrixSetIdentity(m);
    angle = angle*22/1260;
    m[0][0] = cos(angle);
    m[0][2] = sin(angle);
    m[2][0] = -sin(angle);
    m[2][2] = cos(angle);
    matrixPreMultiply(m , theMatrix);
}

```

```

}

void RotateZ(float angle)
{
    Matrix4x4 m;
    matrixSetIdentity(m);
    angle = angle*22/1260;
    m[0][0] = cos(angle);
    m[0][1] = -sin(angle);
    m[1][0] = sin(angle);
    m[1][1] = cos(angle);
    matrixPreMultiply(m , theMatrix);
}

void Reflect(void)
{
    Matrix4x4 m;
    matrixSetIdentity(m);
    switch(choiceRef)
    {
        case 1: m[2][2] = -1;
        break;
        case 2: m[0][0] = -1;
        break;
        case 3: m[1][1] = -1;
        break;
    }
    matrixPreMultiply(m , theMatrix);
}

void DrawRotLine(void)
{

```

```

switch(choiceRot)
{
case 1: glBegin(GL_LINES);
glVertex3s(-1000 ,B,C);
glVertex3s( 1000 ,B,C);
glEnd();
break;

case 2: glBegin(GL_LINES);
glVertex3s(A ,-1000 ,C);
glVertex3s(A ,1000 ,C);
glEnd();
break;

case 3: glBegin(GL_LINES);
glVertex3s(A ,B ,-1000);
glVertex3s(A ,B ,1000);
glEnd();
break;

case 4: glBegin(GL_LINES);
glVertex3s(x1-aa*500 ,y1-bb*500 , z1-cc*500);
glVertex3s(x2+aa*500 ,y2+bb*500 , z2+cc*500);
glEnd();
break;
}
}

void TransformPoints(void)
{
int i,k;

float tmp ;

for(k=0 ; k<8 ; k++)

```

```

for (i=0 ; i<3 ; i++)

ptsFin[k][i] = theMatrix[i][0]*ptsIni[k][0] + theMatrix[i][1]*ptsIni[k][1] +
theMatrix[i][2]*ptsIni[k][2] + theMatrix[i][3];

// Realign above line while execution
}

void Axes(void)
{
glColor3f (0.0, 0.0, 0.0);      // Set the color to BLACK
glBegin(GL_LINES);             // Plotting X-Axis
glVertex2s(-1000 ,0);
glVertex2s( 1000 ,0);
glEnd();
glBegin(GL_LINES);             // Plotting Y-Axis
glVertex2s(0 ,-1000);
glVertex2s(0 , 1000);
glEnd();
}

void Draw(float a[8][3])        //Display the Figure
{
int i;
glColor3f (0.7, 0.4, 0.7);
glBegin(GL_POLYGON);
glVertex3f(a[0][0],a[0][1],a[0][2]);
glVertex3f(a[1][0],a[1][1],a[1][2]);
glVertex3f(a[2][0],a[2][1],a[2][2]);
glVertex3f(a[3][0],a[3][1],a[3][2]);
glEnd();
i=0;
glColor3f (0.8, 0.6, 0.5);
glBegin(GL_POLYGON);

```

```

glVertex3s(a[0+i][0],a[0+i][1],a[0+i][2]);
glVertex3s(a[1+i][0],a[1+i][1],a[1+i][2]);
glVertex3s(a[5+i][0],a[5+i][1],a[5+i][2]);
glVertex3s(a[4+i][0],a[4+i][1],a[4+i][2]);
glEnd();

glColor3f (0.2, 0.4, 0.7);
glBegin(GL_POLYGON);

glVertex3f(a[0][0],a[0][1],a[0][2]);
glVertex3f(a[3][0],a[3][1],a[3][2]);
glVertex3f(a[7][0],a[7][1],a[7][2]);
glVertex3f(a[4][0],a[4][1],a[4][2]);
glEnd();

i=1;

glColor3f (0.5, 0.4, 0.3);
glBegin(GL_POLYGON);

glVertex3s(a[0+i][0],a[0+i][1],a[0+i][2]);
glVertex3s(a[1+i][0],a[1+i][1],a[1+i][2]);
glVertex3s(a[5+i][0],a[5+i][1],a[5+i][2]);
glVertex3s(a[4+i][0],a[4+i][1],a[4+i][2]);
glEnd();

i=2;

glColor3f (0.5, 0.6, 0.2);
glBegin(GL_POLYGON);

glVertex3s(a[0+i][0],a[0+i][1],a[0+i][2]);
glVertex3s(a[1+i][0],a[1+i][1],a[1+i][2]);
glVertex3s(a[5+i][0],a[5+i][1],a[5+i][2]);
glVertex3s(a[4+i][0],a[4+i][1],a[4+i][2]);
glEnd();

i=4;

```

```

glColor3f (0.7, 0.3, 0.4);
glBegin(GL_POLYGON);
glVertex3f(a[0+i][0],a[0+i][1],a[0+i][2]);
glVertex3f(a[1+i][0],a[1+i][1],a[1+i][2]);
glVertex3f(a[2+i][0],a[2+i][1],a[2+i][2]);
glVertex3f(a[3+i][0],a[3+i][1],a[3+i][2]);
glEnd();
}

```

```

void display(void)
{
    glClear (GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT);
    Axes();
    glColor3f (1.0, 0.0, 0.0);          // Set the color to RED
    Draw(ptsIni);
    matrixSetIdentity(theMatrix);
    switch(choice)
    {
        case 1: Translate(TransDistX , TransDistY ,TransDistZ);
        break;
        case 2: Scale(ScaleX, ScaleY, ScaleZ);
        break;
        case 3: switch(choiceRot)
        {
            case 1: DrawRotLine();
            Translate(0,-B,-C);
            RotateX(Alpha);
            Translate(0,B,C);
            break;

```



```

case 2: DrawRotLine();

Translate(-A,0,-C);

RotateY(Beta);

Translate(A,0,C);

break;

case 3: DrawRotLine();

Translate(-A,-B,0);

RotateZ(Gamma);

Translate(A,B,0);

break;

case 4: DrawRotLine();

float MOD =sqrt((x2-x1)*(x2-x1) + (y2-y11)*(y2-y11) + (z2-z1)*(z2-z1));

aa = (x2-x1)/MOD;

bb = (y2-y11)/MOD;

cc = (z2-z1)/MOD;

Translate(-x1,-y11,-z1);

float ThetaDash;

ThetaDash = 1260*atan(bb/cc)/22;

RotateX(ThetaDash);

RotateY(1260*asin(-aa)/22);

RotateZ(Theta);

RotateY(1260*asin(aa)/22);

RotateX(-ThetaDash);

Translate(x1,y11,z1);

break;

}

break;

case 4: Reflect();

break;

```

```

}

TransformPoints();

Draw(ptsFin);

glFlush();
}

void init(void)
{
glClearColor (1.0, 1.0, 1.0, 1.0);

    // Set the Background color to WHITE

glOrtho(-454.0, 454.0, -250.0, 250.0, -250.0, 250.0);

    // Set the no. of Co-ordinates along X & Y axes and their gappings

glEnable(GL_DEPTH_TEST);

    // To Render the surfaces Properly according to their depths
}

int main (int argc, char *argv)
{

glutInit(&argc, &argv);

glutInitDisplayMode (GLUT_SINGLE | GLUT_RGB | GLUT_DEPTH);

glutInitWindowSize (1362, 750);

glutInitWindowPosition (0, 0);

glutCreateWindow (" Basic Transformations ");

init ();

printf("Enter your choice
number:\n1.Translation\n2.Scaling\n3.Rotation\n4.Reflection\n=>");

scanf("%d",&choice);

switch(choice)
{

case 1:printf("Enter Translation along X, Y & Z\n=>");

scanf("%f%f%f",&TransDistX , &TransDistY , &TransDistZ);

break;

```

```

case 2:printf("Enter Scaling ratios along X, Y & Z\n=>");
scanf("%f%f%f",&ScaleX , &ScaleY , &ScaleZ);

break;

case 3:printf("Enter your choice for Rotation about axis:\n1.parallel to X-axis.(y=B &
z=C)\n2.parallel to Y-axis.(x=A & z=C)\n3.parallel to Z-axis.(x=A & y=B)\n4.Arbitrary line
passing through (x1,y1,z1) & (x2,y2,z2)\n =>");

//Realign above line while execution

scanf("%d",&choiceRot);

switch(choiceRot)
{
case 1: printf("Enter B & C: ");
scanf("%f %f",&B,&C);
printf("Enter Rot. Angle Alpha: ");
scanf("%f",&Alpha);
break;

case 2: printf("Enter A & C: ");
scanf("%f %f",&A,&C);
printf("Enter Rot. Angle Beta: ");
scanf("%f",&Beta);
break;

case 3: printf("Enter A & B: ");
scanf("%f %f",&A,&B);
printf("Enter Rot. Angle Gamma: ");
scanf("%f",&Gamma);
break;

case 4: printf("Enter values of x1 ,y1 & z1:\n");
scanf("%f %f %f",&x1,&y1,&z1);
printf("Enter values of x2 ,y2 & z2:\n");
scanf("%f %f %f",&x2,&y2,&z2);
printf("Enter Rot. Angle Theta: ");

```

```

scanf("%f",&Theta);

break;

}

break;

case 4:  printf("Enter your choice for reflection about plane:\n1.X-Y\n2.Y-Z\n3.X-
Z\n=>");

scanf("%d",&choiceRef);

break;

default:  printf("Please enter a valid choice!!!\n");

return 0;

}

glutDisplayFunc(display);

glutMainLoop();


return 0;

}


```

Output are as Follows ; -


1.) Translation

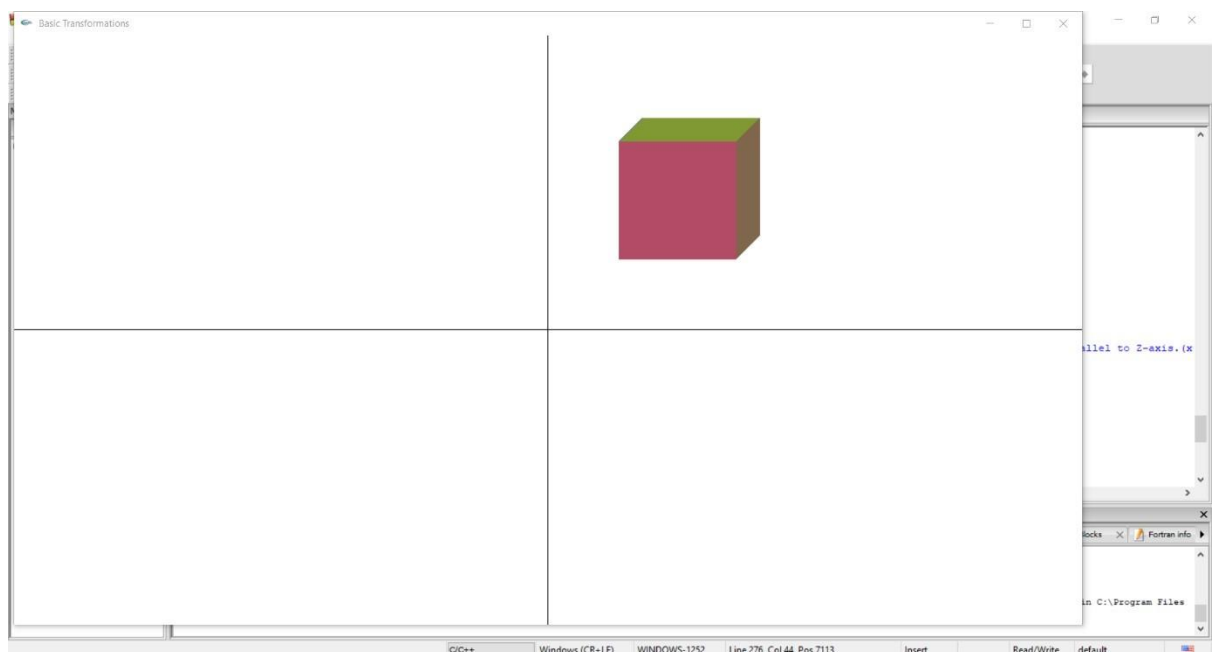

2.) Scaling

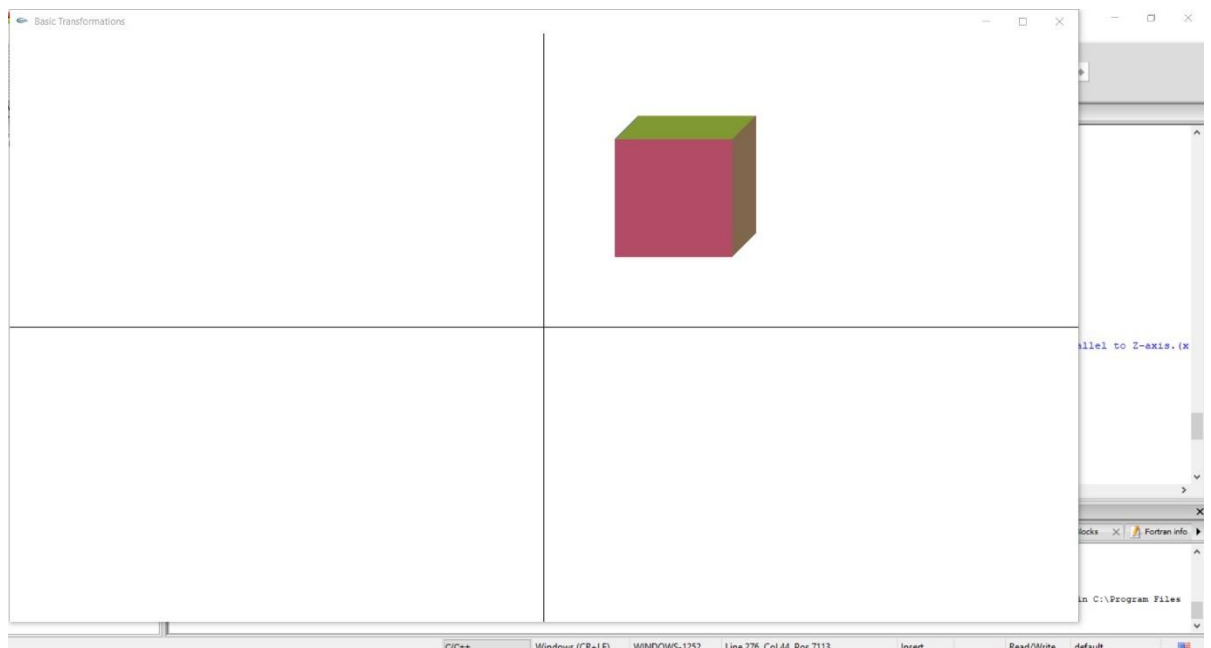

3.) Rotation

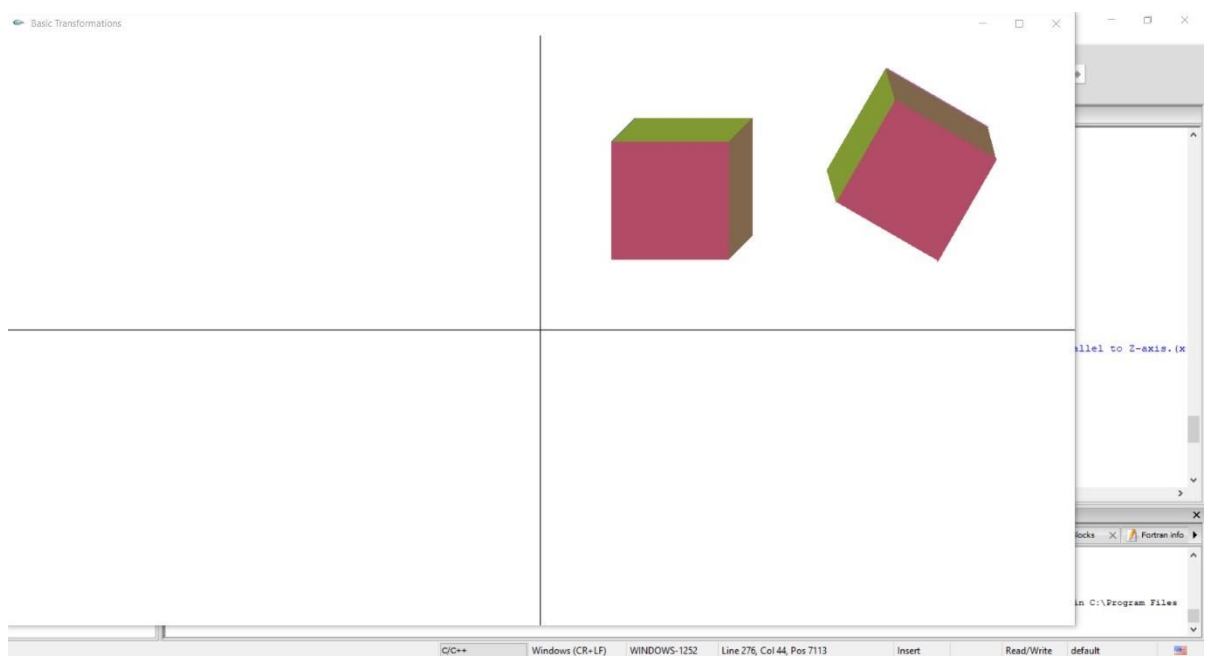

4.) Reflection

