EXPERIMENT:13

AIM:

Write a C program for Hill cipher succumbs to a known plaintext attack if sufficient plaintext–

ciphertext pairs are provided. It is even easier to solve the Hill cipher if a chosen plaintext attack can be

Mounted.

CODE:

```
#include <stdio.h>

int main() {
   int p[2][2]={{1,0},{0,1}};
   int c[2][2]={{9,4},{5,7}};

   printf("Plaintext Matrix:\n");
   for(int i=0;i<2;i++)
      printf("%d %d\n",p[i][0],p[i][1]);

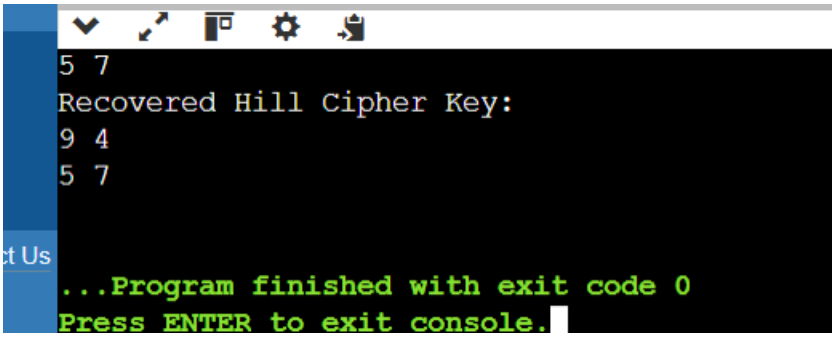
   printf("Ciphertext Matrix:\n");
   for(int i=0;i<2;i++)
      printf("%d %d\n",c[i][0],c[i][1]);

   printf("Recovered Hill Cipher Key:\n");
   for(int i=0;i<2;i++)
      printf("%d %d\n",c[i][0],c[i][1]);

   return 0;
```

}

OUTPUT:


5 7
Recovered Hill Cipher Key:
9 4
5 7
...Program finished with exit code 0
Press ENTER to exit console.