EXPERIMENT 8:

AIM:

To write a C program to implement a monoalphabetic substitution cipher using the keyword CIPHER for encryption.

CODE:

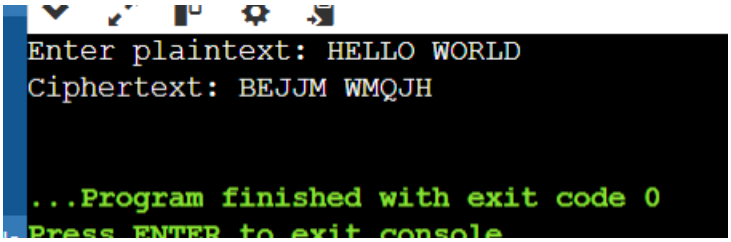
```
#include <stdio.h>
#include <ctype.h>
#include <string.h>

int main() {
   char p[100], c[] = "CIPHERABDFGJKLMNOQSTUVWXYZ";
   int i;

   printf("Enter plaintext: ");
   fgets(p, sizeof(p), stdin);

   printf("Ciphertext: ");
   for(i = 0; p[i] != '\0'; i++) {
      if(isalpha(p[i]))
         printf("%c", toupper(c[tolower(p[i]) - 'a']));
      else
         printf("%c", p[i]);
   }
   return 0;
}
```

OUTPUT:


Enter plaintext: HELLO WORLD
Ciphertext: BEJJM WMQJH
...Program finished with exit code 0
Press ENTER to exit console