VISVESVARAYA TECHNOLOGICAL UNIVERSITY

Belgavi - 590014, Karnataka



MINI PROJECT REPORT

On

"COURIER MANAGEMENT SYSTEM"

Submitted in the partial fulfillment of the requirement for the V Semester

Bachelor of Engineering In COMPUTER SCIENCE AND ENGINEERING

Submitted by

HARSHITHA M KSHEERAJA K 1BO19CS042 1BO19CS053

Under the guidance of DIVYASHREE H.S

Professor, Dept. of CSE BRCE, Bangalore.



2021-2022

Department Of Computer Science and Engineering

BRINDAVAN COLLEGE OF ENGINEERING BANGALORE – 560064

BRINDAVAN COLLEGE OF ENGINEERING

(Affiliated to VTU, Belgaum)

YELAHANKA, Bangalore – 560064



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

CERTIFICATE

This is to certify that the Mini Project work entitled "COURIER MANAGEMENT SYSTEM" is a bonafied work carried out by HARSHITHA M (1BO19CS042) and KSHEERAJA K (1B019CS053) in partial fulfillment for the award of Degree of Bachelors in Computer Science and Engineering of Visvesvaraya Technological University, Belagavi during the year 2021-2022.

It is certified that all the corrections/suggestions indicated for internal assessment have been incorporated in the Report. The report has been approved as it satisfies the academic requirements in respect of Mini-Project work prescribed for said degree.

Signature of the Guide DIVYASHRRE H.S	Signature of the HOD MEENA KUMARI
	Examiners:
Name of the Examiner	Signature with Date
1	
2	

ACKNOWLEDGEMENT

It gives us immense pleasure to present before you our project titled "COURIER MANAGEMENT SYSTEM USING HTML, CSS and PHP". The joy and satisfaction that accompany the successful completion of any task would be incomplete without the mention of those who made it possible.

We are glad to express our gratitude towards our prestigious institution **BRINDAVAN COLLEGE OF ENGINEERING** for providing us with utmost

knowledge, encouragement and the maximum facilities in undertaking this project.

We wish to express a sincere thanks to our respected principal for all their support.

We sincerely acknowledge the guidance and constant encouragement of our mini- project guides, **DIVYASHREE H.S (. Prof. Dept of CSE)**

HARSHITHA M (1B019CS042) AND KSHEERAJA K (1B019CS053)

ABSTRACT

This Courier Management System Project will have different modules. The login section will have login facility for the admin and for the user who will operate this system. While taking orders from its customers, it will take all the details of its customers who is placing the orders and all the details for the recipient such as its address, name, mobile number. Through the tracking id, customers or its recipient will able to track their products from any location using internet. It will provide status of the product after placing orders within 1 minute. The admin can manipulate the data through admin login page and add any new consignment if required. The profile section shows the data of the user and the ricing section of the project shows the price that will be charged for the consignment according to the weight categories.

Using the courier service person can easily send his/her parcel to other person in the particular destination within the time.

CONTENTS

CHAPTERS PAGE NO

Chapter 1 Introduction

Chapter 2 Requirements

Chapter 3 Entity Relationship Diagram

Chapter 4 Schema Diagram

Chapter 5 Implementation

Chapter 6 Snapshots

Conclusion

References

Introduction

This Courier Management System Project will have different modules. The login section will

have login facility for the admin and for the user who will operate this system. While taking

orders from its customers, it will take all the details of its customers who is placing the orders

and all the details for the recipient such as its address, name, mobile number. During billing

process system will generate a tracking id for their products. Through this tracking id,

customers or its recipient will able to track their products from any location using internet. It

will provide status of the product after placing orders within 1 minute.

The courier service is one of the solutions of these problems. It is used to send some things to

any person in the world within time. The courier company has number of branches, which are

spread over the country or the world. So that when person wants to send things then he has to

contact at nearest courier service branch. The courier company creates the schedule & gives

internal/external services. The courier service work as destination office or source office.

In modern age, as time increase, needs & requirements of the person are also increased. They

want more facility & try to do their task quickly & within time. But they can not get all the

things at nearest market or area, so they have to import the things from any place in the world. Within the country, the things can be imported through post service. But it consumes the time & sometimes problem of damage or missing occur. Where as in the international market, the one way is shipping. But it also requires more time.

Motivation behind this project:

To gain maximum business region, customer demands good service. So to make more profit and gain maximum business region, their administration must also have a system to tackle all these problems on time. Its administration can take immediate orders and provide a receipt which will include all the details of the products along with appropriate price to their customers. Thus saving time and eliminating line making process.

Features of Purposed System:

· Easy to update information.

These are the important features of the project Courier Management System:	
\square In computer system of the courier service computation of the rate is easily & quickly	
done.	
☐ Computer system of the courier service provide fast access.	
\square Using this computerized system, bill issued procedure becomes fast.	
$\hfill\Box$ In computer system the person has to fill the various forms & number of copies of the	
forms can be easily generated at a time.	
\Box In computer system, it is not necessary to create the Manifest but we can directly print it,	
which saves our time.	
☐ It contain better storage capacity.	
☐ Accuracy in work.	
☐ Easy & fast retrieval of information.	
☐ Well designed reports.	
\square Decrease the load of the person involve in existing manual system.	
☐ Access of any information individually.	
Work becomes very speedy.	

REQUIREMENTS

System Requirements:

Software Requirement:

- · Apache Server 2.0
- · PHP Version 5.3 or above
- MySQL Version 5.5 or above
- · Latest browser : Chorme, Firefox, Safari etc
- Operating System : Any (Linux, Windows, Mac etc)

Hardware Requirements:

- · Processor Pentium IV or higher version.
- · Ram 128 MB or above
- · Hard Disk 150 MB or above

ENTITY RELATIONSHIP DIAGRAM

An **Entity**—**relationship model** (**ER model**) describes the structure of a database with the help of a diagram, which is known as **Entity Relationship Diagram** (**ER Diagram**). An ER model is a design or blueprint of a database that can later be implemented as a database. The main components of E-R model are: entity set and relationship set.

What is an Entity Relationship Diagram (ER Diagram)?

An ER diagram shows the relationship among entity sets. An entity set is a group of similar entities and these entities can have attributes. In terms of DBMS, an entity is a table or attribute of a table in database, so by showing relationship among tables and their attributes, ER diagram shows the complete logical structure of a database.

The geometric shapes and their meaning in an E-R Diagram. We will discuss these terms in detail in the next section(Components of a ER Diagram) of this guide so don't worry too much about these terms now, just go through them once.

Rectangle: Represents Entity sets.


Ellipses: Attributes

Diamonds: Relationship Set


Lines: They link attributes to Entity Sets and Entity sets to Relationship Set

Double Ellipses: Multivalued Attributes
Dashed Ellipses: Derived Attributes
Double Rectangles: Weak Entity Sets

Double Lines: Total participation of an entity in a relationship set

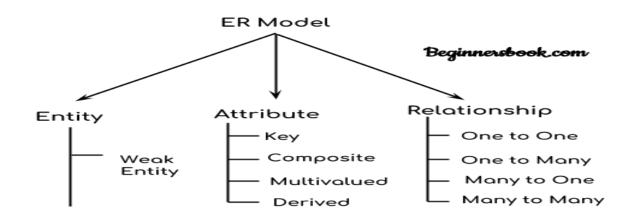

Components of ER Diagram

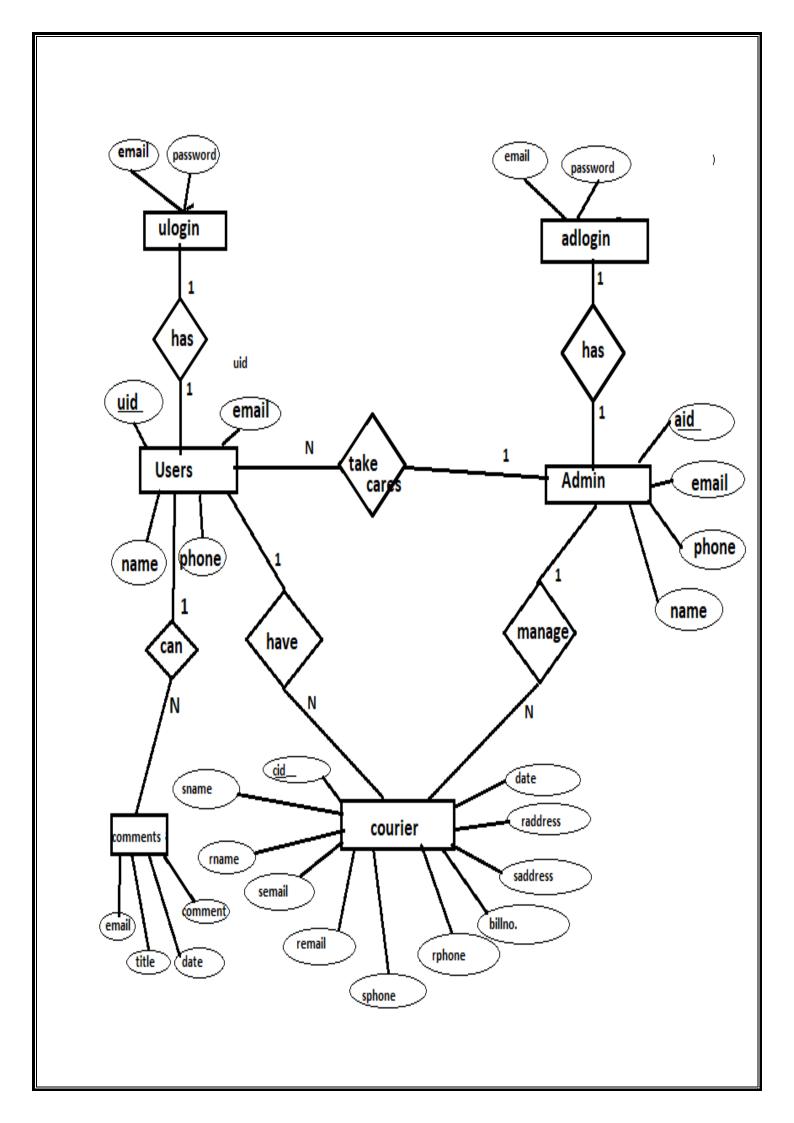

ENTITY RELATIONSHIP SCHEMA DIAGRAM

A database schema is the skeleton structure that represents the logical view of the entire database. It defines how the data is organized and how the relations among them are associated. It formulates all the constraints that are to be applied on the data.

A database schema defines its entities and the relationship among them. It contains a

descriptive detail of the database, which can be depicted by means of schema diagrams.

An Entity-Relationship Model (ERM) is an abstract and conceptual representation of data. Entity-relationship modeling is a database modeling method, used to produce a type of conceptual schema or semantic data model of a system, often a relational database, and its requirements in a top-down fashion.

In order to create an ER schema you must know three main concepts: entity, attribute and relationship.

Entity

Entity is the central concept of the Entity-Relationship model. An entity represents a description of the common features of set of objects of the real world. Examples of entities are Person, Car, Artist, and Album.

Attribute

An Attribute represents the properties of real world objects that are relevant for the application purposes. Attributes are associated with the concept of Entity, with the meaning that all the instances of the entity are characterized by the same set of attributes. In other words, the entity is a descriptor of the common properties of a set of objects, and such properties are expressed as attributes.

Relationship

A Relationship represents semantic connections between entities, like the association between an artist and his/her album, or between an artist and his/her reviews.

The possible values are one and many. Based on their maximum cardinality constraints, relationships are called

- 1."one-to-one", if both relationships roles have maximum cardinality 1,
- 2."one-to-many", if one relationship role has maximum cardinality 1 and the other role has maximum cardinality N,
- 3."many-to-many", if both relationships roles have maximum cardinality N.

E-R Schema Normalization

E-R includes some concept that are not minimal but which can be specified through the usage of the three main concepts of the ER Schema. These concepts are:

Multi value attributes.

Attributes of an object that can take a set of values represented by an entity and a relationship

• Composed attributes.

Attributes with an internal structure (i.e, an address can include different fields), represented by using an entity and a relationship


• N-ary relationships.

Represented by a central entity and two reports

• Relationships with attributes.

Relationships involving N entities

ER SCHEMA DIAGRAM FOR COURIER MANAGEMENT SYSTEM

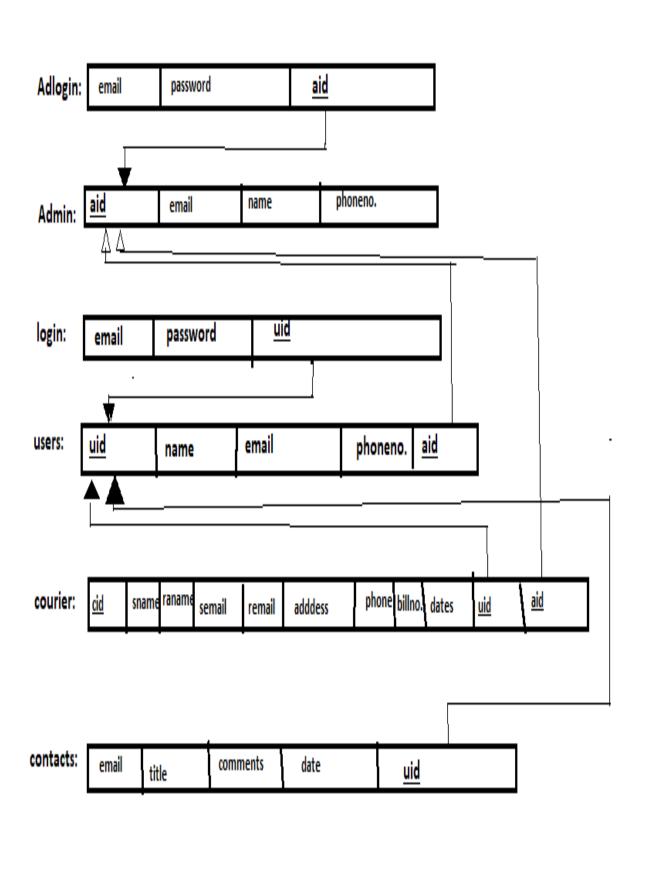

IMPLEMENTATION

FRONTEND CODE

INDEX.PHP

```
<?php
require_once "dbconnection.php";
require_once "session.php";
if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {
  $email = $ POST['email'];
  $password = $_POST['password'];
  $qry = "SELECT * FROM `login` WHERE `email`='$email' AND
`password`='$password''';
  $run = mysqli_query($dbcon, $qry);
  $row = mysqli_num_rows($run);
  if (\text{srow} < 1) {
?>
    <script>
       alert("Opps! plz Enter Your Username and Pswd again..");
       window.open('index.php', '_self');
    </script> <?php
         } else {
           $data = mysqli_fetch_assoc($run);
           $id = $data['u_id']; //fetch id value of user
           $email = $data['email'];
           $_SESSION['uid'] = $id; //now we can use it until session destroy
           $_SESSION['emm'] = $email;
           ?>
    <script>
       alert("स्वागत हैं आपका 🧥 ");
       window.open('home/home.php', '_self');
       // changes made here
    </script> <?php
         }
       }
?>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login</title>
  k rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <style>
    body {
       background-image: url('images/10.jpg');
       background-repeat: no-repeat;
       background-size: cover;
  </style>
</head>
<body>
  <h1 align='center' style="margin: 15px; color:seagreen;font-weight: bold;font-
family: 'Times New Roman', Times, serif''>TYPHOON COURIER SERVICE</h1>
  <hr/>
  <P align='center' style="font-weight: bold;color:orange;font-family:'Times New Roman',</p>
Times, serif">The Fastest Courier Service Ever</P>
  <div>
    <h5><a href="admin/adminlogin.php" style="float: right; margin-right:40px; color:blue;
margin-top:0px">AdminLogin</a></h5>
  </div>
  <div class="container" style="margin-top: 60px; width:50%;">
    <div class="row">
       <div class="col-md-12">
         <h2 style="color: #273c75;">Login</h2>
         Please Fill Your 11
         <!-- <?php echo $error; ?> -->
         <form action="" method="post">
           <div class="form-group">
              <label>Email Address</label>
              <input type="email" name="email" class="form-control" placeholder="Enter</pre>
username/emailId" required />
           </div>
           <div class="form-group">
              <label>Password</label>
              <input type="password" name="password" class="form-control"</pre>
placeholder="Enter your password" required>
           </div>
           <div class="form-group">
              <input type="submit" name="submit" class="btn btn-primary" value="SignIn"</pre>
/>
              <button onclick="window.location.href='resetpswd.php'" class="btn btn-
danger" style="cursor:pointer">Reset Password</button>
```

DBCONNECTION.PHP

```
<?php

$dbcon = mysqli_connect('localhost','root',",'courierdb');

if($dbcon==false)
{
    echo "Database is not Connected!";
}

?>
```

REGISTER.PHP

```
<?php
require_once "dbconnection.php";
require_once "session.php";
if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {
  $fullname = $_POST['name'];
  phn = POST['ph'];
  $email = $_POST['email'];
  $password = $_POST['password'];
  $confirm_password = $_POST['confirm_password'];
  if($password==$confirm_password){
  $qry = "INSERT INTO `users` (`email`, `name`, `pnumber`) VALUES ('$email',
'$fullname', '$phn')";
  $run = mysqli_query($dbcon,$qry);
  if($run==true){
    $psqry = "INSERT INTO `login` (`email`, `password`, `u_id`) VALUES ('$email',
'$password',LAST_INSERT_ID() )";
```

```
$psrun = mysqli_query($dbcon,$psqry);
    ?> <script>
       alert('Registration Successfully :)');
       window.open('index.php','_self');
       </script>
    <?php
  }else{
    ?> <script>
      alert('Password mismatched!!');
       </script>
    <?php
  }
}
?>
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Sign Up</title>
    k rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
    <style>
    body
    background-image:url('images/brr.png');
    background-repeat: no-repeat;
    background-size: cover;
  </style>
  </head>
  <body><br>
    <div class="container">
       <div class="row">
         <div class="col-md-12">
           <h2 style="color:green">Register</h2>
           Please fill this form to create an account.
           <!-- <?php echo $success; ?>
           <?php echo $error; ?> -->
           <form action="" method="post">
              <div class="form-group">
                <label>Full Name</label>
                <input type="text" name="name" class="form-control" required>
              </div>
              <div class="form-group">
                <label>Phone Num.</label>
                <input type="number" name="ph" class="form-control" required>
              </div>
```

```
<div class="form-group">
                <label>Email Address</label>
                <input type="email" name="email" class="form-control" required />
             </div>
             <div class="form-group">
                <label>Password</label>
                <input type="password" name="password" class="form-control" required>
             </div>
             <div class="form-group">
                <label>Confirm Password</label>
                <input type="password" name="confirm_password" class="form-control"</pre>
required>
             </div>
             <div class="form-group">
                <input type="submit" name="submit" class="btn btn-danger"</pre>
value="Register">
             </div>
             Already have an account? <a href="index.php" style="color: red;">Login
here</a>.
           </form>
         </div>
      </div>
      <hr>Notice: If the email Id is registered before, it will not respond.
      In this case, reset your password or register with different email Id....
    </div>
  </body>
</html>
RESET.PHP
<?php
include('dbconnection.php');
session_start();
gd = SESSION['gid'];
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Set Pswd</title>
 <style>
   body {
    background-image: url('images/Reset.jpg');
    background-repeat: no-repeat;
    background-size: cover;
 </style>
</head>
<body>
 <form action="reset.php" method="POST">
   font-weight:bold;border-spacing: 50px 30px;">
    70px;font-weight:bold;">To chalo new Password daalo bina kisi bakchodi k <a>
    New Password
      <input type="password" name="pass" placeholder="enter new password"
style="font-size: 20px;font-weight:bold" required />
    <input type="submit" name="submit" value="Update" style="background-color:</pre>
red; border-radius: 15px; width: 140px; height: 50px;"/>
      </form>
</body>
</html>
<?php
```

RESETPSWD.PHP

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  k rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <title>Conforming</title>
  <style>
    body
    background-image:url('images/brr.png');
    background-repeat: no-repeat;
    background-size: cover;
  </style>
</head>
<body>
  <h1 align='center' style="margin: 15px; color:green;font-weight: bold;font-family:'Times
New Roman', Times, serif">THE BROKEN SAINT</h1><hr/>
  <P align='center' style="font-weight: bold;color:yellow;font-family:'Times New Roman',</p>
Times, serif">The Fastest Courier Service Ever</P>
  <div><h5 ><a href="index.php" style="float: right; margin-right:40px; color:blue; margin-</pre>
top:0px">SignIn</a></h5></div>
    <div class="container" style="margin-top: 60px; width:50%;">
      <div class="row">
        <div class="col-md-12">
           <h2 style="color: #273c75;">Verify The Following Details</h2>
```

```
<form action="resetpswd.php" method="get">
             <div class="form-group">
                <label>Email</label>
                <input type="email" name="email" class="form-control"</pre>
placeholder="Enter emailId" required>
             </div>
             <div class="form-group">
                <input type="submit" name="submit" class="btn btn-primary"</pre>
value="Verify" />
             </div>
             Don't have an account?▶► <a</pre>
href="register.php">Register here</a>.
           </form>
         </div>
      </div>
    </div>
</body>
</html>
<?php
require_once "dbconnection.php";
// require_once "session.php";
if (isset($_REQUEST['submit'])) {
  $email = $_REQUEST['email'];
  $qryy= "SELECT * FROM `login` WHERE `email`='$email'";
  $run= mysqli_query($dbcon,$qryy);
  $row= mysqli_num_rows($run);
  if($row<1){
    ?>
    <script>alert("Opps! Email not matched..Try again or Create New One");
      window.open('resetpswd.php','_self');
    </script> <?php
  }
  else{
    $data= mysqli_fetch_assoc($run);
    $id=$data['u_id'];
    session_start();
    $_SESSION['gid']=$id;
    ?> <script>
      window.open('reset.php','_self');
      </script>
    <?php
```

```
}
}
?>
```

SESSION.PHP

```
<?php
// Start the session
session_start();

// if the user is already logged in then redirect user to welcome page
if (isset($_SESSION["uid"]) && $_SESSION["uid"] === true) {
    header("location: home/home.php");
    exit;
}
?>
```

HEAD.PHP

```
<!-- Admin header style for Admin pages -->
<!DOCTYPE html>
<html>
       <head>
              <title>Header Demo</title>
              <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width,initial-scale=1.0">
    <style>
       *{
    margin: 0;
    padding: 0;
    background-repeat: no-repeat;
    /* body {
    background-image: url('../images/plane.jpg');
    background-size: cover;
    } */
.admintitle{
       position: relative;
       background-color: brown;
       color: #fff;
       height: 100px;
       line-height: 140px;
```

```
}
  </style>
  </head>
   <body bgcolor="#067d64">
```

ADMINLOGIN.PHP

```
<!-- admin logIn page and login logic -->
<?php
session_start();
if (isset($_SESSION['uid'])) {
 header('location: dashboard.php');
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width, initial-scale=1.0">
 <title>Admin Login</title>
</head>
<body bgcolor="#067d64">
 <h5><a href="../index.php" style="float: right; margin-right:50px;
color:#00BCD4">BackToHome</a></h5><br
 <h1 align='center' style="color: #00BCD4;font-size:60px">Admin Login</h1>
  <form action="adminlogin.php" method="POST" style="margin: auto;">
   Email_ID:
       <input type="email" name="uname" require>
     Password:
       <input type="password" name="pass" require>
     <hr>
```

```
<input type="submit" name="login"
value="Login" style="cursor: pointer;">
      </form>
</body>
</html>
<?php
include('../dbconnection.php');
if (isset($_POST['login'])) {
  $ademail = $_POST['uname'];
  $password = $_POST['pass'];
  $qry = "SELECT * FROM `adlogin` WHERE `email` = '$ademail' AND
`password`='$password''';
  $run = mysqli_query($dbcon, $qry);
  $row = mysqli_num_rows($run);
  if (\text{srow} < 1) {
    ?>
    <script>
      alert("Only admin can login..");
      window.open('adminlogin.php', '_self');
    </script><?php
  else {
    $data = mysqli_fetch_assoc($run);
    $id = $data['a_id'];
    $ SESSION['uid'] = $id;
    header('location:dashboard.php');
  }
?>
```

USERDELETED.PHP

```
<!-- this page will delete user & there courier when deleteUser link clicked in deleteusers.php by admin -->

<!php
include('../dbconnection.php');
$em= $_GET['emm'];
```

```
// $qrycr="DELETE FROM `courier` WHERE `semail`='$em'";
  // $runcr = mysqli_query($dbcon,$qrycr);
  // if($runcr==false){
      echo ";
  //
  // }
  $qry = "DELETE FROM `users` WHERE `email`='$em'";
  $run = mysqli_query($dbcon,$qry);
  if($run==true){
  ?> <script>
    alert('User Removed Successfully :)');
    window.open('deleteusers.php','_self');
    </script>
  <?php
}
?>
```

DASHBOARD.PHP

```
<!-- admin dashbord page with options for admin -->
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
}else{
  header('location: ../login.php');
?>
<?php
include('head.php');
<style>
  body {
     background-image: url('../images/21.png');
     background-size: cover;
</style>
<div class="admintitle">
  <div>
  <h5><a href="../index.php" style="float: left; margin-left:20px;
color:aliceblue;">LoginAsUser</a></h5>
```

```
<h5><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
  </div>
  <h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Welcome To
Admin Dashbord</h1>
</div>
<div align="center" style="margin-top:200px;">
<form style="position: center;color:lightblue;font-weight:bold;font-size:50px">
  <!-- <a href="insertdata.php">Insert Data</a><br> -->
  <!-- <a href="updatedata.php">Update Data</a><br>-->
  <a href="deletedata.php">Delete Data</a><br><br>
  <a href="deleteusers.php">Delete Users</a><br><br>
</form>
</div>
</body>
</html>
```

DELETEDATA.PHP

```
<!-- when admin click delete data link, page with filter options-->
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
  }else{
  header('location: ../login.php');
?>
<?php
include('head.php');
?>
<div class="admintitle">
  <div>
  <h5><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
  <h5><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
  </div>
```

```
<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-spacing: 5px 5px;">
 <th>No.</th>
   Items Image
   Sender Name
   Receiver Name
   Sender Email
   Action
 <?php
 include('../dbconnection.php');
 $qryd= "SELECT * FROM `courier`";
 $run= mysqli_query($dbcon,$qryd);
 if(mysqli_num_rows($run)<1){
   echo "No record found..";
 else{
   $count=0;
   while($data=mysqli_fetch_assoc($run))
     $count++;
   ?>
   <?php echo $count; ?>
     <img src="../dbimages/<?php echo $data['image']; ?>" alt="pic" style="max-
width: 100px;"/> 
     <?php echo $data['sname']; ?>
     <?php echo $data['rname']; ?>
     <?php echo $data['semail']; ?>
     <a href="datadeleted.php?bb=<?php echo $data['billno']; ?>">Delete</a>
   <?php
</div>
```

DELETEUSERS.PHP

```
<!-- when admin click delete user link, it displays all users with delete option --> <?php
session_start();
if(isset($_SESSION['uid'])){
```

```
echo "";
  }else{
  header('location: ../login.php');
?>
<?php
include('head.php');
?>
<div class="admintitle">
  <div>
  <h5><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
  <h5><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
  </div>
  <h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Showing All
Users</h1>
</div>
<div style="overflow-x:auto;">
<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-collapse: collapse;">
  <th>>No.</th>
    Users Name
    Email Id
    Action
  <?php
    include('../dbconnection.php');
    $qry= "SELECT * FROM `users`"; //AND `name` LIKE '%name%'
    $run= mysqli_query($dbcon,$qry);
    if(mysqli_num_rows($run)<1){</pre>
      echo "There is no Data in Database";
    }
    else{
      while($data=mysqli_fetch_assoc($run))
        $count++;
      <?php echo $count; ?>
        <?php echo $data['name']; ?>
        <?php echo $data['email']; ?>
```

DATADELETED.PHP

DELETECOURIER.PHP

```
<!-- user will delete there courier themself when click delete link in track section-->
<!php
include('../dbconnection.php');
$billno= $_REQUEST['bb'];

$qry = "DELETE FROM `courier` WHERE `billno`='$billno'";
```

```
$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('Courier Deleted Successfully :)');
    window.open('trackMenu.php','_self');

    </script>
    <?php
}
?>
```

EDITDATA.PHP

```
<!-- php code for updating new info to database, directed from updationtable.php -->
<?php
if(isset($_POST['submit'])){
  include('../dbconnection.php');
  idd = POST[idd'];
  $sname = $ POST['sname'];
  $rname = $_POST['rname'];
  $semail = $ POST['semail'];
  $remail = $ POST['remail'];
  $sphone = $_POST['sphone'];
  $rphone = $_POST['rphone'];
  $sadd = $_POST['saddress'];
  $radd = $ POST['raddress'];
  wgt = POST['wgt'];
  $billn = $_POST['billno'];
  $originalDate = $_POST['date'];
  $newDate = date("Y-m-d", strtotime($originalDate));
  $imagenam = $_FILES['simg']['name'];
  $tempnam = $_FILES['simg']['tmp_name'];
  move_uploaded_file($tempnam,"../dbimages/$imagenam");
  $qry = "UPDATE `courier` SET
`sname`='$sname',`rname`='$rname',`semail`='$semail',`remail`='$remail',`sphone`='$sphone'
,`rphone`='$rphone',`saddress`='$sadd',`raddress`='$radd',`weight`='$wgt',`billno`='$billn',`i
mage = '$imagenam', 'date' = '$newDate' WHERE 'c id' = '$idd'";
  $run = mysqli_query($dbcon,$qry);
  if($run==true){
```

```
?> <script>
    alert('Data Updated Successfully :)');
    window.open('home.php','_self');
    </script>
    <?php
}
</pre>
```

HEADER.PHP

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<title>Navbar with Logo Image</title>
<link rel="stylesheet"</pre>
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css">
<style>
  .bs-example{
    margin: 0;
</style>
</head>
<body>
<div class="bs-example">
  <nav class="navbar navbar-expand-md navbar-light bg-light">
    <a href="home.php" class="navbar-brand">
       <img src="../images/fcmw.png" height="80" alt="CoolBrand">
    <button type="button" class="navbar-toggler" data-toggle="collapse" data-
target="#navbarCollapse">
       <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarCollapse">
       <div class="navbar-nav">
         <a href="home.php" class="nav-item nav-link active">Home</a>
         <a href="price.php" class="nav-item nav-link active">Price</a>
         <a href="courierMenu.php" class="nav-item nav-link">Courier</a>
         <a href="trackMenu.php" class="nav-item nav-link">Track</a>
         <a href="profile.php" class="nav-item nav-link">Profile</a>
```

HOME.PHP

```
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
  }else{
  header('location: ../index.php');
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Home Page</title>
  <style>
    body
    background-image:url('../images/19.png');
    background-repeat: no-repeat;
    background-size: cover;
  </style>
</head>
<body>
  <?php include('header.php'); ?>
  <div align='center' style="font-weight: bold;font-family:'Times New Roman', Times,</pre>
serif"><br><br><br><br>
    <h2>FALCON COURIER MANAGEMENT SERVICE</h2>
```

```
<h3>DBMS MINI PROJECT</h3>
<h6>By Group 24</h6>
</div>
</body>
</html>
```

PRICE.PHP

```
<?php
session_start();
if(isset(\$\_SESSION['uid']))\{
 echo "";
 }else{
 header('location: ../index.php');
?>
<?php
include('header.php');
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width, initial-scale=1.0">
 <title>Pricing</title>
</head>
<body>
 <table width='30%' border="5px solid" style="margin-top:30px;margin-left:auto;margin-
right:auto; font-weight:bold; border-spacing: 5px 5px; border-collapse: collapse; ">
 Weight in KgPrice
 0-1120
 1-2200
 2-4250
 4-5300
```

```
5-7400
 7-above500
 <h3 align="center" style="margin-top:20px;"> As per your courier's weight pay the
amount on:</h3>
 <div style="margin-left:45% ;margin-right:auto ;font-weight:bold;">
 <01>
 UPI: abcd@sbi.com
 GPay: 6362786223
 PhnPay: 3565656555
 </div>
</body>
</html>
```

TRACKMENU.PHP

```
<!-- when track menu is clicked it will show all courier placed by that User-->
<?php
session_start();
if(isset($_SESSION['uid'])){
 echo "";
  }else{
  header('location: ../login.php');
?>
<?php include('header.php'); ?>
<div style="overflow-x:auto;">
<table width='80%' border="1px dash" style="margin-top:30px;margin-left:auto ;margin-
right:auto; font-weight:bold; border-spacing: 5px 5px; border-collapse: collapse; ">
  <th>No.</th>
    Item's Image
    Sender Name
    Receiver Name
    Receiver Email
    Action
  <?php
  include('../dbconnection.php');
```

```
$email = $_SESSION['emm'];
  $qryy= "SELECT * FROM `courier` WHERE `semail`='$email'";
  $run= mysqli_query($dbcon,$qryy);
  if(mysqli num rows($run)<1){
    echo "No record found..";
  }
 else{
    $count=0;
    while($data=mysqli_fetch_assoc($run))
      $count++;
    <?php echo $count; ?>
      <img src="../dbimages/<?php echo $data['image']; ?>" alt="pic" style="max-
width: 100px;"/> 
      <?php echo $data['sname']; ?>
      <?php echo $data['rname']; ?>
      <?php echo $data['remail']; ?>
      <a href="updationtable.php?sid=<?php echo $data['c_id']; ?>">Edit</a> ||
        <a href="deletecourier.php?bb=<?php echo $data['billno']; ?>">Delete</a>|
        <a href="status.php?sidd=<?php echo $data['c id']; ?>">CheckStatus</a>
      <?php
</div>
```

COURIERMENU.PHP

```
<!-- for 'courier' navbar, courier placing page -->
<!php
session_start();
if (isset($_SESSION['uid'])) {
   echo "";
} else {
   header('location: ../index.php');
}

?>
<!php
```

```
include('header.php');
$email = $_SESSION['emm'];
$uid = $_SESSION['uid'];
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width, initial-scale=1.0">
 <title>Place Order</title>
 <style>
   body {
    background-image: url('../images/14.png');
    background-repeat: no-repeat;
    background-size: cover;
 </style>
</head>
<body>
 <form action="courierMenu.php" method="POST" enctype="multipart/form-data">
   <div style="overflow-x:auto;">
    <table border="0px solid" style="margin: auto; font-weight:bold;border-spacing: 5px
15px;">
      140px; height: 50px;">Fill The Details Of Sender & Receiver
        <hr>
        SENDER
        RECEIVER
      <hr>>
        Name:
        <input type="text" name="sname" placeholder="Sender FullName"
required>
```

```
Name:
        <input type="text" name="rname" placeholder="Sender FullName"
required>
      Email:
        <input type="text" name="semail" value="<?php echo $email; ?>"
readonly>
        Email:
        <input type="text" name="remail" placeholder="Receiver EmailId"
required>
      PhoneNo.:
        <input type="number" name="sphone" placeholder="sender number"
required>
        PhoneNo.:
        <input type="number" name="rphone" placeholder="receiver number"
required>
      Address:
        <input type="textfield" name="saddress" placeholder="sender address"
required>
        Address:
        <input type="textfield" name="raddress" placeholder="receiver address"
required>
      <td
Weight:
        <input type="number" name="wgt" placeholder="weights in kg"
required>
        Payment Id:
        <input type="number" name="billno" placeholder="enter transition num"
required>
      <!-- <td>Date:<input type="date" name="date"> -->
        Date:
```

<input name="date" readonly="" type="date" value="<?php echo date('Y-m-d'); ?>"/>	

```
Items Image:
           <input type="file" name="simg" >
         <input type="submit" name="submit"
value="Place Order" style="background-color: orange; border-radius: 15px; width: 140px;
height: 50px;cursor:pointer;">
         </div>
  </form>
</body>
</html>
<?php
if (isset($ POST['submit'])) { //if we'll not give this,it'will submit from with zero values.
  include('../dbconnection.php');
  $sname = $_POST['sname'];
  $rname = $_POST['rname'];
  $semail = $_POST['semail'];
  $remail = $ POST['remail'];
  $sphone = $_POST['sphone'];
  $rphone = $_POST['rphone'];
  $sadd = $_POST['saddress'];
  $radd = $ POST['raddress'];
  wgt = POST['wgt'];
  $billn = $_POST['billno'];
  $originalDate = $_POST['date'];
  $newDate = date("Y-m-d", strtotime($originalDate));
  $imagenam = $_FILES['simg']['name'];
  $tempnam = $_FILES['simg']['tmp_name'];
  move_uploaded_file($tempnam, "../dbimages/$imagenam");
  $qry = "INSERT INTO `courier` (`sname`, `rname`, `semail`, `remail`, `sphone`, `rphone`,
`saddress`, `raddress`, `weight`, `billno`, `image`, `date`, `u_id`) VALUES ('$sname', '$rname',
'$semail', '$remail', '$sphone', '$rphone', '$sadd', '$radd', '$wgt', '$billn', '$imagenam',
'$newDate','$uid');";
  $run = mysqli_query($dbcon, $qry);
  // $trackqry= "INSERT INTO `track` (`u_id`, `c_id`) VALUES ('$uid',
'LAST_INSERT_ID()')";
```

```
/$runtrack = mysqli_query($dbcon, $trackqry);

if ($run == true) {

    ?> <script>
        alert('Order Placed Successfully :)');
        window.open('courierMenu.php', '_self');
        </script>
        <?php
    }
}</pre>
```

STATUS.PHP

```
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
  }else{
  header('location: ../login.php');
<?php include('header.php');</pre>
  include('../dbconnection.php');
  $idd = $_GET['sidd'];
  $qryy= "SELECT * FROM `courier` WHERE `c_id`='$idd'";
  $run= mysqli_query($dbcon,$qryy);
  $data=mysqli_fetch_assoc($run);
  $stdate = $data['date'];
  $tddate= date('Y-m-d');
  if($stdate==$tddate){
     ?>
     <h1 style="margin: 100px;background-color:red;text-align:center">Status >> On The
Way...</h1>
     <br/><hr/>
     <div align='center'>
```

```
<button onclick="window.location.href='trackMenu.php" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
    </div>
     <?php
  }
  else{
    ?>
    <h1 style="margin: 100px;background-color:red;text-align:center">Status >> Items
Delivered..<br/>
HAVE A NICE DAY</h1>
    <br/>hr/>
    <div align='center'>
    <button onclick="window.location.href='trackMenu.php'" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
    </div>
    <?php
  }
?>
```

PROFILE.PHP

```
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
  }else{
  header('location: ../index.php');
?>
<?php
include('header.php');
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Profile</title>
  <link rel="stylesheet"</pre>
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
  <style>
    body {
    background-color: #f9f9fa
```

```
.padding {
padding: 3rem !important
.user-card-full {
overflow: hidden
.card {
border-radius: 5px;
-webkit-box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);
box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);
border: none;
margin-bottom: 30px
.m-r-0 {
margin-right: 0px
.m-l-0 {
margin-left: 0px
.user-card-full .user-profile {
border-radius: 5px 0 0 5px
.bg-c-lite-green {
background: -webkit-gradient(linear, left top, right top, from(#f29263), to(#ee5a6f));
background: linear-gradient(to right, #ee5a6f, #f29263)
.user-profile {
padding: 20px 0
.card-block {
padding: 1.25rem
.m-b-25 {
margin-bottom: 25px
.img-radius {
border-radius: 5px
```

}

```
h6 {
    font-size: 14px
    .card .card-block p {
    line-height: 25px
    @media only screen and (min-width: 1400px) {
    p {
      font-size: 14px
    .card-block {
    padding: 1.25rem
    .b-b-default {
    border-bottom: 1px solid #e0e0e0
    .m-b-20 {
    margin-bottom: 20px
    .p-b-5 {
    padding-bottom: 5px !important
    .card .card-block p {
    line-height: 25px
    .m-b-10 {
    margin-bottom: 10px
    .text-muted {
    color: #919aa3 !important
    .b-b-default {
    border-bottom: 1px solid #e0e0e0
    .f-w-600 {
    font-weight: 600
```

```
}
     .m-b-20 {
    margin-bottom: 20px
     .m-t-40 {
    margin-top: 20px
     .p-b-5 {
     padding-bottom: 5px !important
     .m-b-10 {
    margin-bottom: 10px
     .m-t-40 {
    margin-top: 20px
     .user-card-full .social-link li {
    display: inline-block
     .user-card-full .social-link li a {
     font-size: 20px;
    margin: 0 10px 0 0;
    -webkit-transition: all 0.3s ease-in-out;
    transition: all 0.3s ease-in-out
  </style>
</head>
<body>
<?php
include('../dbconnection.php');
$id= $_SESSION['uid'];
$qry= "SELECT * FROM `users` WHERE `u_id`='$id'";
$run= mysqli_query($dbcon,$qry);
$data = mysqli_fetch_assoc($run);
?>
```

```
<div class="page-content page-container" id="page-content">
  <div class="padding">
    <div class="row container d-flex justify-content-center">
      <div class="col-xl-6 col-md-12">
        <div class="card user-card-full">
          <div class="row m-l-0 m-r-0">
            <div class="col-sm-4 bg-c-lite-green user-profile">
               <div class="card-block text-center text-white">
                 <div class="m-b-25"> <img
src="https://img.icons8.com/bubbles/100/00000/user.png" class="img-radius" alt="User-
Profile-Image"> </div>
                 <h3 class="f-w-600"><?php echo $data['name']; ?></h3>
                 user <i class=" mdi mdi-square-edit-outline feather icon-edit m-
t-10 f-16" > </i>
               </div>
             </div>
            <div class="col-sm-8">
               <div class="card-block">
                 <h6 class="m-b-20 p-b-5 b-b-default f-w-600">Information</h6>
                 <div class="row">
                   <div class="col-sm-6">
                     Email
                     <h6 class="text-muted f-w-400"><?php echo $data['email'];
?></h6>
                   </div>
                   <div class="col-sm-6">
                     Phone
                     <h6 class="text-muted f-w-400"><?php echo $data['pnumber'];
?></h6>
                   </div>
                 </div>
                 <div class="row">
                 <hr><hr><hr><
                 </div>
                 <h6>Leave it when u can't hold it..</h6>
                 </div>
             </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
</body>
</html>
```


UPDATIONTABLE.PHP

```
<!-- when we click update any items, it gives table with prev info -->
<?php
session start();
if(isset($ SESSION['uid'])){
 echo "";
 }else{
 header('location: ../index.php');
?>
<?php
 include('../dbconnection.php');
 $idd= $_GET['sid'];
 $uqry= "SELECT * FROM `courier` WHERE `c_id`='$idd'";
 $run= mysqli_query($dbcon,$uqry);
 $data = mysqli_fetch_assoc($run);
?>
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width, initial-scale=1.0">
 <title>Place Order</title>
</head>
<body>
<form action="editdata.php" method="POST" enctype="multipart/form-data">
<div style="overflow-x:auto;">
 font-weight:bold;border-spacing: 5px 15px;">
   height: 50px;">Update The Details As Required
   SENDERRECEIVER
   Name:<tp>echo
$data['sname'];?>" required>
```

```
Name:<tp>"rname" value="<?php echo"</td>
$data['rname'];?>" required>
   Email:<input type="text" name="semail" value="<?php echo
$data['semail'];?>" readonly>
     Email:<input type="text" name="remail" value="<?php echo
$data['remail'];?>" required>
   PhoneNo.:<tp>"number" name="sphone" value="<?php echo" value="<?php echo" value="<pre>td
$data['sphone'];?>" required>
     PhoneNo.:<tp>"number" name="rphone" value="<?php echo"</td>
$data['rphone'];?>" required>
   Address:<tp>type="textfield" name="saddress" value="<?php echo
$data['saddress'];?>" required>
     Address:<tp>tqpe="textfield" name="raddress" value="<?php echo
$data['raddress'];?>" required>
   <td
Weight:<input type="number" name="wgt" value="<?php echo
$data['weight'];?>" required>
     ReceiptNo.:<input type="number" name="billno" value="<?php echo
$data['billno'];?>" required>
   Date:<tp>td>="date" value="<?php echo date('Y-m-
d'); ?>" readonly />
     Items Image:<input type="file" name="simg" value="<?php echo
$data['image'];?>" >
   <input type="hidden" name="idd" value="<?php echo $data['c_id']; ?>" />
     <input type="submit" name="submit"
value="Update" style="background-color: orange; border-radius: 15px; width: 140px; height:
50px;cursor:pointer;">
   </div>
</form>
</body>
```

BACKEND CODE

```
-- phpMyAdmin SQL Dump
-- version 5.0.3
-- https://www.phpmyadmin.net/
-- Host: 127.0.0.1
-- Generation Time: Dec 30, 2021 at 11:41 AM
-- Server version: 10.4.14-MariaDB
-- PHP Version: 7.4.11
SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT
*/;
/*!40101 SET
@OLD CHARACTER SET RESULTS=@@CHARACTER SET RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION
/*!40101 SET NAMES utf8mb4 */;
-- Database: `courierdb`
-- Table structure for table `adlogin`
CREATE TABLE `adlogin` (
 'email' varchar(50) DEFAULT NULL,
 `password` varchar(50) DEFAULT NULL,
 `a_id` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `adlogin`
INSERT INTO `adlogin` (`email`, `password`, `a_id`) VALUES
('premkumar1215225@gmail.com', '1215225', 1),
('himanshu.18is027@cambridge.edu.in', '1cd18is027', 2);
```

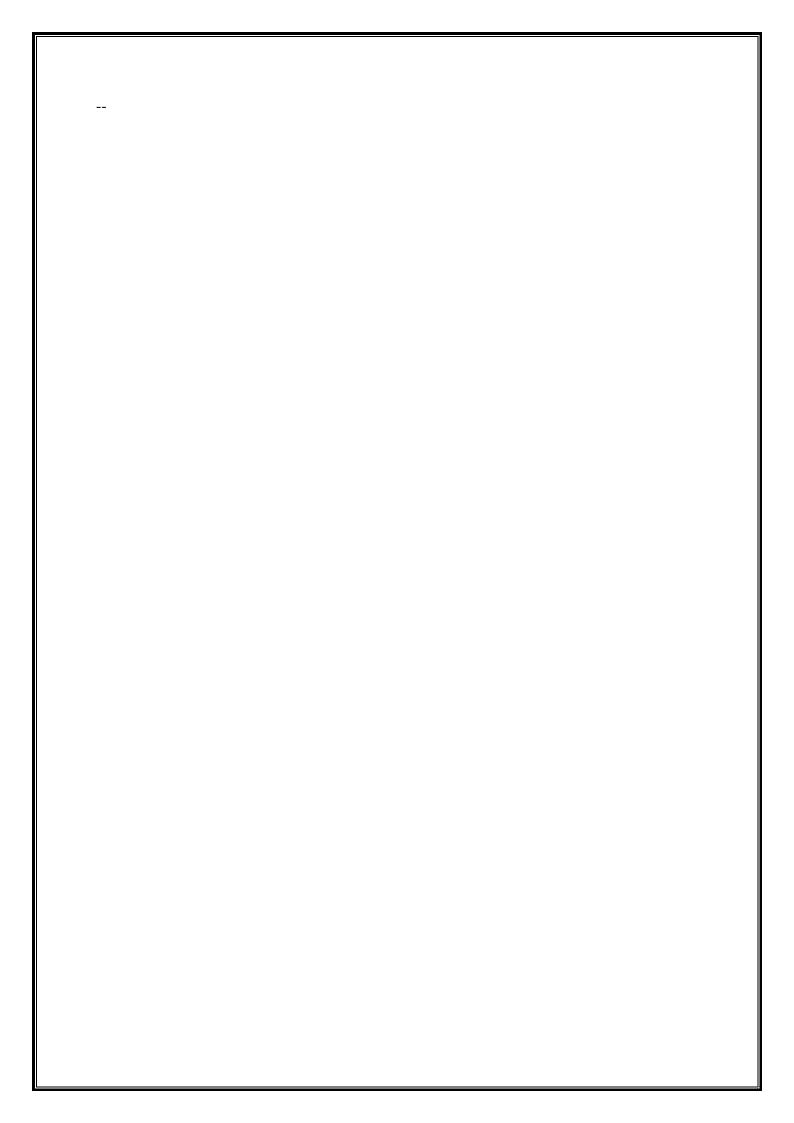

```
-- Table structure for table `admin`
CREATE TABLE `admin` (
 `a_id` int(11) NOT NULL,
 'email' varchar(50) NOT NULL,
 `name` varchar(50) DEFAULT NULL,
 `pnumber` int(14) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `admin`
INSERT INTO `admin` (`a_id`, `email`, `name`, `pnumber`) VALUES
(1, 'admin1@gmail.com', 'Admin1', 12345),
(2, 'admin2@gmail.com', 'Admin2', 12345);
-- Table structure for table `contacts`
CREATE TABLE `contacts` (
 'id' int(11) NOT NULL,
 `email` varchar(50) NOT NULL,
 `subject` varchar(30) NOT NULL,
 'msg' varchar(300) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `contacts`
INSERT INTO `contacts` (`id`, `email`, `subject`, `msg`) VALUES
(1, 'harshitha@gmail.com', 'delay', 'I have courier 2 weeks ago but its not delivered yet..'),
(2, 'ksheeraja@gmail.com', 'Delay', 'gjndfjkgnhdfjkgn');
-- Table structure for table `courier`
CREATE TABLE `courier` (
 `c_id` int(11) NOT NULL,
 `u id` int(11) DEFAULT NULL,
 `semail` varchar(50) DEFAULT NULL,
 'remail' varchar(50) DEFAULT NULL,
```

```
`sname` varchar(50) DEFAULT NULL,
 `rname` varchar(50) DEFAULT NULL,
 `sphone` varchar(20) DEFAULT NULL,
 `rphone` varchar(20) DEFAULT NULL,
 `saddress` varchar(50) DEFAULT NULL,
 `raddress` varchar(50) DEFAULT NULL,
 `weight` int(11) DEFAULT NULL,
 'billno' int(11) NOT NULL,
 `image` text DEFAULT NULL,
 `date` date NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `courier`
INSERT INTO 'courier' ('c_id', 'u_id', 'semail', 'remail', 'sname', 'rname', 'sphone',
`rphone`, `saddress`, `raddress`, `weight`, `billno`, `image`, `date`) VALUES
(7, 4, 'harshitha@gmail.com', 'ksheeraja@gmail.com', 'Harshitha', 'Ksheeraja', '06362786223',
'6526652', 'BRCE college, Bangalore, Karnataka', 'Girls Hostel of Brindavan College Of
Engineering, j', 2, 22, 'cddd.jpeg', '2021-12-20'),
(8, 4, 'harshitha@gmail.com', 'bhumika@gmail.com', 'Harshitha', 'Bhumika', '06362786223',
'06362786223', 'BRCE college, Bangalore, Karnataka', 'Girls hostel of Brindavan College Of
Engineering, j', 2, 3263, 'fc.png', '2021-12-20');
-- Table structure for table `login`
CREATE TABLE `login` (
 'email' varchar(50) DEFAULT NULL,
 'password' varchar(50) DEFAULT NULL,
 `u id` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `login`
INSERT INTO `login` (`email`, `password`, `u_id`) VALUES
('ksheeraja@gmail.com', '12345', 1),
('harshitha@gmail.com', '12345', 4);
-- Table structure for table `users`
```

```
CREATE TABLE `users` (
 `u_id` int(11) NOT NULL,
 'email' varchar(50) NOT NULL,
 `name` varchar(50) DEFAULT NULL,
 `pnumber` int(14) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
-- Dumping data for table `users`
INSERT INTO `users` (`u_id`, `email`, `name`, `pnumber`) VALUES
(1, 'ksheeraja@gmail.com', 'Kshee', 56665),
(4, 'harshitha@gmail.com', 'Harshii', 2147483647);
-- Indexes for dumped tables
-- Indexes for table `adlogin`
ALTER TABLE 'adlogin'
 ADD KEY `a_id` (`a_id`);
-- Indexes for table `admin`
ALTER TABLE `admin`
 ADD PRIMARY KEY ('a id'),
 ADD UNIQUE KEY 'email' ('email');
-- Indexes for table `contacts`
ALTER TABLE `contacts`
 ADD PRIMARY KEY ('id');
-- Indexes for table `courier`
ALTER TABLE `courier`
 ADD PRIMARY KEY (`c_id`),
ADD UNIQUE KEY `billno` (`billno`),
ADD KEY `u_id` (`u_id`);
-- Indexes for table `login`
```

```
ALTER TABLE 'login'
 ADD KEY `u_id` (`u_id`);
-- Indexes for table `users`
ALTER TABLE `users`
 ADD PRIMARY KEY (`u_id`),
ADD UNIQUE KEY 'email' ('email');
-- AUTO_INCREMENT for dumped tables
-- AUTO_INCREMENT for table `admin`
ALTER TABLE `admin`
MODIFY `a_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;
-- AUTO_INCREMENT for table `contacts`
ALTER TABLE `contacts`
 MODIFY 'id' int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;
-- AUTO_INCREMENT for table `courier`
ALTER TABLE `courier`
MODIFY `c_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=10;
-- AUTO_INCREMENT for table `users`
ALTER TABLE `users`
MODIFY `u_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=5;
-- Constraints for dumped tables
-- Constraints for table `adlogin`
ALTER TABLE `adlogin`
```

ADD CONSTRAINT `adlogin_ibfk_1` FOREIGN KEY (`a_id`) REFERENCES `admin` (`a_id`);

--

-- Constraints for table `courier`

--

ALTER TABLE `courier`
ADD CONSTRAINT `courier_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users` (`u_id`) ON DELETE CASCADE;

--

-- Constraints for table `login`

--

ALTER TABLE `login`
ADD CONSTRAINT `login_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users`
(`u_id`) ON DELETE CASCADE;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */; /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */; /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;

END OF IMPLEMENTATION CODE OF THE PROJECT

CHAPTER 6

SNAPSHOTS


1.USER LOGIN PAGE




2. HOME PAGE




3. PRICING OF COURIER

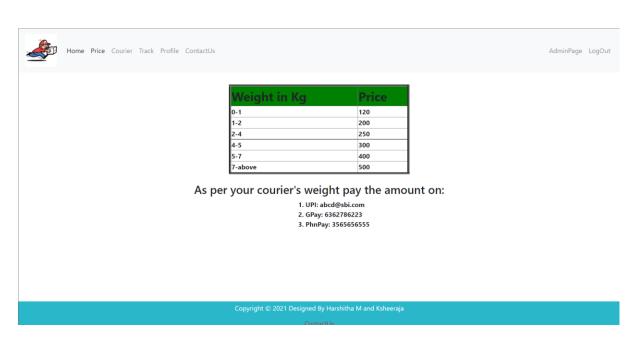


4. COURIER SENDING PAGE

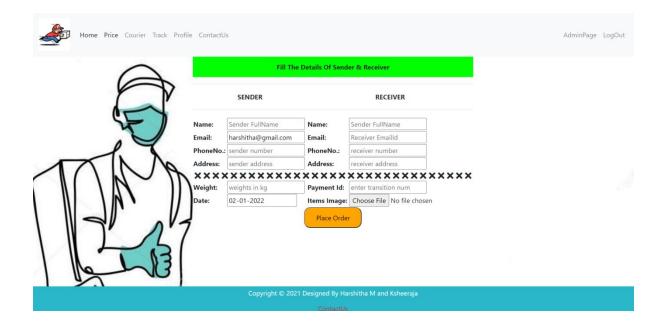


5. TRACK CONSIGNMENT PAGE

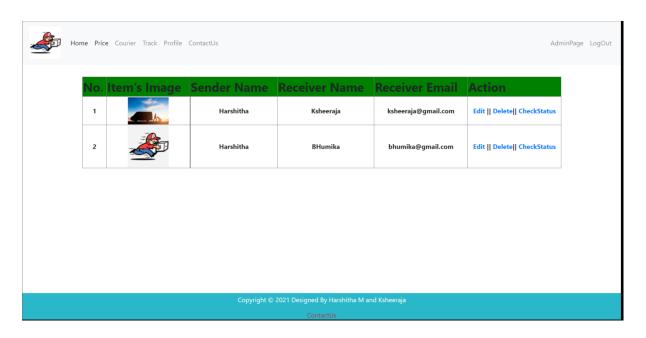


6. TRACK STATUS OF PARCEL

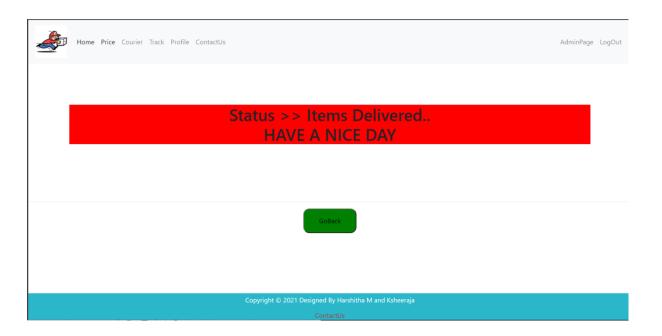


7. PROFILE VIEW SECTION

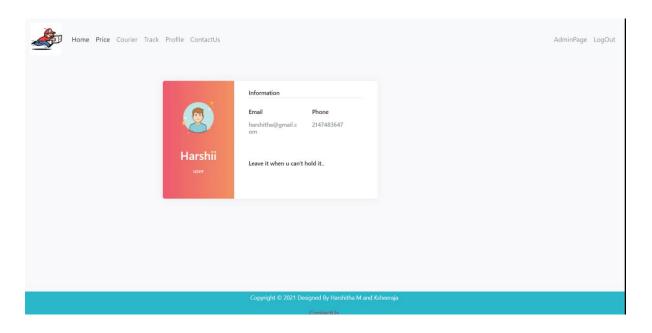

8. CONTACT US SECTION

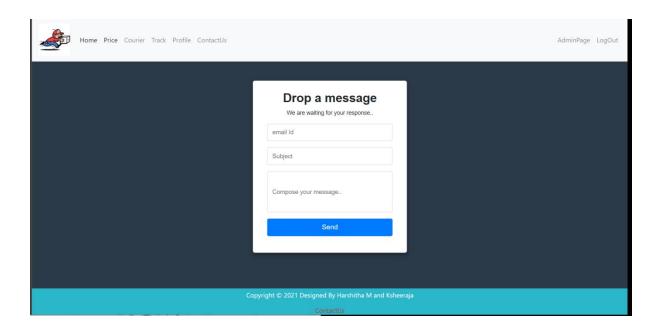

9. REGISTER NEW USERS PAGE

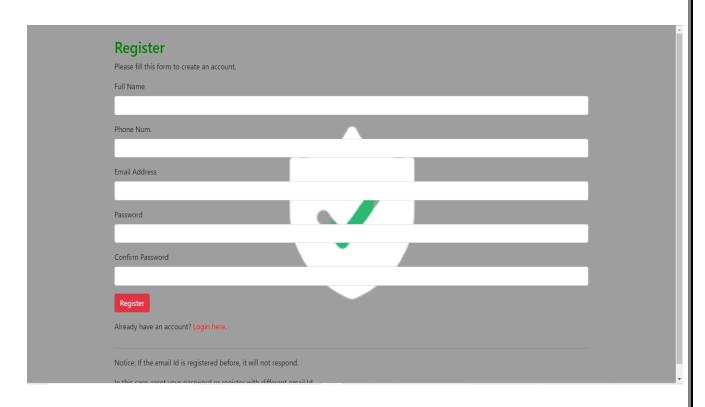

10. ADMIN LOGIN PAGE




11. ADMIN PAGE




12. ADMIN'S DELETE DATA PAGE




13. ALL THE USER DETAILS PAGE

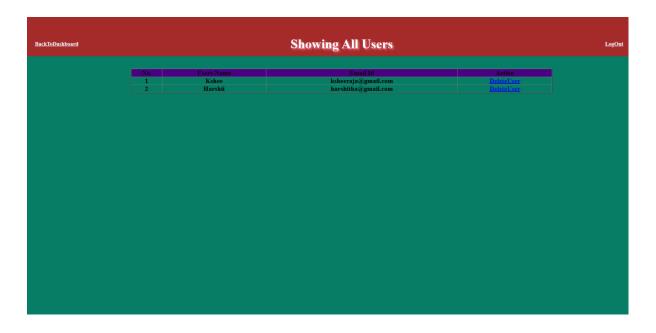

14. UPDATE COURIER DETAILS PAGE.



15. LIST OF ALL THE TABLES IN PROJECT

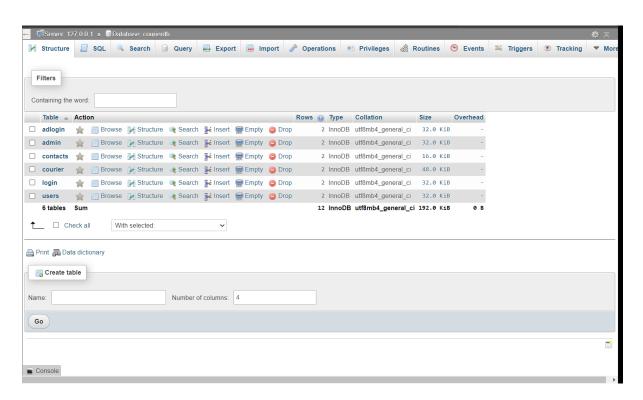

CONCLUSION

System development is also considered as a process backed by engineering approach. We have tried to incorporate & develop new particles for our education particles have been followed not during the but coding but also during the analysis, design phases & in documentation.

Courier agency is considered as an expansion of business relations. It contributes a lot by providing quick & fast services of sending documents letters (formal & informal both) to business as it enables any business to flourish

Following modification or upgrades can be done in system.

- 1) More than one company can be integrated through this software.
- 2) Web services can be used to know exact delivery status of packets.
- 3) Client can check the repacked delivery status online.
- 4) Distributed database approach in place of centralized approach

References and B	ibliography:	
□ http://www.bluedart.co	om/	
☐ http://www.xamppserv	ver.com/en/	
□ http://www.php.net/		
http://youtube.com/		
☐ http://www.tutorialspo	oint.com/mysql/	
https://apache.org/doc	es/2.0/misc/tutorials.html	