

Phase 5 — Project Development Phase

5.1 Development Overview

This phase represents the actual implementation of the planned Incident Management lifecycle in ServiceNow.

5.2 Development Step 1 — Service Configuration

Create:

Service: Remote Access

Operational Status: Operational

The screenshot shows the ServiceNow 'Remote Access' service configuration form. The form is titled 'Service Remote Access' and includes several fields for configuration. The 'Name' field is set to 'Remote Access'. The 'Model ID' field is empty. The 'Owned by' field is empty. The 'Business criticality' field is set to '2 - somewhat critical'. The 'Version' field is empty. The 'Used for' field is set to 'Production'. The 'Operational status' field is set to 'Operational'. The 'Service classification' field is set to 'Business Service'. The 'Comments' field is empty. The 'Approval group' field is empty. The 'Support group' field is empty. The 'Change Group' field is empty. The 'Managed by' field is empty. The 'SLA' field is empty. The 'Location' field is empty. The 'Vendor' field is empty. The form includes buttons for 'Open in CMDB Workspace', 'Update', 'Convert to Application Service', and 'Delete'. Below the form, there is a 'Related Items' section with a search bar and a 'Search for CI' button. Below that, there is a 'Related Links' section with links to 'Convert to business service', 'Convert to technology management service', and 'Subscribe'. The bottom of the screenshot shows a Windows taskbar with the date and time '19:12 06-09-2026'.

ServiceNow Developers | INC0010015 | Service Operatio... | Remote Access | Service | Service... | GitHub | Ask Gemini

dev339184.service-now.com/cmdb_ci_service.do?sys_id=20e657c38303071089715929feaad30e&sysparm_record_target=cmdb_ci_service&sysparm_record_row=1&sysparm_record_rows=22&s...

Service Remote Access

Open in CMDB Workspace Update Convert to Application Service Delete

Name Remote Access

Model ID

Owned by

Business criticality 2 - somewhat critical

Version

Used for Production

Operational status Operational

Service classification Business Service

Comments

Approval group

Support group

Change Group

Managed by

SLA

Location

Vendor

Related Items

Search for CI

Open in CMDB Workspace Update Convert to Application Service Delete

Related Links

[Convert to business service](#)

[Convert to technology management service](#)

[Subscribe](#)

19:12 06-09-2026

Then create:

Service Offering: Corporate VPN

Parent: Remote Access

Operational Status: Operational

The screenshot shows the ServiceNow interface for creating a new Service Offering. The form is titled "Offering Corporate VPN". It contains several input fields and dropdown menus. The "Name" field is filled with "Corporate VPN". The "Parent" field is set to "Remote Access". The "Operational status" is set to "Operational". The "Used for" dropdown is set to "Production". The "Business criticality" dropdown is set to "2 - somewhat critical". There are also fields for "Approval group", "Support group", "Change group", "Managed by", "Version", "SLA", and "Location". At the bottom, there are text areas for "Short Description", "Description", and "Comments". The form has buttons for "Open in CMDB Workspace", "Update", and "Delete".

These records establish the service hierarchy required for incident tracking.

5.3 Development Step 2 — Incident Creation

Create a new incident from:

Service Operations Workspace → List → Incidents → Open → New

Example:

Short Description:

Unable to connect to Corporate VPN from home office

Caller:

Michael Hoefer

Assignment Group:

Service Desk

The screenshot displays the ServiceNow Service Desk interface. The left sidebar shows a navigation menu with categories like Interactions, Requests, Catalog tasks, Incidents, and Problems. The 'Incidents' category is expanded, and the 'Open' filter is selected. The main area shows a list of incidents under the heading 'Incidents - Open' with 43 items. The table columns include Number, Short description, Caller, Priority, State, Service, and Assignment group. The incidents listed are:

Number	Short description	Caller	Priority	State	Service	Assignment group
INC0010015	Unable to connect to Corporate VPN	User 1	5 - Planning	Resolved		
INC0010009	Unable to connect to Corporate VPN	User 1	5 - Planning	Resolved		
INC0010001	Unable to connect to Corporate VPN from home office	Michael Hoefer	4 - Low	Resolved	Network	Davi
INC0009009	Unable to access the shared folder.	David Miller	4 - Low	New		
INC0009005	Email server is down.	David Miller	1 - Critical	New		
INC0009001	Unable to post content on a Wiki page	David Miller	3 - Moderate	New		

The source documentation uses this VPN incident as the implementation scenario.

5.4 Development Step 3 — Incident Classification

Update:

Channel → Phone

Category → Network

Subcategory → VPN

Urgency → 2 - Medium

Service → Remote Access

Service Offering → Corporate VPN

Configuration Item → ThinkStationS20

Add appropriate work notes and assign the incident to the responsible agent.


5.5 Development Step 4 — Knowledge Integration

Use **Agent Assist** to identify relevant knowledge articles.

The implementation should verify:

- Knowledge articles appear.
- Relevant article can be opened.

- Article can be marked Helpful.
- Article can be attached to the incident.
- Attached article appears in the Activity Log.

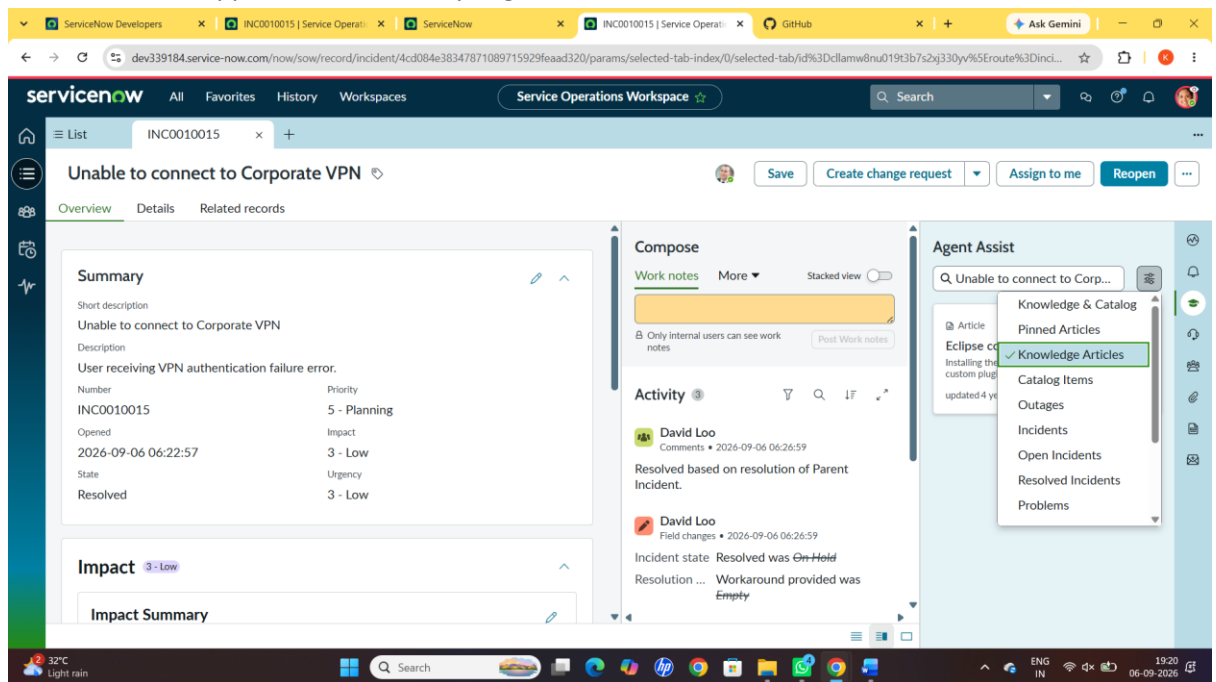

5.6 Development Step 5 — Reassignment & Escalation

Update incident participants through:

- Watch List
- Work Notes List

Then reassign the incident:

Assignment Group → Network

The assignment process allows the Level 2 support team to continue investigation and resolution.

5.7 Development Step 6 — Level 2 Investigation

The Network team investigates the VPN incident.

The Level 2 technician verifies:

- Incident description
- Knowledge articles
- SLA information
- Related records

This ensures that the advanced support team has all required information for diagnosis and resolution.

5.8 Development Step 7 — Emergency Change

When a change is required to resolve the incident:

Configuration Item → PowerEdge

The incident is then placed on hold:

State → On Hold

On Hold Reason → Awaiting Change

This connects incident resolution with the Change Management process.

5.9 Development Step 8 — Child Incident

If multiple users experience the same problem, create a child incident from:

Related Records → Child Incidents → New

Example:

Short Description:

Unable to connect to Corporate VPN

Description:

User receiving VPN authentication failure error.

The screenshot displays the ServiceNow user interface for a specific incident record. The browser tabs at the top include 'ServiceNow Developers', 'INC0010015 | Service Operat...', 'ServiceNow', 'INC0010001 | Service Operat...', and 'GitHub'. The URL bar shows a long ServiceNow record ID. The main header of the ServiceNow page includes navigation links like 'All', 'Favorites', 'History', and 'Workspaces', along with a search bar and a 'Service Operations Workspace' dropdown. The incident title is 'Unable to connect to Corporate VPN from home office'. Below the title, there are tabs for 'Overview', 'Details', and 'Related records'. The 'Related records' tab is active, showing a table of 'Child Incidents'. The table has columns for 'Number', 'Short description', 'Caller', 'Category', and 'Service'. One incident is listed with the number 'INC0010015' and the description 'Unable to connect to Corporate VPN'. To the right of the table, there is a 'Record Information' panel showing 'SLAs and timings' (Response SLA: Completed, Resolution SLA: Paused), 'Caller' information (Michael Hoefer, Development, Brasilia - 06:52:25, America/Los_Angeles), and links for 'Recent incidents', 'Recent interactions', and 'Assigned assets'. The bottom of the screen shows a Windows taskbar with various application icons and a system tray indicating the time as 19:23 on 06-09-2026.

5.10 Development Step 9 — Incident Resolution

Document the probable cause:

PowerEdge service was suspended and required restart.

Then record the resolution:

Resolution Code:

Workaround provided

Resolution Notes:

Restarted VPN-SRV-02 service as per emergency change request.

Finally, resolve the incident.

5.11 Development Step 10 — Knowledge Creation

After resolving the incident:

1. Select **Create Knowledge**.
 2. Choose **IT** as the Knowledge Base.
 3. Select **Standard** article template.
 4. Verify the incident details.
 5. Save the article.
 6. Verify the created knowledge article under Related Records.
-

5.12 Development Step 11 — Final Validation

The completed implementation should verify:

Validation Item	Expected Result
Parent Incident	Resolved
Child Incident	Resolved
Activity	Resolution reflected
Change Request	Linked
Knowledge Article	Created
SLA	Visible
Related Records	Correctly associated