



PRACTICAL - 5

1.

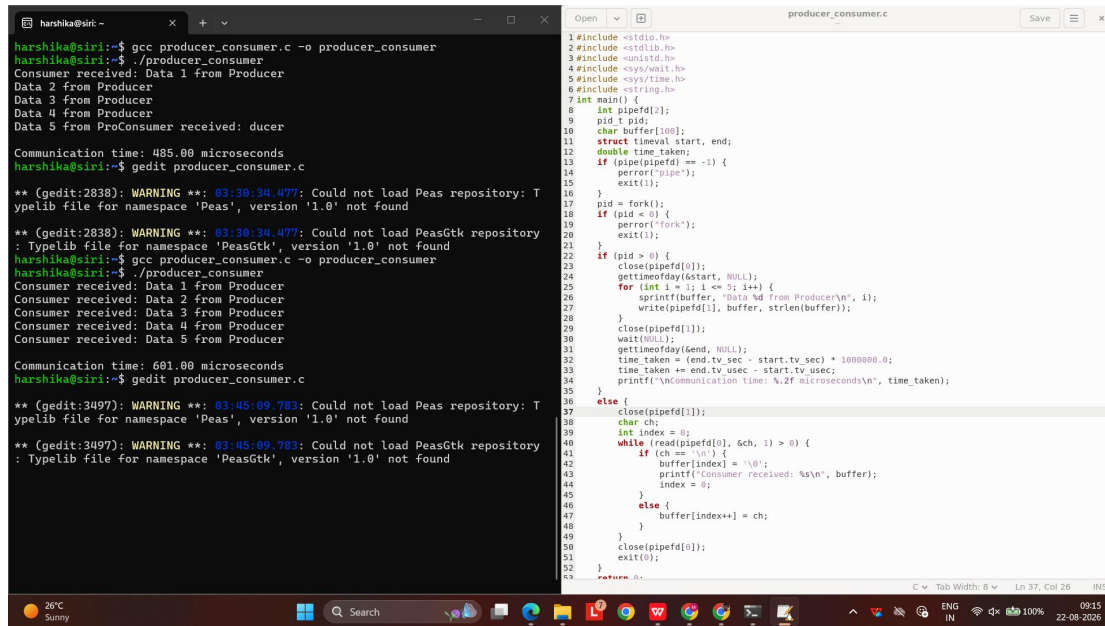

The screenshot shows a terminal window on the left and a code editor on the right. The terminal displays the execution of a C program named `producer_consumer.c`. The program uses a pipe to communicate between a producer and a consumer. The producer sends data to the consumer, and the consumer prints it. The terminal output shows the producer sending data 1 through 5, and the consumer receiving and printing it. The communication time is 485.00 microseconds. The code editor shows the source code of `producer_consumer.c`, which includes headers for `stdio.h`, `stdlib.h`, `unistd.h`, `sys/wait.h`, `sys/time.h`, and `string.h`. The `main` function forks a child process. The parent process (producer) writes data to the pipe, and the child process (consumer) reads data from the pipe and prints it. The program uses `waitpid` to wait for the child to finish.

2.

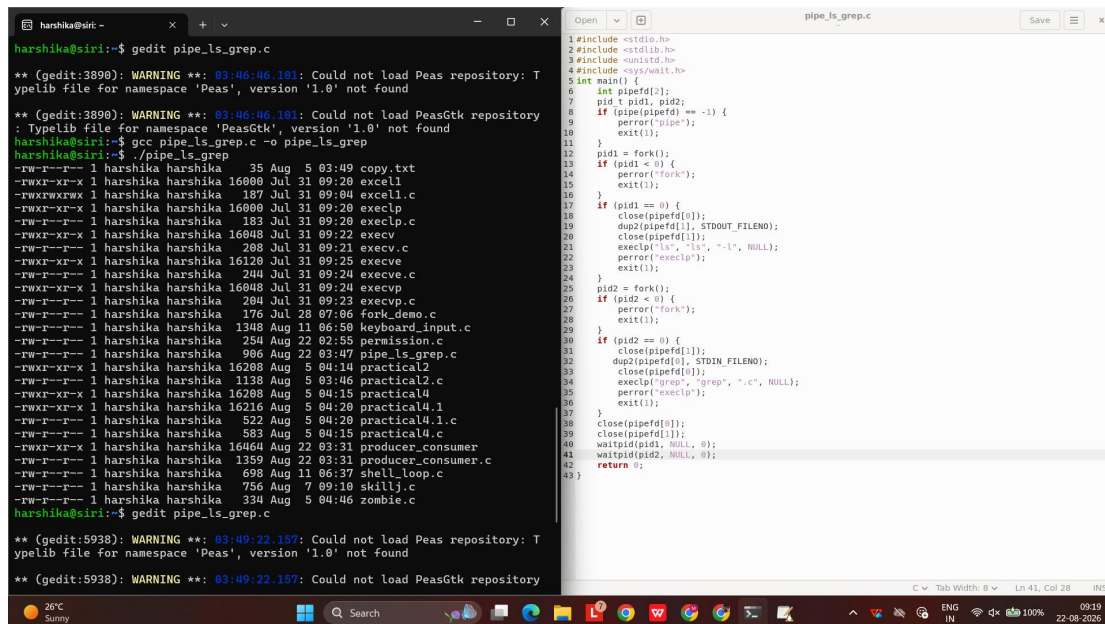

The screenshot shows a terminal window on the left and a code editor on the right. The terminal displays the execution of a C program named `pipe_ls_grep.c`. The program uses a pipe to communicate between a producer and a consumer. The producer sends data to the consumer, and the consumer prints it. The terminal output shows the producer sending data 1 through 5, and the consumer receiving and printing it. The communication time is 485.00 microseconds. The code editor shows the source code of `pipe_ls_grep.c`, which includes headers for `stdio.h`, `stdlib.h`, `unistd.h`, `sys/wait.h`, `sys/time.h`, and `string.h`. The `main` function forks a child process. The parent process (producer) writes data to the pipe, and the child process (consumer) reads data from the pipe and prints it. The program uses `waitpid` to wait for the child to finish.