


Apple Pay Integration Guide for Headless BigCommerce App

Overview

This document outlines the comprehensive process for integrating Apple Pay into a headless BigCommerce application using the BigCommerce Payments API. The integration follows a 5-step process that ensures secure and efficient payment processing.

Reference Materials

- [Process Payments API](#)
- [Create Payment Access Token API](#)
- [Get Payment Methods API](#)
- [Create an Order API](#)
- [Create a Cart API](#)
- [Payments API Sequence Diagram](#)
- [BigCommerce Payments Documentation](#)

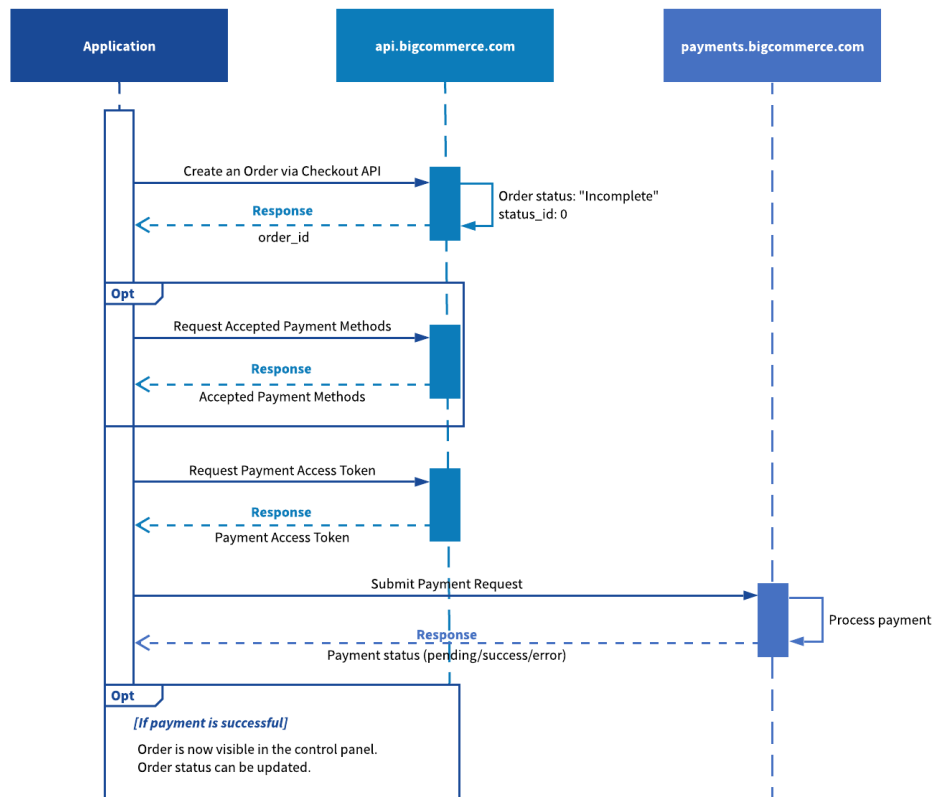

Integration Flow – 5 Steps

Step 1: Create Cart and Get Checkout ID

Endpoint: POST https://api.bigcommerce.com/stores/{store_hash}/v3/carts

Purpose: Create a shopping cart and obtain the checkout ID required for subsequent operations.

Request Example:

POST /v3/carts

Content-Type: application/json

X-Auth-Token: {access_token}

```
{
  "line_items": [
    {
      "quantity": 1,
      "product_id": 123,
      "variant_id": 456
    }
  ],
  "channel_id": 1
}
```

Response Example:

```
{
  "data": {
    "id": "cart-uuid",
    "checkout_url": "https://store.com/checkout/cart-uuid",
    "line_items": {...},
    "created_time": "2023-01-01T00:00:00+00:00"
  }
}
```

Key Information:

- Extract the cart ID (used as checkout ID in later steps).
- Store the cart ID securely for the session.

Step 2: Create Order via Checkout ID

Endpoint: POST

https://api.bigcommerce.com/stores/{store_hash}/v3/checkouts/{checkout_id}/orders

Purpose: Convert the cart into an order for payment processing.

Request Example:

POST /v3/checkouts/{checkout_id}/orders

Content-Type: application/json

X-Auth-Token: {access_token}

```
{
  "billing_address": {
    "first_name": "John",
    "last_name": "Doe",
    "email": "john.doe@example.com",
    "company": "BigCommerce",
    "address1": "123 Main Street",
    "city": "Austin",
    "state_or_province": "Texas",
    "state_or_province_code": "TX",
    "country_code": "US",
    "postal_code": "78751"
  }
}
```

Response Example:

```
{
  "data": {
    "id": 12345,
    "status": "incomplete",
    "customer_id": 0,
    "billing_address": {...}
  }
}
```

Key Information:

- Extract the order ID.
- Status remains "incomplete" until payment is processed.

Step 3: Get Accepted Payment Methods (Optional)

Endpoint: GET

https://payments.bigcommerce.com/stores/{store_hash}/payments/methods?order_id={order_id}

Purpose: Verify if Apple Pay is available for the given order.

Request Example:

GET /payments/methods?order_id=12345

X-Auth-Token: {access_token}

Response Example:

```
{
  "data": [
    {
      "id": "applepay",
      "name": "Apple Pay",
      "type": "wallet",
      "supported_instruments": [
        { "instrument_type": "applepay_card" }
      ]
    }
  ]
}
```

Key Information:

- Confirm Apple Pay support before proceeding.
- Validate supported_instruments.

Step 4: Request Payment Access Token

Endpoint: POST

https://payments.bigcommerce.com/stores/{store_hash}/payments/access_tokens

Purpose: Generate a payment access token required to initiate payment.

Request Example:

POST /payments/access_tokens

Content-Type: application/json

X-Auth-Token: {access_token}

```
{
  "order": {
    "id": 12345
  }
}
```

Response Example:

```
{
  "data": {
    "id": "payment-access-token-uuid"
  }
}
```

Key Information:

- Token is required for Apple Pay processing.
- Never expose this token in frontend code.

Step 5: Submit Payment Request

Endpoint: POST https://payments.bigcommerce.com/stores/{store_hash}/payments

Purpose: Process the payment using the Apple Pay payment data and access token.

Request Example:

POST /payments

Content-Type: application/json

Authorization: PAT {payment_access_token}

```
{
  "payment": {
    "instrument": {
      "type": "applepay_card",
      "applepay_card": {
        "payment_data": "{apple_pay_payment_data}",
        "transaction_id": "{apple_pay_transaction_id}",
        "device_session_id": "{device_session_id}"
      }
    },
    "payment_method_id": "applepay"
  }
}
```

Response Example:

```
{
  "data": {
    "id": "payment-uuid",
    "status": "success",
    "transaction_type": "purchase",
    "gateway_transaction_id": "txn_12345",
    "amount": 29.99,
    "currency": "USD"
  }
}
```

Key Information:

- Use payment_access_token from Step 4.
- payment_data, transaction_id, and device_session_id come from the frontend.
- Store the gateway_transaction_id for refunds or audits.

Frontend Apple Pay Integration Example

```
// Apple Pay Payment Sheet Handler
const handleApplePayPayment = (event) => {
  const paymentData = JSON.stringify(event.payment.token.paymentData);
```

```
const transactionId = event.payment.token.transactionIdentifier;
const deviceSessionId = generateDeviceSessionId(); // custom logic

const paymentPayload = {
  payment: {
    instrument: {
      type: "applepay_card",
      applepay_card: {
        payment_data: paymentData,
        transaction_id: transactionId,
        device_session_id: deviceSessionId
      }
    },
    payment_method_id: "applepay"
  }
};

// Call backend API to process payment
processPayment(paymentPayload);
};
```

Where to Get Apple Pay Payment Details

- payment_data: event.payment.token.paymentData
- transaction_id: event.payment.token.transactionIdentifier
- device_session_id: Generated on frontend (optional for fraud prevention)

Integration Completion Checklist

- [x] Cart created with Checkout ID
- [x] Order created from checkout
- [x] Verified Apple Pay is available (optional)
- [x] Payment access token obtained
- [x] Payment processed successfully

Document Created: 30/06/2025