


TASK-2 : Attendance System (static website on S3)

1)Creating the bucket:

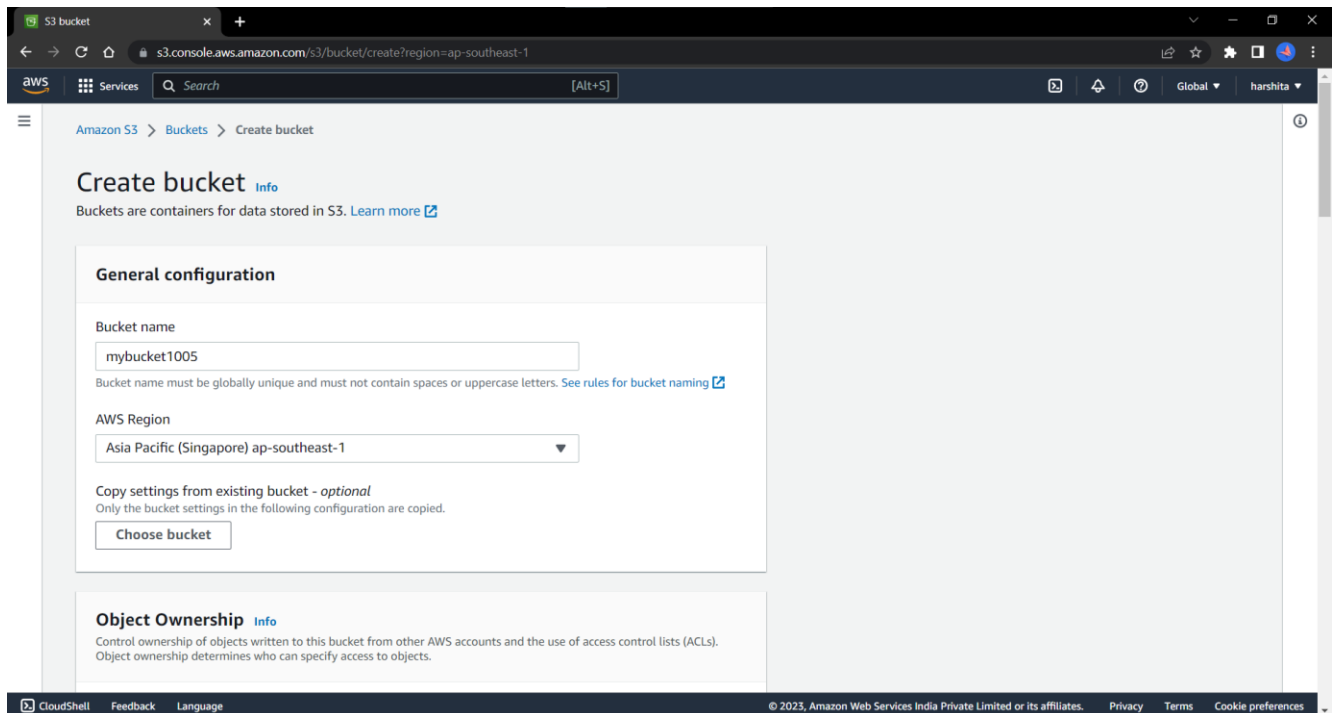

S3 bucket

s3.console.aws.amazon.com/s3/bucket/create?region=ap-southeast-1

Amazon S3 > Buckets > Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

General configuration

Bucket name

mybucket1005

Bucket name must be globally unique and must not contain spaces or uppercase letters. [See rules for bucket naming](#)

AWS Region

Asia Pacific (Singapore) ap-southeast-1

Copy settings from existing bucket - *optional*


Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

CloudShell Feedback Language © 2023, Amazon Web Services India Private Limited or its affiliates. Privacy Terms Cookie preferences

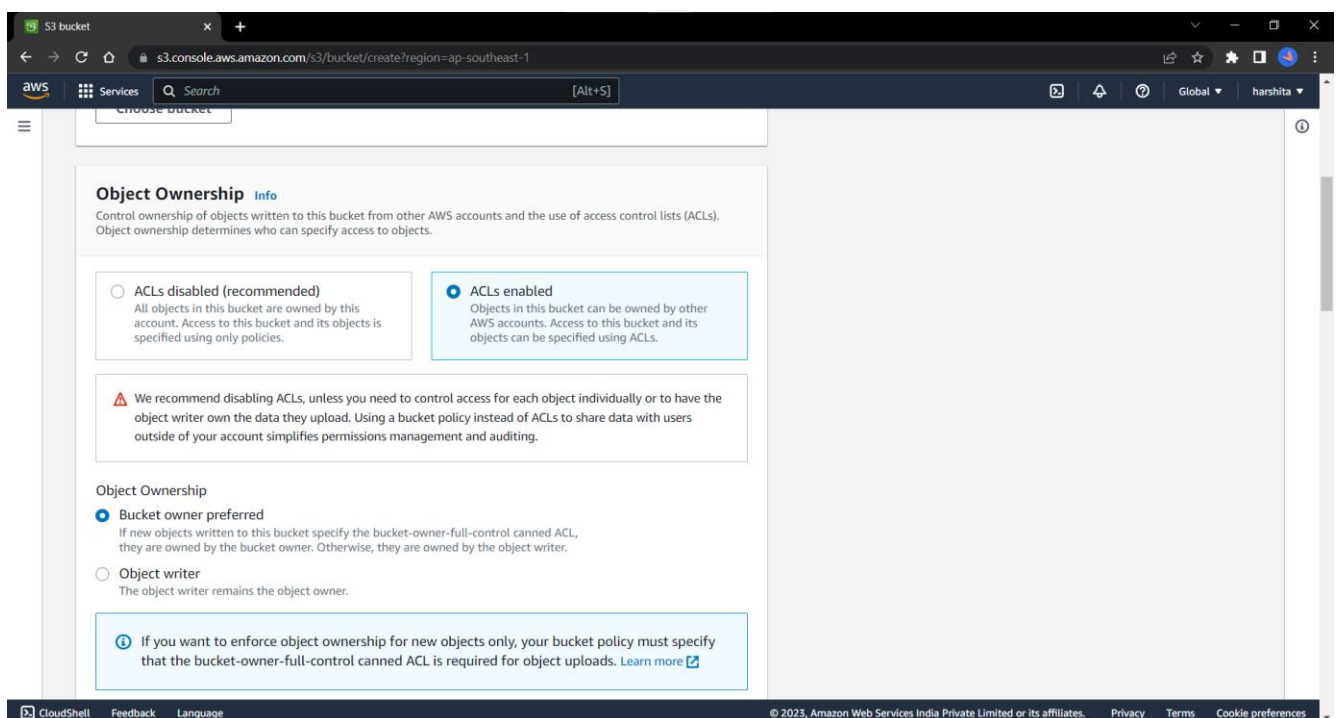

Choose bucket

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ Bucket owner preferred


If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ Object writer


The object writer remains the object owner.

i If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)


CloudShell Feedback Language © 2023, Amazon Web Services India Private Limited or its affiliates. Privacy Terms Cookie preferences

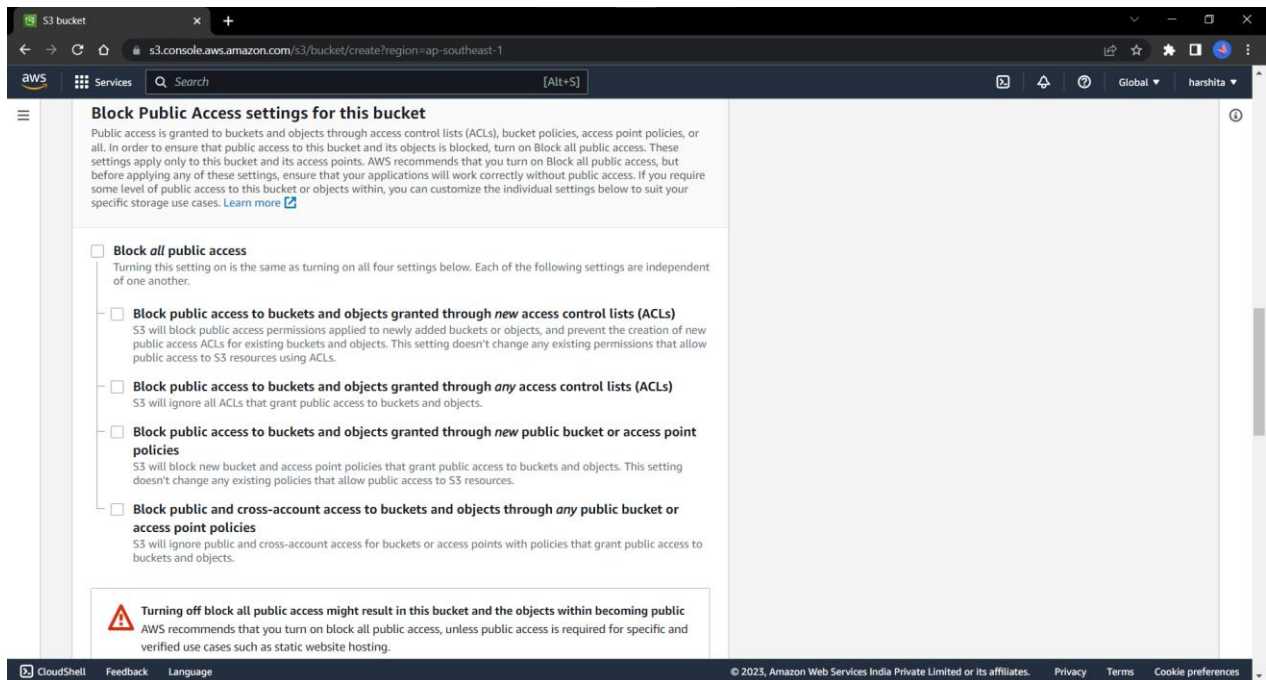


2)Bucket name- mynewbucket1005

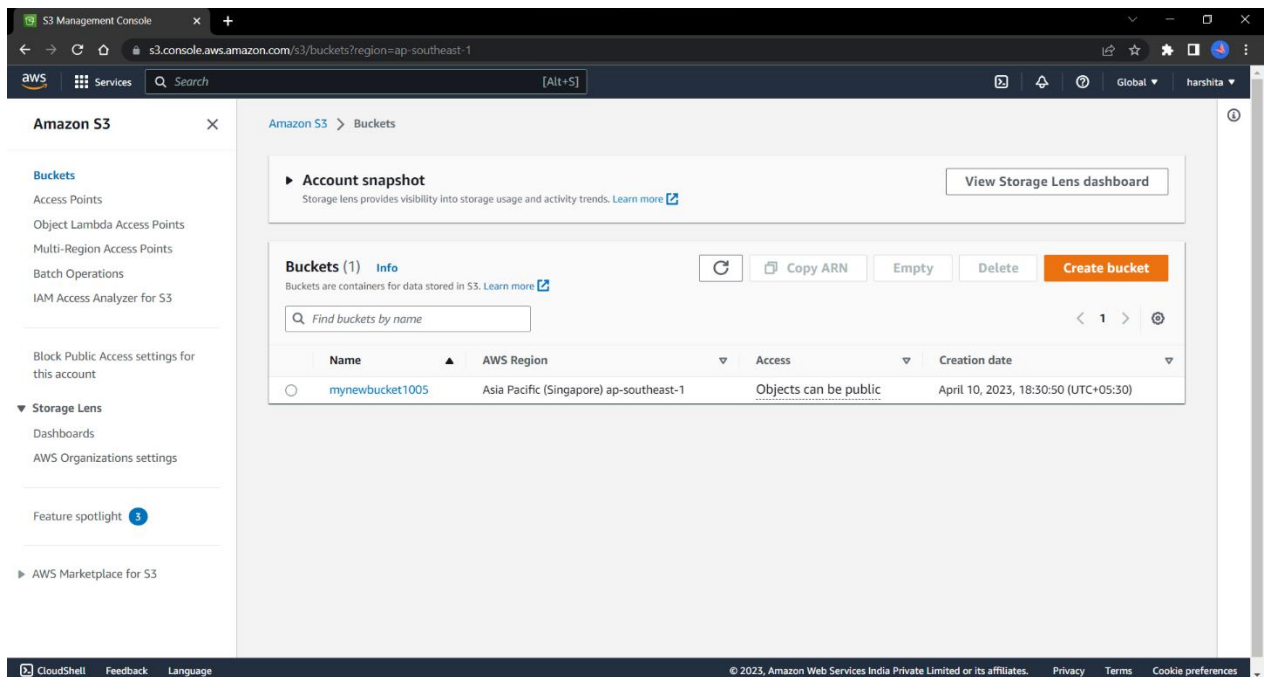


3) Uploading the files of our website:

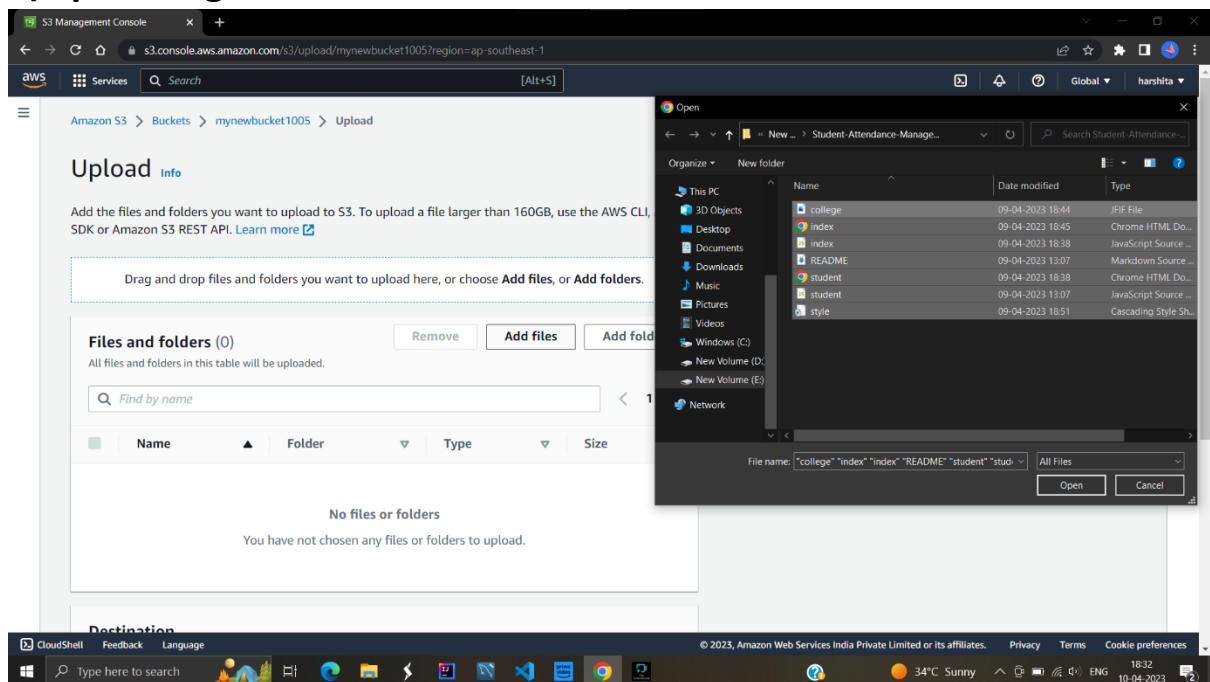


4) Editing the static website hosting configurations:

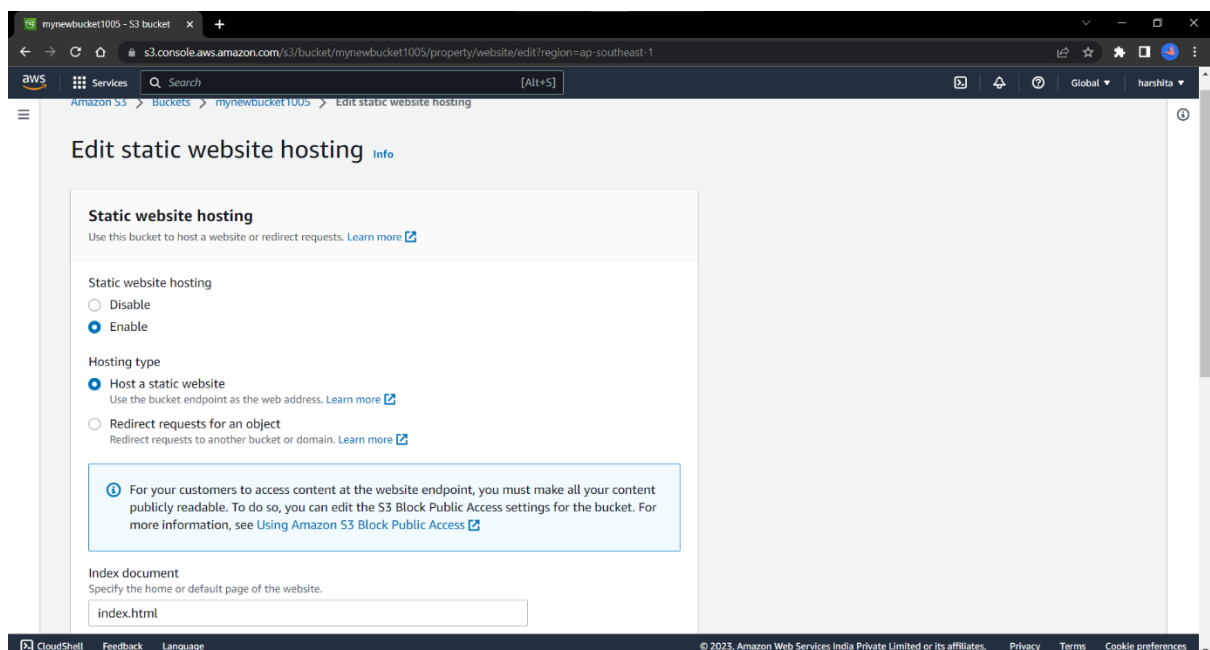

5)After enabling the static hosting, we get our IP address of S3 bucket from where we can access the website publicly

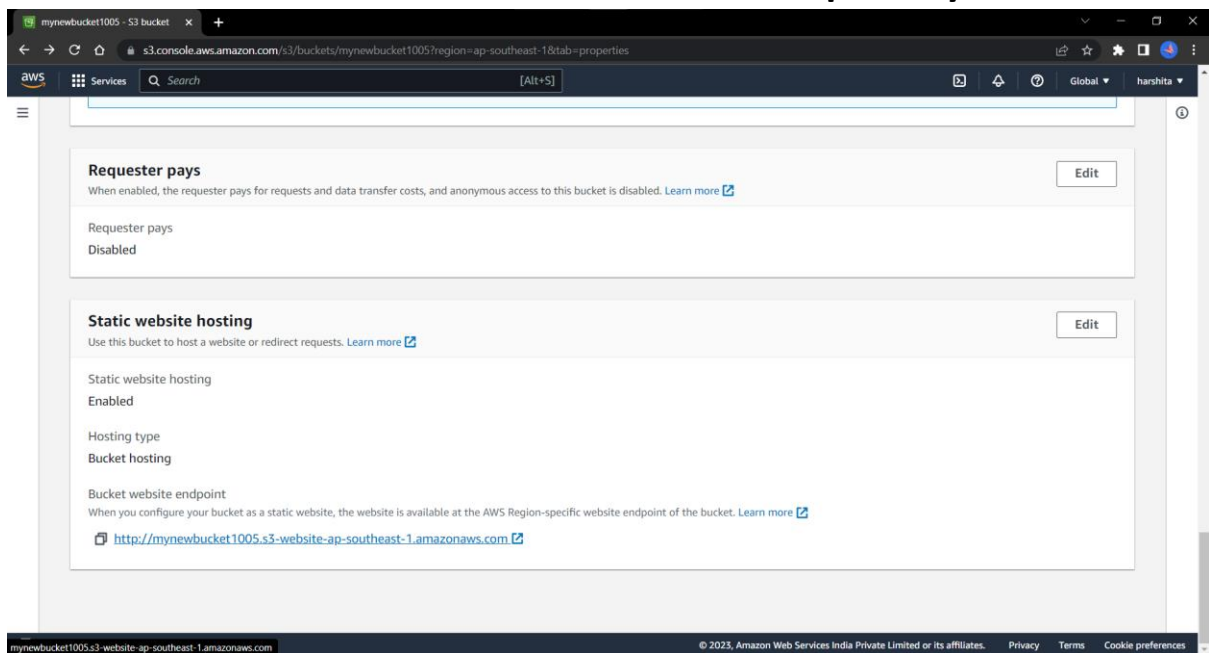

6)Selecting “Make public using ACL” option to make all objects publicly available

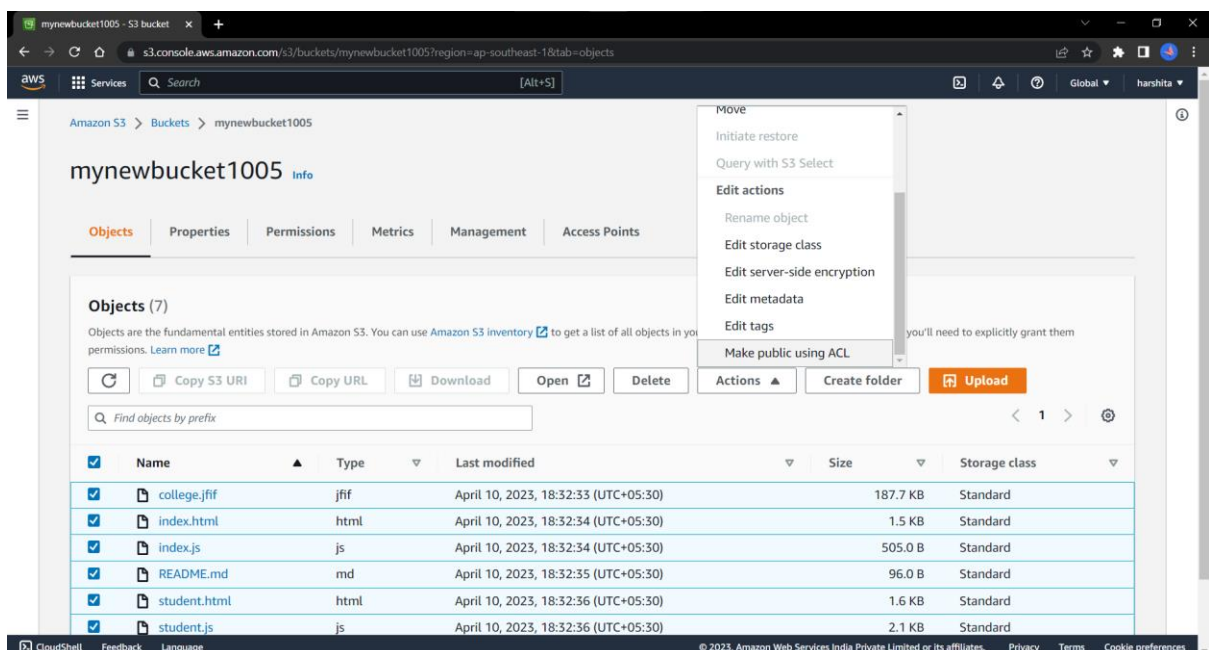

7) And by using the IP address of created bucket we can run our website on web browser and can be accessed by anyone over the internet.

<http://mynewbucket1005.s3-website-ap-southeast-1.amazonaws.com>

