

1. Log Explorer — Main Screen

Functions:

- Search logs
- Filter by time, source/device, severity, event type
- Display normalized logs in a table
- Click a log to open details

Purpose: Unified visibility + analytics-ready standardized logs.

2. Event Details — Detail View

When an analyst clicks a log:

Functions:

- Show **normalized event**
- Show **original/raw event**
- Show source/vendor information
- Show unique event/trace ID
- Show mapping between raw → normalized fields

Purpose: Lossless preservation + traceability.

3. Sources / Devices

Functions:

- List connected devices/log sources
- Show vendor/type
- Show input format (Syslog/CEF/JSON/etc.)
- Show connection/ingestion status
- Show event count

Purpose: Demonstrate multi-source, vendor-agnostic ingestion.

4. Overview / Analytics

Functions:

- Total events
- Events/sec
- Active sources
- Error/failed parsing count
- Event volume over time
- Events by source/severity

Purpose: Demonstrate that the normalized data is actually useful for analytics.

5. Manual Vendor Mapping — Optional

Functions:

- Add a new vendor
- Specify log/input format
- Define mapping from vendor fields → OCSF fields
- Validate and register the mapping in the parser registry


Purpose: Allow manual onboarding of unsupported vendors without modifying the core processing pipeline.


6. Export — Optional

Functions:

- Export filtered/search results
- Export normalized events
- Support JSON / OCSF JSON / CSV
- Preserve relevant event fields and metadata

Purpose: Allow analysts to take normalized, standardized log data outside the platform for further analysis or integration.

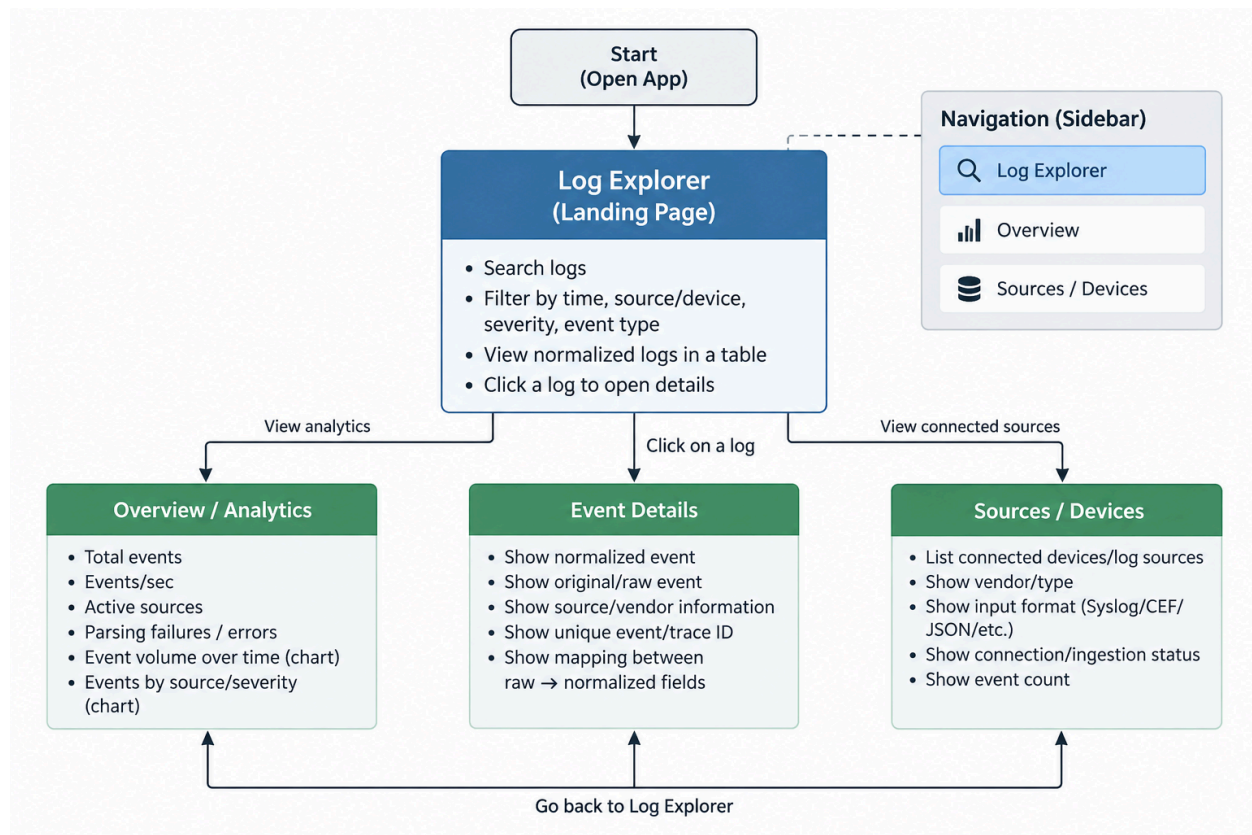

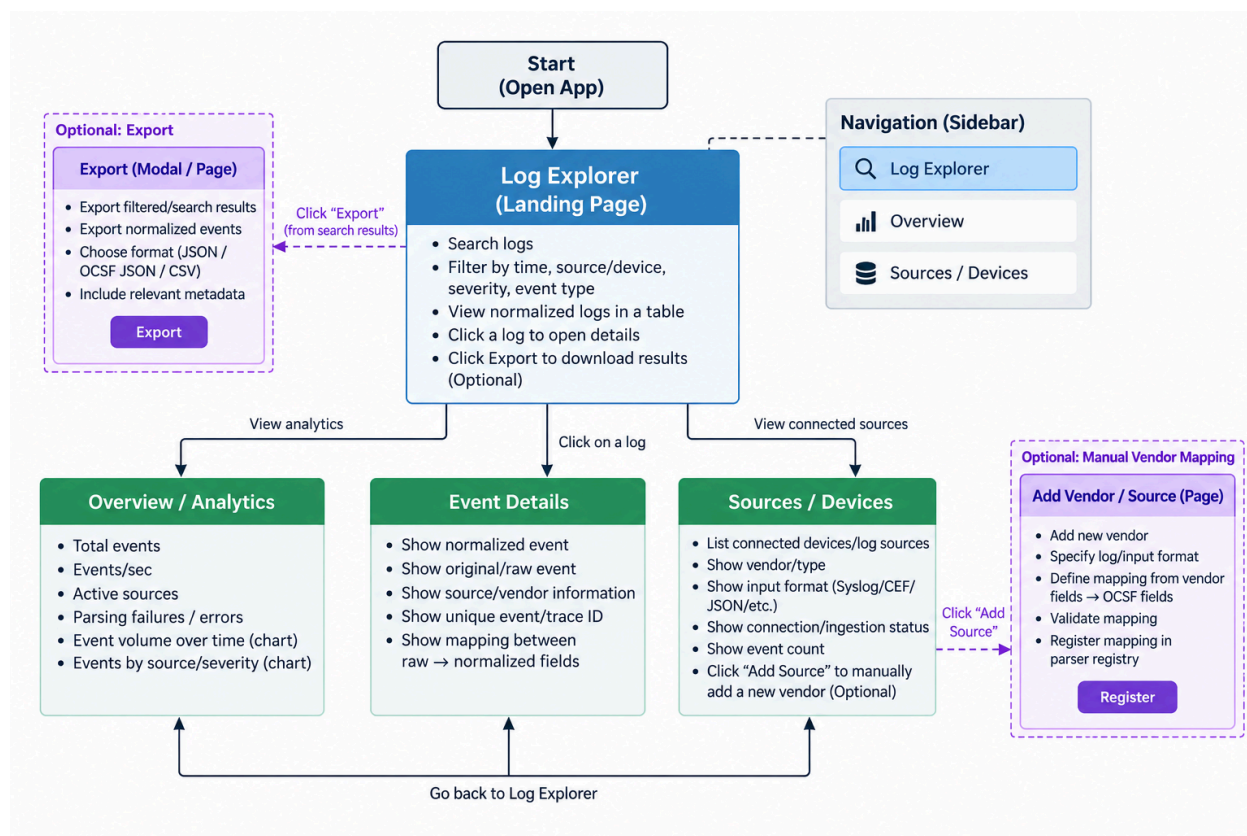

List of API services

API	Function
POST /api/logs/search	Search and filter normalized logs using SQL/filters.
GET /api/events/{id}	Fetch complete event details: raw + OCSF + source + field mapping.
GET /api/sources	List sources/devices with vendor, format, status, and event count.
GET /api/overview	Return dashboard metrics and aggregated event statistics.

<code>POST /api/parsers</code>	Register a manually provided vendor → OCSF field mapping.
<code>GET /api/parsers</code>	List registered vendor/parser mappings.
<code>POST /api/logs/export</code>	Export filtered/search results as JSON, OCSF JSON, or CSV.

List of files

File	Responsibility
<code>main.tsx</code>	Entry point that starts the React application
<code>App.tsx</code>	Defines routing and overall application structure
<code>LogExplorer.tsx</code>	Main screen for searching, filtering, and viewing logs
<code>EventDetails.tsx</code>	Displays raw event, normalized event, source info, and field mapping
<code>Overview.tsx</code>	Displays system metrics and analytics
<code>Sources.tsx</code>	Displays connected log sources/devices and their status
<code>VendorMapping.tsx</code>	Provides the manual vendor → OCSF mapping interface

<code>Layout.tsx</code>	Provides the common sidebar, header, and page layout
<code>Table.tsx</code>	Reusable table for logs, sources, mappings, etc.
<code>SearchFilter.tsx</code>	Reusable search bar and filtering controls
<code>Modal.tsx</code>	Reusable popup for exports, forms, confirmations, etc.
<code>Cards.tsx</code>	Reusable metric/information cards
<code>api.ts</code>	Contains all functions that communicate with the backend APIs
<code>types/index.ts</code>	Contains shared TypeScript interfaces/types for logs, sources, events, etc.

Color Scheme:

Primary accent: #D7AC27

Background: #F7F6F2

Text: #222222

Secondary text: #6B6B66

Border: #E4E1D8