
LAB 4 – Date Functions

INPUT

```
SELECT DAY('2026-10-02') AS Day;
SELECT DATE_FORMAT('2026-10-02','%d-%m-%Y') AS Formatted_Date;
SELECT DATEDIFF('2026-10-02','2026-09-20') AS Difference;
```

OUTPUT SCREENSHOT

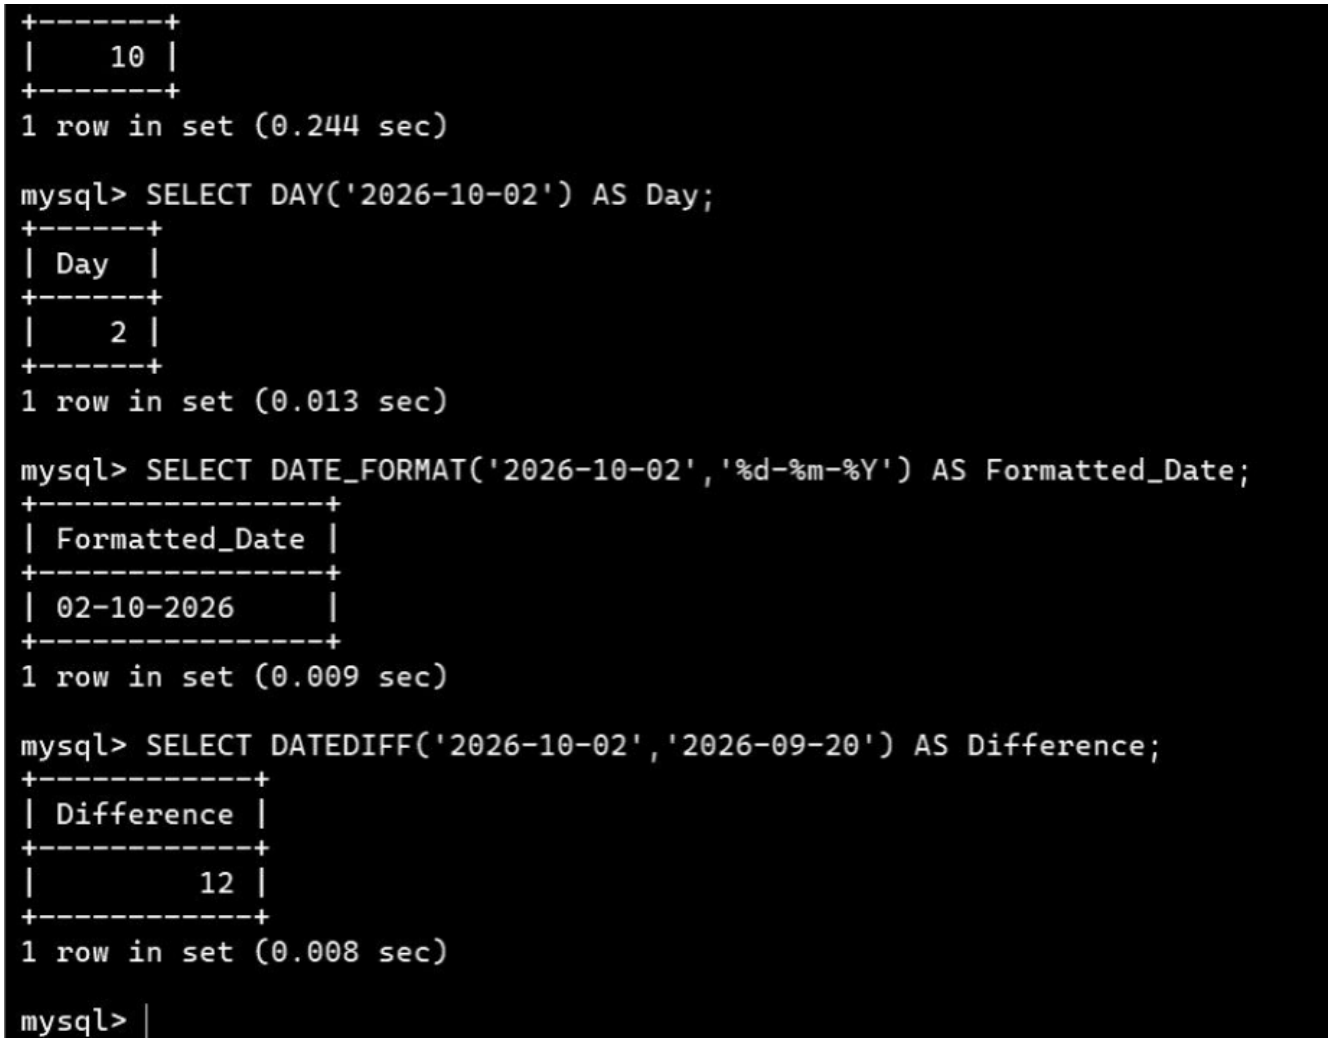

```
+-------+
|    10 |
+-------+
1 row in set (0.244 sec)

mysql> SELECT DAY('2026-10-02') AS Day;
+------+
| Day  |
+------+
|    2 |
+------+
1 row in set (0.013 sec)

mysql> SELECT DATE_FORMAT('2026-10-02','%d-%m-%Y') AS Formatted_Date;
+----------------+
| Formatted_Date |
+----------------+
| 02-10-2026     |
+----------------+
1 row in set (0.009 sec)

mysql> SELECT DATEDIFF('2026-10-02','2026-09-20') AS Difference;
+------------+
| Difference |
+------------+
|         12 |
+------------+
1 row in set (0.008 sec)

mysql>
```

LAB 5 – Arithmetic Operators

INPUT

```
SELECT NAME, Marks + 5 AS New_Marks FROM Student;
SELECT NAME, Marks - 5 AS Reduced_Marks FROM Student;
SELECT NAME, Marks * 2 AS Double_Marks FROM Student;
```

OUTPUT SCREENSHOT

```
mysql> SELECT NAME,Marks + 5 AS New_Marks  FROM Student;
+-------+-----------+
| NAME  | New_Marks |
+-------+-----------+
| Anu   |        90 |
| Ravi  |        77 |
| priya |        95 |
| kiran |        70 |
| sneha |        83 |
+-------+-----------+
5 rows in set (0.008 sec)

mysql> SELECT NAME,Marks - 5 AS Reduced_Marks  FROM Student;
+-------+---------------+
| NAME  | Reduced_Marks |
+-------+---------------+
| Anu   |            80 |
| Ravi  |            67 |
| priya |            85 |
| kiran |            60 |
| sneha |            73 |
+-------+---------------+
5 rows in set (0.011 sec)

mysql> SELECT NAME,Marks * 2 AS Double_Marks  FROM Student;
+-------+--------------+
| NAME  | Double_Marks |
+-------+--------------+
| Anu   |          170 |
| Ravi  |          144 |
| priya |          180 |
| kiran |          130 |
| sneha |          156 |
+-------+--------------+
5 rows in set (0.010 sec)
```

LAB 5 – Arithmetic Operators

INPUT

```
SELECT NAME, Marks * 2 AS Double_Marks FROM Student;
SELECT Name, Marks / 2 AS Half_Marks FROM Student;
SELECT Name, Marks % 2 AS Remainder FROM Student;
```

OUTPUT SCREENSHOT

```
mysql> SELECT NAME,Marks * 2 AS Double_Marks  FROM Student;
+-------+--------------+
| NAME  | Double_Marks |
+-------+--------------+
| Anu   |          170 |
| Ravi  |          144 |
| priya |          180 |
| kiran |          130 |
| sneha |          156 |
+-------+--------------+
5 rows in set (0.010 sec)

mysql> SELECT Name, Marks / 2 AS Half_Marks  FROM Student;
+-------+------------+
| Name  | Half_Marks |
+-------+------------+
| Anu   |    42.5000 |
| Ravi  |    36.0000 |
| priya |    45.0000 |
| kiran |    32.5000 |
| sneha |    39.0000 |
+-------+------------+
5 rows in set (0.009 sec)


mysql> SELECT Name, Marks % 2 AS Remainder  FROM Student;
+-------+-----------+
| Name  | Remainder |
+-------+-----------+
| Anu   |         1 |
| Ravi  |         0 |
| priya |         0 |
| kiran |         1 |
| sneha |         0 |
+-------+-----------+
5 rows in set (0.008 sec)
```

LAB 5 – Comparison Operators

INPUT

```
SELECT * FROM Student WHERE Marks = 85;
SELECT * FROM Student WHERE Marks > 80;
SELECT * FROM Student WHERE Marks < 70;
SELECT * FROM Student WHERE Marks >= 80;
SELECT * FROM Student WHERE Marks <= 70;
```

OUTPUT SCREENSHOT

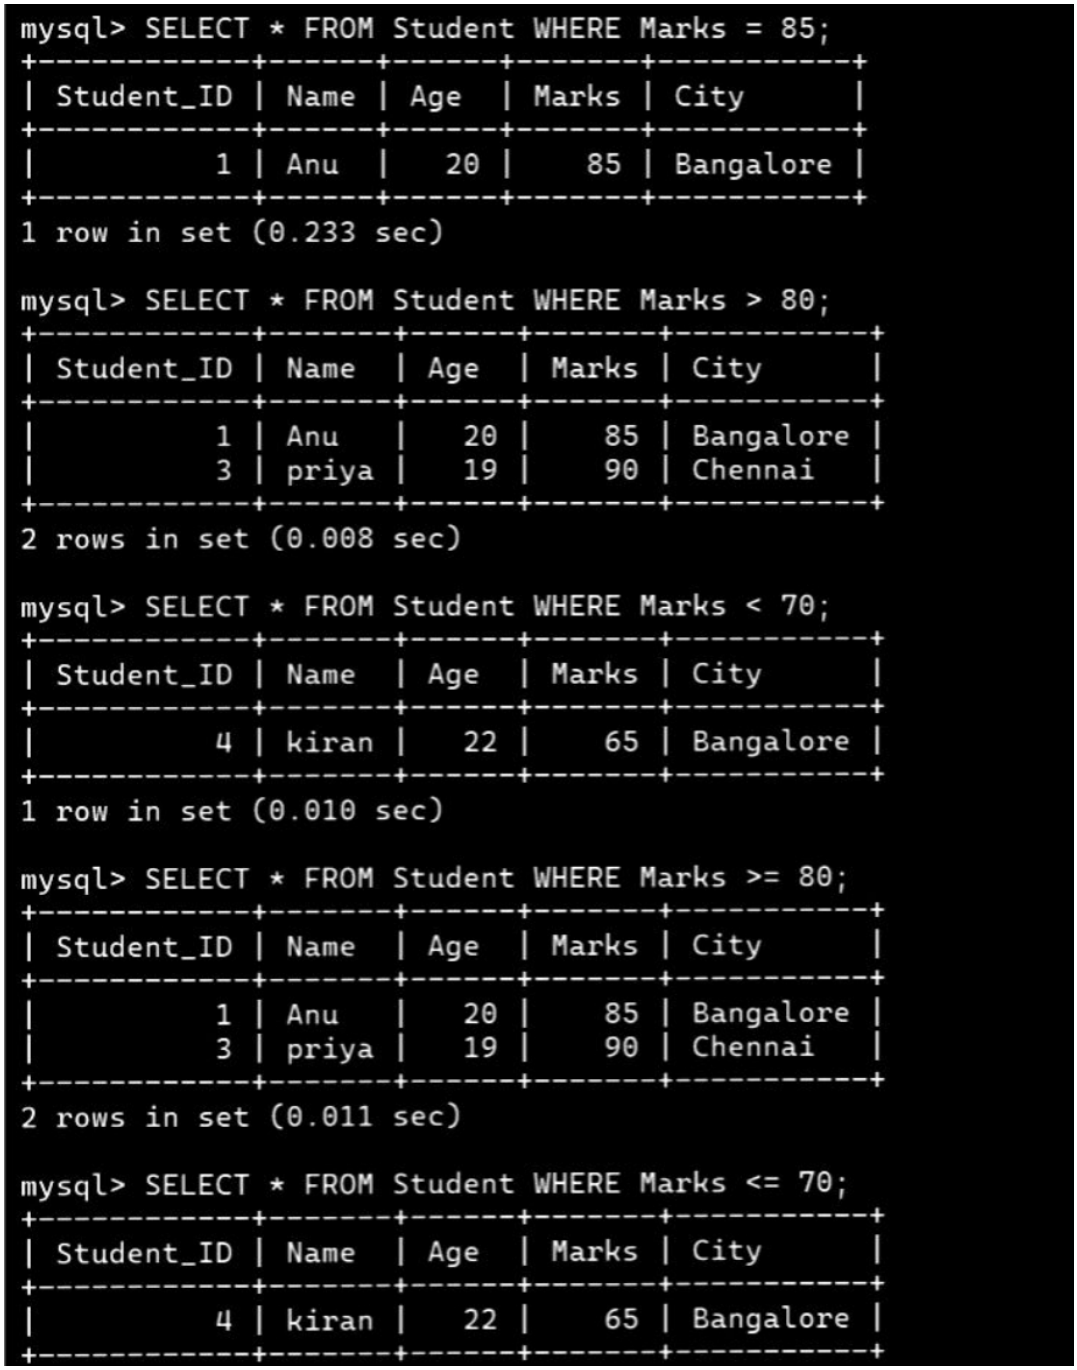

```
mysql> SELECT * FROM Student WHERE Marks = 85;
+------------+------+------+-------+-----------+
| Student_ID | Name | Age  | Marks | City      |
+------------+------+------+-------+-----------+
|          1 | Anu  |   20 |    85 | Bangalore |
+------------+------+------+-------+-----------+
1 row in set (0.233 sec)

mysql> SELECT * FROM Student WHERE Marks > 80;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          3 | priya |   19 |    90 | Chennai   |
+------------+-------+------+-------+-----------+
2 rows in set (0.008 sec)

mysql> SELECT * FROM Student WHERE Marks < 70;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
1 row in set (0.010 sec)

mysql> SELECT * FROM Student WHERE Marks >= 80;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          3 | priya |   19 |    90 | Chennai   |
+------------+-------+------+-------+-----------+
2 rows in set (0.011 sec)


mysql> SELECT * FROM Student WHERE Marks <= 70;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
```

LAB 5 – Logical Operators

INPUT

```
SELECT * FROM Student WHERE City <> 'Mysuru';
SELECT * FROM Student WHERE Marks > 70 AND Age = 20;
SELECT * FROM Student WHERE City = 'Mysuru' OR Marks > 85;
SELECT * FROM Student WHERE City = 'Bangalore';
```

OUTPUT SCREENSHOT

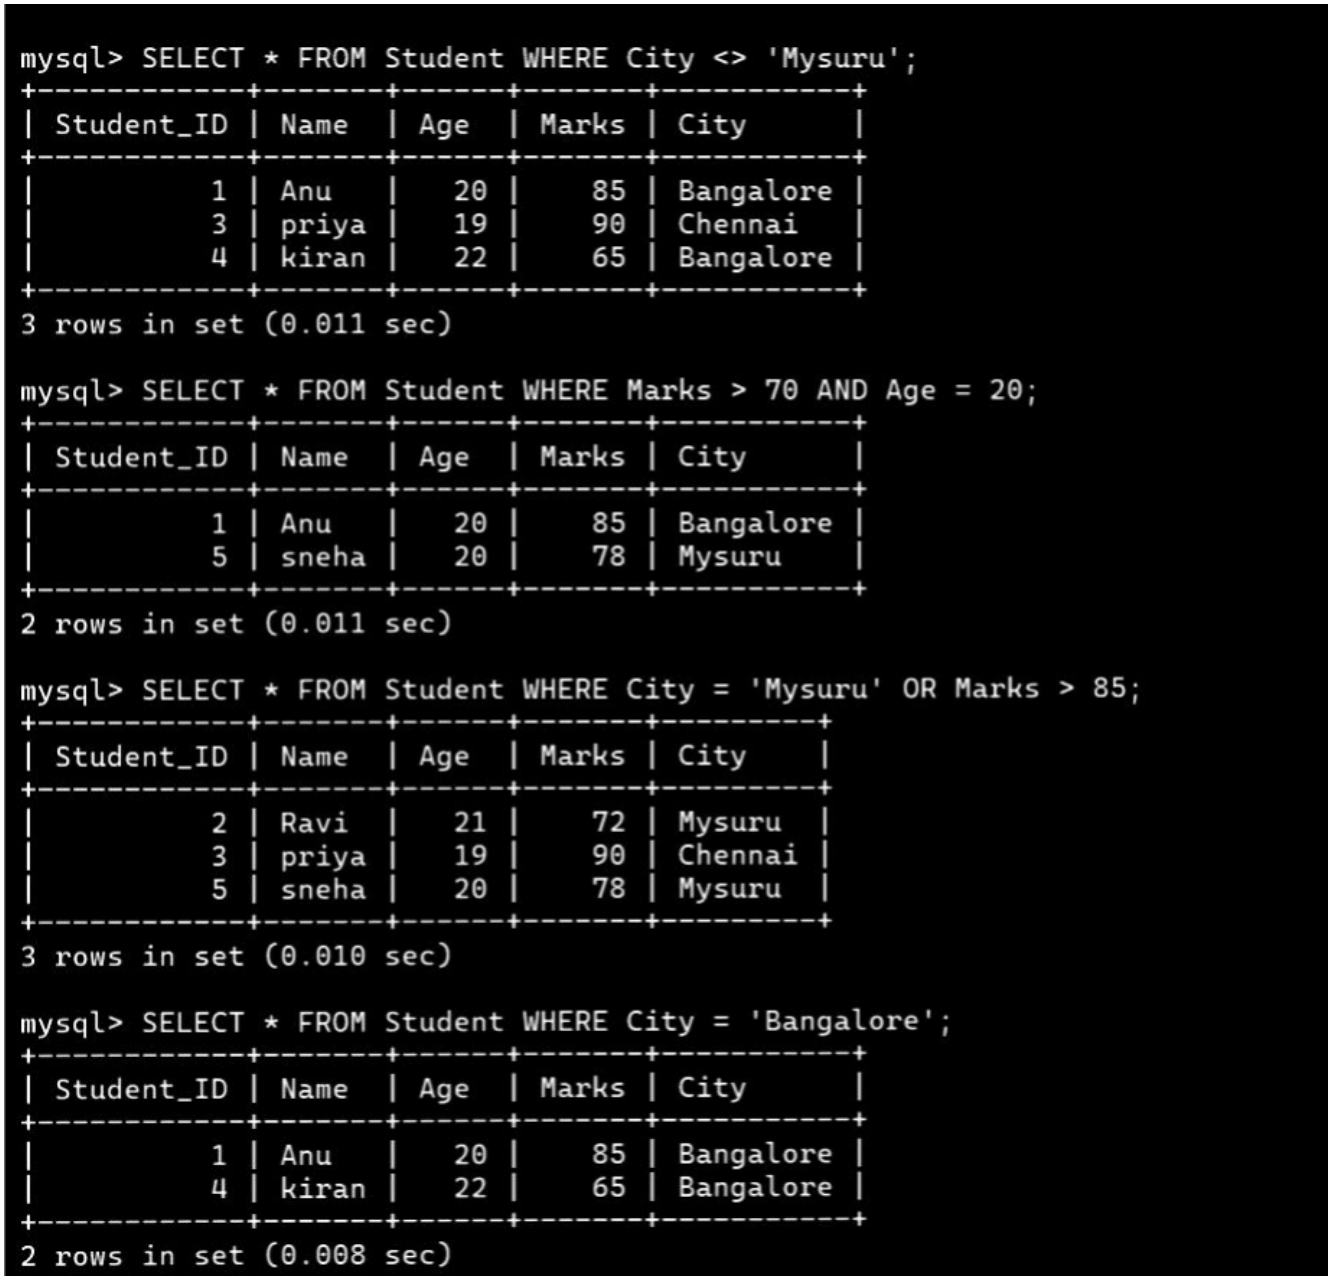

```
mysql> SELECT * FROM Student WHERE City <> 'Mysuru';
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          3 | priya |   19 |    90 | Chennai   |
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
3 rows in set (0.011 sec)

mysql> SELECT * FROM Student WHERE Marks > 70 AND Age = 20;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          5 | sneha |   20 |    78 | Mysuru    |
+------------+-------+------+-------+-----------+
2 rows in set (0.011 sec)

mysql> SELECT * FROM Student WHERE City = 'Mysuru' OR Marks > 85;
+------------+-------+------+-------+---------+
| Student_ID | Name  | Age  | Marks | City    |
+------------+-------+------+-------+---------+
|          2 | Ravi  |   21 |    72 | Mysuru  |
|          3 | priya |   19 |    90 | Chennai |
|          5 | sneha |   20 |    78 | Mysuru  |
+------------+-------+------+-------+---------+
3 rows in set (0.010 sec)


mysql> SELECT * FROM Student WHERE City = 'Bangalore';
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
2 rows in set (0.008 sec)
```

LAB 5 – Comparison / Logical Operators

INPUT

```
SELECT * FROM Student WHERE City <> 'Mysuru';
```

OUTPUT SCREENSHOT

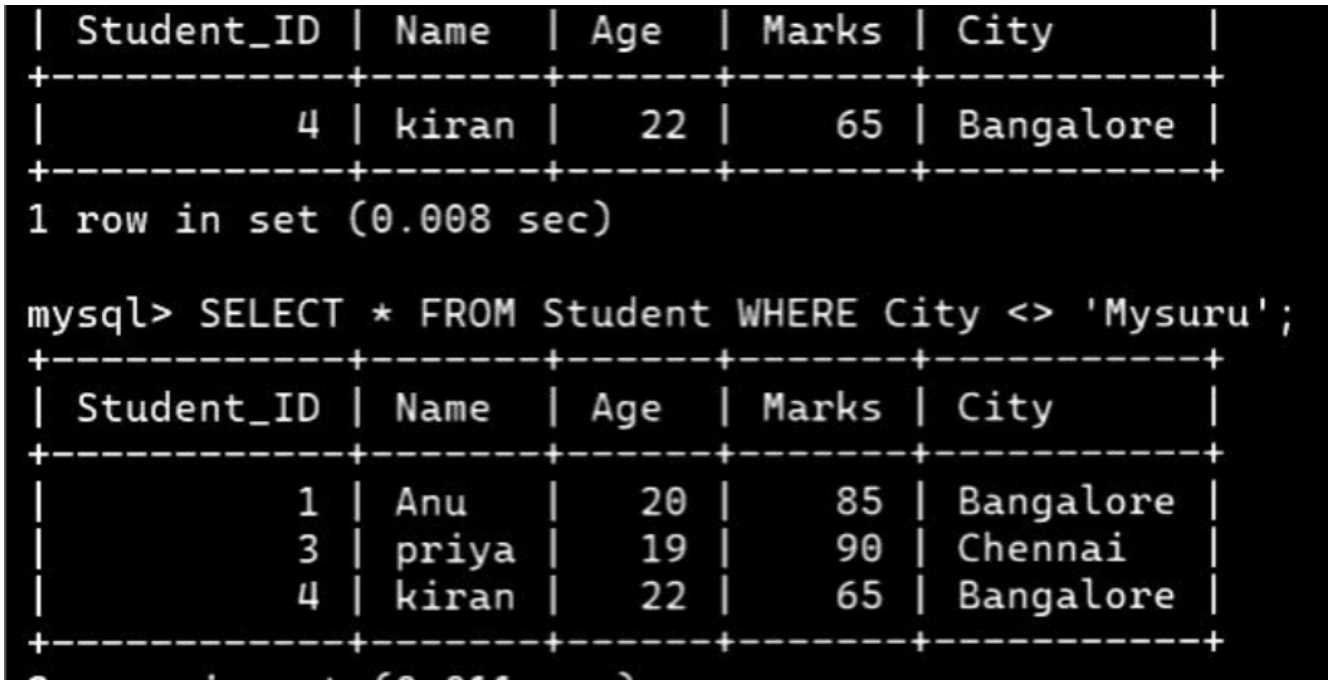

```
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
1 row in set (0.008 sec)


mysql> SELECT * FROM Student WHERE City <> 'Mysuru';
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          3 | priya |   19 |    90 | Chennai   |
|          4 | kiran |   22 |    65 | Bangalore |
+------------+-------+------+-------+-----------+
```

LAB 6 – Special Operators

INPUT

```
SELECT * FROM Student WHERE Marks BETWEEN 70 AND 85;
SELECT * FROM Student WHERE City IN ('Bangalore','Mysuru');
SELECT * FROM Student WHERE Name LIKE 'A%';
SELECT * FROM Student WHERE City IS NULL;
```

OUTPUT SCREENSHOT

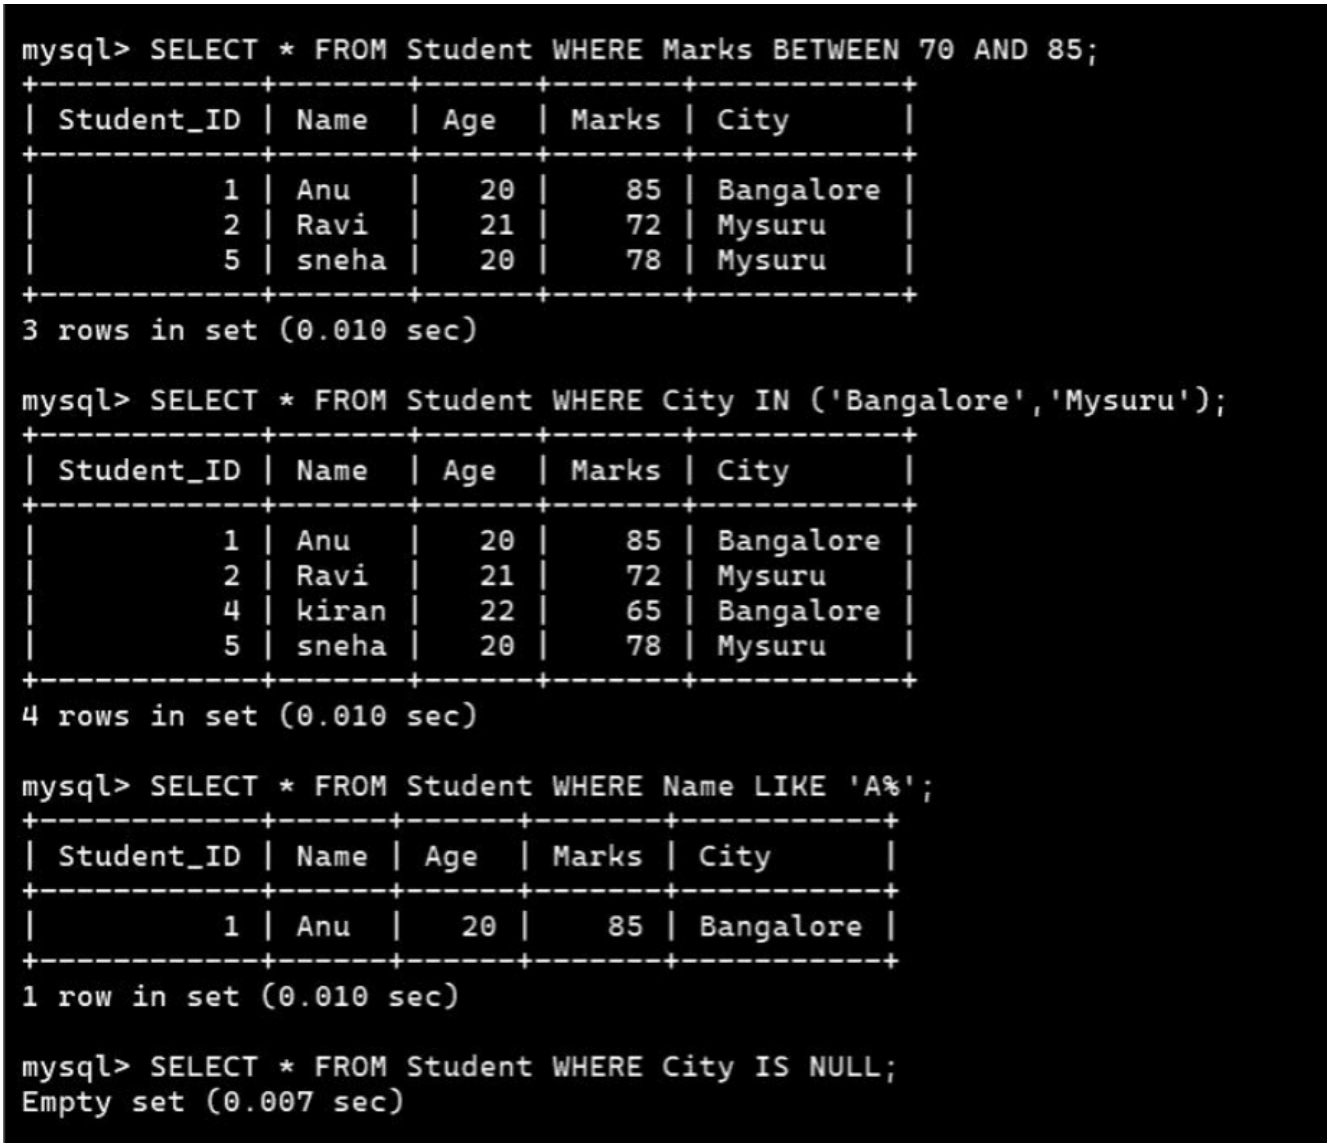

```
mysql> SELECT * FROM Student WHERE Marks BETWEEN 70 AND 85;
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          2 | Ravi  |   21 |    72 | Mysuru    |
|          5 | sneha |   20 |    78 | Mysuru    |
+------------+-------+------+-------+-----------+
3 rows in set (0.010 sec)

mysql> SELECT * FROM Student WHERE City IN ('Bangalore','Mysuru');
+------------+-------+------+-------+-----------+
| Student_ID | Name  | Age  | Marks | City      |
+------------+-------+------+-------+-----------+
|          1 | Anu   |   20 |    85 | Bangalore |
|          2 | Ravi  |   21 |    72 | Mysuru    |
|          4 | kiran |   22 |    65 | Bangalore |
|          5 | sneha |   20 |    78 | Mysuru    |
+------------+-------+------+-------+-----------+
4 rows in set (0.010 sec)

mysql> SELECT * FROM Student WHERE Name LIKE 'A%';
+------------+------+------+-------+-----------+
| Student_ID | Name | Age  | Marks | City      |
+------------+------+------+-------+-----------+
|          1 | Anu  |   20 |    85 | Bangalore |
+------------+------+------+-------+-----------+
1 row in set (0.010 sec)


mysql> SELECT * FROM Student WHERE City IS NULL;
Empty set (0.007 sec)
```

LAB 6 – Set Operations (UNION)

INPUT

```
SELECT Name FROM Student WHERE Marks > 80 UNION SELECT Name FROM STUDENT WHERE City = 'Mysuru';
SELECT Name FROM Student WHERE Marks > 80 UNION SELECT Name FROM STUDENT WHERE Age = 20;
SELECT Name FROM Student WHERE Marks > 80 UNION SELECT City FROM STUDENT WHERE Age = 20;
SELECT City FROM Student WHERE Marks > 80 UNION SELECT City FROM STUDENT WHERE Age = 20;
```

OUTPUT SCREENSHOT

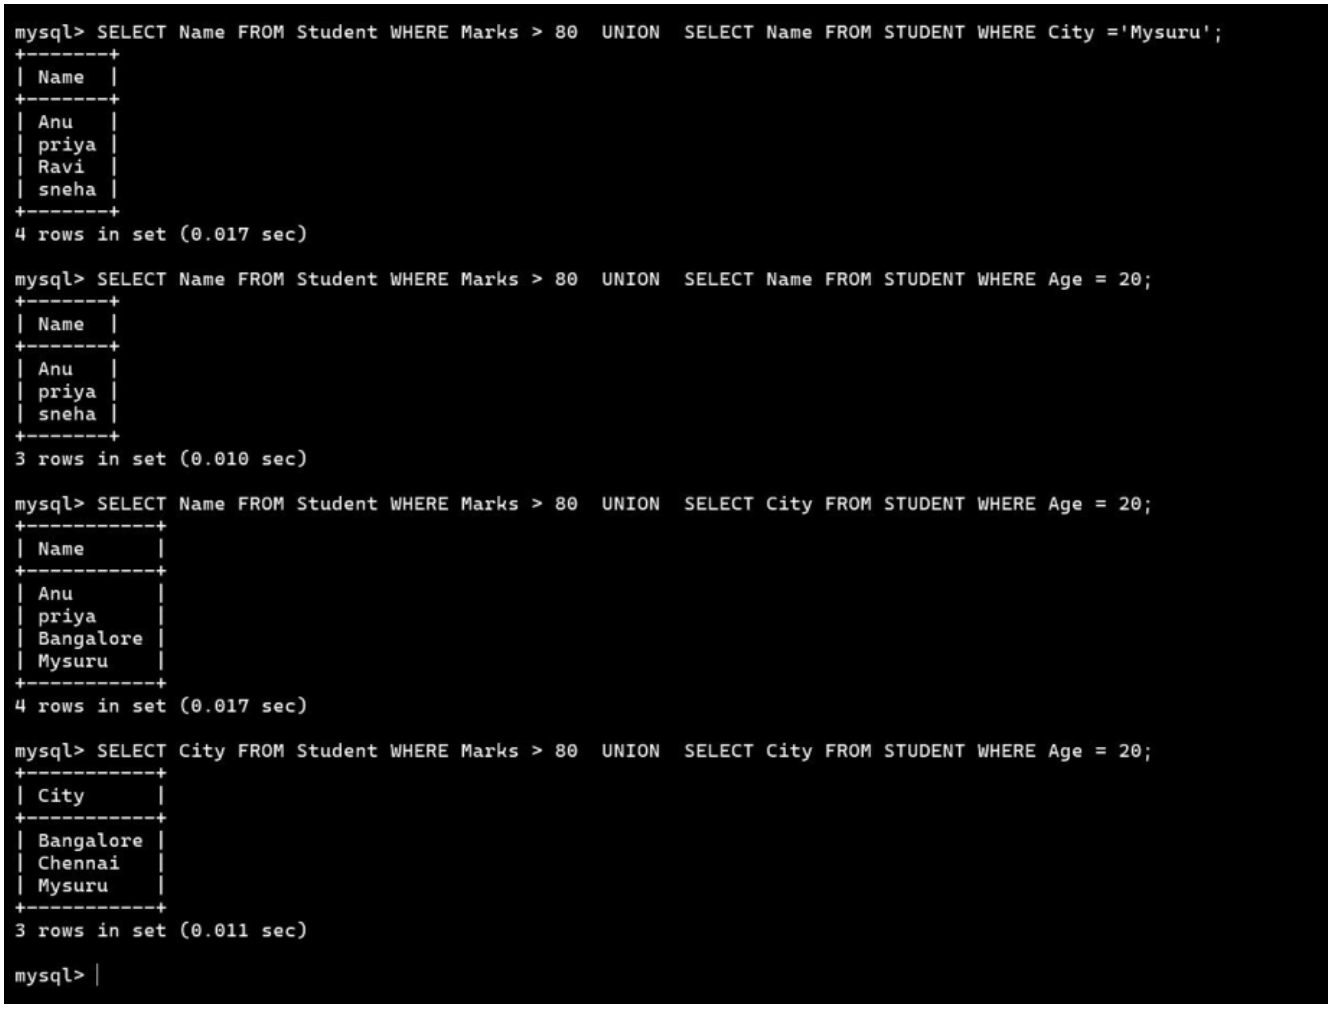

```
mysql> SELECT Name FROM Student WHERE Marks > 80  UNION  SELECT Name FROM STUDENT WHERE City ='Mysuru';
+-------+
| Name  |
+-------+
| Anu   |
| priya |
| Ravi  |
| sneha |
+-------+
4 rows in set (0.017 sec)

mysql> SELECT Name FROM Student WHERE Marks > 80  UNION  SELECT Name FROM STUDENT WHERE Age = 20;
+-------+
| Name  |
+-------+
| Anu   |
| priya |
| sneha |
+-------+
3 rows in set (0.010 sec)

mysql> SELECT Name FROM Student WHERE Marks > 80  UNION  SELECT City FROM STUDENT WHERE Age = 20;
+-----------+
| Name      |
+-----------+
| Anu       |
| priya     |
| Bangalore |
| Mysuru    |
+-----------+
4 rows in set (0.017 sec)

mysql> SELECT City FROM Student WHERE Marks > 80  UNION  SELECT City FROM STUDENT WHERE Age = 20;
+-----------+
| City      |
+-----------+
| Bangalore |
| Chennai   |
| Mysuru    |
+-----------+
3 rows in set (0.011 sec)


mysql>
```

LAB 4 – Date Functions

INPUT

```
SELECT CURDATE() AS Today;
SELECT NOW() AS Today;
SELECT YEAR('2026-10-02') AS Year;
SELECT MONTH('2026-10-02') AS Month;
SELECT DAY('2026-10-02') AS Day;
```

OUTPUT SCREENSHOT

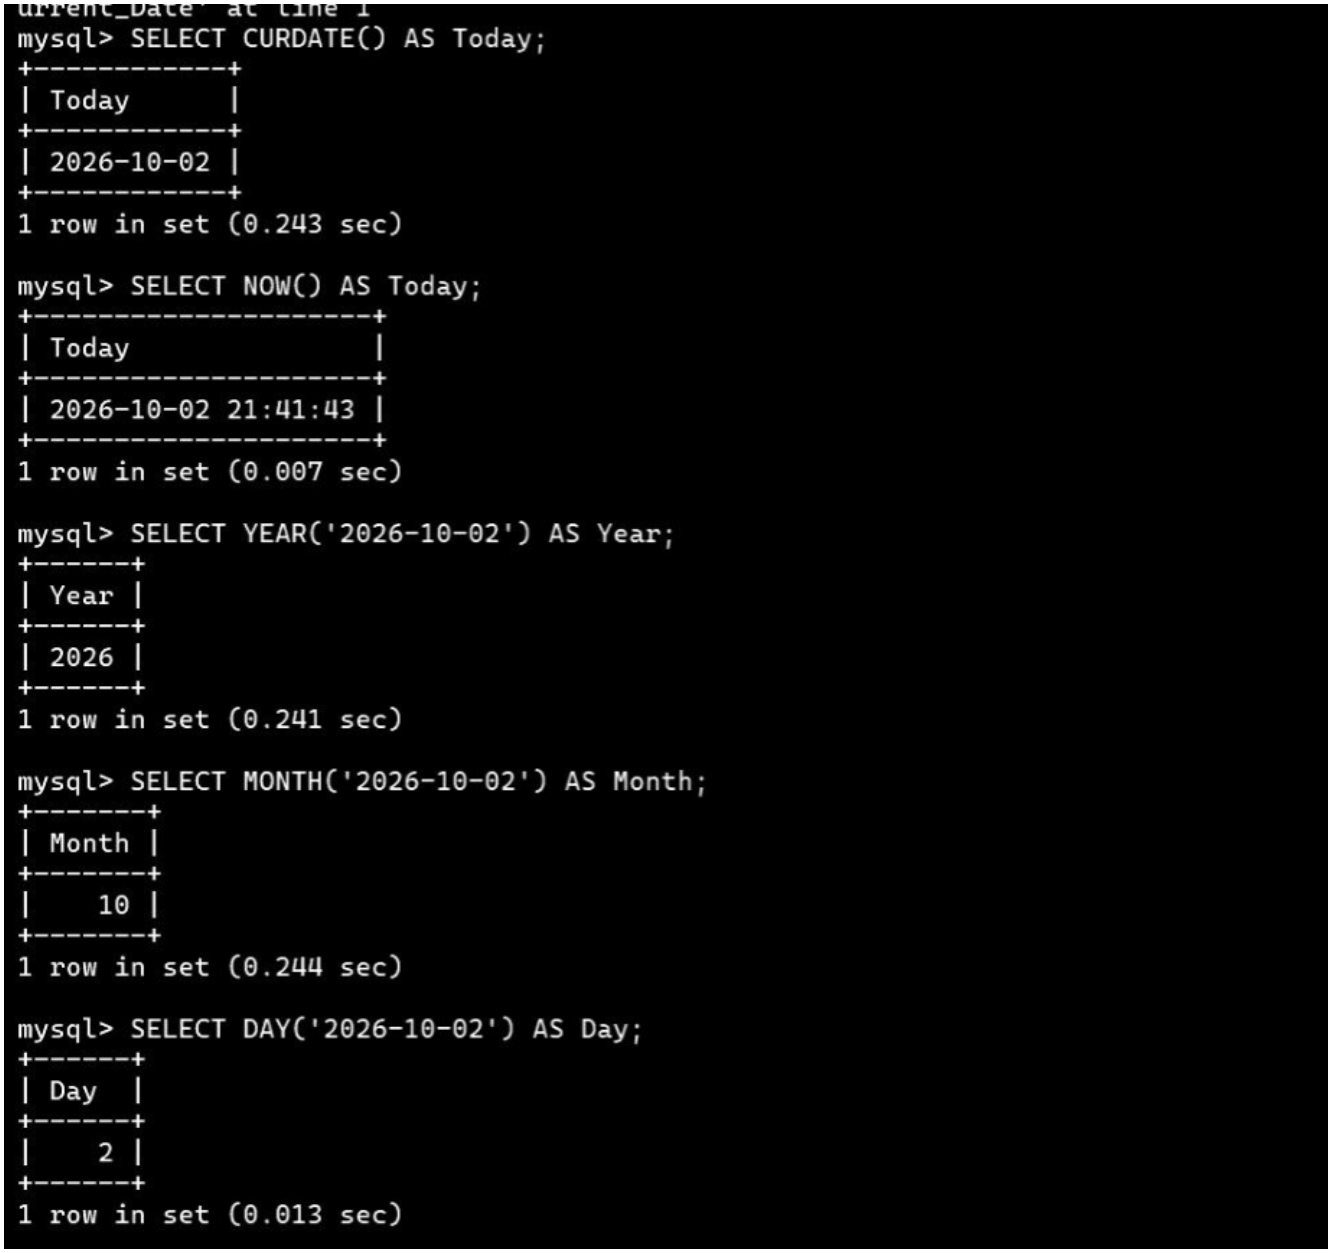

```
urrent_Date' at line 1
mysql> SELECT CURDATE() AS Today;
+------------+
| Today      |
+------------+
| 2026-10-02 |
+------------+
1 row in set (0.243 sec)

mysql> SELECT NOW() AS Today;
+---------------------+
| Today               |
+---------------------+
| 2026-10-02 21:41:43 |
+---------------------+
1 row in set (0.007 sec)

mysql> SELECT YEAR('2026-10-02') AS Year;
+------+
| Year |
+------+
| 2026 |
+------+
1 row in set (0.241 sec)

mysql> SELECT MONTH('2026-10-02') AS Month;
+-------+
| Month |
+-------+
|    10 |
+-------+
1 row in set (0.244 sec)


mysql> SELECT DAY('2026-10-02') AS Day;
+------+
| Day  |
+------+
|    2 |
+------+
1 row in set (0.013 sec)
```

LAB 6– Conversion Functions

INPUT

```
USE College;
SELECT CAST(85 AS CHAR) AS Marks;
SELECT CONVERT(85,CHAR) AS Marks;
SELECT CAST(Marks AS DECIMAL(5,2)) AS Converted_Marks FROM Student;
```

OUTPUT SCREENSHOT

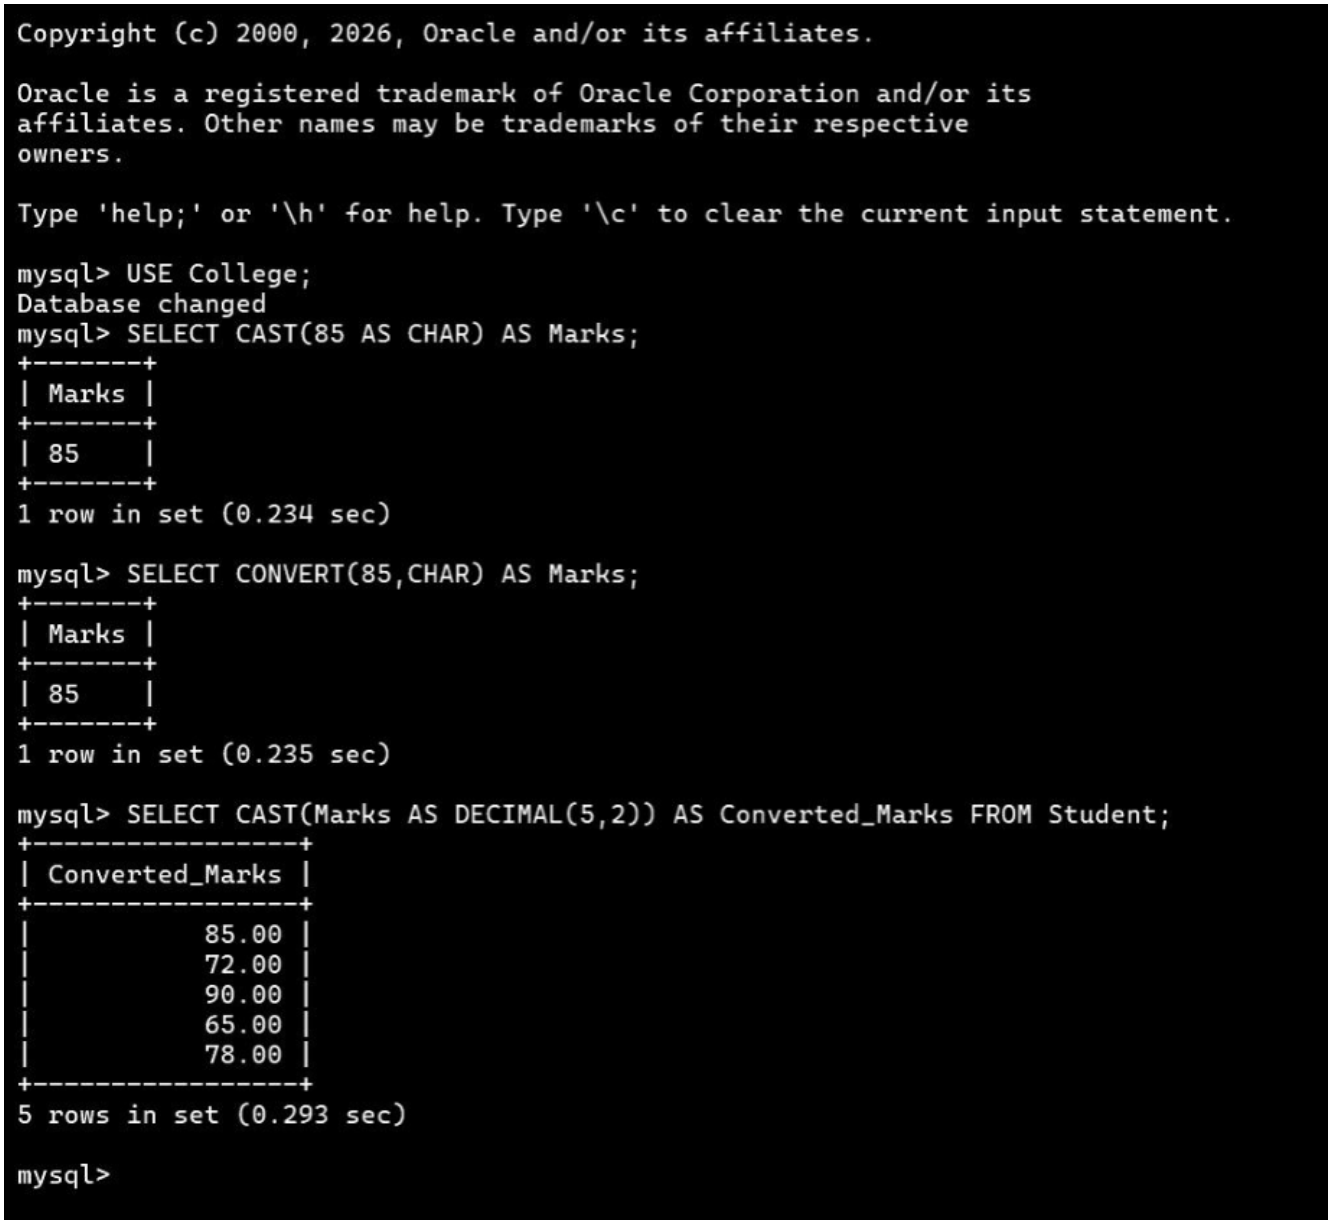

```
Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> USE College;
Database changed
mysql> SELECT CAST(85 AS CHAR) AS Marks;
+-------+
| Marks |
+-------+
| 85    |
+-------+
1 row in set (0.234 sec)

mysql> SELECT CONVERT(85,CHAR) AS Marks;
+-------+
| Marks |
+-------+
| 85    |
+-------+
1 row in set (0.235 sec)

mysql> SELECT CAST(Marks AS DECIMAL(5,2)) AS Converted_Marks FROM Student;
+-----------------+
| Converted_Marks |
+-----------------+
|           85.00 |
|           72.00 |
|           90.00 |
|           65.00 |
|           78.00 |
+-----------------+
5 rows in set (0.293 sec)

mysql>
```

GITHUB link : https://github.com/harshithagmbca25-cmd/DBMS-ASSIGNMENT-4-5-6.git