JQUERY & BOOTSTRAP ASSIGNMENT

Harshit Kushmakar | 16896

1. Add an input field in form and on adding value in input field same value should get displayed in a label field next to input field.



- 2. In second row, add drop down and add some values in drop down through jQuery and on selection, value should get displayed in tooltip of element.
- 3. Add a date field next to drop down and its default value should be blank and on selection text field in datepicker should be enabled but its corresponding datepicker area where you can select date should get hide and on click of datepicker it should not get open(Use jQuery).


4. In third row add a checkbox and two radio buttons (YES and NO) next to the checkbox in second column. When checkbox get checked YES radio button get selected and when checkbox get unchecked NO radio button gets selected. Similar handling is required on click of YES radio button checkbox get checked and on click of NO radio button checkbox should get unchecked.

Only one radio should get selected at a time and default selected radio will be NO and checkbox should be unchecked respectively in 5th column it should get disabled. On 6th column delete button should be present and on click of the button, row should get deleted.


```
<!DOCTYPE html>
GLhlTQ8iRABdZL1603oVMWSktQ0p6b7In1Zl3/Jr59b6EGGoI1aFkw7cmDA6j6gD"
</head>
</script>
</select>
 this.type='date'
 </script>
```

```
<hr>
<hr>
<hr>
<hr>
<hr>
<hr>
<br/>
<br/>
<br/>
<input type="checkbox" id="ckbox">
<input type="radio" id="radio1" name="ck">
<label>YES</label>
<input type="radio" id="radio2" name="ck" checked>
<label>NO</label>
<script>
$("#ckbox").click(function() {
$("#radio1").click();
});
$("#radio2").click(function() {
$("#ckbox").prop('checked',false);
});
$("#radio1").click(function() {
$("#ckbox").prop('checked',true);
});
</script>
<br>
<br>
<br/>
<br/
```

Q.2



Q3.

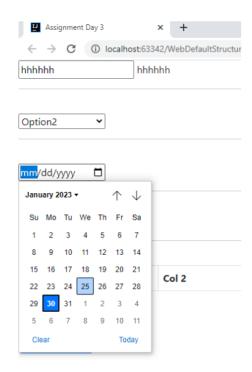

Q4.



