

LEC-9: SQL in 1-Video




1. **SQL**: Structured Query Language, used to access and manipulate data.
2. SQL used **CRUD** operations to communicate with DB.
 1. **CREATE** - execute INSERT statements to insert new tuple into the relation.
 2. **READ** - Read data already in the relations.
 3. **UPDATE** - Modify already inserted data in the relation.
 4. **DELETE** - Delete specific data point/tuple/row or multiple rows.
3. **SQL is not DB, is a query language.**
4. What is **RDBMS**? (Relational Database Management System)
 1. Software that enable us to implement designed relational model.
 2. e.g., MySQL, MS SQL, Oracle, IBM etc.
 3. Table/Relation is the simplest form of data storage object in R-DB.
 4. **MySQL** is open-source RDBMS, and it uses SQL for all CRUD operations
5. **MySQL** used client-server model, where client is CLI or frontend that used services provided by MySQL server.
6. **Difference between SQL and MySQL**
 1. SQL is Structured Query language used to perform CRUD operations in R-DB, while MySQL is a RDBMS used to store, manage and administrate DB (provided by itself) using SQL.

SQL DATA TYPES (Ref: https://www.w3schools.com/sql/sql_datatypes.asp)

1. In SQL DB, data is stored in the form of tables.
2. Data can be of different types, like INT, CHAR etc.

DATATYPE	Description
CHAR	string(0-255), string with size = (0, 255], e.g., CHAR(251)
VARCHAR	string(0-255)
TINYTEXT	String(0-255)
TEXT	string(0-65535)
BLOB	string(0-65535)
MEDIUMTEXT	string(0-16777215)
MEDIUMBLOB	string(0-16777215)
LONGTEXT	string(0-4294967295)
LOBLOB	string(0-4294967295)
TINYINT	integer(-128 to 127) 1 bytes
SMALLINT	integer(-32768 to 32767) 2 bytes
MEDIUMINT	integer(-8388608 to 8388607)
INT	integer(-2147483648 to 2147483647) 4 bytes
BIGINT	integer (-9223372036854775808 to 9223372036854775807) 8 bytes
FLOAT	Decimal with precision to 23 digits 4 bytes
DOUBLE	Decimal with 24 to 53 digits

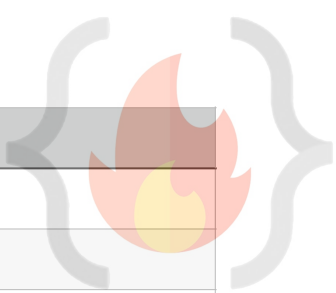

DATATYPE	Description
DECIMAL	Double stored as string
DATE	YYYY-MM-DD
DATETIME	YYYY-MM-DD HH:MM:SS
TIMESTAMP	YYYYMMDDHHMMSS
TIME	HH:MM:SS
ENUM	One of the preset values
SET	One or many of the preset values
BOOLEAN	0/1
BIT	e.g., BIT(n), n upto 64, store values in bits.

3. Size: TINY < SMALL < MEDIUM < INT < BIGINT.
4. **Variable length Data types** e.g., VARCHAR, are better to use as they occupy space equal to the actual data size.
5. Values can also be unsigned e.g., INT UNSIGNED.
6. **Types of SQL commands:**
 1. **DDL** (data definition language): defining relation schema.
 1. **CREATE**: create table, DB, view.
 2. **ALTER TABLE**: modification in table structure. e.g, change column datatype or add/remove columns.
 3. **DROP**: delete table, DB, view. syntax : **DROP DATABASE** database_name;
 4. **TRUNCATE**: remove all the tuples from the table. syntax : **TRUNCATE TABLE** table_name;
 5. **RENAME**: rename DB name, table name, column name etc.
 2. **DRL/DQL** (data retrieval language / data query language): retrieve data from the tables.
 1. **SELECT**
 3. **DML** (data modification language): use to perform modifications in the DB
 1. **INSERT**: insert data into a relation
 2. **UPDATE**: update relation data.
 3. **DELETE**: delete row(s) from the relation.
 4. **DCL** (Data Control language): grant or revoke authorities from user.
 1. **GRANT**: access privileges to the DB
 2. **REVOKE**: revoke user access privileges.
 5. **TCL** (Transaction control language): to manage transactions done in the DB
 1. **START TRANSACTION**: begin a transaction
 2. **COMMIT**: apply all the changes and end transaction
 3. **ROLLBACK**: discard changes and end transaction
 4. **SAVEPOINT**: checkout within the group of transactions in which to rollback.

MANAGING DB (DDL)

1. **Creation of DB**
 1. **CREATE DATABASE IF NOT EXISTS db-name;**
 2. **USE db-name;** //need to execute to choose on which DB CREATE TABLE etc commands will be executed.
//make switching between DBs possible.
 3. **DROP DATABASE IF EXISTS db-name;** //dropping database.
 4. **SHOW DATABASES;** //list all the DBs in the server.
 5. **SHOW TABLES;** //list tables in the selected DB.



DATA RETRIEVAL LANGUAGE (DRL)

1. Syntax: `SELECT <set of column names> FROM <table_name>;`
2. Order of execution from RIGHT to LEFT.
3. Q. Can we use **SELECT** keyword without using **FROM** clause?
 1. Yes, using DUAL Tables.
 2. Dual tables are dummy tables created by MySQL, help users to do certain obvious actions without referring to user defined tables.
 3. e.g., `SELECT 55 + 11;`
`SELECT now();`
`SELECT ucase();` etc.
4. **WHERE**
 1. Reduce rows based on given conditions.
 2. E.g., `SELECT * FROM customer WHERE age > 18;`
5. **BETWEEN**
 1. `SELECT * FROM customer WHERE age between 0 AND 100;`
 2. In the above e.g., 0 and 100 are inclusive. **including 0 AND 100**
6. **IN**
 1. Reduces **OR** conditions;
 2. e.g., `SELECT * FROM officers WHERE officer_name IN ('Lakshay', 'Maharana Pratap', 'Deepika');`
7. **AND/OR/NOT**
 1. **AND**: `WHERE cond1 AND cond2`
 2. **OR**: `WHERE cond1 OR cond2`
 3. **NOT**: `WHERE col_name NOT IN (1,2,3,4);`
8. **IS NULL**
 1. e.g., `SELECT * FROM customer WHERE prime_status is NULL;`
9. **Pattern Searching / Wildcard ('%', '_')**
 1. '%', any number of character from 0 to n. Similar to '*' asterisk in regex.
 2. '_', only one character.
 3. `SELECT * FROM customer WHERE name LIKE 'p%';`
10. **ORDER BY**
 1. Sorting the data retrieved using **WHERE** clause.
 2. `ORDER BY <column-name> DESC;`
 3. **DESC** = Descending and **ASC** = Ascending
 4. e.g., `SELECT * FROM customer ORDER BY name DESC; LIMIT 5`
11. **GROUP BY**
 1. **GROUP BY** Clause is used to collect data from multiple records and group the result by one or more column. It is generally used in a **SELECT** statement.
 2. Groups into category based on column given.
 3. `SELECT c1, c2, c3 FROM sample_table WHERE cond GROUP BY c1, c2, c3.`
 4. All the column names mentioned after **SELECT** statement shall be repeated in **GROUP BY**, in order to successfully execute the query.
 5. Used with aggregation functions to perform various actions. **used just after select keyword**
 1. `COUNT()`
 2. `SUM()`
 3. `AVG()`
 4. `MIN()`
 5. `MAX()`
12. **DISTINCT**
 1. Find distinct values in the table.
 2. `SELECT DISTINCT(col_name) FROM table_name;`
 3. **GROUP BY** can also be used for the same
 1. "Select col_name from table GROUP BY col_name;" same output as above **DISTINCT** query.

INITCAP: The purpose of this function is to return the string with the first letter in uppercase and the rest of the letters in lowercase.
Syntax:

`INITCAP('string')`

```
SELECT country, COUNT(*) AS number
FROM Customers
GROUP BY country;
```

2. SQL is smart enough to realise that if you are using GROUP BY and not using any aggregation function, then you mean "DISTINCT".

13. GROUP BY HAVING

1. Out of the categories made by GROUP BY, we would like to know only particular thing (cond).
2. Similar to WHERE.
3. Select COUNT(cust_id), country from customer GROUP BY country HAVING COUNT(cust_id) > 50;
4. **WHERE vs HAVING** sounds same but different
 1. Both have same function of filtering the row base on certain conditions.
 2. **WHERE** clause is used to filter the rows from the table based on specified condition
 3. **HAVING** clause is used to filter the rows from the groups based on the specified condition.
 4. HAVING is used after GROUP BY while WHERE is used before GROUP BY clause.
 5. If you are using HAVING, GROUP BY is necessary.
 6. WHERE can be used with SELECT, UPDATE & DELETE keywords while GROUP BY used with SELECT.

CONSTRAINTS (DDL) are basically rules to be followed while defining the table

1. Primary Key

```
CREATE TABLE Customer
(
  id INT PRIMARY KEY,
  branch_id INT,
  First name CHAR(50),
  Last name CHAR(50),
  DOB DATE,
  Gender CHAR(6),
  PRIMARY KEY (id)
);
```

Choose one of the two ways.

1. PK is not null, unique and only one per table.

2. Foreign Key

1. FK refers to PK of other table.
2. Each relation can having any number of FK.
3. CREATE TABLE ORDER (
id INT PRIMARY KEY,
delivery_date DATE,
order_placed_date DATE,
cust_id INT,
FOREIGN KEY (cust_id) REFERENCES customer(id)
);

3. UNIQUE

1. Unique, can be null, table can have multiple unique attributes.
2. CREATE TABLE customer (
...
email VARCHAR(1024) UNIQUE,
...
);

4. CHECK

1. CREATE TABLE customer (
...
CONSTRAINT age_check CHECK (age > 12),
...
);

2. "age_check", can also avoid this, MySQL generates name of constraint automatically.

There won't be any database update and if the age < 12 years.

5. **DEFAULT**

1. Set default value of the column.
2. CREATE TABLE account (
...
savings-rate DOUBLE NOT NULL DEFAULT 4.25,
...
);

DESC table_name

gives description of the table

6. An attribute can be **PK and FK both** in a table.

7. **ALTER OPERATIONS**

1. Changes schema
2. **ADD**
 1. **Add new column.**
 2. ALTER TABLE table_name ADD new_col_name datatype ADD new_col_name_2 datatype;
 3. e.g., ALTER TABLE customer ADD age INT NOT NULL;
3. **MODIFY**
 1. **Change datatype of an attribute.**
 2. ALTER TABLE table-name MODIFY col-name col-datatype;
 3. E.g., VARCHAR TO CHAR
ALTER TABLE customer MODIFY name CHAR(1024);
4. **CHANGE COLUMN**
 1. **Rename column name.**
 2. ALTER TABLE table-name CHANGE COLUMN old-col-name new-col-name new-col-datatype;
 3. e.g., ALTER TABLE customer CHANGE COLUMN name customer-name VARCHAR(1024);
5. **DROP COLUMN**
 1. **Drop a column completely.**
 2. ALTER TABLE table-name DROP COLUMN col-name;
 3. e.g., ALTER TABLE customer DROP COLUMN middle-name;
6. **RENAME TO**
 1. **Rename table name itself.**
 2. ALTER TABLE table-name RENAME TO new-table-name;
 3. e.g., ALTER TABLE customer RENAME TO customer-details;

DATA MANIPULATION LANGUAGE (DML)

1. **INSERT**

1. INSERT INTO table-name(col1, col2, col3) VALUES (v1, v2, v3), (val1, val2, val3);

SET 2. **UPDATE**

1. UPDATE table-name SET col1 = 1, col2 = 'abc' WHERE id = 1;
2. Update multiple rows e.g.,
 1. UPDATE student SET standard = standard + 1;

SET SQL_SAFE_UPDATES = 0
if you want to change entire rows in table because it gives warning and then,
UPDATE CUSTOMER SET PINCODE = 411014

3. **ON UPDATE CASCADE**

1. Can be added to the table while creating constraints. Suppose there is a situation where we have two tables such that primary key of one table is the foreign key for another table. if we update the primary key of the first table then using the ON UPDATE CASCADE foreign key of the second table automatically get updated.


3. **DELETE**

1. DELETE FROM table-name WHERE id = 1;
2. DELETE FROM table-name; //all rows will be deleted.
3. **DELETE CASCADE - (to overcome DELETE constraint of Referential constraints)**
 1. What would happen to child entry if parent table's entry is deleted?
 2. CREATE TABLE ORDER (
order_id int PRIMARY KEY,
delivery_date DATE,
cust_id INT,

Note: Be careful when deleting records in a table! Notice the WHERE clause in the DELETE statement. The WHERE clause specifies which record(s) should be deleted. If you omit the WHERE clause, all records in the table will be deleted!

on delete cascade : corresponding row in the child table is also deleted

deletes the whole row



```
FOREIGN KEY(cust_id) REFERENCES customer(id) ON DELETE CASCADE
);
```

3. ON DELETE NULL - (can FK have null values?)

```
1. CREATE TABLE ORDER (
    order_id int PRIMARY KEY,
    delivery_date DATE,
    cust_id INT,
    FOREIGN KEY(cust_id) REFERENCES customer(id) ON DELETE SET NULL
);
```

on delete null : sets child value null when parent row is deleted

4. REPLACE


1. Primarily used for already present tuple in a table.
2. As UPDATE, using REPLACE with the help of WHERE clause in PK, then that row will be replaced.
3. As INSERT, if there is no duplicate data new tuple will be inserted. i.e. a new row will be inserted with all values null except the values you are putting
4. REPLACE INTO student (id, class) VALUES(4, 3);
5. REPLACE INTO table SET col1 = val1, col2 = val2;

JOINING TABLES

1. All RDBMS are relational in nature, we refer to other tables to get meaningful outcomes.
2. FK are used to do reference to other table.

3. INNER JOIN

1. Returns a resultant table that has matching values from both the tables or all the tables.
2. `SELECT column-list FROM table1 INNER JOIN table2 ON condition1
INNER JOIN table3 ON condition2`
...;




3. Alias in MySQL (AS)

1. Aliases in MySQL is used to give a temporary name to a table or a column in a table for the purpose of a particular query. It works as a nickname for expressing the tables or column names. It makes the query short and neat.
2. `SELECT col_name AS alias_name FROM table_name;`
3. `SELECT col_name1, col_name2,... FROM table_name AS alias_name;`

4. OUTER JOIN


1. LEFT JOIN

1. This returns a resulting table that all the data from left table and the matched data from the right table.
2. `SELECT columns FROM table LEFT JOIN table2 ON Join_Condition;`




2. RIGHT JOIN

1. This returns a resulting table that all the data from right table and the matched data from the left table.
2. `SELECT columns FROM table RIGHT JOIN table2 ON join_cond;`



3. FULL JOIN -- not a keyword


1. This returns a resulting table that contains all data when there is a match on left or right table data.
2. **Emulated** in MySQL using LEFT and RIGHT JOIN.
3. `LEFT JOIN UNION RIGHT JOIN.`
4. `SELECT columns FROM table1 as t1 LEFT JOIN table2 as t2 ON t1.id = t2.id
UNION
SELECT columns FROM table1 as t1 RIGHT JOIN table2 as t2 ON t1.id = t2.id;`
5. UNION ALL, can also be used this will duplicate values as well while UNION gives unique values.



FULL OUTER JOIN

5. CROSS JOIN

1. This returns all the cartesian products of the data present in both tables. Hence, all possible variations are reflected in the output.
2. Used rarely in practical purpose.
3. Table-1 has 10 rows and table-2 has 5, then resultant would have 50 rows.
4. `SELECT column-lists FROM table1 CROSS JOIN table2;`



CROSS JOIN

6. SELF JOIN



1. It is used to get the output from a particular table when the same table is joined to itself.
2. Used very less.
3. Emulated using INNER JOIN.
4. `SELECT columns FROM table as t1 INNER JOIN table as t2 ON t1.id = t2.id;`

7. Join without using join keywords.

1. `SELECT * FROM table1, table2 WHERE condition;`
2. e.g., `SELECT artist_name, album_name, year_recorded FROM artist, album WHERE artist.id = album.artist_id;`

SET OPERATIONS

1. Used to combine multiple select statements.
2. Always gives distinct rows.

JOIN	SET Operations
Combines multiple tables based on matching condition.	Combination is resulting set from two or more SELECT statements.
Column wise combination.	Row wise combination.
Data types of two tables can be different.	Datatypes of corresponding columns from each table should be the same.
Can generate both distinct or duplicate rows.	Generate distinct rows.
The number of column(s) selected may or may not be the same from each table.	The number of column(s) selected must be the same from each table.
Combines results horizontally.	Combines results vertically.

3. UNION

1. Combines two or more SELECT statements.
2. `SELECT * FROM table1`
`UNION`
`SELECT * FROM table2;`
3. Number of column, order of column must be same for table1 and table2.

Note: If some customers or suppliers have the same city, each city will only be listed once, because UNION selects only distinct values. Use UNION ALL to also select duplicate values!

4. INTERSECT

1. Returns common values of the tables.
2. Emulated.
3. `SELECT DISTINCT column-list FROM table-1 INNER JOIN table-2 USING(join_cond);`
4. `SELECT DISTINCT * FROM table1 INNER JOIN table2 ON USING(id);`


INNER JOIN

5. MINUS

1. This operator returns the distinct row from the first table that does not occur in the second table.
2. Emulated.
3. `SELECT column_list FROM table1 LEFT JOIN table2 ON condition WHERE table2.column_name IS NULL;`
4. e.g., `SELECT id FROM table-1 LEFT JOIN table-2 USING(id) WHERE table-2.id IS NULL;`

SUB QUERIES

1. Outer query depends on inner query.
2. Alternative to joins.
3. Nested queries.
4. `SELECT column_list (s) FROM table_name WHERE column_name OPERATOR (SELECT column_list (s) FROM table_name [WHERE]);`
5. e.g., `SELECT * FROM table1 WHERE col1 IN (SELECT col1 FROM table1);`
6. Sub queries exist mainly in 3 clauses
 1. Inside a WHERE clause.

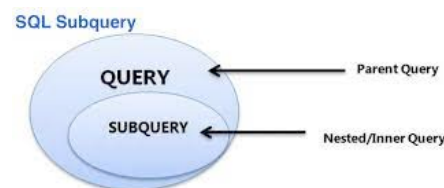



2. Inside a FROM clause.
3. Inside a SELECT clause.

7. Subquery using FROM clause

1. SELECT MAX(rating) FROM (SELECT * FROM movie WHERE country = 'India') as temp;

8. Subquery using SELECT

1. SELECT (SELECT column_list(s) FROM T_name WHERE condition), columnList(s) FROM T2_name WHERE condition;

9. Derived Subquery

1. SELECT columnLists(s) FROM (SELECT columnLists(s) FROM table_name WHERE [condition]) as new_table_name;

10. Co-related sub-queries

1. With a normal nested subquery, the inner SELECT query runs first and executes once, returning values to be used by the main query. A correlated subquery, however, executes once for each candidate row considered by the outer query. In other words, the inner query is driven by the outer query.

```
SELECT column1, column2, ....
FROM table1 as outer
WHERE column1 operator
      (SELECT column1, column2
       FROM table2
       WHERE expr1 =
           outer.expr2);
```

JOIN VS SUB-QUERIES

JOINS	SUBQUERIES
Faster	Slower
Joins maximise calculation burden on DBMS	Keeps responsibility of calculation on user.
Complex, difficult to understand and implement	Comparatively easy to understand and implement.
Choosing optimal join for optimal use case is difficult	Easy.

MySQL VIEWS

1. A view is a database object that has no values. Its contents are based on the base table. It contains rows and columns similar to the real table.
2. In MySQL, the View is a **virtual table** created by a query by joining one or more tables. It is operated similarly to the base table but does not contain any data of its own.
3. The View and table have one main difference that the views are definitions built on top of other tables (or views). If any changes occur in the underlying table, the same changes reflected in the View also.
4. CREATE VIEW view_name AS SELECT columns FROM tables [WHERE conditions];
5. ALTER VIEW view_name AS SELECT columns FROM table WHERE conditions;
6. DROP VIEW IF EXISTS view_name;
7. CREATE VIEW Trainer AS SELECT c.course_name, c.trainer, t.email FROM courses c, contact t WHERE c.id = t.id; (View using Join clause).

NOTE: We can also import/export table schema from files (.csv or json).

declare @ float
set @ = (select avg(total_price) from invoice) - - - - > declaring a variable and setting a value

SELECT ROUND(235.415, 2) AS RoundValue; - - - > rounds the value upto 2 decimal places