



After installation we are getting a blue window which is called IDE – Integrated Development Environment / Editor / Blue screen.

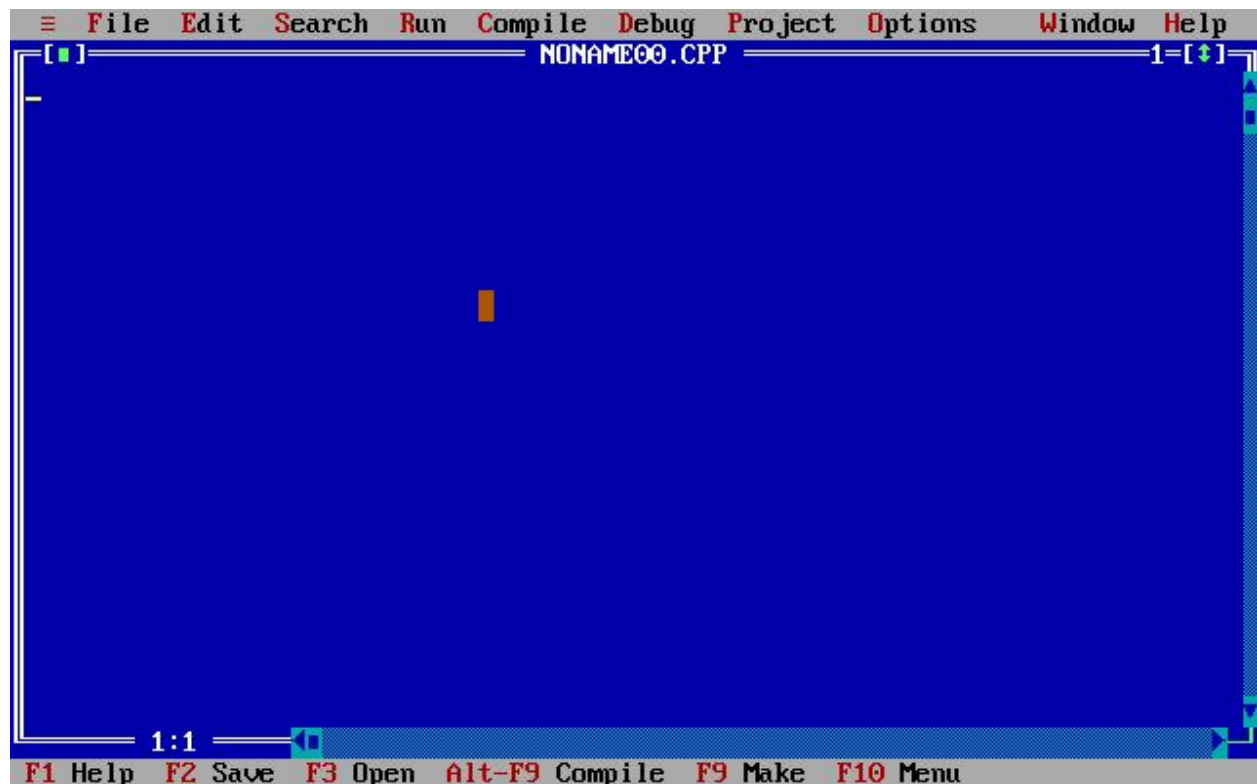

Sample program:

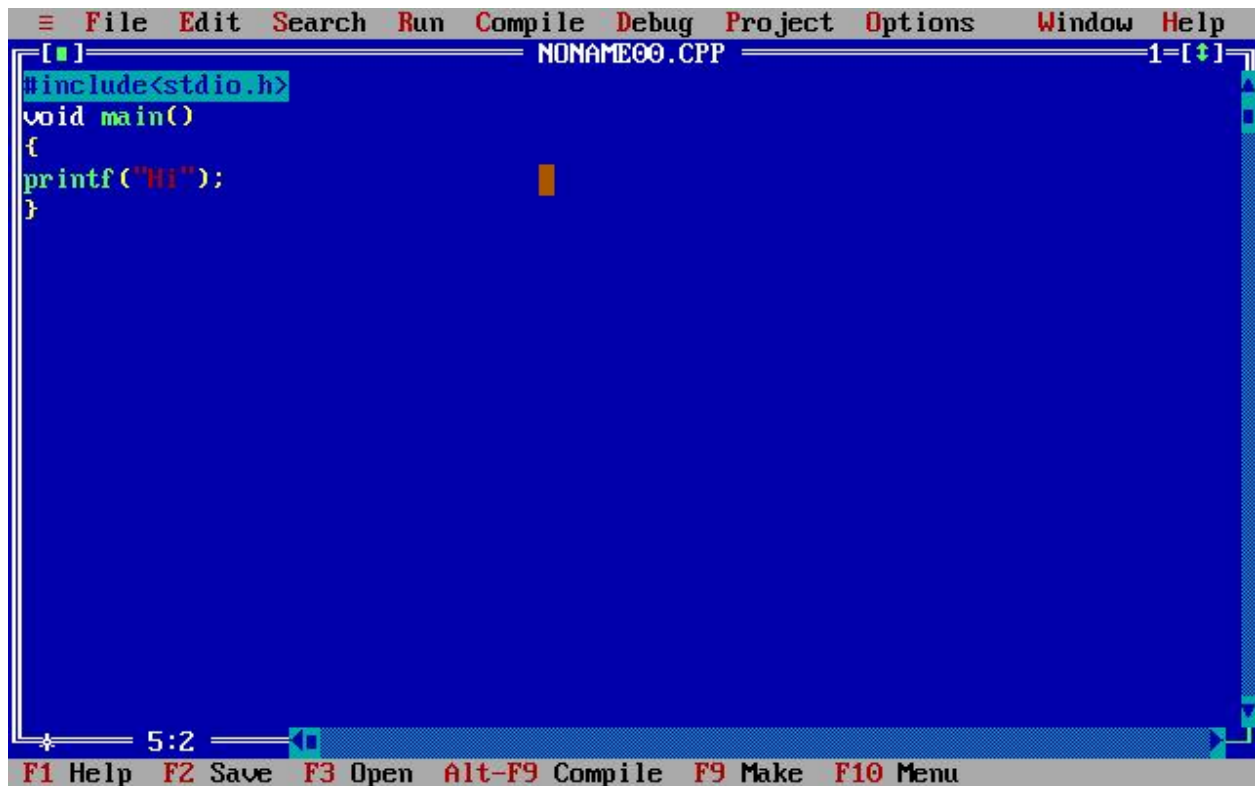

The screenshot shows the Turbo C++ IDE interface. The menu bar at the top includes File, Edit, Search, Run, Compile, Debug, Project, Options, Window, and Help. The title bar indicates the file is NONAME00.CPP. The code editor contains the following C program:

```
#include<stdio.h>
void main()
{
printf("Hi");
}
```

The status bar at the bottom shows the cursor position as 5:2 and lists function key shortcuts: F1 Help, F2 Save, F3 Open, Alt-F9 Compile, F9 Make, and F10 Menu.

To get full / half screen: Alt+Enter

F2 – save or click on file menu and select save [in laptop fn+f2]

Alt+F9 or Alt+C and select compile

Ctrl+F9 or Alt+R and select Run

Press Alt+F5 for output

Now the result displayed in black window which is called

Command prompt / console / run window / user screen

Turbo c\c++ IDE for Windows 7\vista by AKKI


Hi_

```
File Edit Search Run Compile Debug Project Options Window Help
21.CPP
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Hi");
}
```

1:1

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Make F10 Menu

Hi_

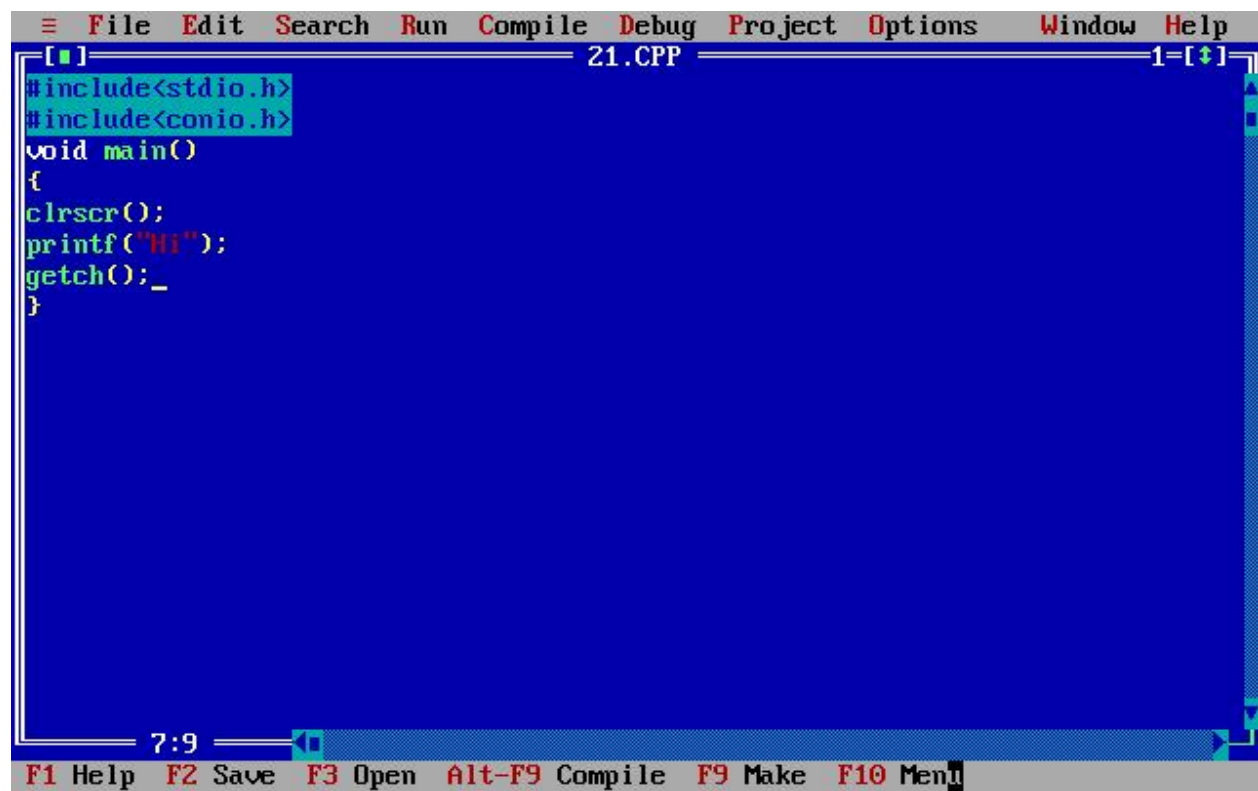


The screenshot shows the Turbo C++ IDE interface. The menu bar at the top includes File, Edit, Search, Run, Compile, Debug, Project, Options, Window, and Help. The title bar of the active window reads '[] 21.CPP 1=[]'. The code editor contains the following C++ code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("HI");
getch();_
}
```

The status bar at the bottom displays the cursor position as 7:9 and provides function key shortcuts: F1 Help, F2 Save, F3 Open, Alt-F9 Compile, F9 Make, and F10 Menu.

Hi_

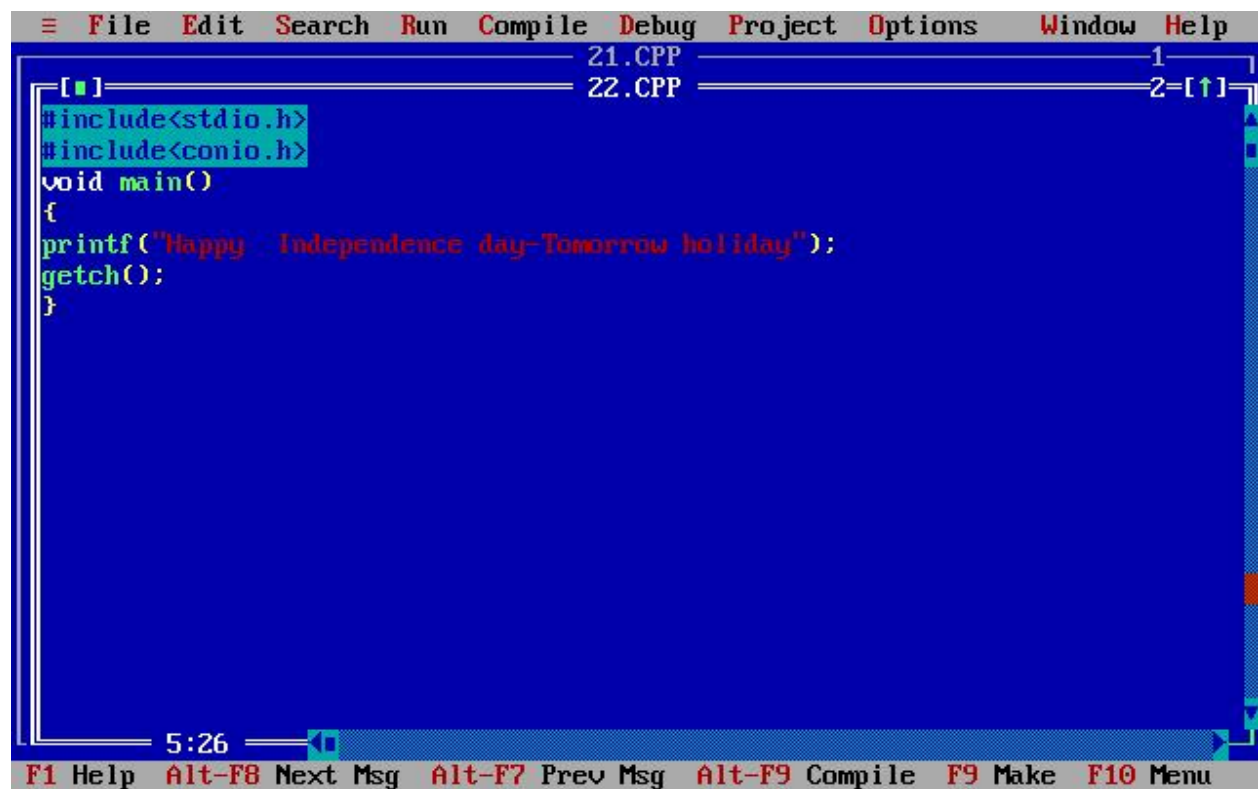

The screenshot shows the Turbo C++ IDE interface. The menu bar at the top includes File, Edit, Search, Run, Compile, Debug, Project, Options, Window, and Help. The window title bar indicates the active file is 22.CPP. The code editor contains the following C++ program:

```
[■]
#include<stdio.h>
#include<conio.h>
void main()
{
printf("Happy Independence day-Tomorrow holiday");
getch();
}
```

The status bar at the bottom displays the time 5:26 and various function key shortcuts: F1 Help, Alt-F8 Next Msg, Alt-F7 Prev Msg, Alt-F9 Compile, F9 Make, and F10 Menu.

HiHappy Independence day-Tomorrow holiday



To open old files press f3 or click on file menu and select open

To close the current file push green box or alt+f3

To close the editor / ide press alt+x [Quit]

To close the total windows at a time alt+w and select close all.

To get full blue screen press the arrow mark or f5 button

Data types:

To store anything in our system, we should have to allocate the memory[bytes]. This memory is having 3 properties.

1. What type of data it want to store
2. How many bytes required
3. Value range

These 3 properties decided by the data type.

int Sal = 32000; [int means non decimal no]

unsigned int sal = 65000;

long int sal = 450000;

in c & c++ 16 bit compiler $\rightarrow 2^{16} \rightarrow$ int -32768 to +32767 $\rightarrow$ 65536 $\rightarrow$ 2 bytes

65536

in java / .net / py / vscode/ dev c++ / online – 32 bit compilers
 $\rightarrow 2^{32} \rightarrow 4294967296 / 2 \rightarrow$ -2147483648 to +2147483647 $\rightarrow$ 4 bytes

float – decimal no's $\rightarrow 3.4 \times 10^{-38}$ to $3.4 \times 10^{+38} \rightarrow$ 4 bytes $\rightarrow$ %f

long float / double – 8 bytes → 1.7×10^{-308} to $1.7 \times 10^{+308}$ → %lf

long double – 10 bytes – 3.4×10^{-4932} to $1.1 \times 10^{+4932}$ → %Lf

char – alpha-numeric – alphabets, numbers and special char

char city[]="Hyd-500016"; string

ascii characters – 256

signed char → -128 to +127 → %c → 1 byte

unsigned char → 0 to 255

Void – nothing - empty