

The image shows a screenshot of the Turbo C++ IDE. The top window, titled 'INC.CPP', contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int x=3, y=2;
int z;
z=x++ * (x+y) - y--;
clrscr();
printf("x=%d, y=%d, z=%d",x,y,z);
getch();
}
```

The bottom window shows the output of the program: `x=4, y=1, z=13_`. The Windows taskbar at the bottom includes icons for various applications and shows the system clock as 2:22 PM on 22-Aug-24.

x=3 y=2

z = x++ * (x+y) - y--;

priority: (), *, -, = , x++, y--

(x+y) ==> (3+2)


x * 5 ==> 3 * 5 = 15

z = 15 - y ==> 15 - 2 ==> 13

z = 13

x++ ==> x=4

y-- = y=1

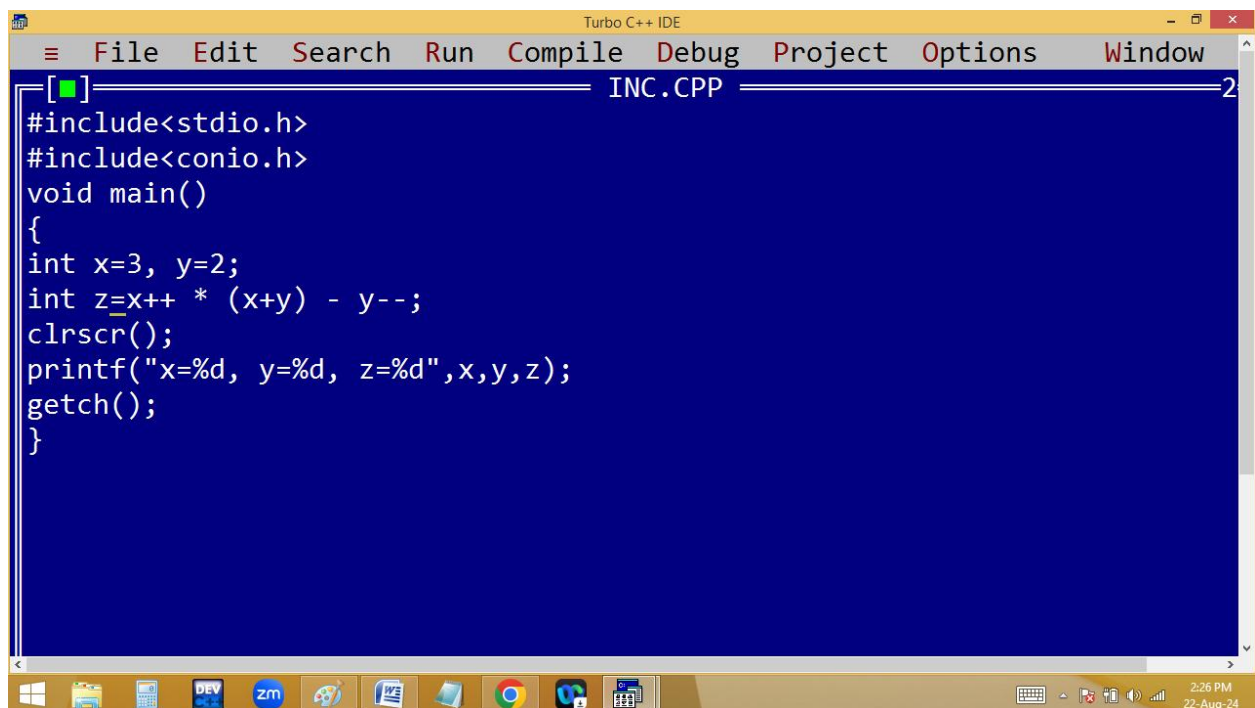

The screenshot shows the Turbo C++ IDE window titled "Turbo C++ IDE". The menu bar includes File, Edit, Search, Run, Compile, Debug, Project, Options, and Window. The editor window shows the following C++ code:

```
[■] INC.CPP 2
#include<stdio.h>
#include<conio.h>
void main()
{
int x=3, y=2;
int z=x++ * (x+y) - y--;
clrscr();
printf("x=%d, y=%d, z=%d",x,y,z);
getch();
}
```

The Windows taskbar at the bottom shows the Start button and several application icons, including DEV, zm, and others. The system clock in the bottom right corner displays "2:26 PM" and "22-Aug-24".

```
Turbo C++ IDE
x=4, y=1, z=16_
```

$$z = \underset{3}{\overline{x}}++ * (\underset{4}{\overline{x}} + \underset{1}{\overline{y}}) - \underset{2}{\overline{y}}--;$$
$$3 * \frac{4+1}{6} - 2$$
$$z = 3 * 6 - 2 = 16 \checkmark$$

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:



```
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 40 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=2;
clrscr();
printf("%d,%d,%d,%d,%d\n",++a,a++,a--,--a,++a);
printf("%d,%d,%d,%d,%d\n",++a,a*10,a=10,a++,++a);
getch();
}
/* In printf execution order right to left and printing left to right */
```

The bottom window shows the output of the program:

```
3,1,2,2,3
11,100,10,4,4
```

The Windows taskbar at the bottom shows the time as 2:43 PM on 22-Aug-24. The TC window title bar indicates the file is E:2PM.C.

a=2

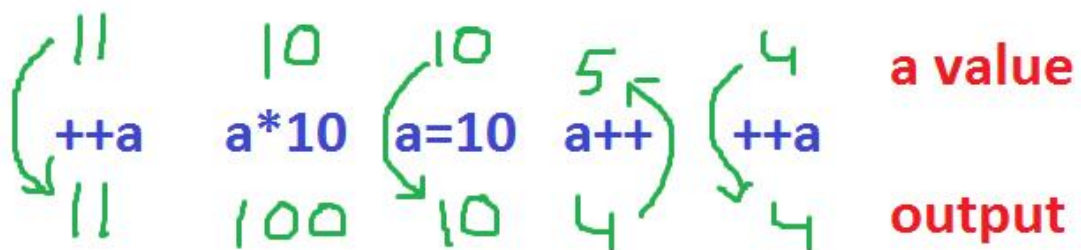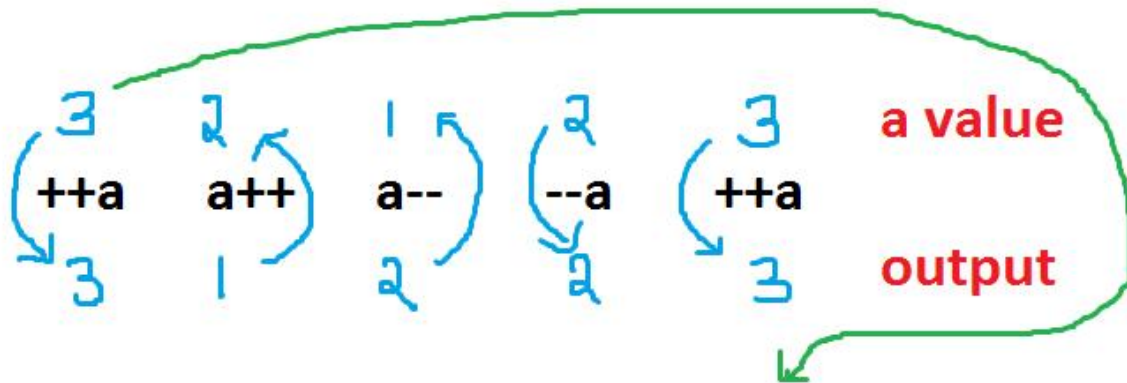

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 32 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
printf("%d,%d\n",++a, a=20 );
printf("%d, %d\n", a++, a= printf("Hi\n"), a=50);
printf("%d, %d, %d\n", a--,++a, a-1);
getch();
}
```


The bottom window shows the output of the program:

```
21,20
Hi
3, 3
5, 5, 3
```


The output consists of four lines: "21,20", "Hi", "3, 3", and "5, 5, 3". The first line is the result of the first printf statement, the second line is the result of the second printf statement, and the third line is the result of the third printf statement. The fourth line is a blank line, which is the result of the getch() function.

a=1


21 20
%d %d, ++a, a=20

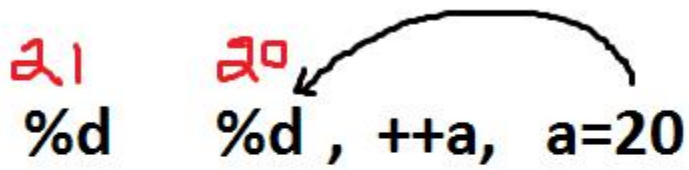

%d %d, a++, a=H\n, a=50
3 3

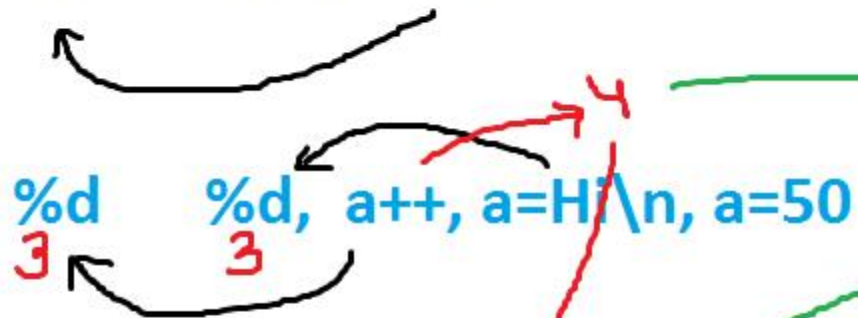

5 5 3
%d %d %d, a--, ++a, a-1

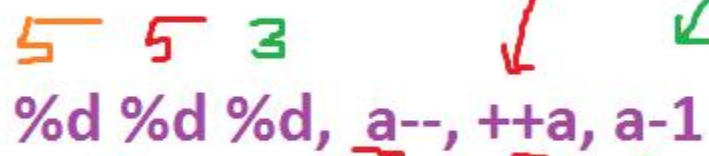

5 5 3




The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 5 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
a = a++ + ++a;
printf("a=%d\n",a);
a=1;
printf("a=%d\n",a++ + ++a);
getch();
}
```

The bottom window shows the output of the program:

```
a=5
a=4
```

The Windows taskbar at the bottom shows the time as 2:58 PM on 22-Aug-24. The taskbar includes icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Paint, Word, Chrome, and the TC application.

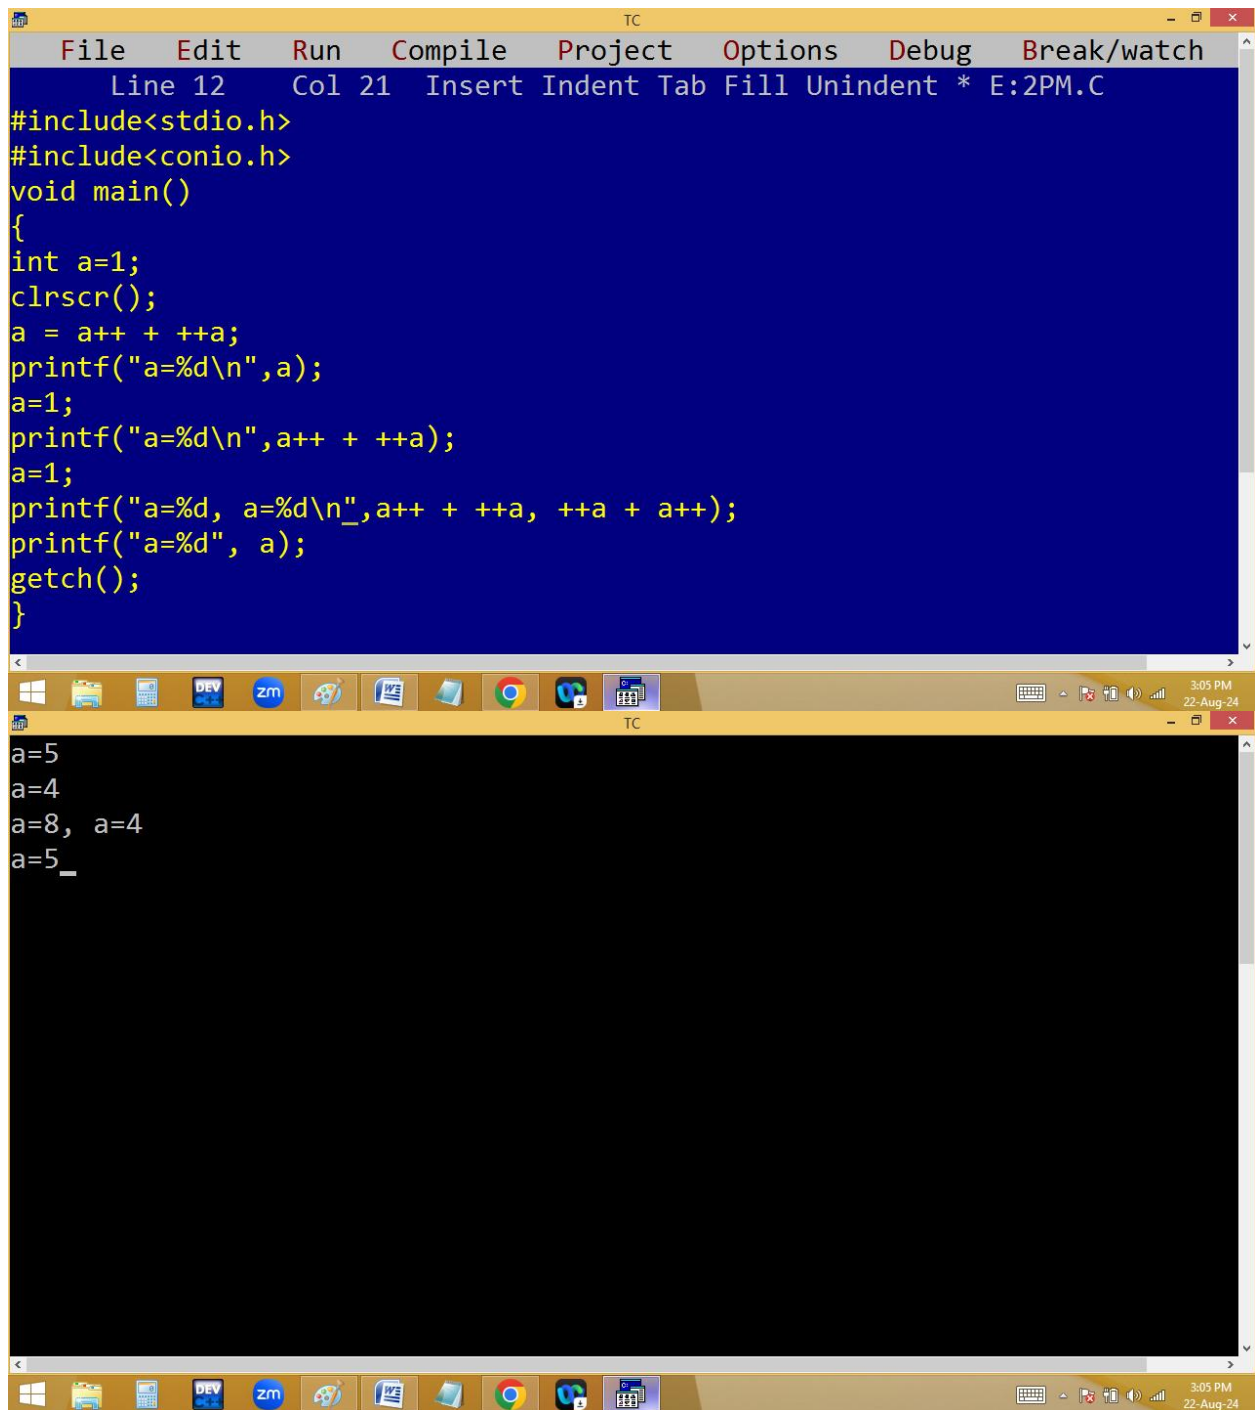

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 12 Col 21 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
a = a++ + ++a;
printf("a=%d\n",a);
a=1;
printf("a=%d\n",a++ + ++a);
a=1;
printf("a=%d, a=%d\n",a++ + ++a, ++a + a++);
printf("a=%d", a);
getch();
}
```

The bottom window shows the output of the program:

```
a=5
a=4
a=8, a=4
a=5_
```

The Windows taskbar at the bottom indicates the time is 3:05 PM on 22-Aug-24. The taskbar includes icons for various applications like DEV, zm, and a file explorer.

a=1

a = a++ + ++a;

priority: ++a, +, =, a++

1. ++a==>a=2


2. a = a + a ==> 2 + 2


3. a = 4

4. a++ ==> **a=5**

a=1

p("a=%d", a++ + ++a);

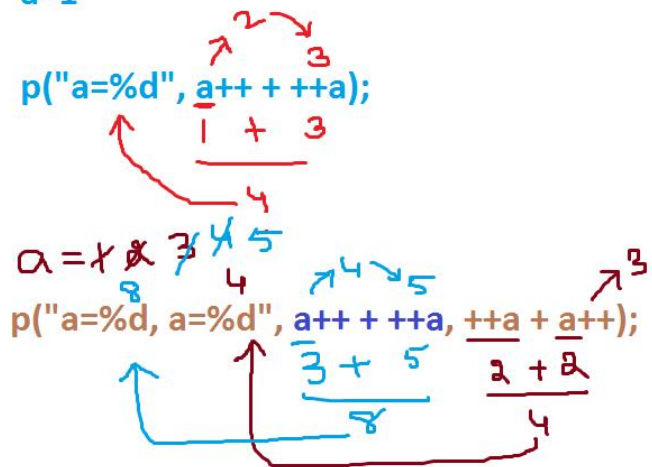

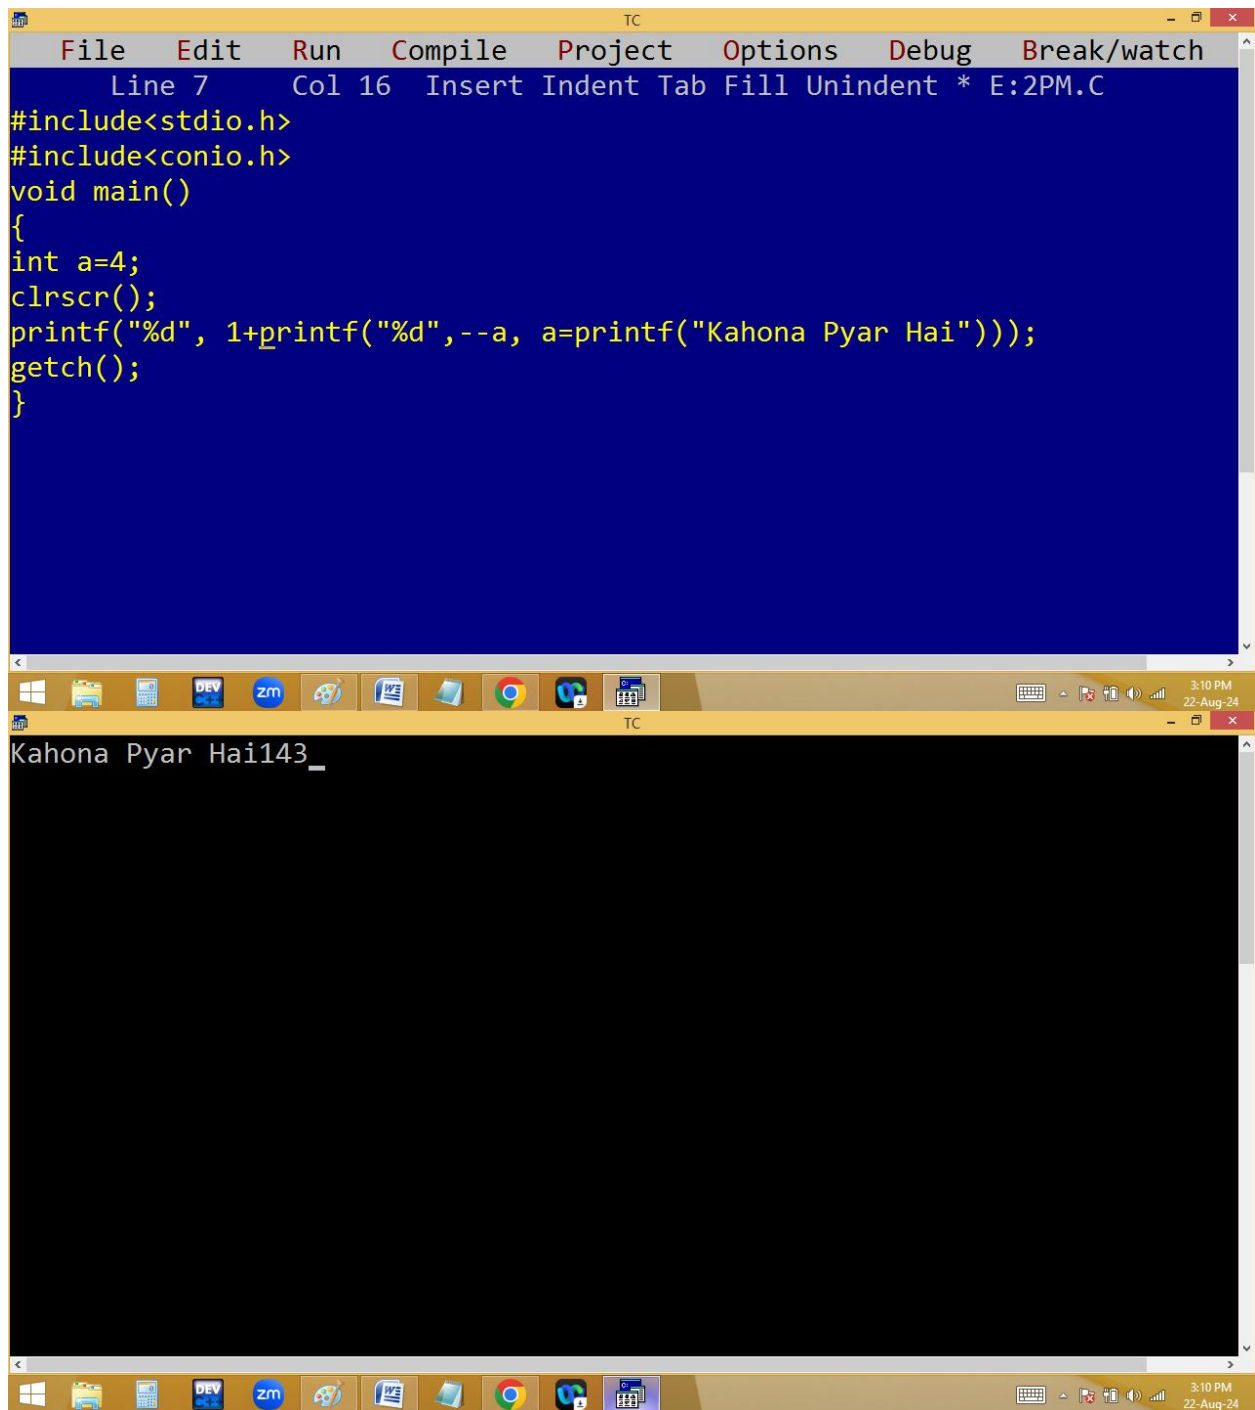

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 7 Col 16 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=4;
clrscr();
printf("%d", 1+printf("%d",--a, a=printf("Kahona Pyar Hai")));
getch();
}
```

The bottom window shows the output of the program, which is "Kahona Pyar Hai143_". The taskbar at the bottom indicates the system time is 3:10 PM on 22-Aug-24.

a=4

$p(\%d, 1+p(\%d, --a, a=p(\text{Kahona pyar hai})))$;

Kahonar pyar hai 143

$a = p(\text{Kahona pyar hai });$

$--a \rightarrow 14$

$1 + p(\%d, a);$


14

$2+1$

$p(\%d);$

Kahona pyar hai 143


```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 11 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=4,b;
clrscr();
b = ++a >= printf("India");
printf("%d%d",a,b);
getch();
}
```

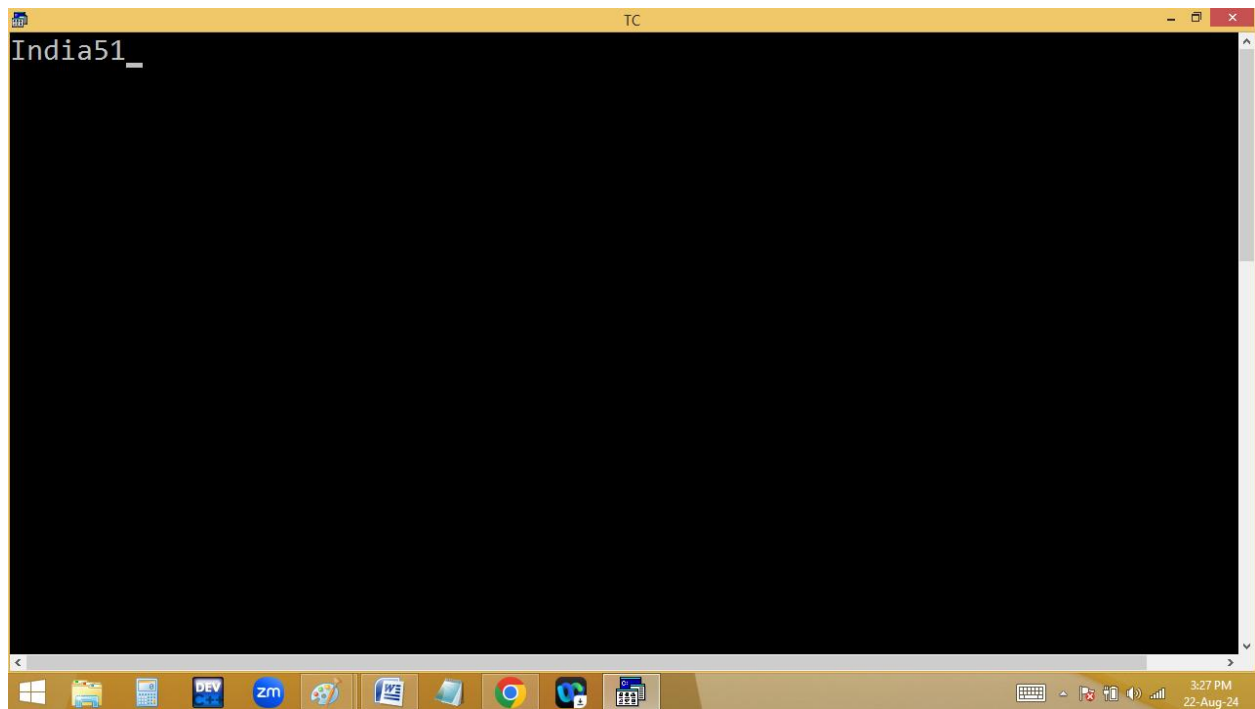

a=4

b = ++a >= p("India");

Handwritten red annotations: An arrow points from the '5' in '5 >= 5' to the '5' in '5 ✓'. Another arrow points from the '1' in '1 ✓' to the '5' in '5 >= 5'. A third arrow points from the '1' in '1 ✓' to the '5' in '5 >= 5'.

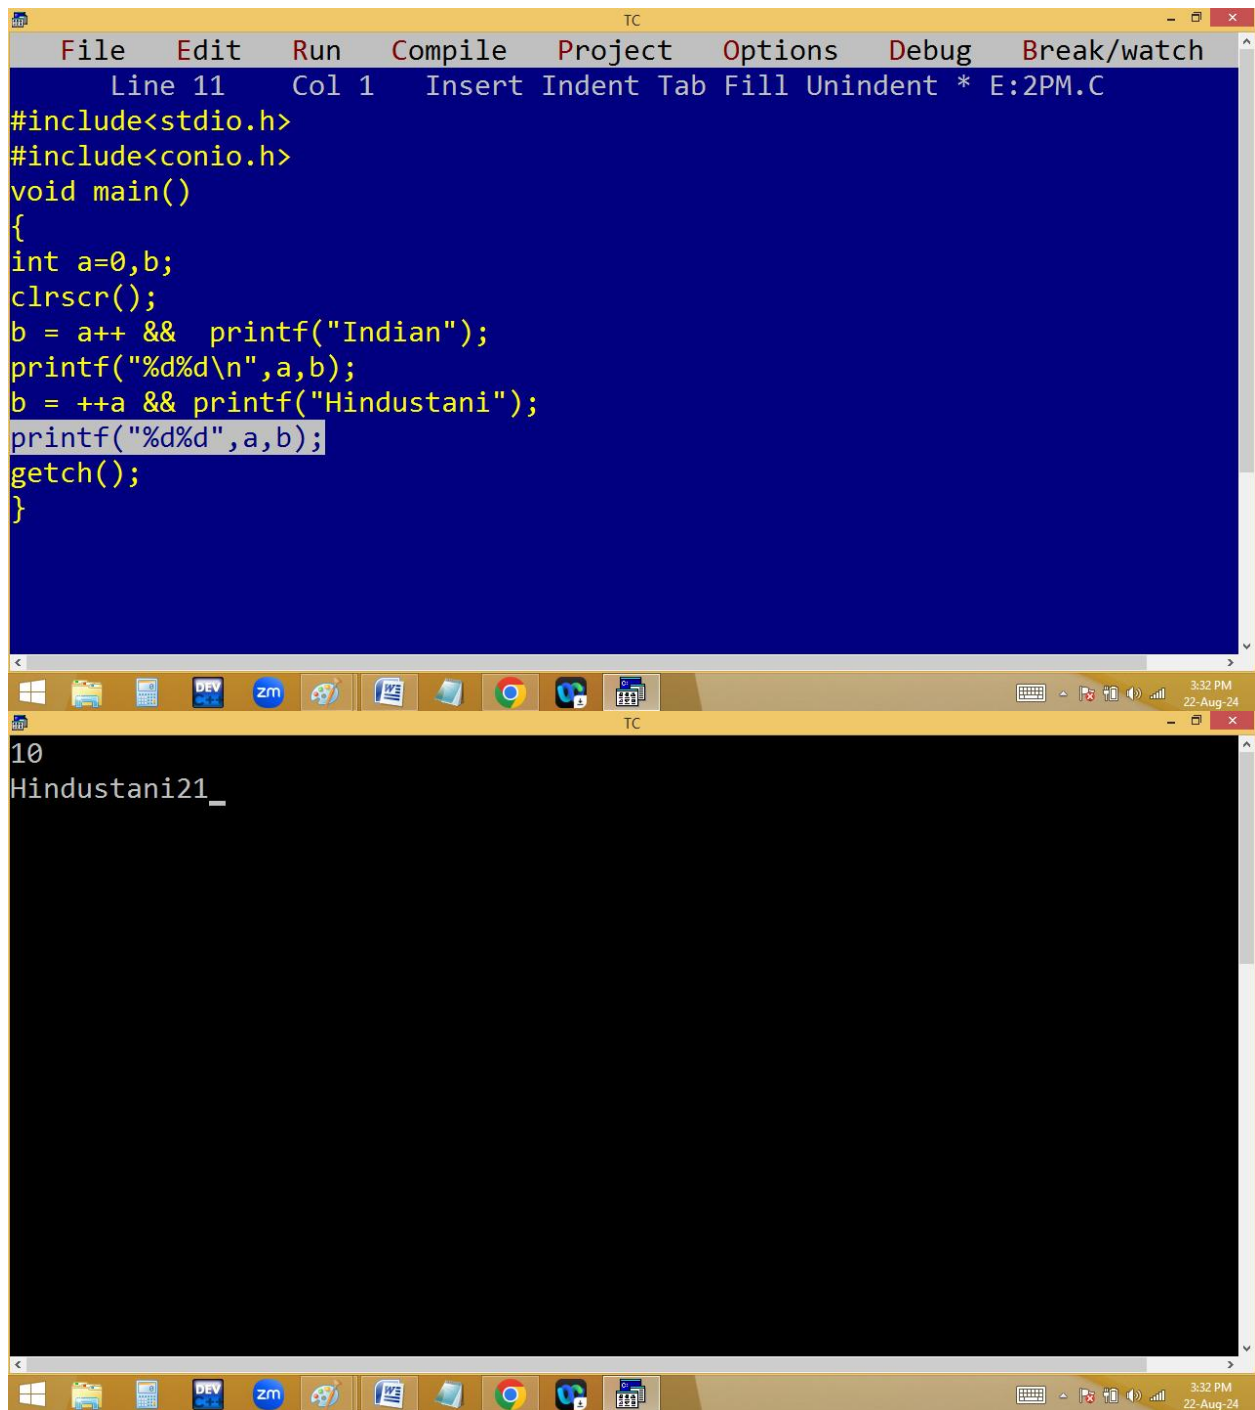

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0,b;
clrscr();
b = a++ && printf("Indian");
printf("%d%d\n",a,b);
b = ++a && printf("Hindustani");
printf("%d%d",a,b);
getch();
}
```

The bottom window shows the output of the program:


```
10
Hindustani21_
```

The IDE interface includes a menu bar at the top with options: File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the bottom right indicates the time as 3:32 PM on 22-Aug-24. The taskbar at the very bottom shows various application icons, including Windows Explorer, DEV, zm, and others.

```
TC
File Edit Run Compile Project Options Debug Break/watch
Error: Lvalue required in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0,b;
clrscr();
b = a++ && a=4;
printf("%d%d\n",a,b);
getch();
}
```

a=0

b = a++ && a=4

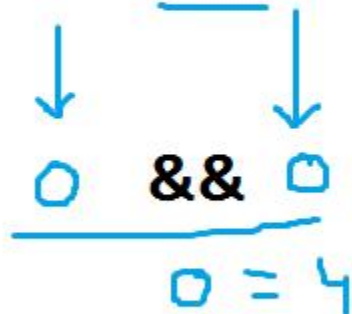

const = const ==> error

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window is the source code editor, which has a blue background. It contains the following C code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 23 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0,b=1,c;
clrscr();
c = a++ == --b;
printf("a=%d, b=%d, c=%d\n",a,b,c);
getch();
}
```

The bottom window is the output console, which has a black background. It displays the output of the program:

```
a=1, b=0, c=1
```

The Windows taskbar is visible at the bottom of the screen, showing various application icons and the system clock indicating 3:43 PM on 22-Aug-24.