



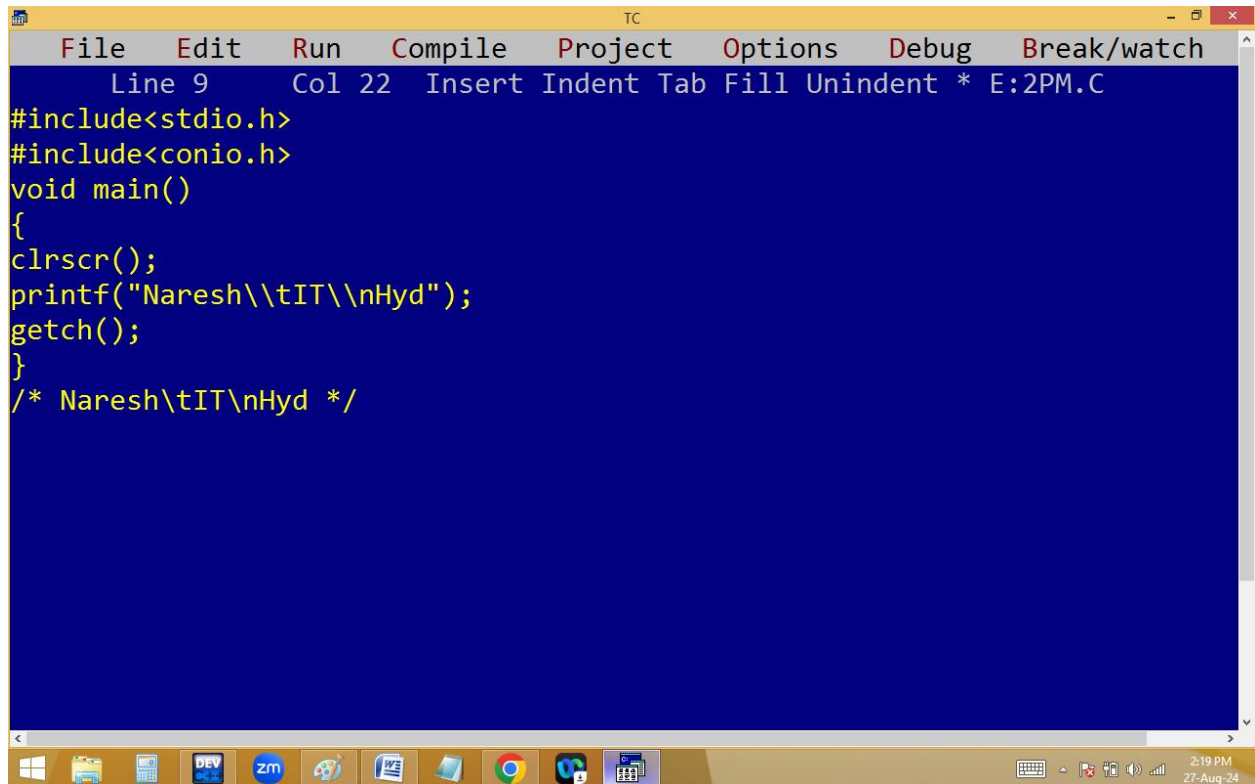

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 22 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Naresh\tIT\nHyd");
getch();
}
/* Naresh\tIT\nHyd */
```

p("Naresh\tIT\nHyd");


```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Naresh\\tIT\\nHyd");
getch();
}
/* Naresh\      IT\
   Hyd
*/
```

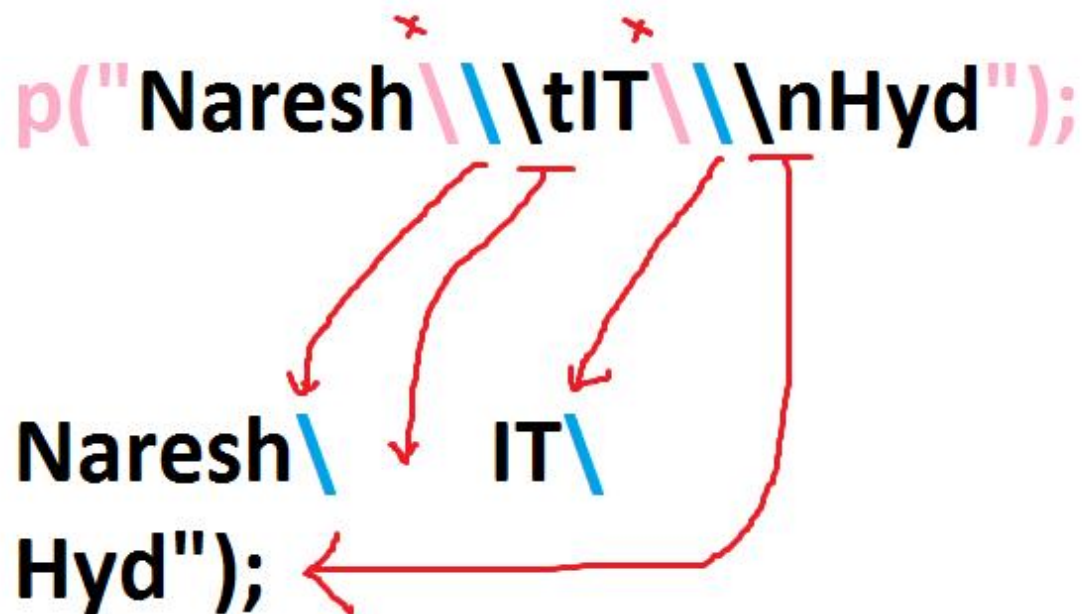

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 20 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("12%c34%c56",9,10);
getch();
}
/* 12 34
   56


9 - \t ascii value
10 - \n ascii value
*/
```

p("12%c34%c56",9,10);

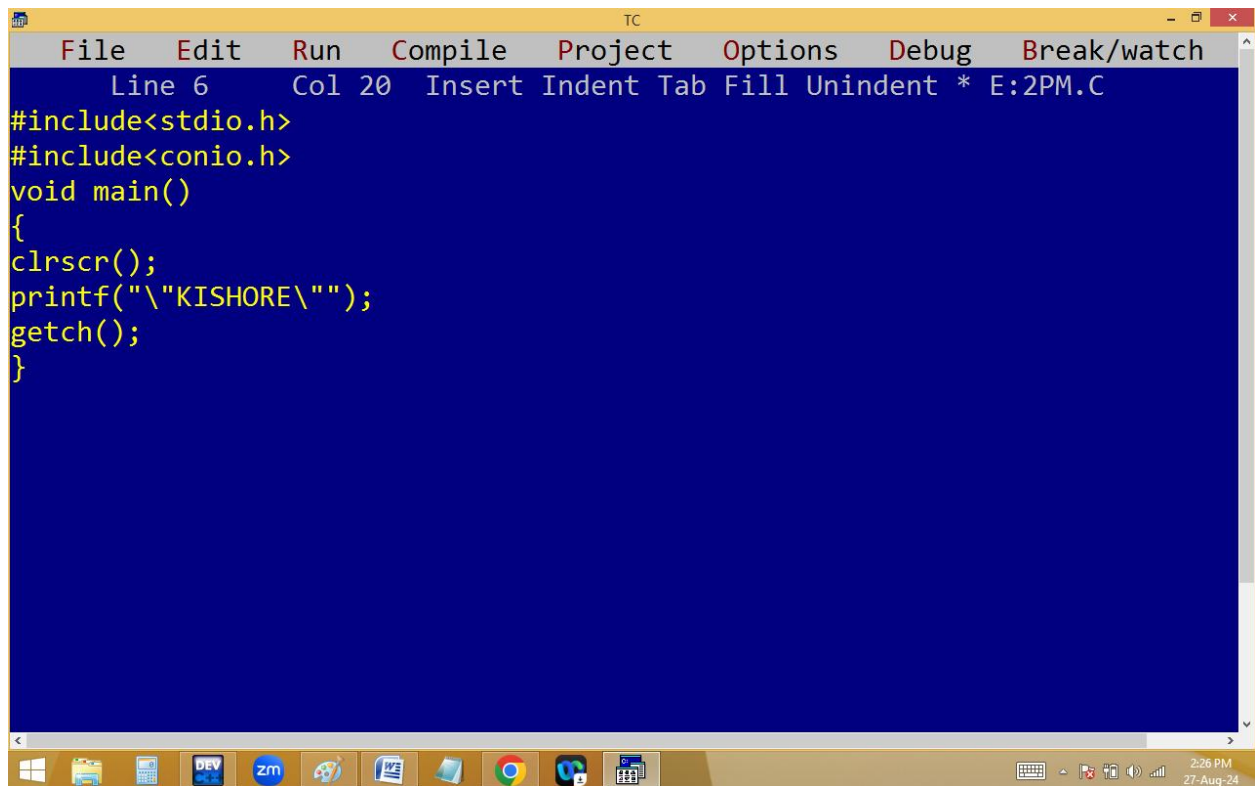


```
File Edit Run Compile Project Options Debug Break/watch
Line 6 Col 20 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("\\\"KISHORE\\\"\\");
getch();
}
```

p("\\\"KISHORE\\\"\\");

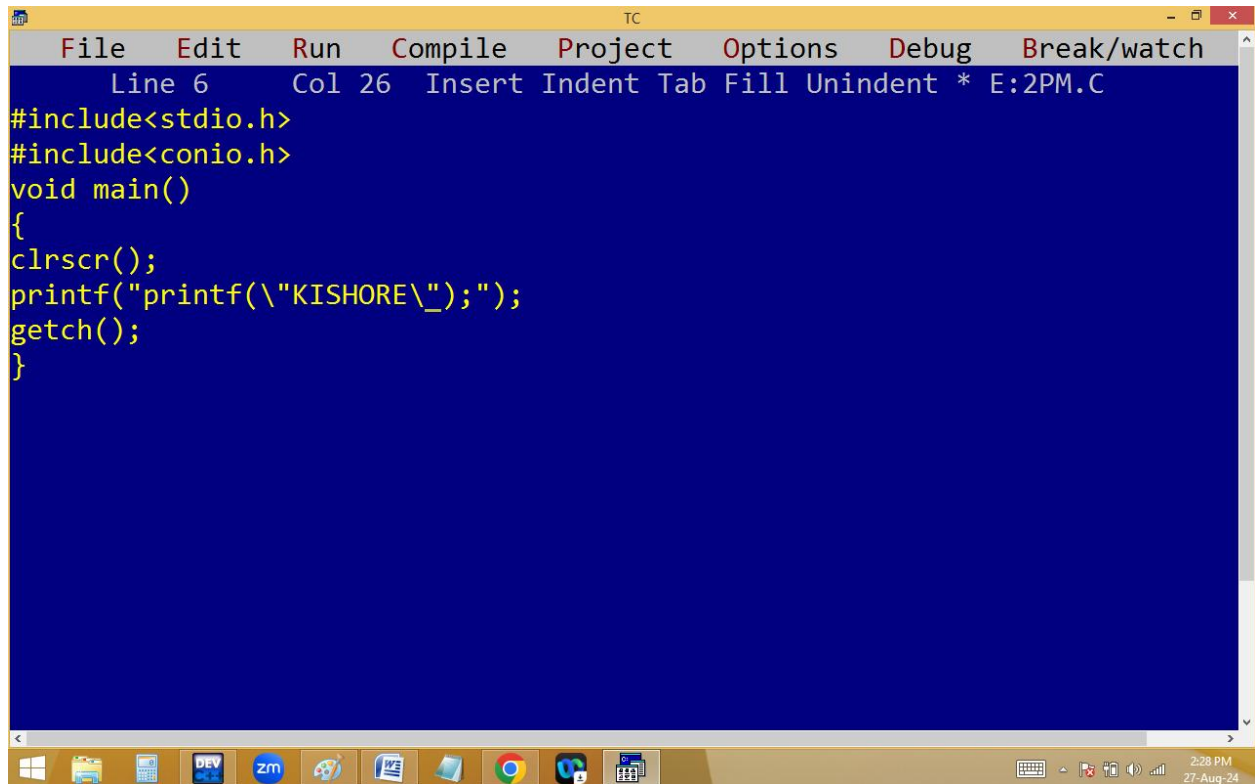


```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 6 Col 26 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("printf(\"KISHORE\\_\");");
getch();
}
```


`printf( "printf(\"KISHORE\\_\");");`

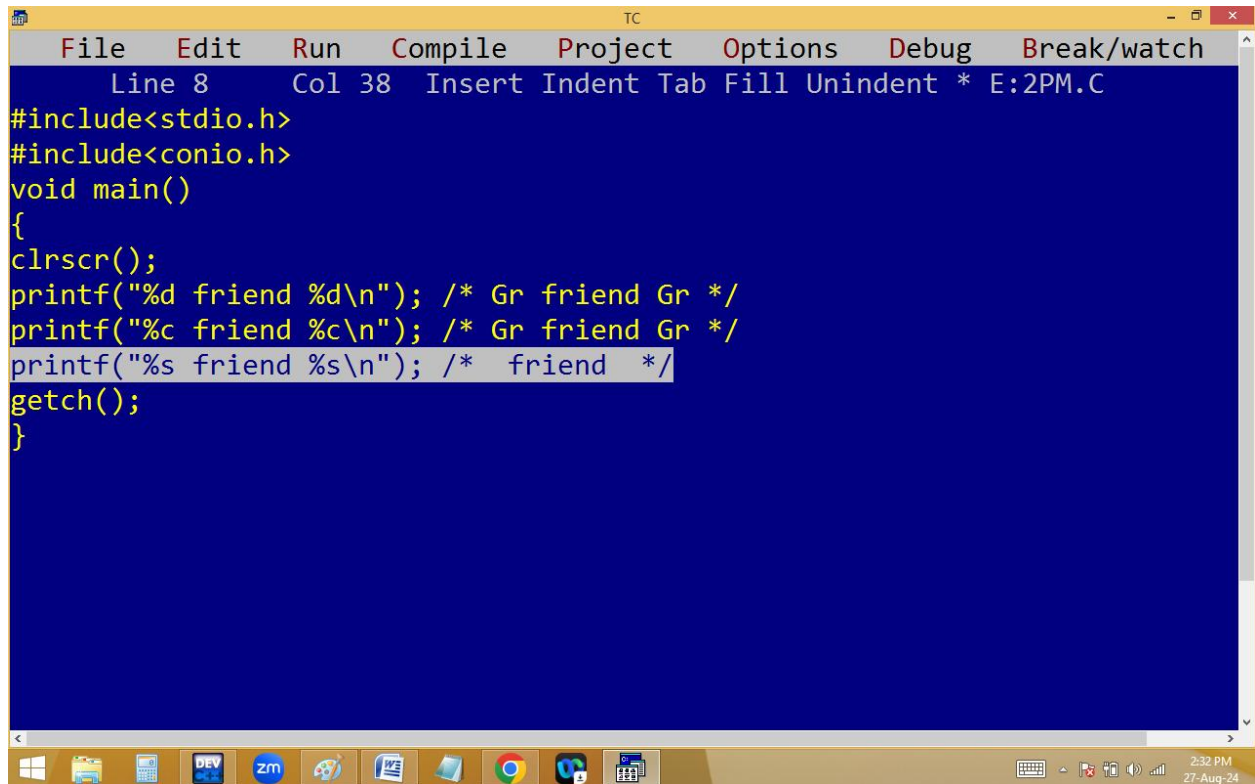

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 38 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d friend %d\n"); /* Gr friend Gr */
printf("%c friend %c\n"); /* Gr friend Gr */
printf("%s friend %s\n"); /* friend */
getch();
}
```

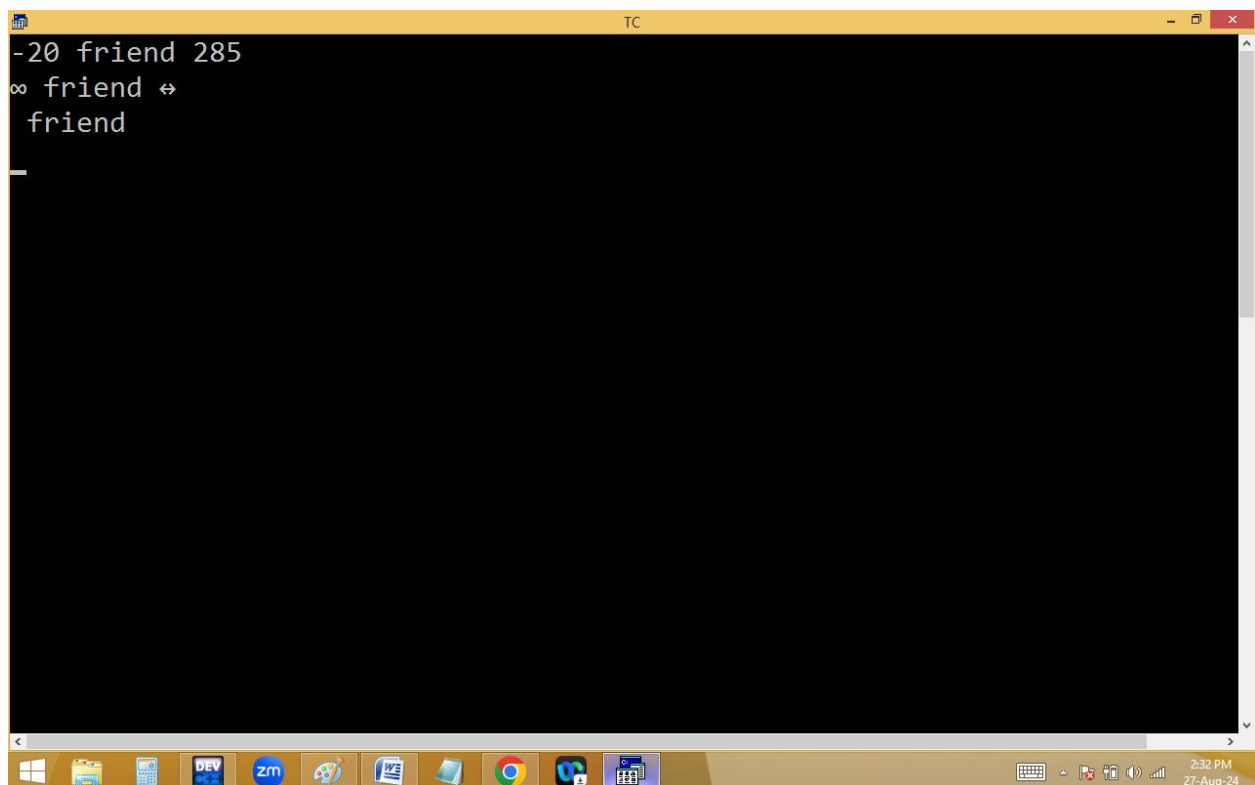


```
TC
-20 friend 285
∞ friend ⇄
friend
```

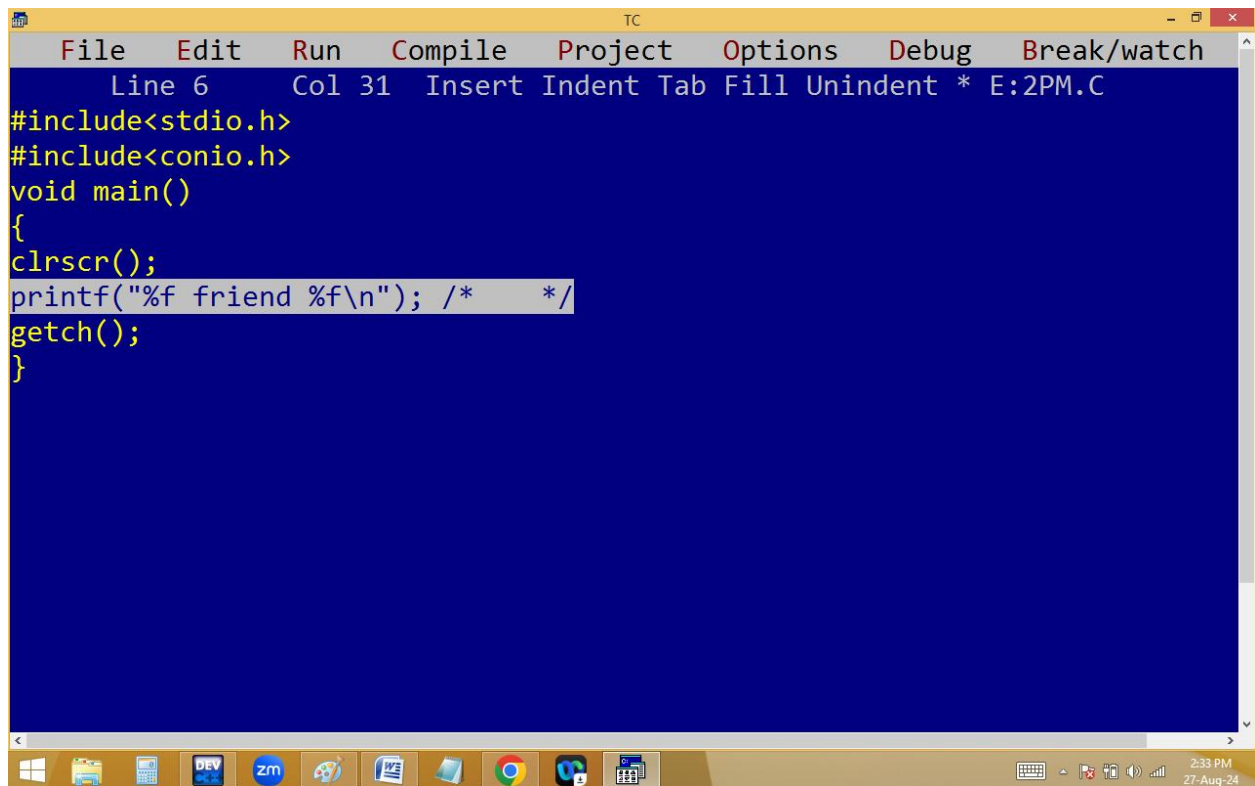

The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 6 Col 31 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%f friend %f\n"); /* */
getch();
}
```

The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, and others. The system clock in the bottom right corner shows 2:33 PM on 27-Aug-24.

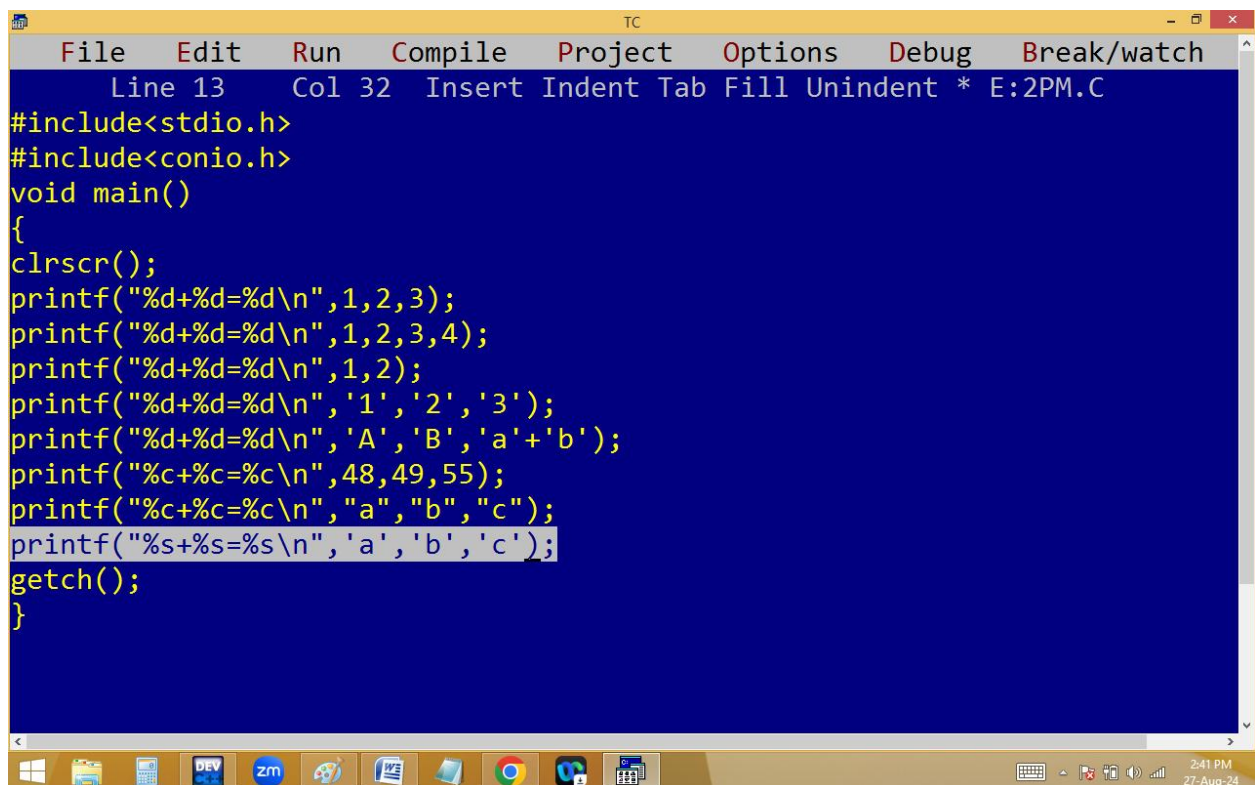


The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 32 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d+%d=%d\n",1,2,3);
printf("%d+%d=%d\n",1,2,3,4);
printf("%d+%d=%d\n",1,2);
printf("%d+%d=%d\n",'1','2','3');
printf("%d+%d=%d\n",'A','B','a'+ 'b');
printf("%c+%c=%c\n",48,49,55);
printf("%c+%c=%c\n","a","b","c");
printf("%s+%s=%s\n",'a','b','c');
getch();
}
```

The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, and others. The system clock in the bottom right corner shows 2:41 PM on 27-Aug-24.



```
TC
1+2=3
1+2=3
1+2=-20
49+50=51
65+66=195
0+1=7
r+=
ogram termination
h>ogram termination
h>=ram termination
h>
_
```

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 22 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%D+%d=%d\n",1,2,3);
printf("%d+%D=%d\n",1,2,3);
printf("%d+%d=%D\n",1,2,3);
printf("%d % %d=%d\n",5,2,5%2);
printf("%d %% %d=%d\n",5,2,5%2);
printf("%d %% %%d=%%d\n",5,2,5%2);
getch();
}
```

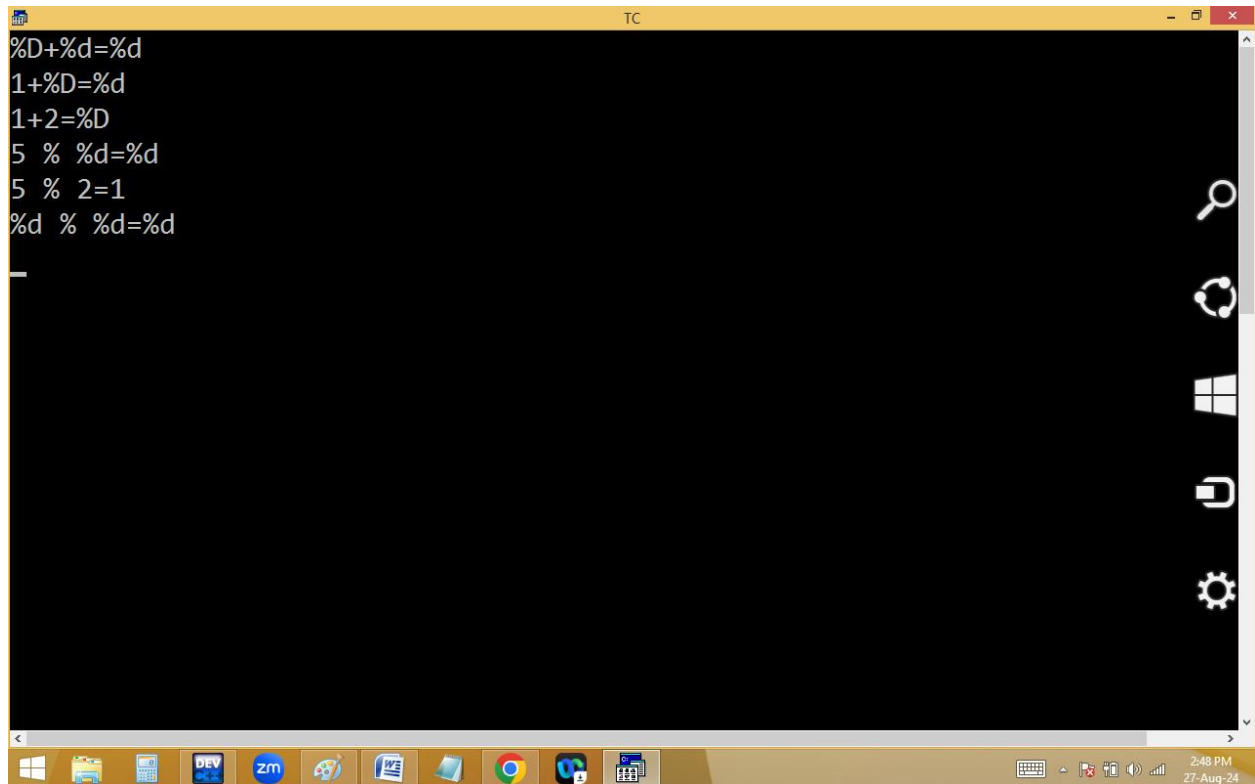
A screenshot of a Turbo C++ (TC) console window. The window has a yellow title bar with the text "TC" and standard window controls. The background is black, and the text is white. The console displays the following lines of code: `%D+%d=%d`, `1+%D=%d`, `1+2=%D`, `5 % %d=%d`, `5 % 2=1`, and `%d % %d=%d`. On the right side of the console, there is a vertical toolbar with icons for search, refresh, window management, and settings. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 2:48 PM on 27-Aug-24.

```
%D+%d=%d
1+%D=%d
1+2=%D
5 % %d=%d
5 % 2=1
%d % %d=%d
```

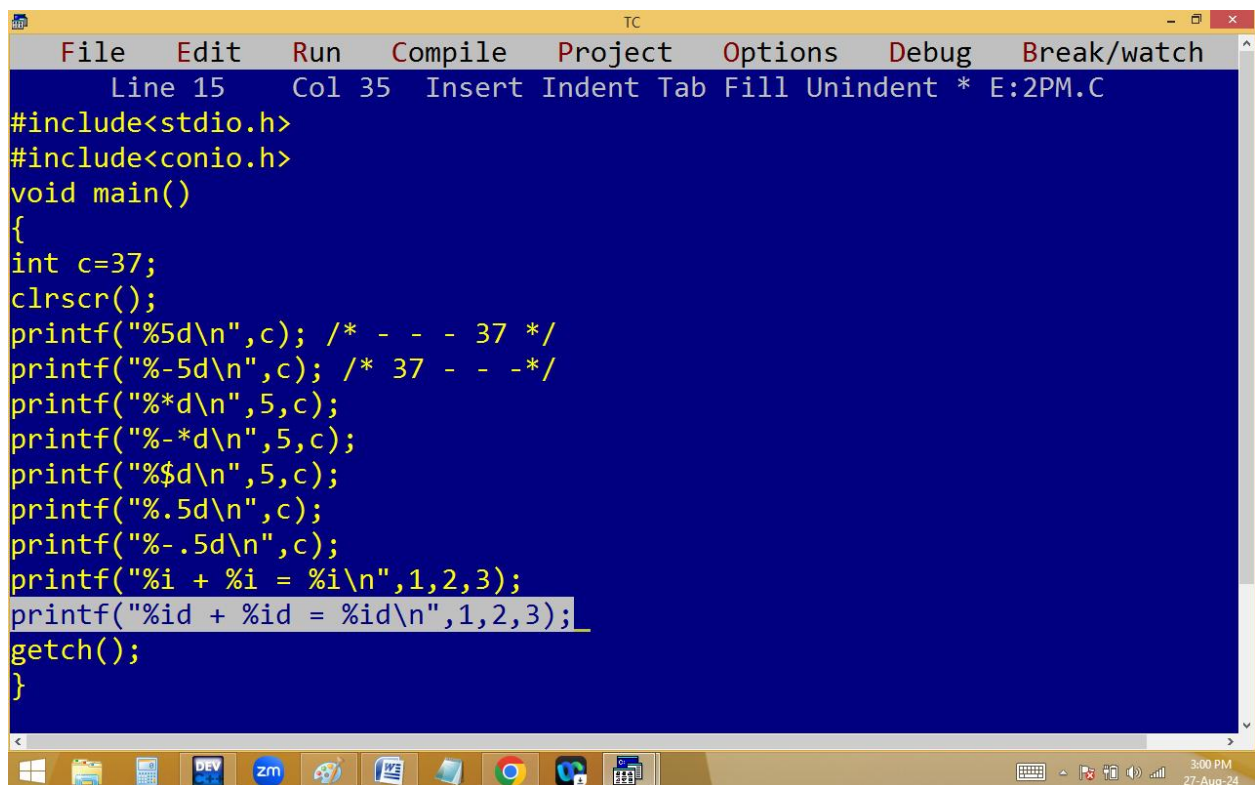


A screenshot of a Turbo C++ (TC) editor window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates "Line 15 Col 35 Insert Indent Tab Fill Unindent * E:2PM.C". The background is blue, and the text is yellow. The code in the editor is as follows: `#include<stdio.h>`, `#include<conio.h>`, `void main()`, `{`, `int c=37;`, `clrscr();`, `printf("%5d\n",c); /* - - - 37 */`, `printf("%-5d\n",c); /* 37 - - - */`, `printf("%*d\n",5,c);`, `printf("%-*d\n",5,c);`, `printf("%$d\n",5,c);`, `printf("%.5d\n",c);`, `printf("%-.5d\n",c);`, `printf("%i + %i = %i\n",1,2,3);`, `printf("%id + %id = %id\n",1,2,3);`, `getch();`, and `}`. The last line is highlighted. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 3:00 PM on 27-Aug-24.


```
File Edit Run Compile Project Options Debug Break/watch
Line 15 Col 35 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int c=37;
clrscr();
printf("%5d\n",c); /* - - - 37 */
printf("%-5d\n",c); /* 37 - - - */
printf("%*d\n",5,c);
printf("%-*d\n",5,c);
printf("%$d\n",5,c);
printf("%.5d\n",c);
printf("%-.5d\n",c);
printf("%i + %i = %i\n",1,2,3);
printf("%id + %id = %id\n",1,2,3);
getch();
}
```

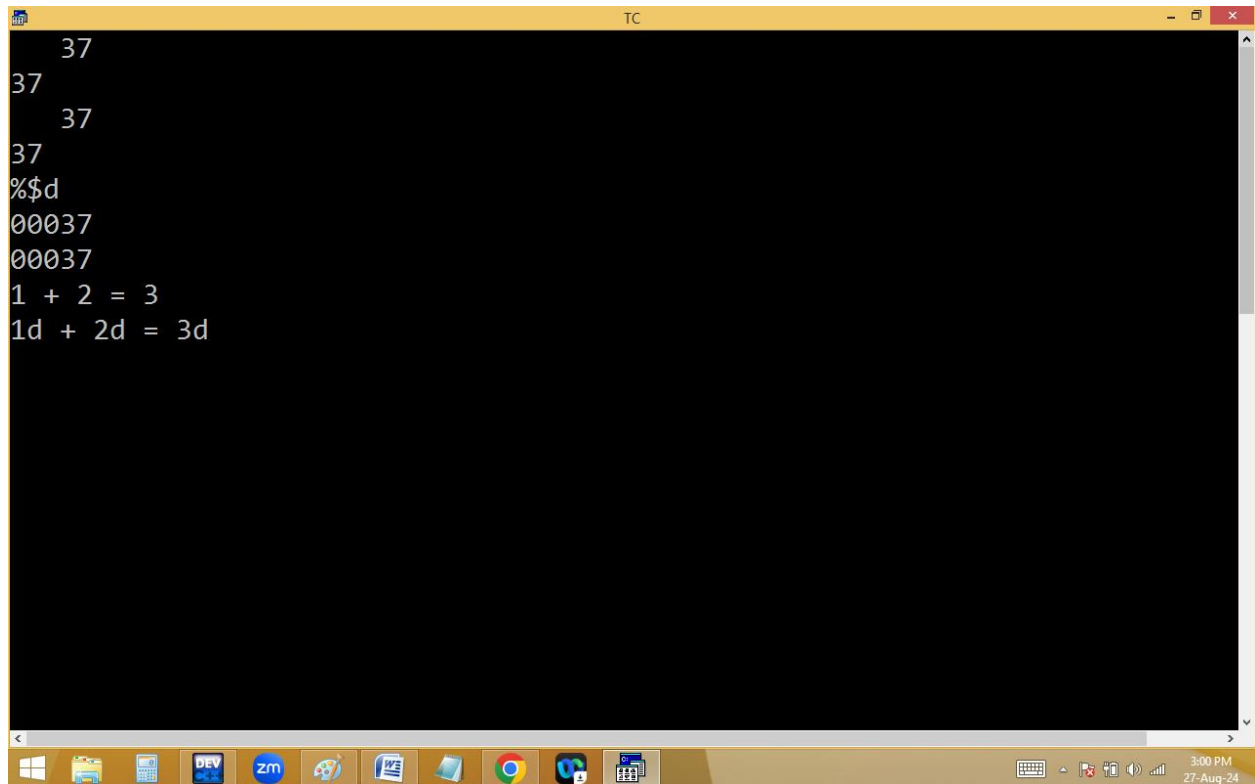


```
37
37
37
37
%$d
00037
00037
1 + 2 = 3
1d + 2d = 3d
```

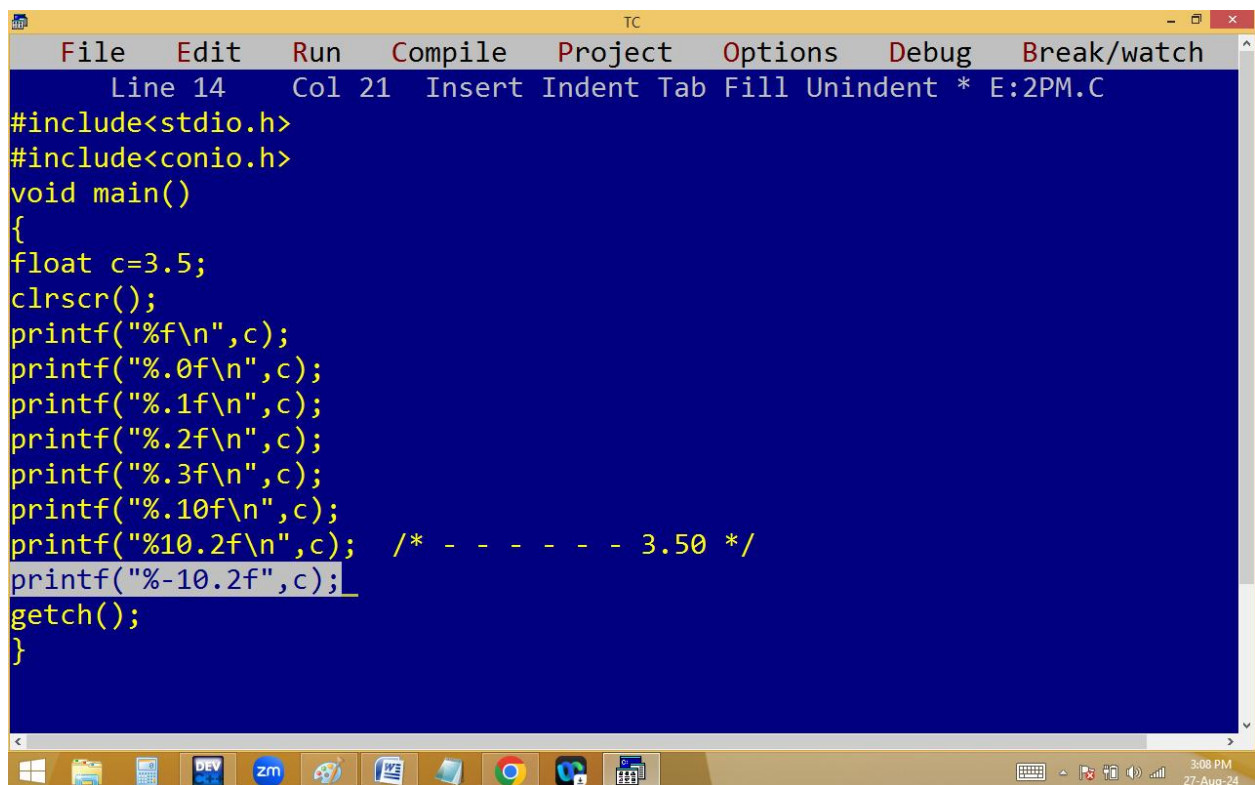

```
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 21 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
float c=3.5;
clrscr();
printf("%f\n",c);
printf("%.0f\n",c);
printf("%.1f\n",c);
printf("%.2f\n",c);
printf("%.3f\n",c);
printf("%.10f\n",c);
printf("%10.2f\n",c); /* - - - - - 3.50 */
printf("%-10.2f",c);
getch();
}
```

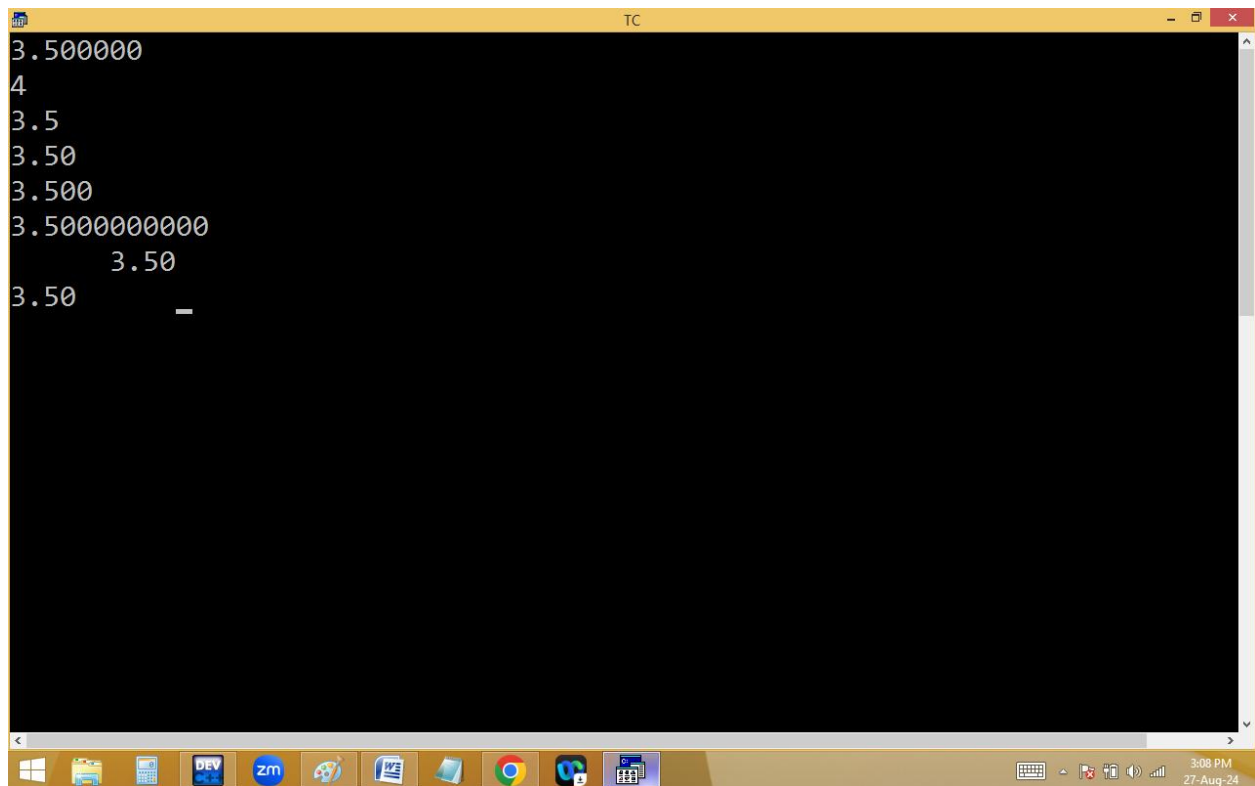

```
3.500000
4
3.5
3.50
3.500
3.5000000000
3.50
3.50
_
```

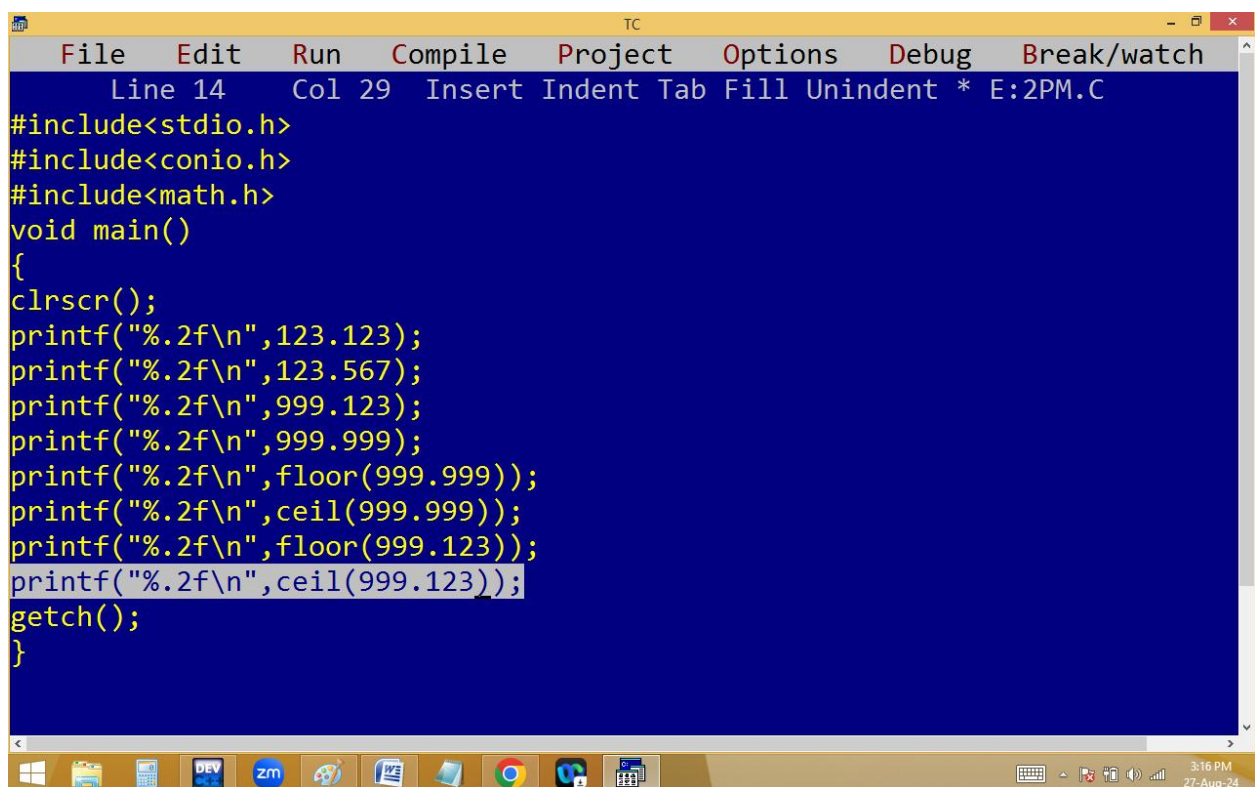

```
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 29 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
clrscr();
printf("%.2f\\n",123.123);
printf("%.2f\\n",123.567);
printf("%.2f\\n",999.123);
printf("%.2f\\n",999.999);
printf("%.2f\\n",floor(999.999));
printf("%.2f\\n",ceil(999.999));
printf("%.2f\\n",floor(999.123));
printf("%.2f\\n",ceil(999.123));
getch();
}
```

```
TC
123.12
123.57
999.12
1000.0
999.00
1000.00
999.00
1000.00

```


```
TC
Line 19   Col 1   Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
char name[]="Kishore";
clrscr();
printf("%s\n",name);
printf("%10s\n",name);
printf("%.3s\n",name);
printf("%10.3s\n",name);
printf("%-10.3s\n",name);
printf("Bharathi addr is %u\n","Bharathi");
printf("Bharathi\n"+1);
printf(1+"Bharathi\n"+1);
printf("Bharathi\n"-1);/* GrBharathi or Blank */
printf("%d\n"+1,999);
printf("%d\n"+1);
getch();
}
```

```
TC
Kishore
  Kishore
Kis
  Kis
Kis
Bharathi addr is 466
harathi
arathi
d
d
_
```



```
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Krish %c Radha\n",3);
printf("%c + %c = %c\n",1,2,3);
getch();
}
```


```
Krish ♥ Radha
☺ + ☹ = ♥
```

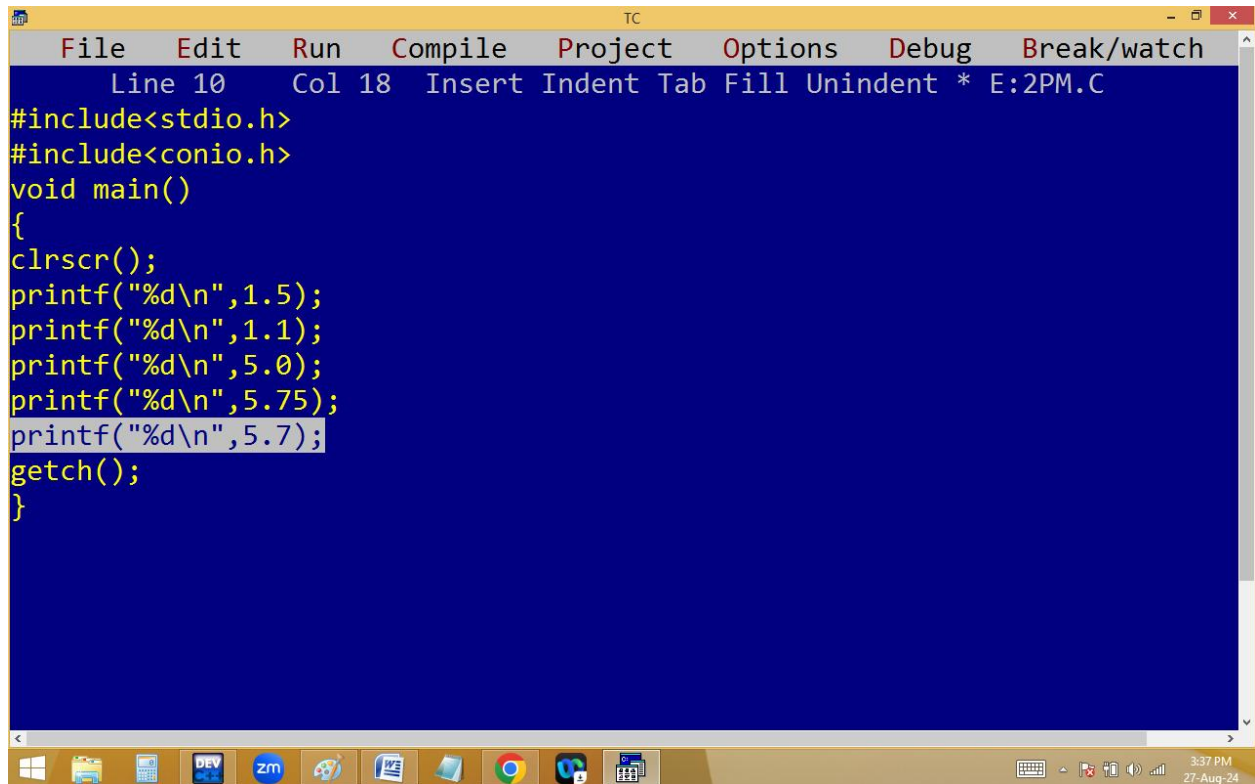

The screenshot shows the Turbo C++ (TC) IDE window. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 10 Col 18 Insert Indent Tab Fill Unindent * E:2PM.C'. The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",1.5);
printf("%d\n",1.1);
printf("%d\n",5.0);
printf("%d\n",5.75);
printf("%d\n",5.7);
getch();
}
```


The taskbar at the bottom shows various application icons including Windows Explorer, DEV, zm, and others. The system clock in the bottom right corner displays '3:37 PM 27-Aug-24'.

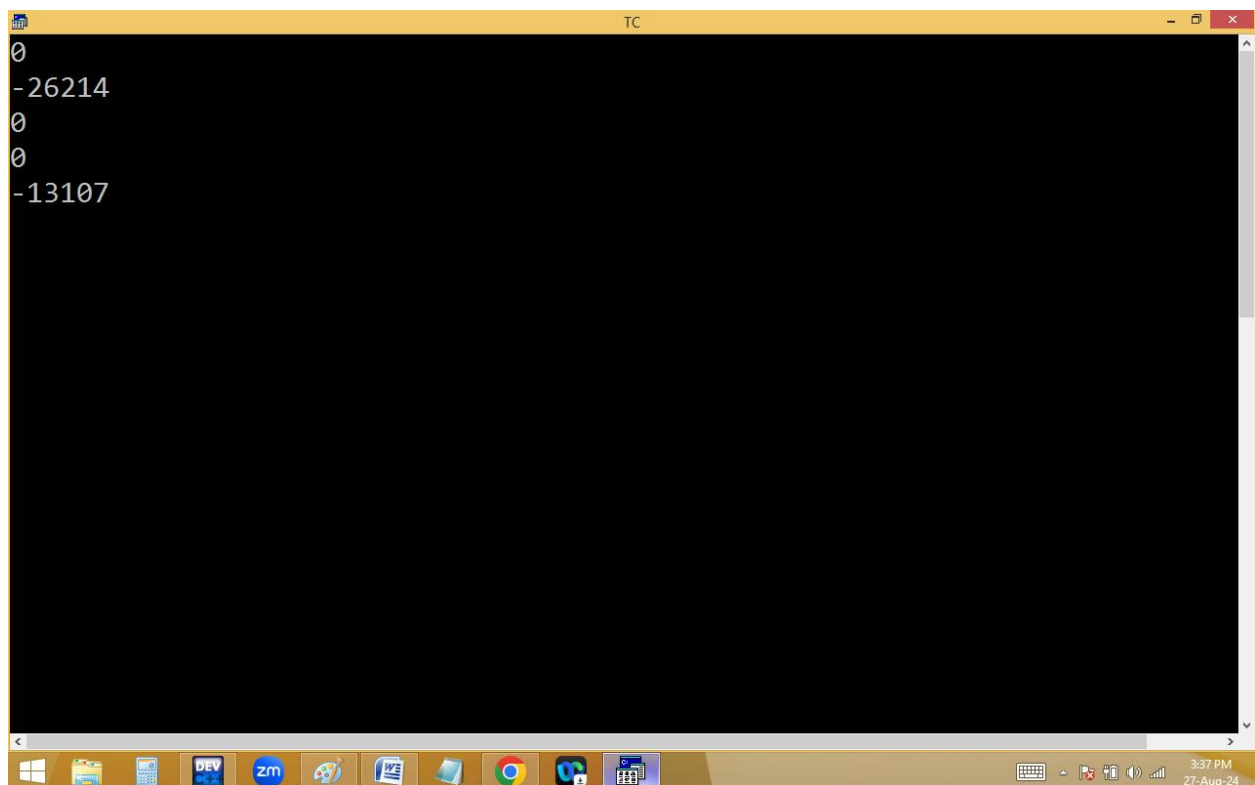

The screenshot shows the Turbo C++ (TC) IDE window displaying the output of the program. The output window shows the following values:

```
0
-26214
0
0
-13107
```


The taskbar at the bottom is identical to the first screenshot, showing the same application icons and system clock ('3:37 PM 27-Aug-24').

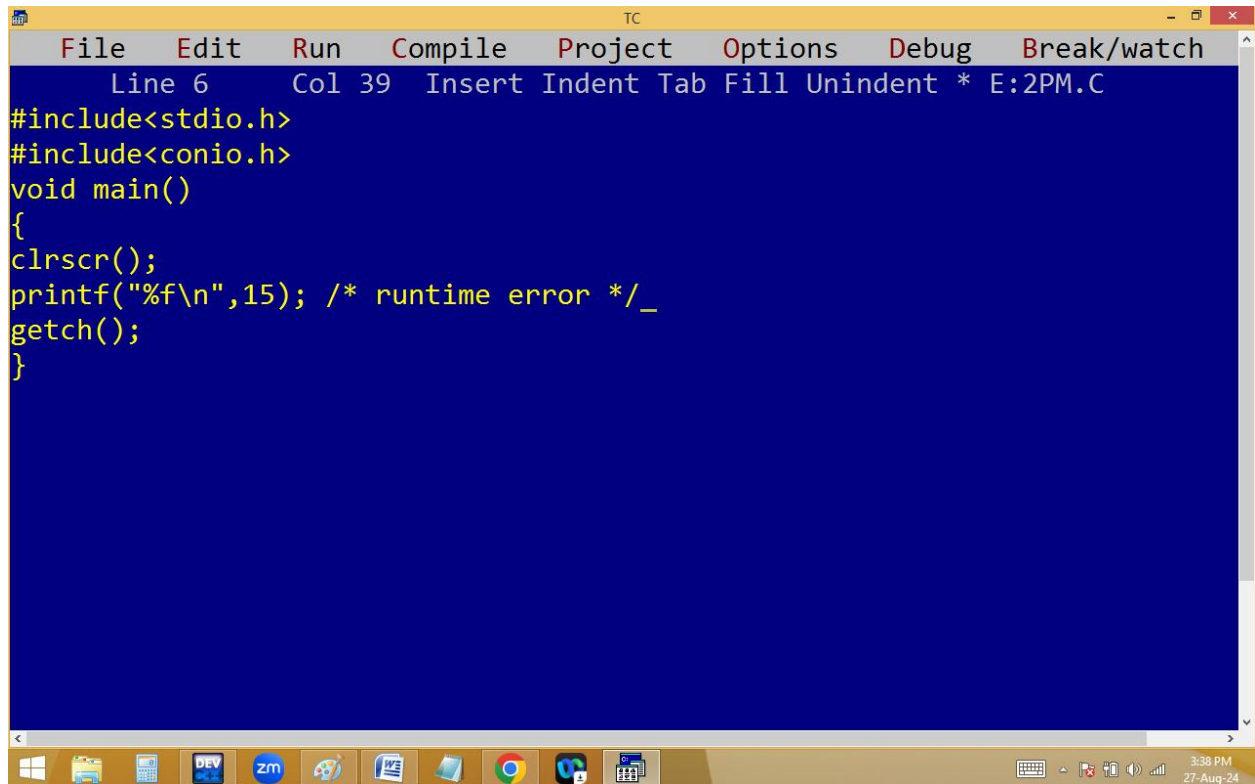

The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 6 Col 39 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%f\n",15); /* runtime error */_
getch();
}
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, and others. The system clock in the bottom right corner displays '3:38 PM 27-Aug-24'.

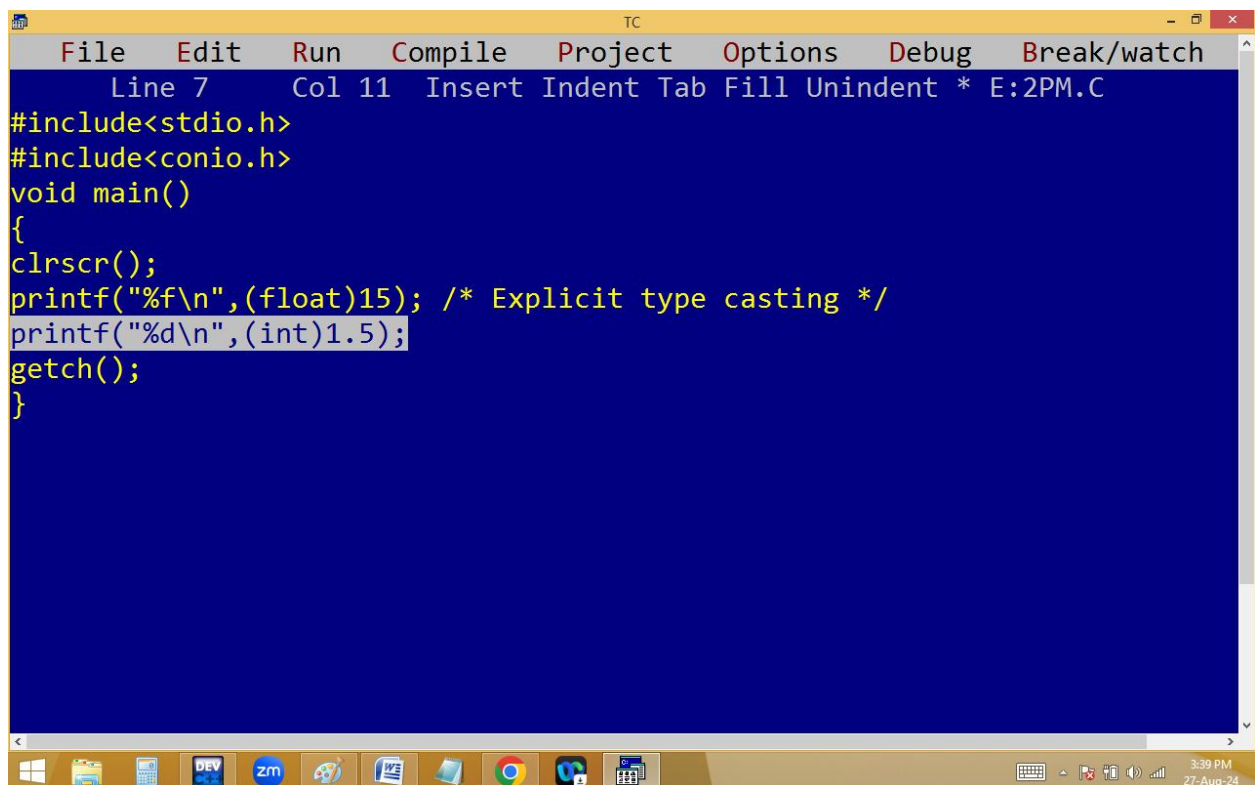

The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 7 Col 11 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%f\n",(float)15); /* Explicit type casting */
printf("%d\n",(int)1.5);
getch();
}
```

The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, and others. The system clock in the bottom right corner displays '3:39 PM 27-Aug-24'.

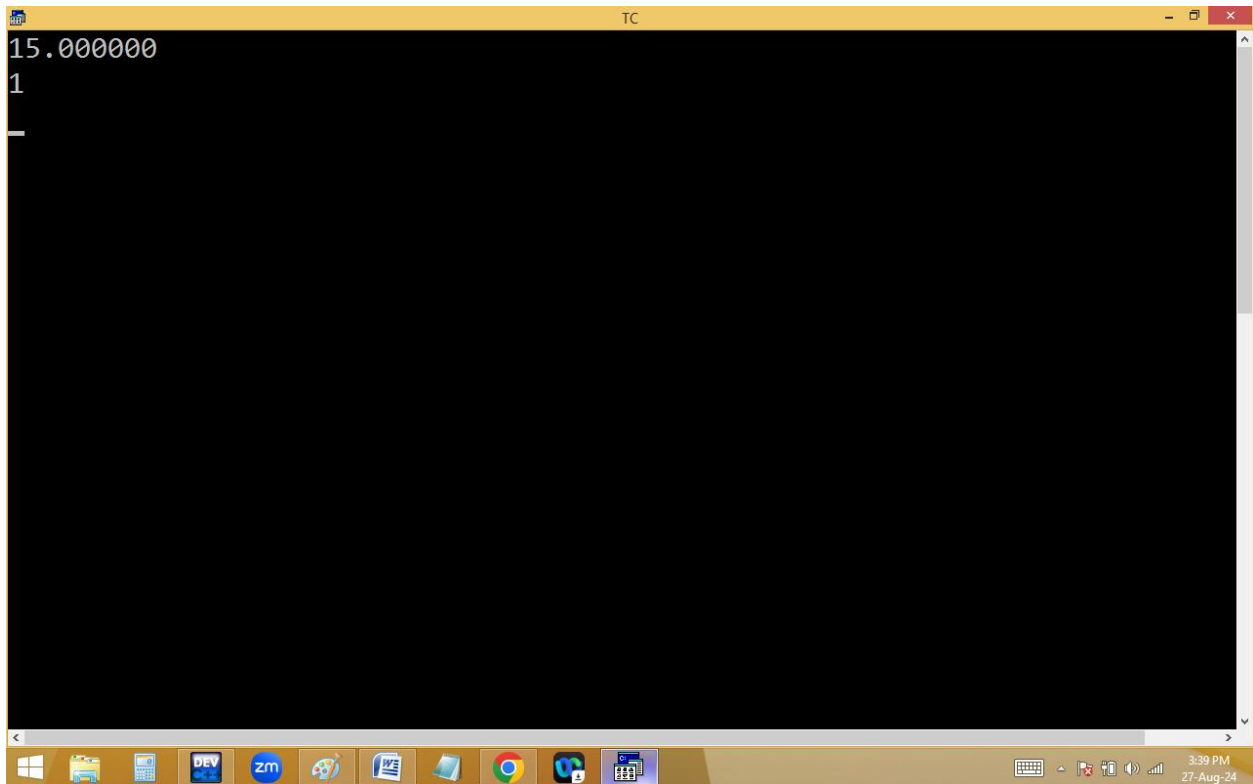

A screenshot of a Turbo C++ (TC) console window. The window has a yellow title bar with the text "TC" and standard window controls. The console area is black with white text. The output displayed is "15.000000" on the first line and "1" on the second line. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 3:39 PM on 27-Aug-24.

```
15.000000
1
```

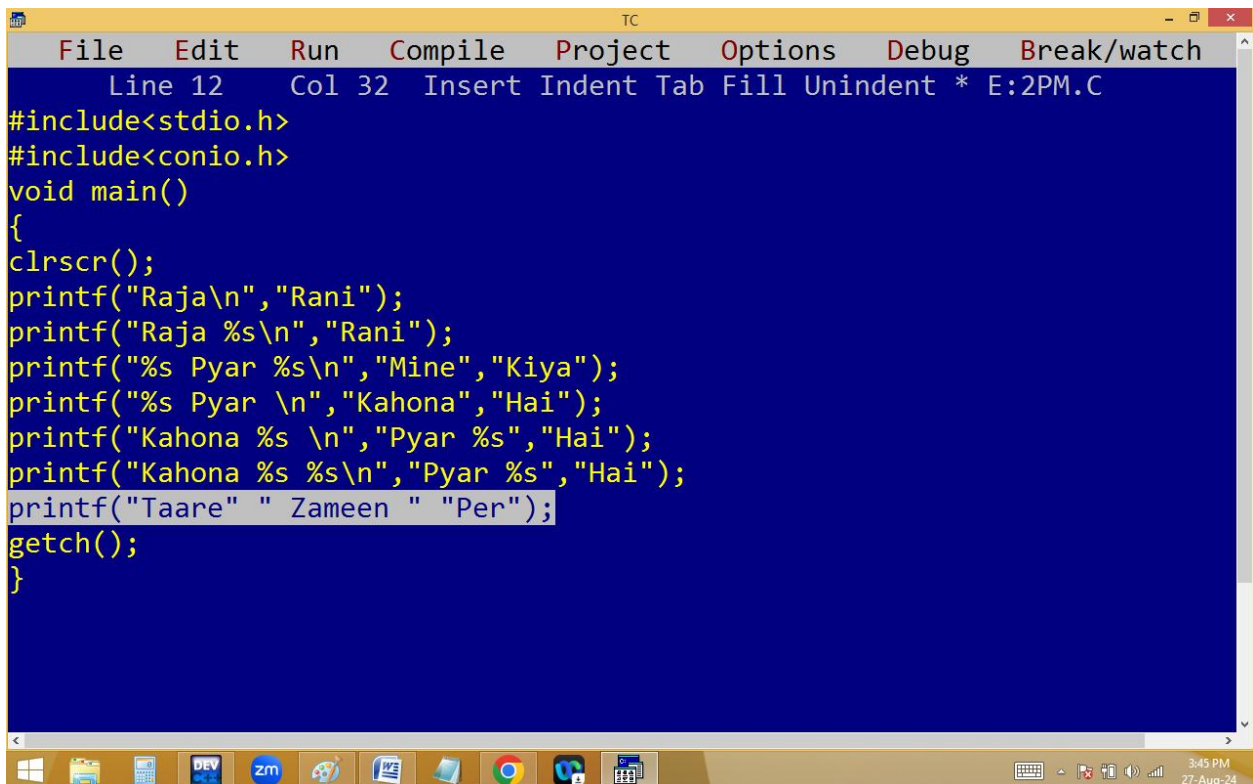

A screenshot of a Turbo C++ (TC) editor window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar shows "Line 12 Col 32 Insert Indent Tab Fill Unindent * E:2PM.C". The code is written in a blue editor area with yellow text. The code includes headers for stdio.h and conio.h, defines a main function, and uses clrscr(), printf(), and getch(). The line "printf(\"Taare\" \" Zameen \" \"Per\");" is highlighted. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 3:45 PM on 27-Aug-24.

```
File Edit Run Compile Project Options Debug Break/watch
Line 12 Col 32 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Raja\n","Rani");
printf("Raja %s\n","Rani");
printf("%s Pyar %s\n","Mine","Kiya");
printf("%s Pyar \n","Kahona","Hai");
printf("Kahona %s \n","Pyar %s","Hai");
printf("Kahona %s %s\n","Pyar %s","Hai");
printf("Taare\" \" Zameen \" \"Per\");
getch();
}
```

```
TC
Raja
Raja Rani
Mine Pyar Kiya
Kahona Pyar
Kahona Pyar %s
Kahona Pyar %s Hai
Taare Zameen Per_
```

```
TC
File Edit Run Compile Project Options Debug Break/watch
Error: Invalid pointer addition in function main
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Jodha" + "Akbar");
getch();
}
```