

break: It is a keyword used within switch / loop. When break is occurred the program execution jumped to outside the switch / loop.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Misplaced break in function main


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
puts("Hi");
break;
puts("Bye");
getch();
}
/* Error */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
puts("Hi");
}
puts("Bye");
getch();
}
```

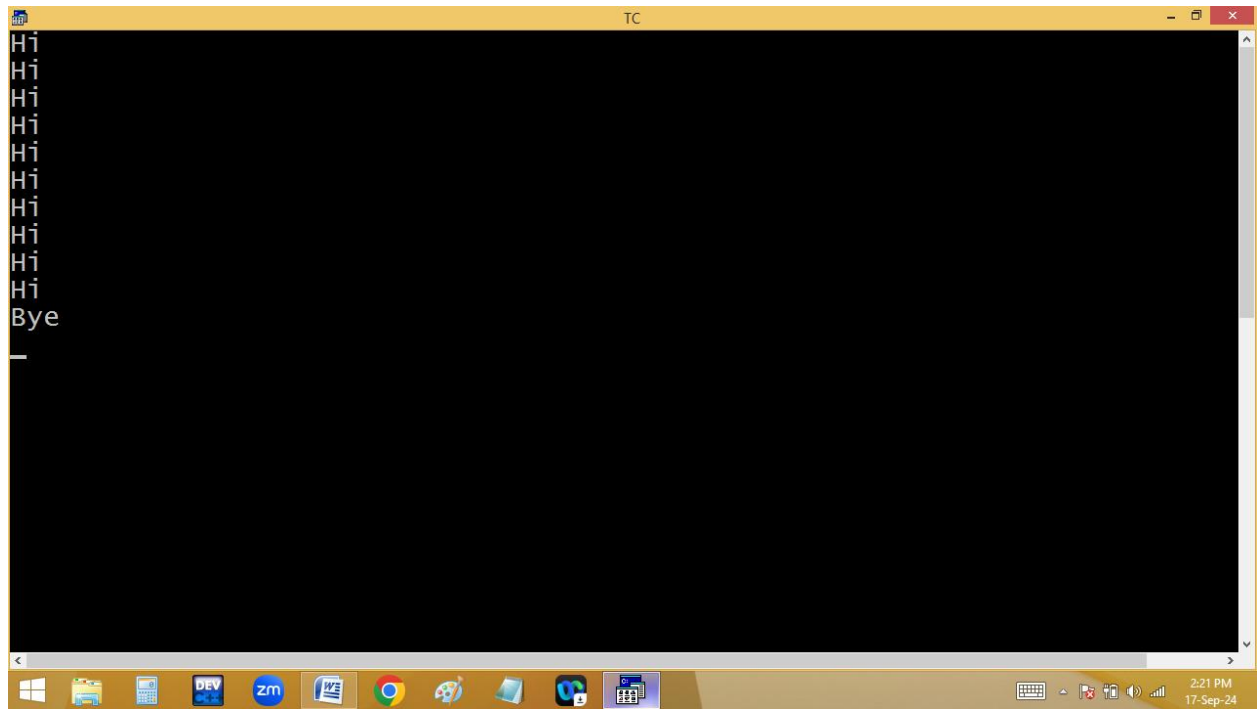

The image shows two windows of the Turbo C++ (TC) IDE. The top window is the source code editor, titled 'E:2PM.C', displaying a C program. The code includes `<stdio.h>` and `<conio.h>`, defines `main()`, declares `int i`, clears the screen with `clrscr()`, and uses a `for` loop from `i=1` to `i=10`. Inside the loop, it checks `if(i==5) break;`, prints `"Hi"`, and after the loop, prints `"Bye"` and waits for a key press with `getch()`. The bottom window is the output console, titled 'TC', which shows the program's execution results: four lines of 'Hi' followed by a line of 'Bye'. Both windows have a standard Windows taskbar at the bottom with icons for various applications and system utilities.

```
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 15 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==5)break;_
puts("Hi");
}
puts("Bye");
getch();
}
```

Hi
Hi
Hi
Hi
Bye

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window is the source code editor, which has a blue background and yellow text. It contains a C program with the following code:

```
File Edit Run Compile Project Options Debug Break/watch
Line 3 Col 34 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void show() /* fun definition */
{
puts("Good afternoon");
return;
puts("Good evening");
}

void main()
{
clrscr();
puts("Good morning");
show(); /* fun calling */
puts("Good night");
getch();
}
```

The bottom window is the output window, which has a black background and white text. It displays the output of the program:

```
Good morning
Good afternoon
Good night
```

The Windows taskbar is visible at the bottom of the screen, showing various application icons and the system clock indicating 2:24 PM on 17-Sep-24.

The screenshot shows the Turbo C++ (TC) IDE. The top window displays the source code for a file named E:2PM.C. The code defines a function `show()` that prints "Good afternoon" and "Good evening", and a `main()` function that prints "Good morning", calls `show()`, prints "Good night", and waits for input with `getch()`. The bottom window shows the program's output: "Good morning" followed by "Good afternoon" on a new line. The Windows taskbar at the bottom shows the time as 2:26 PM on 17-Sep-24.

```
File Edit Run Compile Project Options Debug Break/watch
Line 3 Col 39 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
#include<stdlib.h> #include<process.h>_
void show() /* fun definition */
{
puts("Good afternoon");
exit(0);
puts("Good evening");
}


void main()
{
clrscr();
puts("Good morning");
show(); /* fun calling */
puts("Good night");
getch();
}
```

Good morning
Good afternoon

break	exit()	Return
Keyword	Function	Keyword
Header file not required	stdlib.h / process.h required	Header file not required
Terminates switch / loop	Terminates total program	Closes that function only
Should be used within	Used any where	Used any where

switch/loop		
-------------	--	--

continue: It is keyword used within loop only. When continue is occurred the program execution jumped to end of loop and later to beginning of loop. Due to this remaining statements in that loop are not executed.

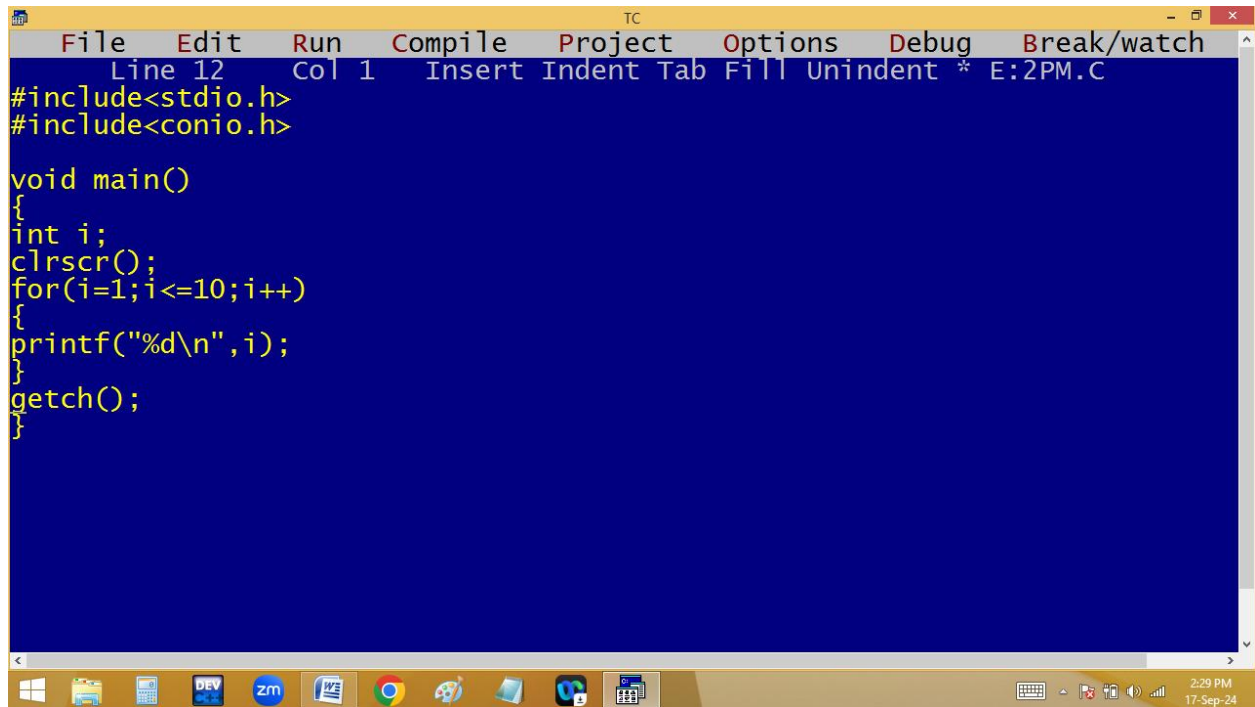


The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar. The menu items are File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. Below the menu bar, the status bar indicates 'Line 12 Col 1' and 'Insert Indent Tab Fill Unindent * E:2PM.C'. The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>

void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        printf("%d\n",i);
    }
    getch();
}
```

The Windows taskbar is visible at the bottom, showing various application icons and the system clock displaying 2:29 PM on 17-Sep-24.

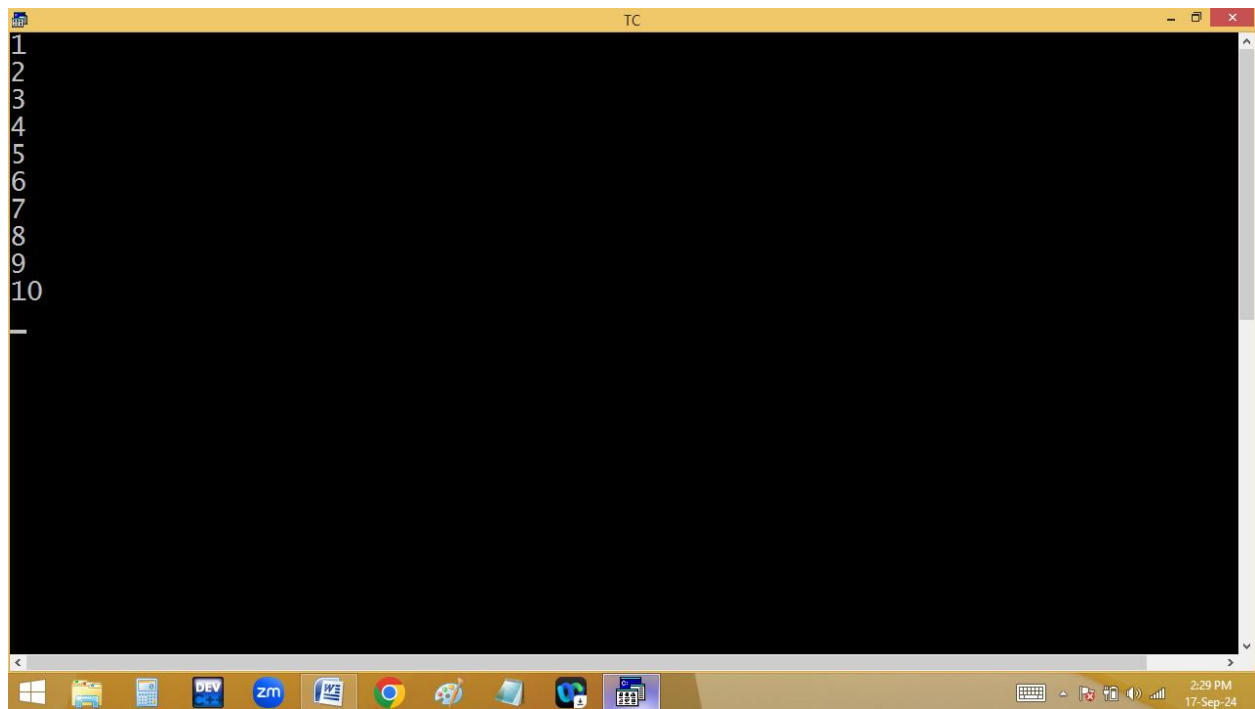


The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar. The main editing area has a black background and displays the output of the program. The numbers 1 through 10 are printed, each on a new line. The Windows taskbar is visible at the bottom, showing various application icons and the system clock displaying 2:29 PM on 17-Sep-24.

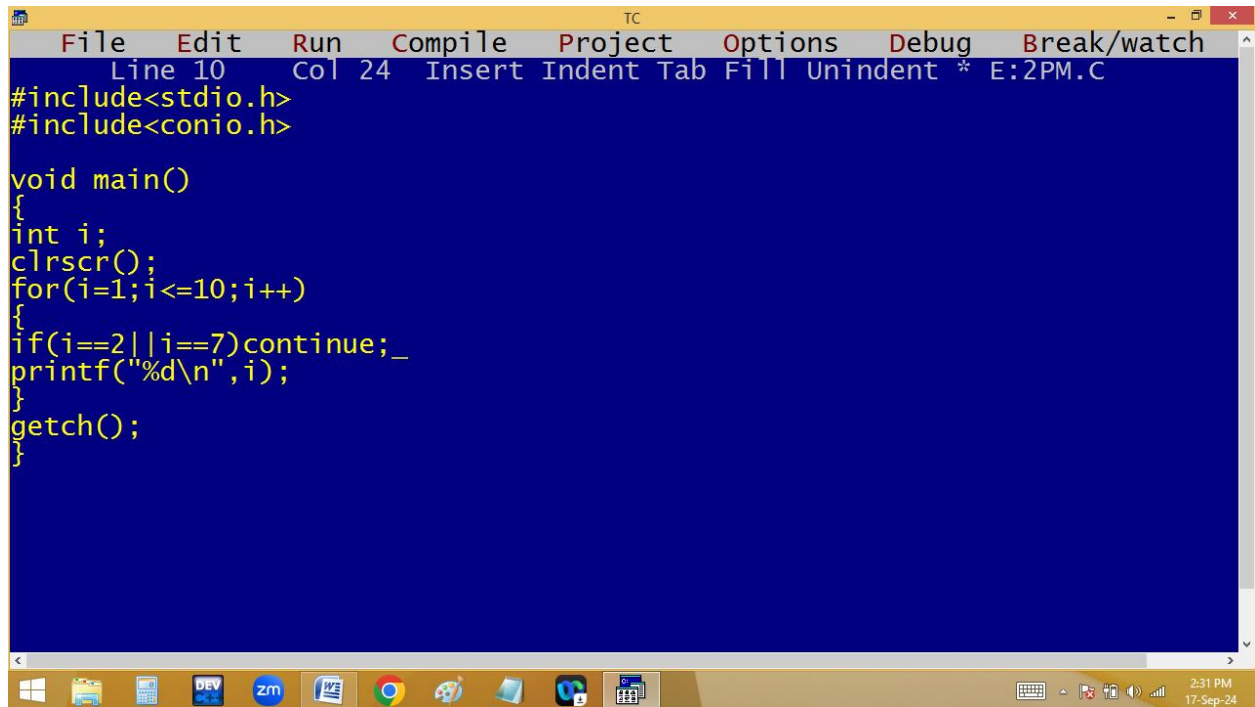

```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 24 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>

void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==2||i==7)continue;_
printf("%d\n",i);
}
getch();
}
```

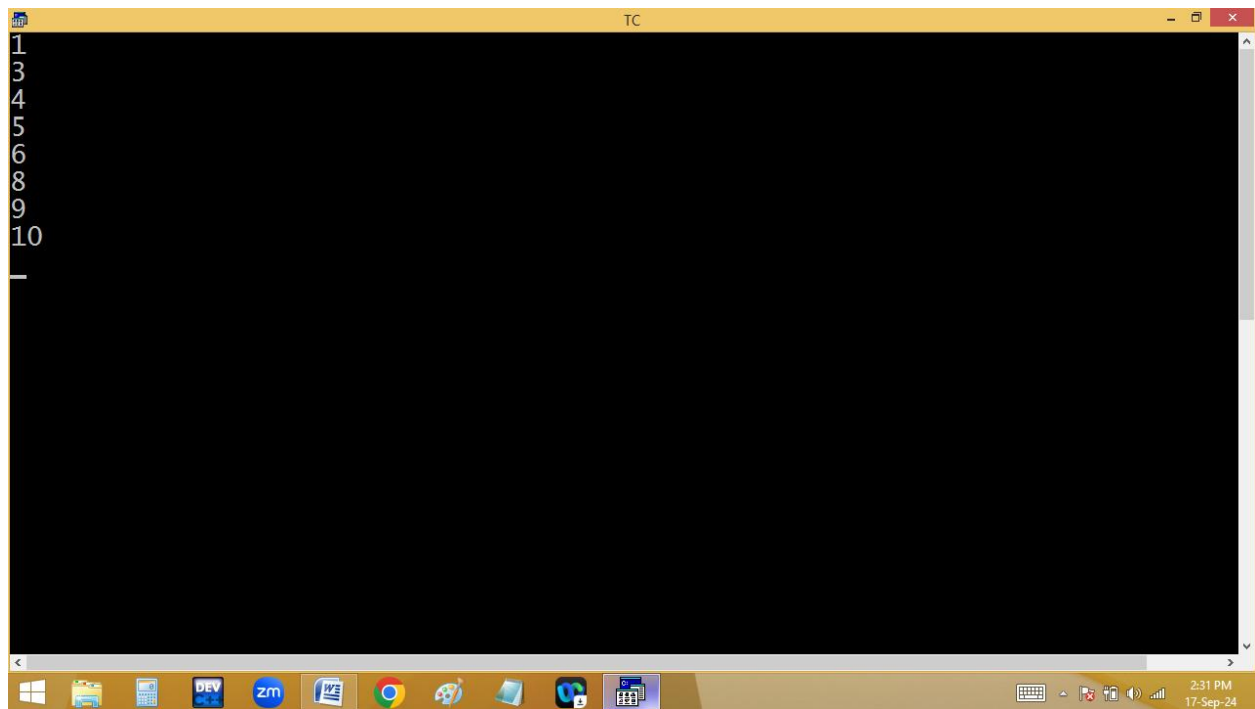

```
1
3
4
5
6
8
9
10
_
```

Finding strong no or not


1, 2, 145,....

1 factorial is 1

2 factorial is 2

145 = 1! + 4! + 5! = 1 + 24 + 120 = 145

3 = 3! = 6 ← not a strong no


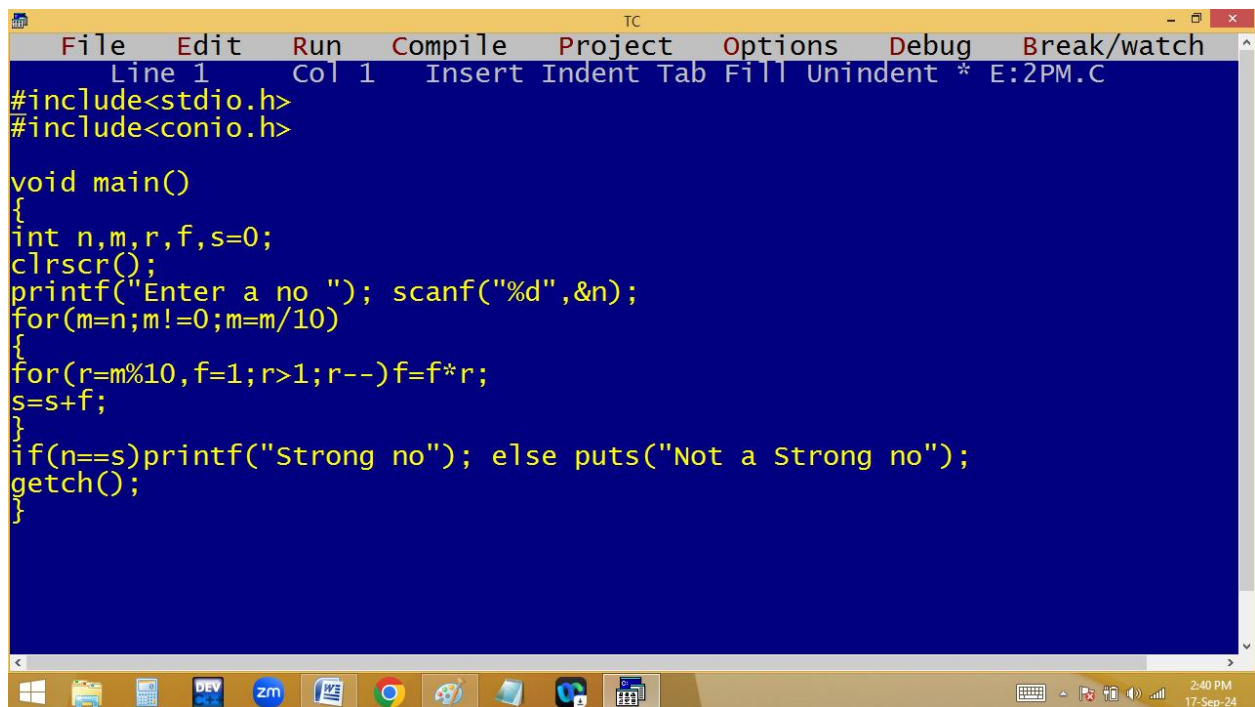


```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 1 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>


void main()
{
int n,m,r,f,s=0;
clrscr();
printf("Enter a no "); scanf("%d",&n);
for(m=n;m!=0;m=m/10)
{
for(r=m%10,f=1;r>1;r--)f=f*r;
s=s+f;
}
if(n==s)printf("Strong no"); else puts("Not a Strong no");
getch();
}
```

The screenshot shows a Turbo C++ IDE window titled 'TC'. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 1 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C'. The main editing area has a blue background and contains the following C code:
`#include<stdio.h>`
`#include<conio.h>`


`void main()`
`{`
`int n,m,r,f,s=0;`
`clrscr();`
`printf("Enter a no "); scanf("%d",&n);`
`for(m=n;m!=0;m=m/10)`
`{`
`for(r=m%10,f=1;r>1;r--)f=f*r;`
`s=s+f;`
`}`
`if(n==s)printf("Strong no"); else puts("Not a Strong no");`
`getch();`
`}`
The Windows taskbar is visible at the bottom with various icons including Windows, File Explorer, DEV, zm, and others. The system clock in the bottom right corner shows '2:40 PM 17-Sep-24'.

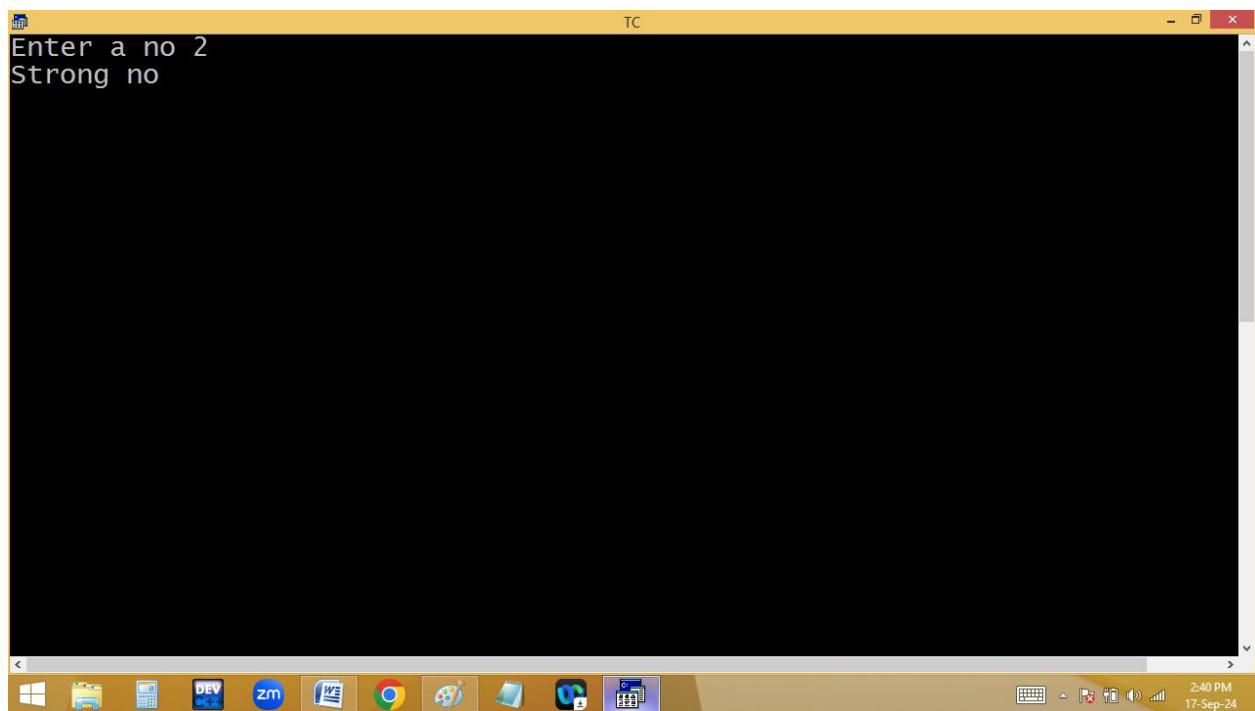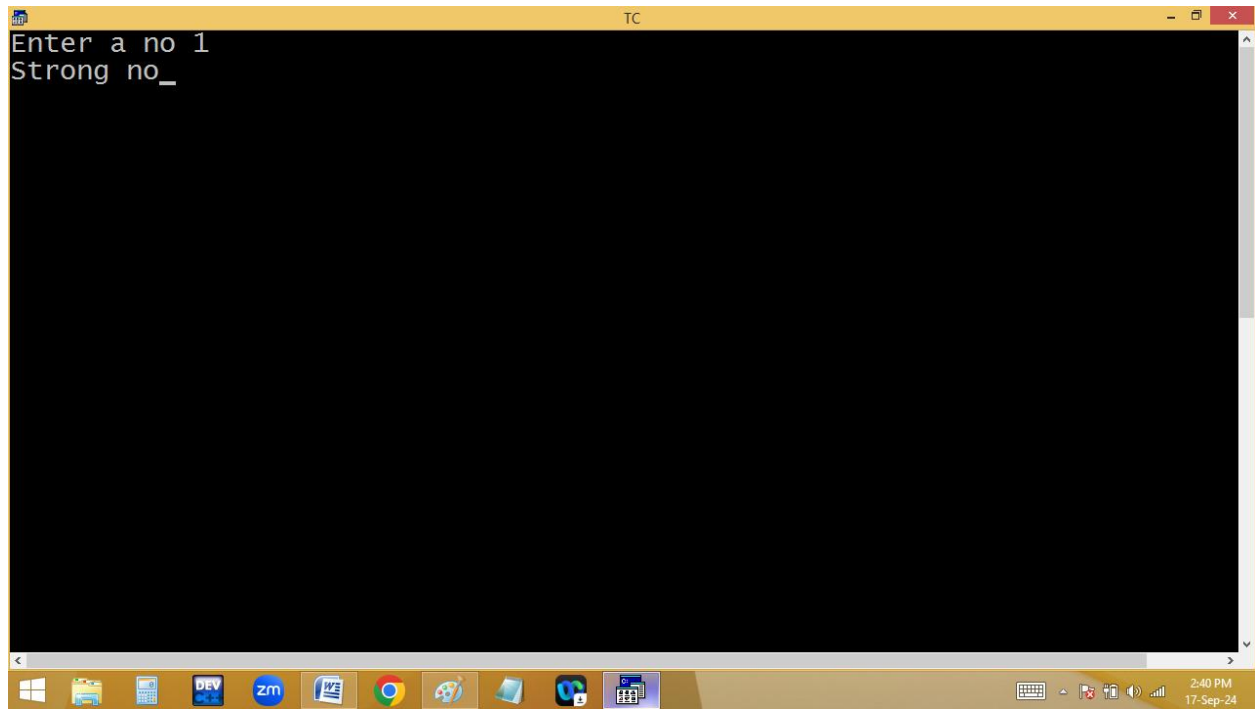

```
TC
Enter a no 3
Not a Strong no
_
```

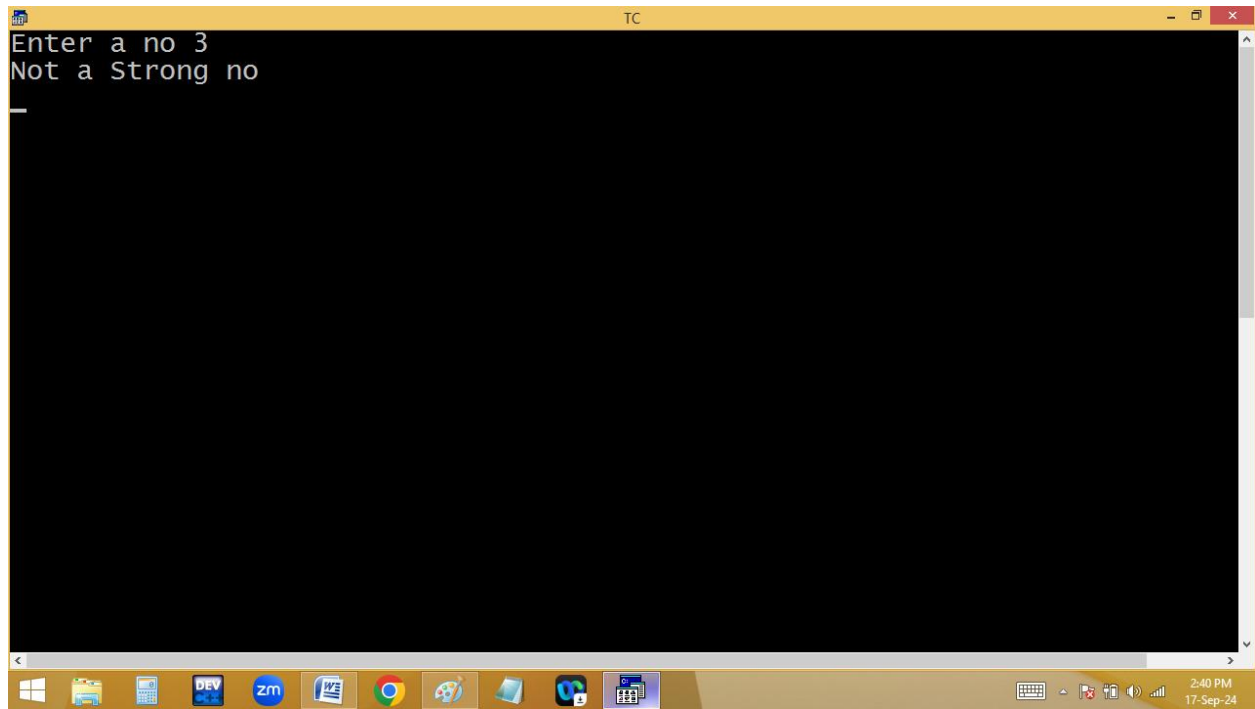

```
TC
Enter a no 145
Strong no_
```

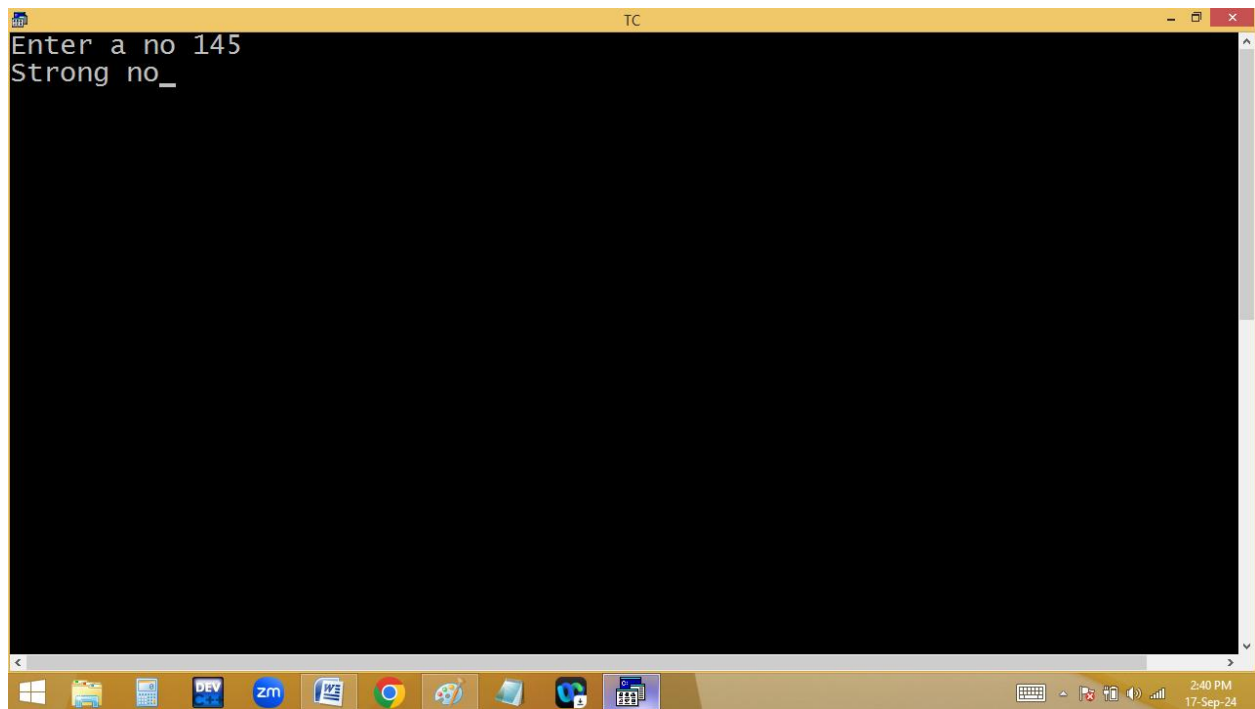

$$\frac{n}{145}$$

$$\frac{m}{145} \div 10 = \frac{5}{5} \times 4 \times 3 \times 2 \times 1 = 120 + \frac{5}{5} = 120$$

$$145 \div 10 = 4 \times 3 \times 2 \times 1 = 24 + 120 = 144$$

$$145 \div 10 = 1 \quad 1 + 144 = 145$$

```

for( m=n; m!=0; m=m/10 )
{
    for( f=1, r=m%10; r>1; r-- ) f=f*r;
    s=s+f;
}

puts( n == s ? "Strong ":"Not");

```

$$123 = 1 + 2 + 6 = 9$$

Print n to n all the prime's and count.

```

TC
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 27 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,i,j,c,cnt=0;
    clrscr();
    printf("Enter a no "); scanf("%d",&n);
    for(i=2;i<=n;i++)
    {
        for(c=0,j=1;j<=i;j++) if(i%j==0) c++;
        if(c==2) printf("%4d",i,cnt++);
    }
    printf("\n%d primes",cnt);
    getch();
}

```

2:48 PM 17-Sep-24

```
TC
Enter a no 10
2 3 5 7
4 primes_
```

```
TC
Enter a no 200
2 3 5 7 11 13 17 19 23 29 31 37 41 43 47 53 59 61
73 79 83 89 97 101 103 107 109 113 127 131 137 139 149 151 157 163 173
179 181 191 193 197 199
46 primes_
```

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 8 Col 26 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int n,i,j,c,cnt=0;
clrscr();
printf("Enter starting and ending no's "); scanf("%d%d",&i,&n);
if(i>n){int t=i;i=n;n=t;}
for( ;i<=n;i++)
{
for(c=0,j=1;j<=i;j++)if(i%j==0)c++;
if(c==2)printf("%4d",i,cnt++);
}
printf("\n%d primes",cnt);
getch();
}
```

```
TC
Enter starting and ending no's 200 100
101 103 107 109 113 127 131 137 139 149 151 157 163 167 173 179 181 191 1
199
21 primes_
```

```

for( i=2; i<=n; i++ )
{
    c=0; ✓
    for( j=1; j<=i; j++) if(i%j==0)c++;
    if(c==2) p(i, cnt++);
}

```

$\frac{i}{1}$ $\frac{n}{10}$ cnt=0 $\frac{c}{0, 2}$

$\frac{i}{4} \% \frac{j}{1} = 0$ $\frac{c}{0}$ $\frac{i}{2} \% \frac{j}{1} = 0$ $\frac{i}{3} \% \frac{j}{1} = 0$
 $\frac{4}{4} \% \frac{2}{2} = 0$ $\frac{1}{1}$ $\frac{2}{2} \% \frac{2}{2} = 0$ $\frac{3}{3} \% \frac{3}{3} = 0$
 $\frac{4}{4} \% \frac{4}{4} = 0$ $\frac{2}{2}$

Print 1 to n palindromes and count:

Eg: 1 to 50 palindromes are 1-9, 11, 22, 33, 44 →
13 palindromes

```

TC
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 23 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,i,j,c=0,rev,r;
    clrscr();
    printf("Enter starting and ending value "); scanf("%d%d",&i,&n);
    if(i>n){int t=i;i=n;n=t;}
    for( ;i<=n;i++)
    {
        for(rev=0,j=i;j!=0;j=j/10){r=j%10;rev=rev*10+r;}
        if(i==rev)printf("%4d",i,c++);
    }
    printf("\n%d palindromes",c);
    getch();
}

```

```
TC
Enter starting and ending value 1 50
1 2 3 4 5 6 7 8 9 11 22 33 44
13 palindromes
```

```
TC
Enter starting and ending value 200 350
202 212 222 232 242 252 262 272 282 292 303 313 323 333 343
15 palindromes
```

```

TC
Enter starting and ending value 500 250
252 262 272 282 292 303 313 323 333 343 353 363 373 383 393 404 414 424 4
454 464 474 484 494
25 palindromes_

```


```

for( i=1;i<=n;i++ )
{
for( rev=0, j=i; j!=0;j=j/10)
{
r=j%10;
rev=rev*10+r;
}
if( i==rev) p(i,c++);
}

```

i	j	r	rev	c
1	1	1 % 10 = 1 ✓	0 × 10 + 1 = 1	1
2	2	2 % 10 = 2	0 × 10 + 2 = 2	2
9	9	9 % 10 = 9	0 × 10 + 9 = 9	9
10	10	10 % 10 = 0 1 % 10 = 1	0 × 10 + 0 = 0 0 × 10 + 1 = 1	
11	11	11 % 10 = 1 1 % 10 = 1	0 × 10 + 1 = 1 1 × 10 + 1 = 11	10


Loops interview questions:

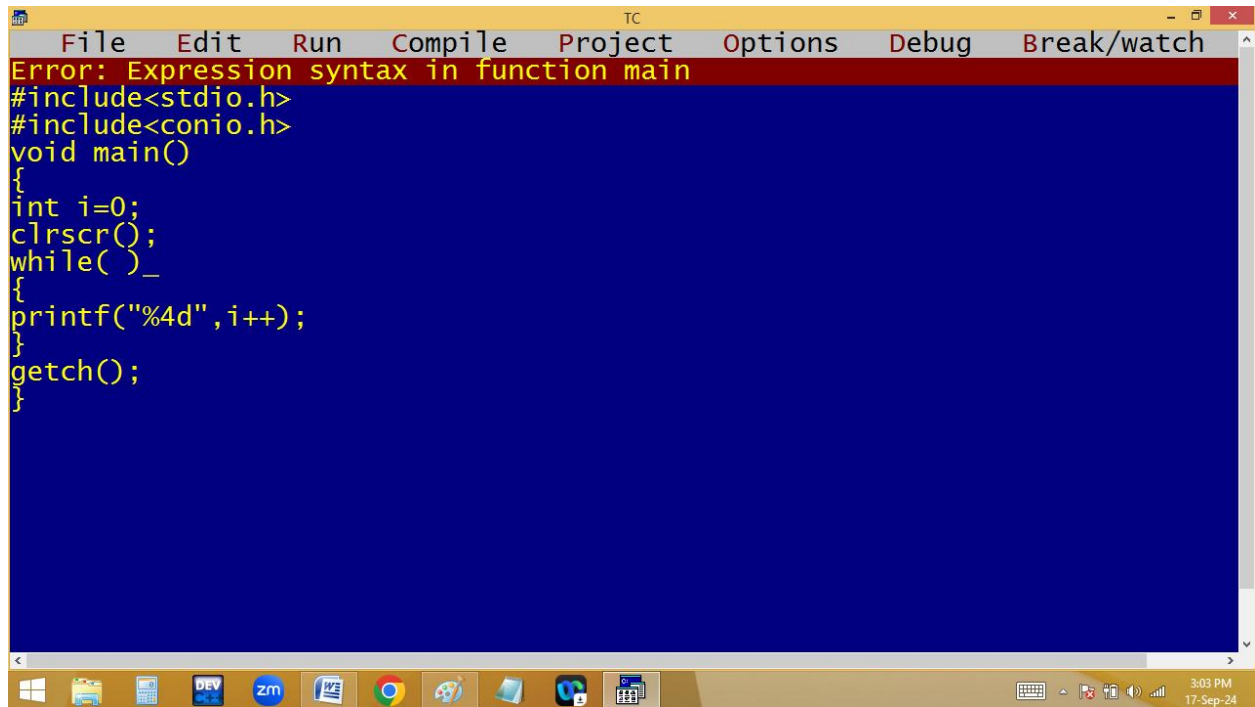

The screenshot shows the Turbo C++ (TC) IDE with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a blue editor area. A red error message bar at the top reads "Error: Expression syntax in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( )_
{
printf("%4d",i++);
}
getch();
}
```


The taskbar at the bottom shows various application icons and the system clock indicating 3:03 PM on 17-Sep-24.

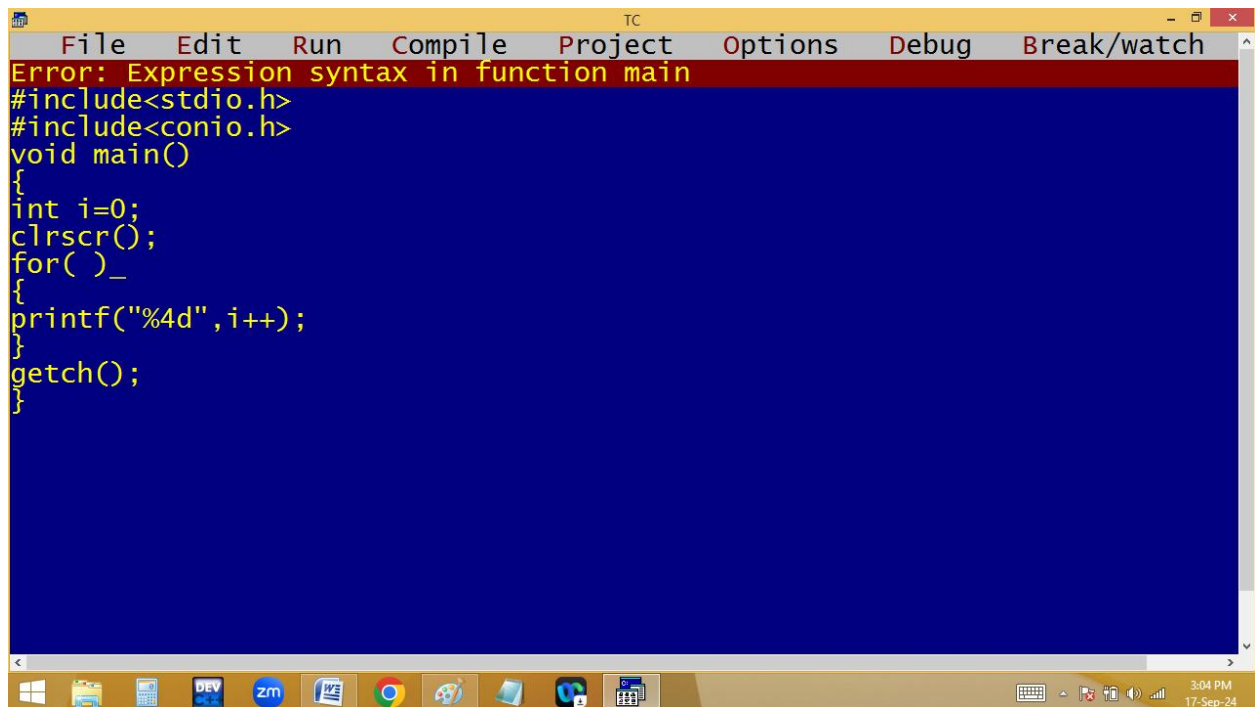

The screenshot shows the Turbo C++ (TC) IDE with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a blue editor area. A red error message bar at the top reads "Error: Expression syntax in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( )_
{
printf("%4d",i++);
}
getch();
}
```


The taskbar at the bottom shows various application icons and the system clock indicating 3:04 PM on 17-Sep-24.

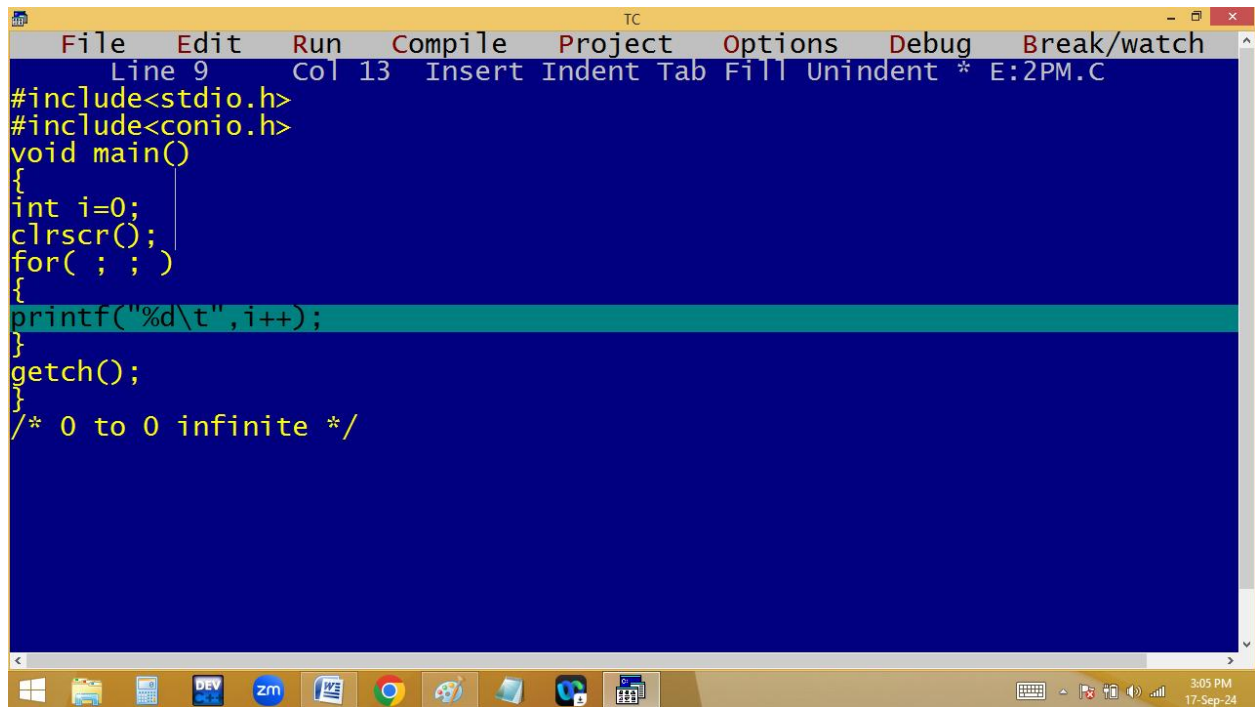

The screenshot shows the Turbo C++ IDE with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (Line 9, Col 13, Insert, Indent, Tab, Fill, Unindent, * E:2PM.C). The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( ; ; )
    {
        printf("%d\t",i++);
    }
    getch();
}
/* 0 to 0 infinite */
```

The taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, WPS, Chrome, and others. The system clock indicates 3:05 PM on 17-Sep-24.

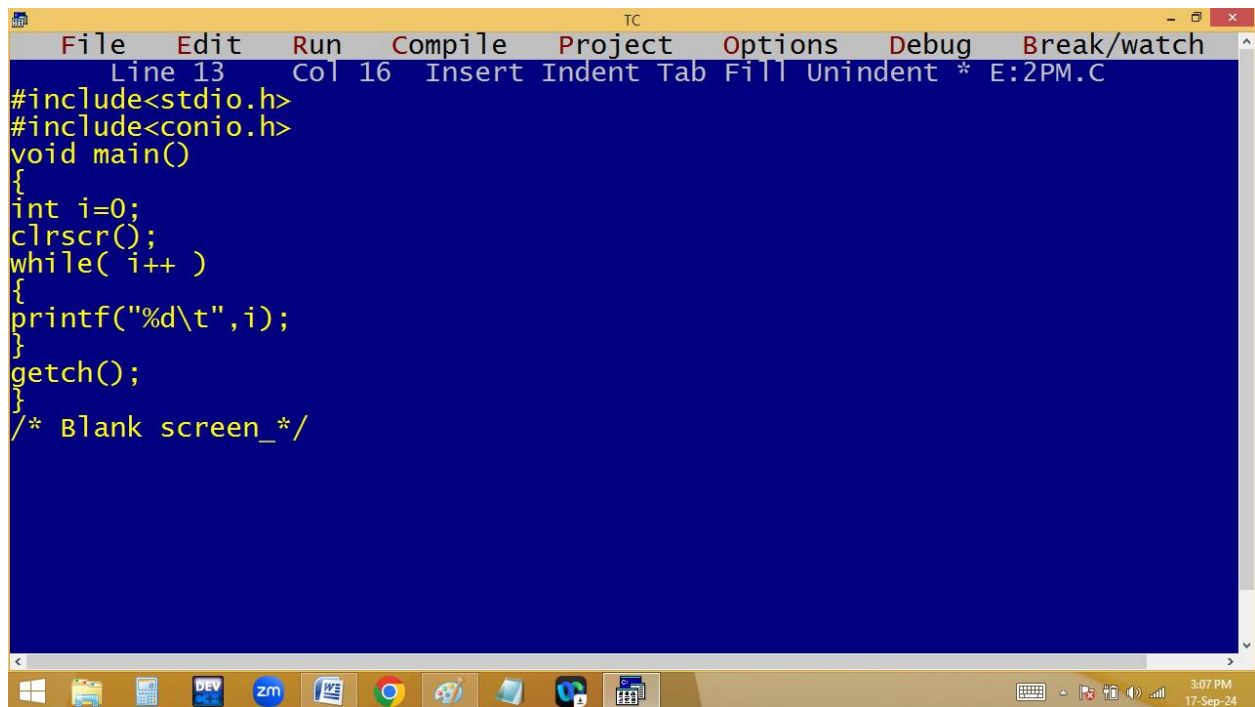

The screenshot shows the Turbo C++ IDE with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (Line 13, Col 16, Insert, Indent, Tab, Fill, Unindent, * E:2PM.C). The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( i++ )
    {
        printf("%d\t",i);
    }
    getch();
}
/* Blank screen_*/
```

The taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, WPS, Chrome, and others. The system clock indicates 3:07 PM on 17-Sep-24.

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 45 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( ++i )
    {
        printf("%d\t",i);
    }
    getch();
}
/* 1 2 3 ... 32767 -32768 -32767 ... -1 _*/
```

The Windows taskbar at the bottom shows various application icons and the system clock indicating 3:09 PM on 17-Sep-24.

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 6 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( i++ );
    {
        printf("%d\t",i);
    }
    getch();
}
/* 1 _*/
```


The Windows taskbar at the bottom shows various application icons and the system clock indicating 3:11 PM on 17-Sep-24.

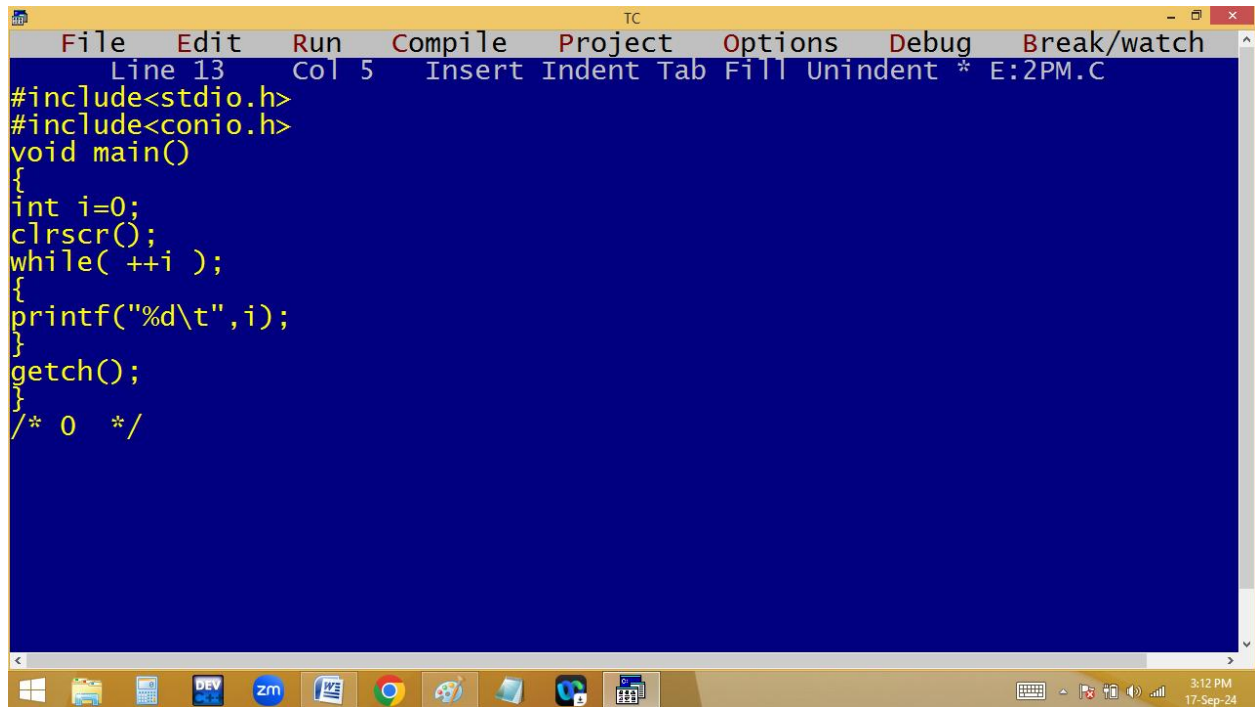

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 5' and 'Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( ++i );
{
printf("%d\t",i);
}
getch();
}
/* 0 */
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, Paint, and others. The system clock in the bottom right corner shows 3:12 PM on 17-Sep-24.

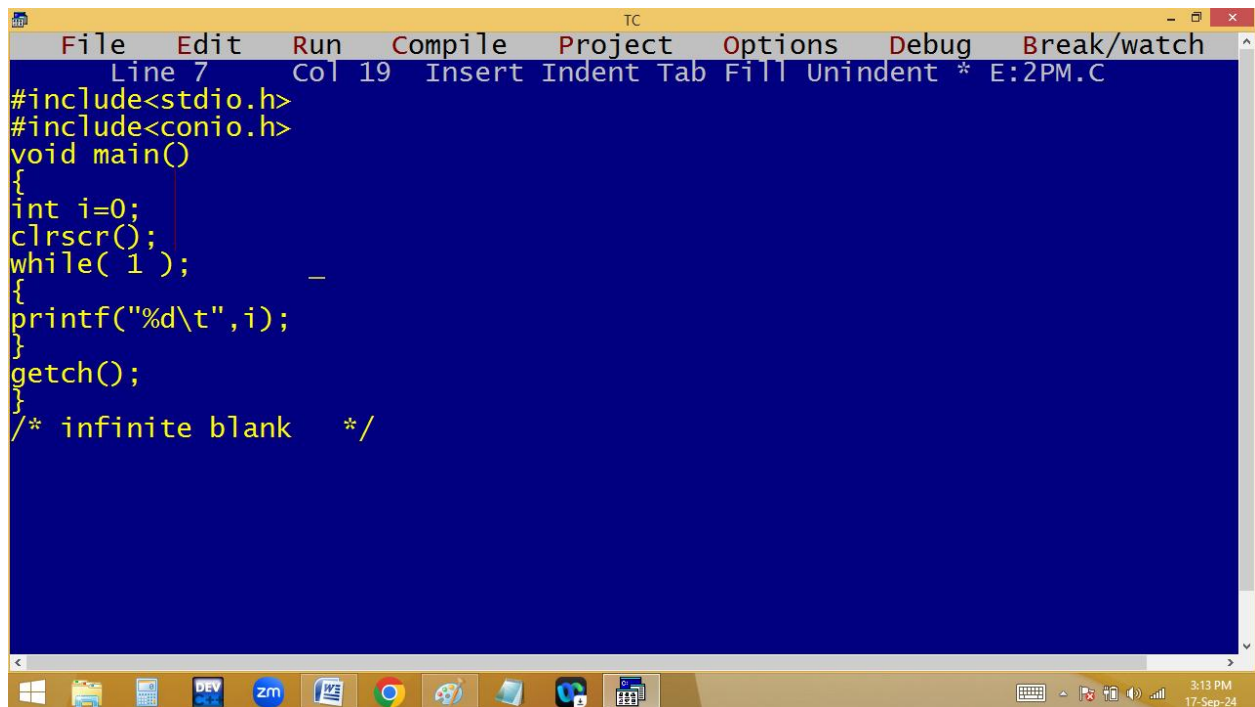

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 7 Col 19' and 'Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( 1 );
{
printf("%d\t",i);
}
getch();
}
/* infinite blank */
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, Paint, and others. The system clock in the bottom right corner shows 3:13 PM on 17-Sep-24.

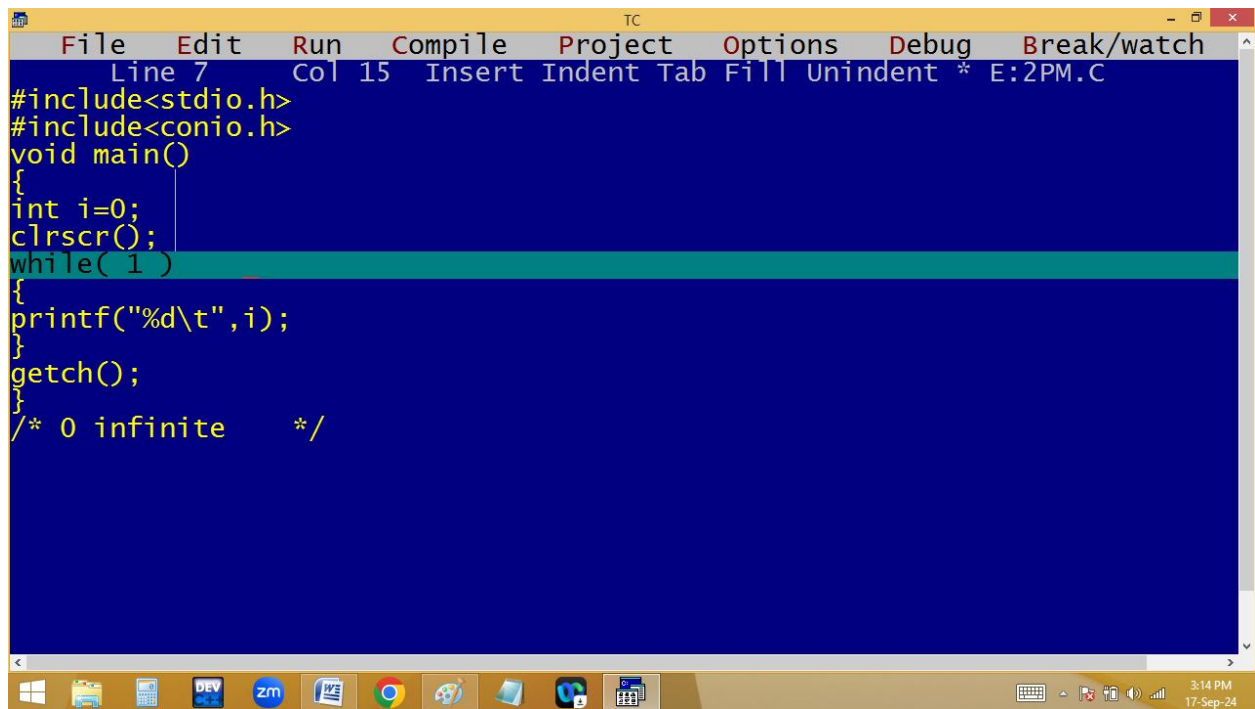

The screenshot shows the Turbo C++ IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 7 Col 15 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( 1 )
{
printf("%d\t",i);
}
getch();
}
/* 0 infinite */
```


The taskbar at the bottom shows various application icons, including Windows Explorer, DEV, zm, and others. The system clock in the bottom right corner shows 3:14 PM on 17-Sep-24.

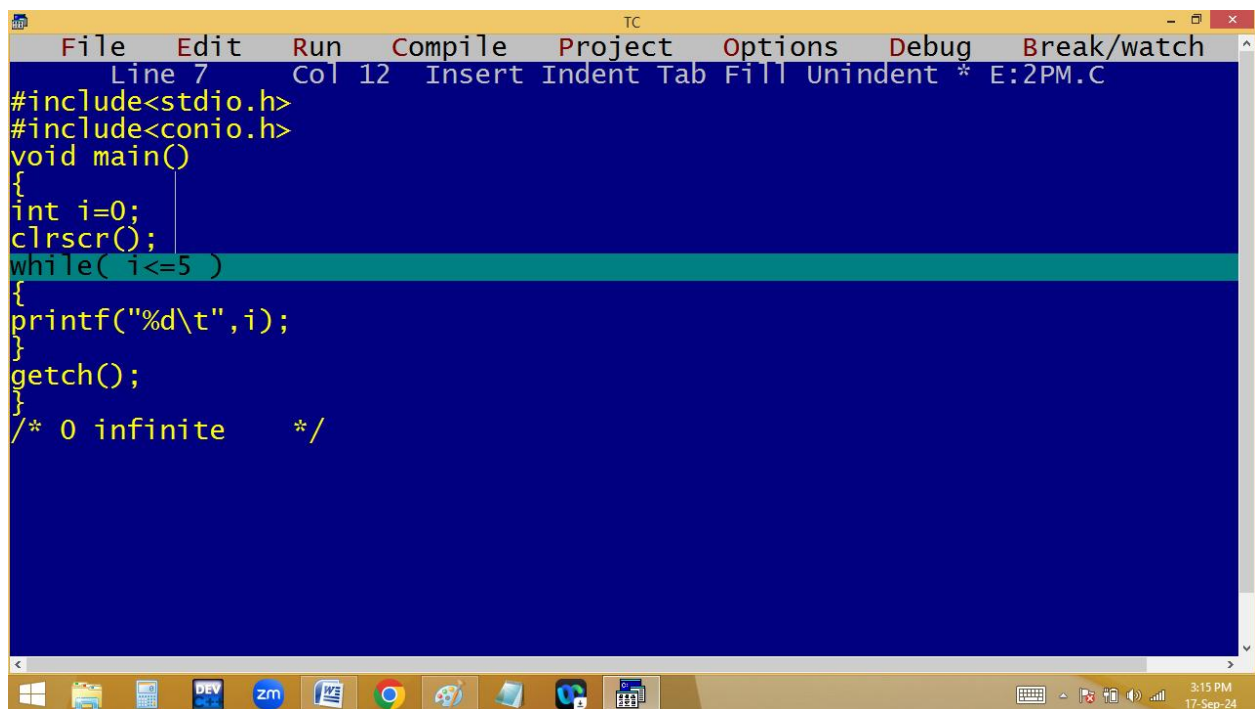

The screenshot shows the Turbo C++ IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 7 Col 12 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( i<=5 )
{
printf("%d\t",i);
}
getch();
}
/* 0 infinite */
```


The taskbar at the bottom shows various application icons, including Windows Explorer, DEV, zm, and others. The system clock in the bottom right corner shows 3:15 PM on 17-Sep-24.

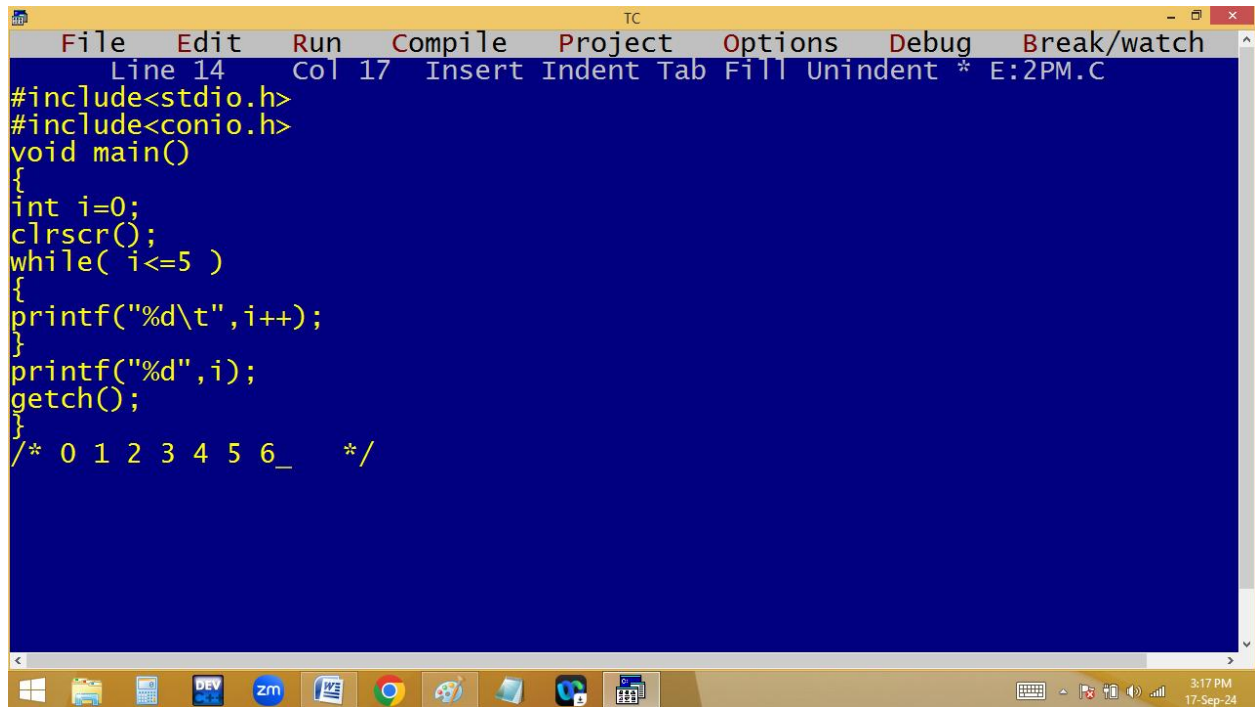

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 14 Col 17 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( i<=5 )
    {
        printf("%d\t",i++);
    }
    printf("%d",i);
    getch();
}
/* 0 1 2 3 4 5 6_ */
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, and others. The system clock in the bottom right corner displays '3:17 PM 17-Sep-24'.

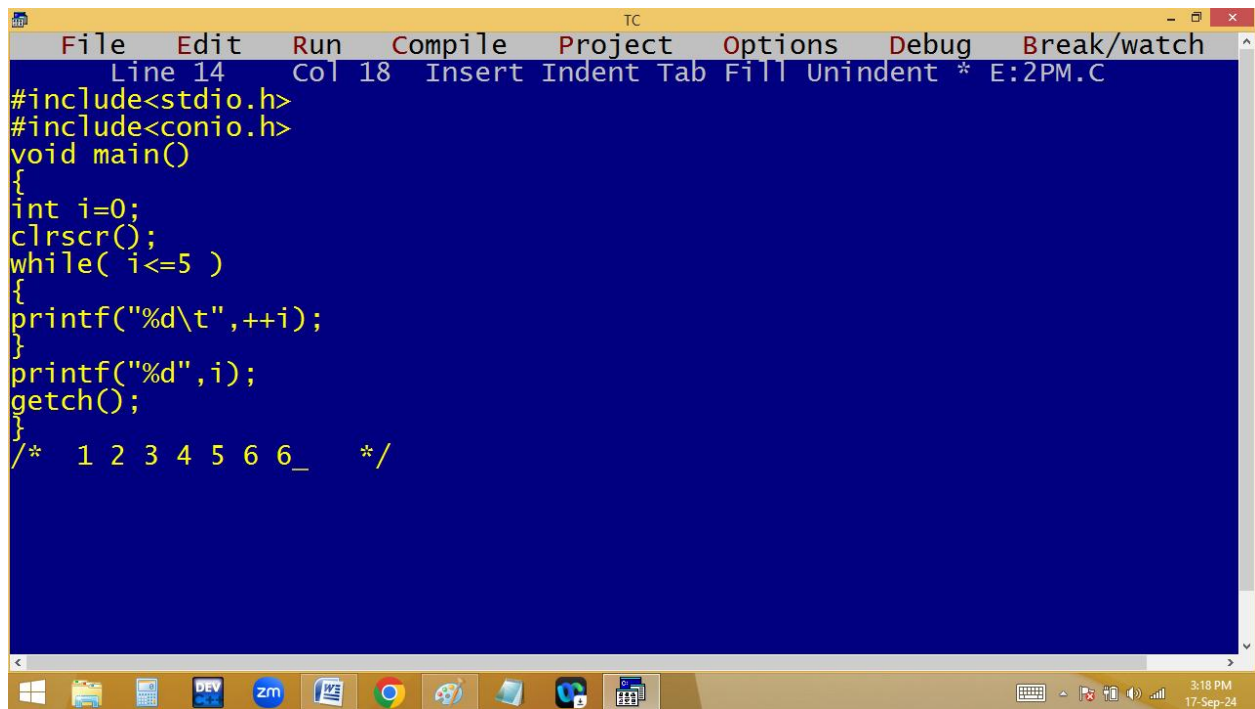

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 14 Col 18 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( i<=5 )
    {
        printf("%d\t",++i);
    }
    printf("%d",i);
    getch();
}
/* 1 2 3 4 5 6 6_ */
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, and others. The system clock in the bottom right corner displays '3:18 PM 17-Sep-24'.

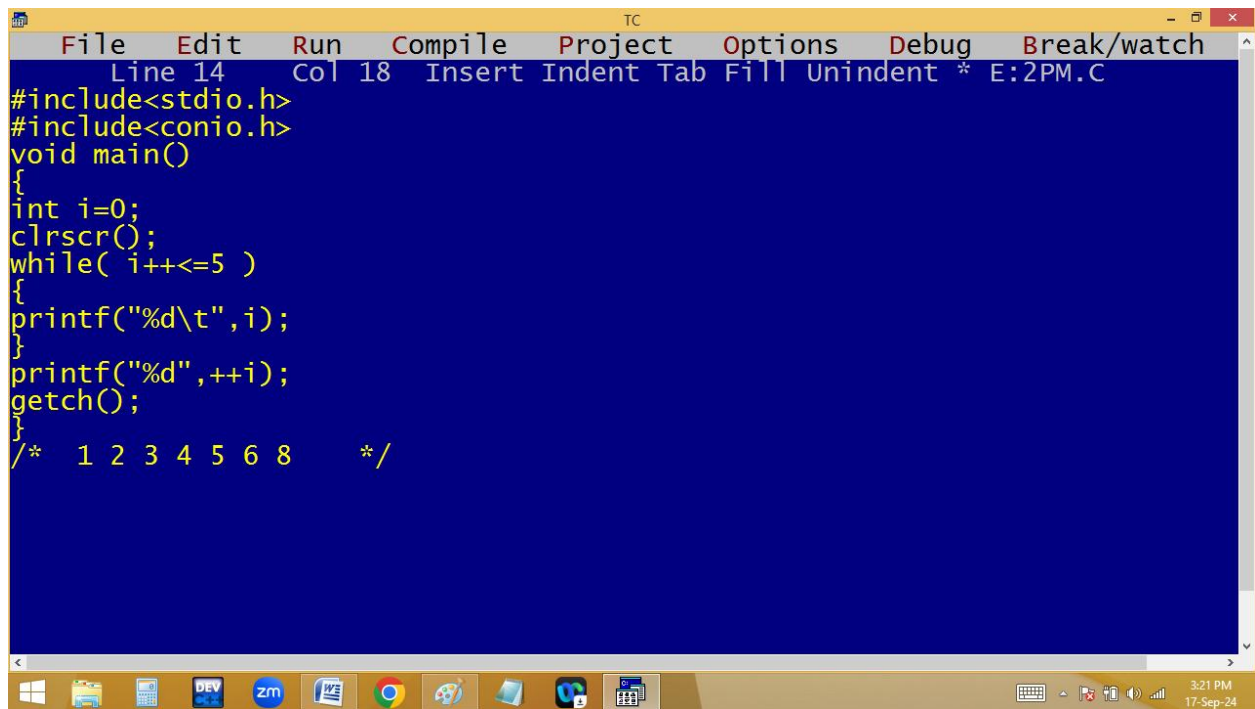

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 14 Col 18 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( i++<=5 )
    {
        printf("%d\t",i);
    }
    printf("%d",++i);
    getch();
}
/* 1 2 3 4 5 6 8 */
```


The Windows taskbar at the bottom shows various icons including the Start button, File Explorer, and several application icons. The system clock in the bottom right corner displays '3:21 PM' and '17-Sep-24'.

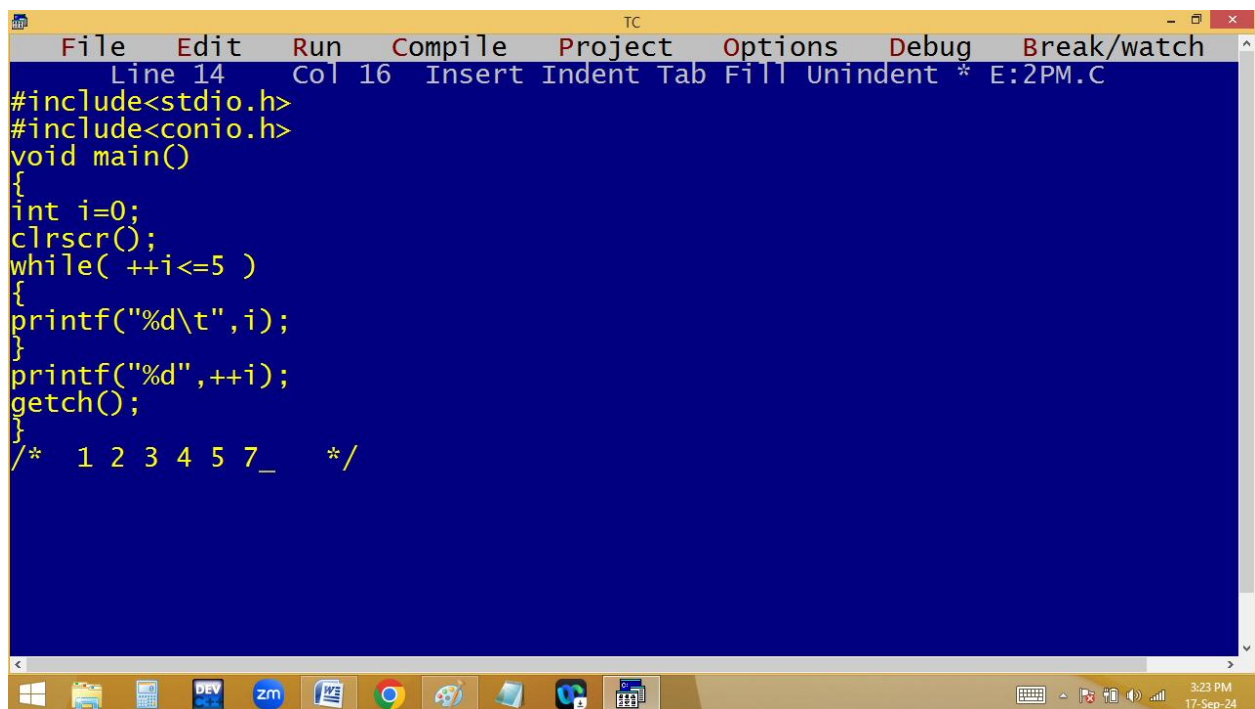


The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 14 Col 16 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( ++i<=5 )
    {
        printf("%d\t",i);
    }
    printf("%d",++i);
    getch();
}
/* 1 2 3 4 5 7_ */
```


The Windows taskbar at the bottom shows various icons including the Start button, File Explorer, and several application icons. The system clock in the bottom right corner displays '3:23 PM' and '17-Sep-24'.

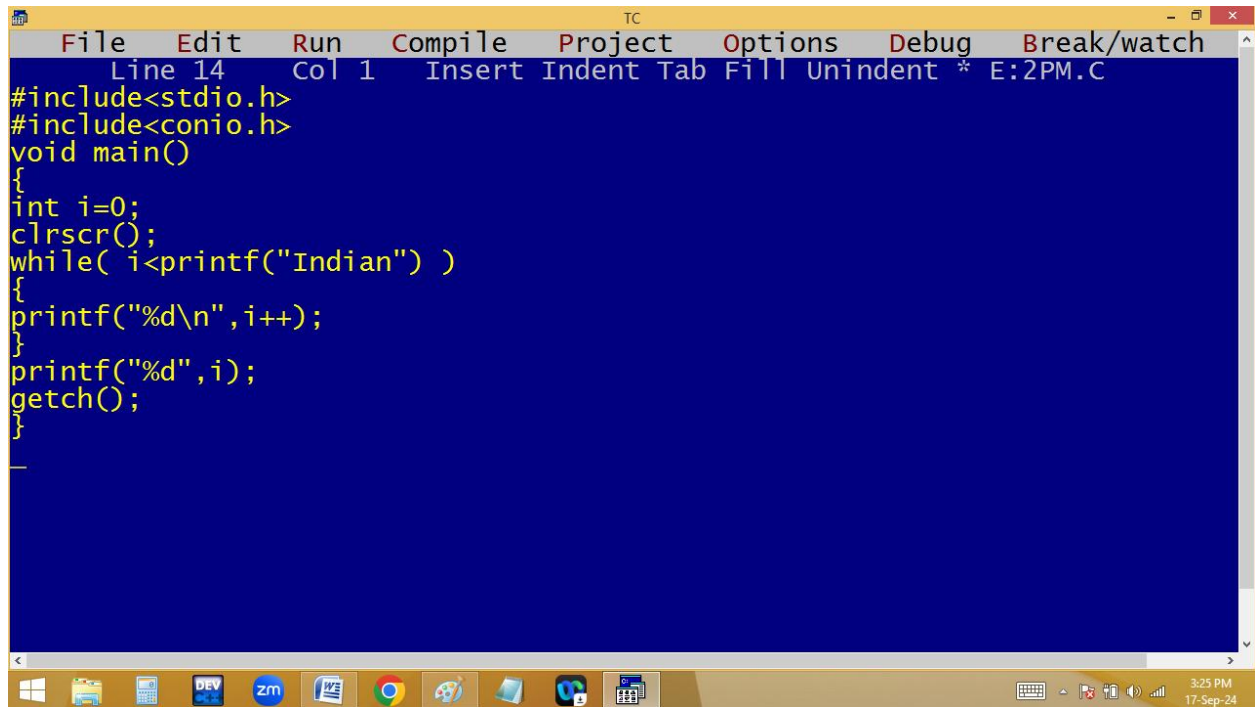

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( i<printf("Indian") )
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

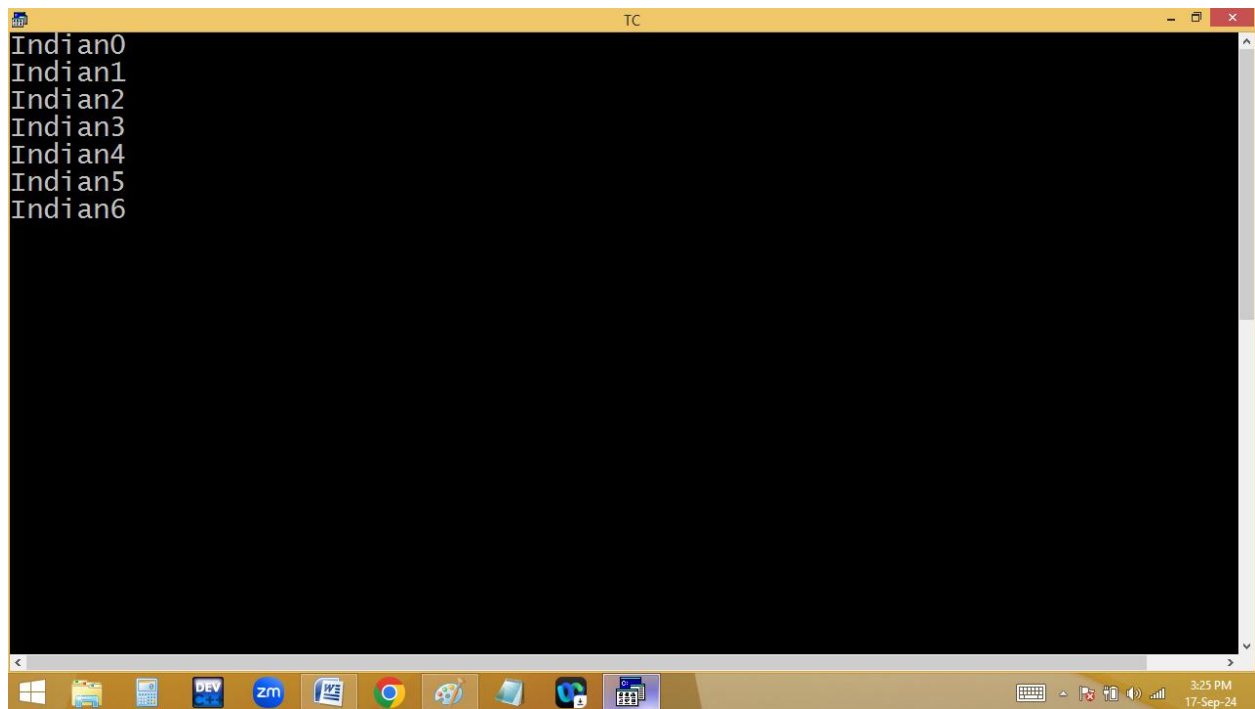


```
TC
Indian0
Indian1
Indian2
Indian3
Indian4
Indian5
Indian6
```

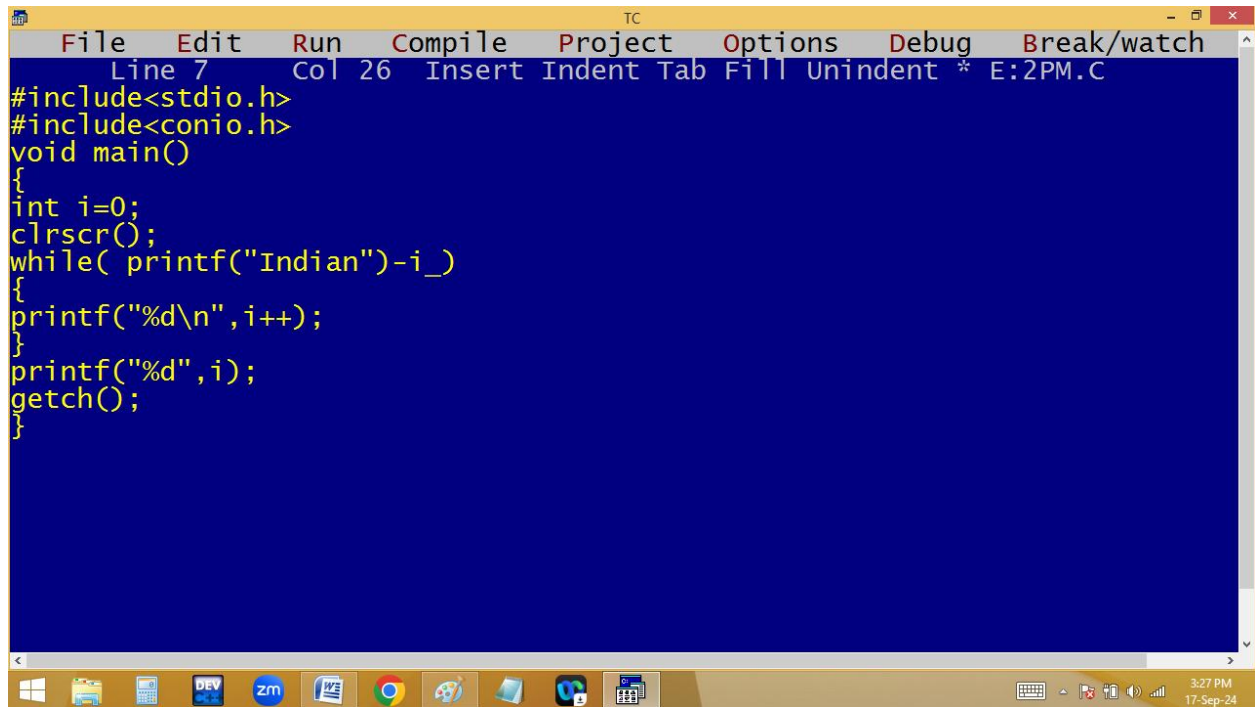


The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the bottom indicates 'Line 7', 'Col 26', and 'Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( printf("Indian")-i_)
    {
        printf("%d\n",i++);
    }
    printf("%d",i);
    getch();
}
```

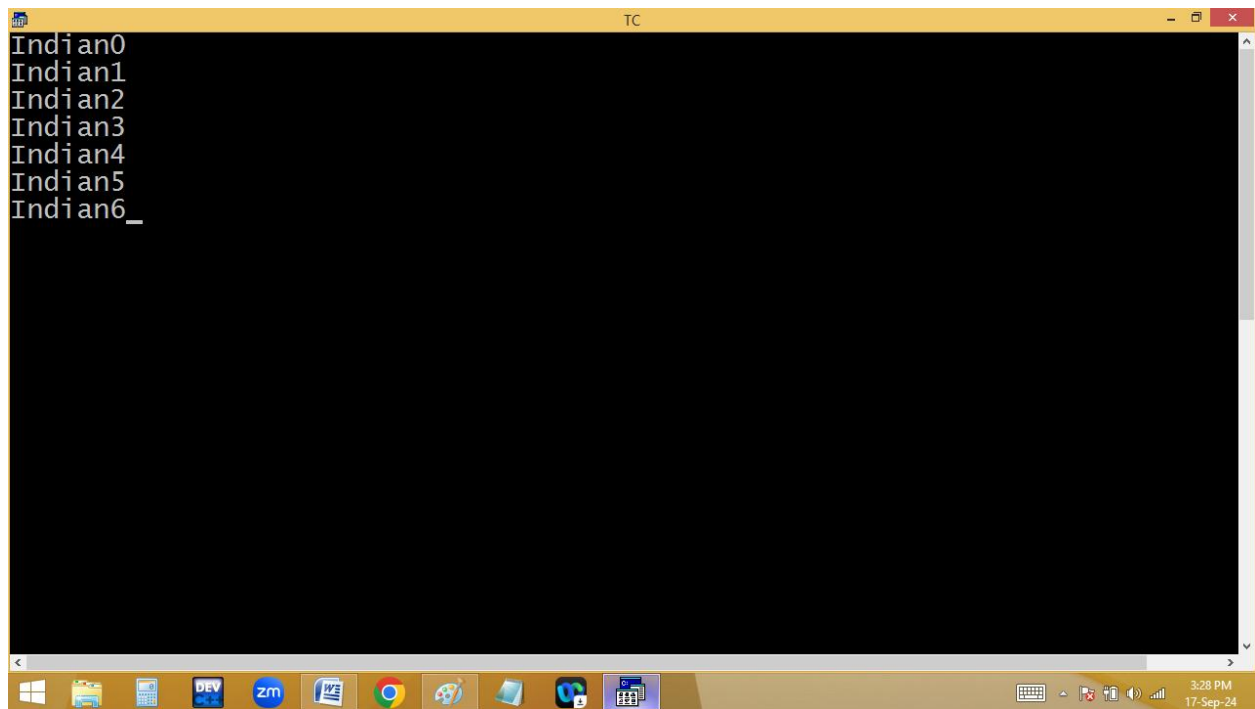

The screenshot shows the Turbo C++ (TC) IDE with a black background, displaying the output of the program. The output consists of seven lines, each starting with the word 'Indian' followed by a number or an underscore. The cursor is positioned at the end of the last line, 'Indian6_'. The status bar at the bottom indicates '3:28 PM' and '17-Sep-24'.


```
Indian0
Indian1
Indian2
Indian3
Indian4
Indian5
Indian6_
```

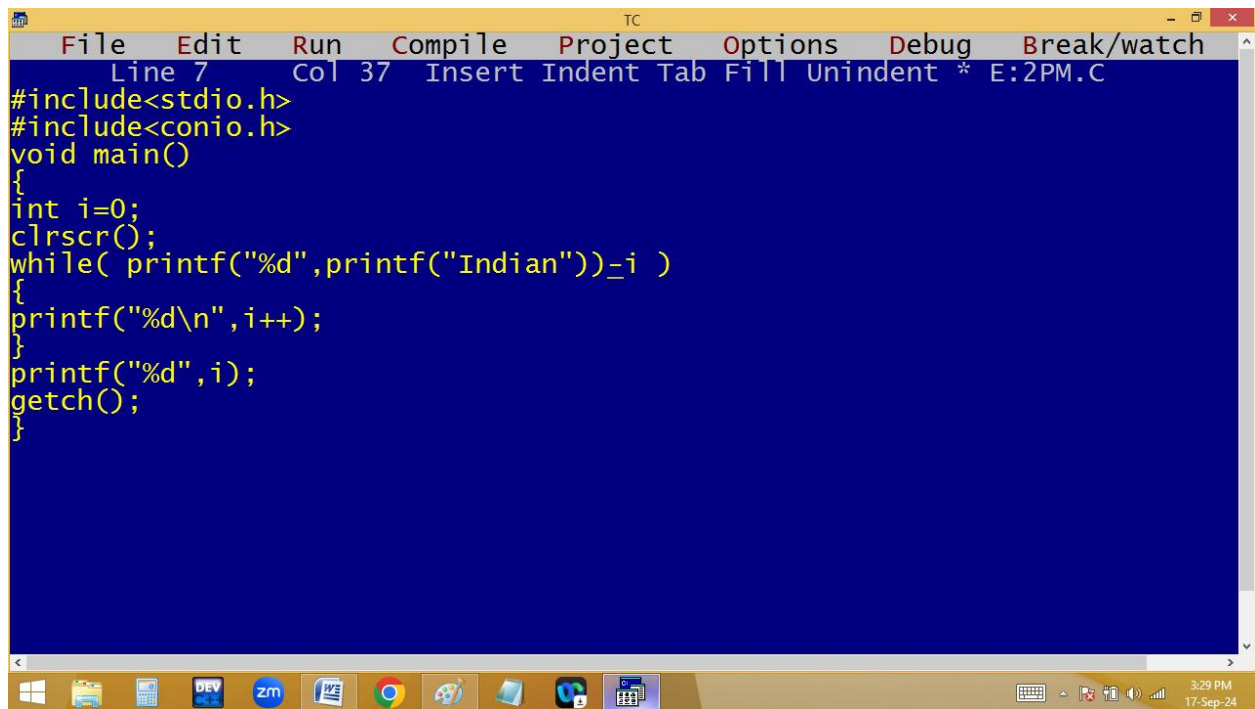

The screenshot shows the Turbo C++ (TC) IDE with a blue background. The menu bar includes File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the bottom indicates 'Line 7', 'Col 37', and 'Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while( printf("%d",printf("Indian"))_i )
    {
        printf("%d\n",i++);
    }
    printf("%d",i);
    getch();
}
```

The Windows taskbar at the bottom shows various application icons and the system clock displaying 3:29 PM on 17-Sep-24.

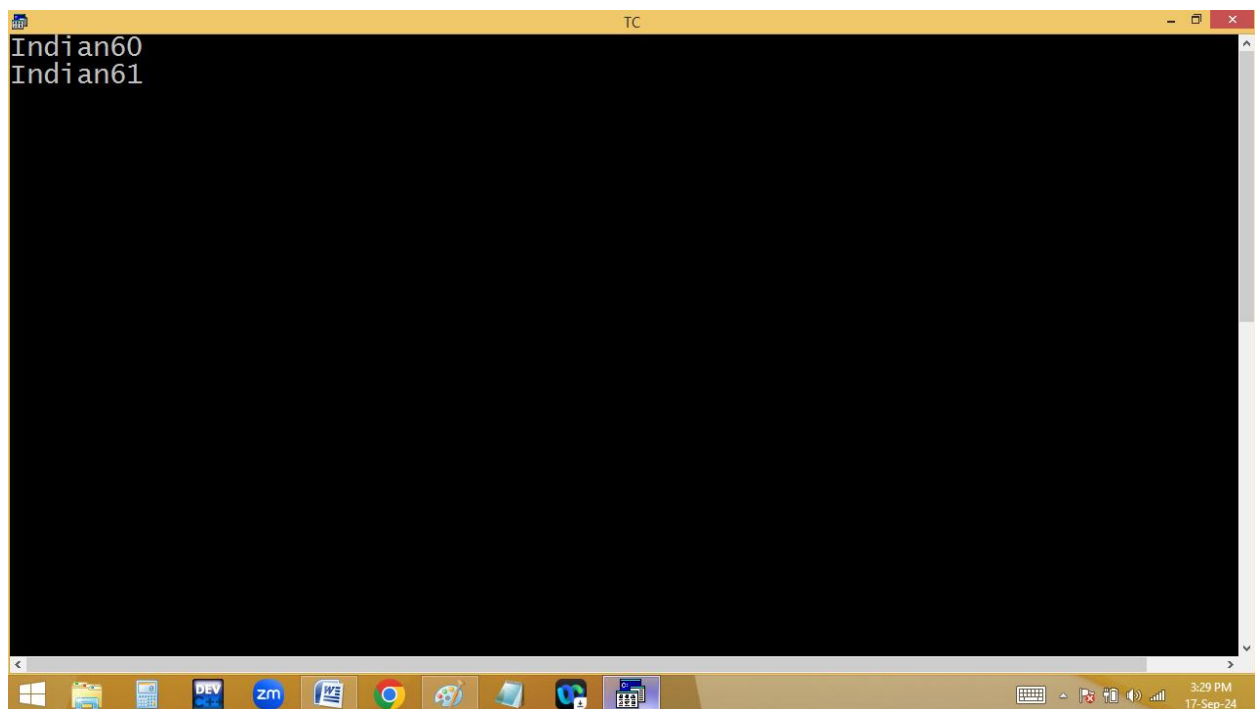

The screenshot shows the same Turbo C++ IDE, but the output window is active, displaying the results of the program's execution. The output consists of two lines: 'Indian60' and 'Indian61'.

```
Indian60
Indian61
```

The Windows taskbar at the bottom remains the same, showing the system clock at 3:29 PM on 17-Sep-24.

$\begin{matrix} 1-1 \\ 1-0 \end{matrix} \leftarrow \underline{G}$
Indian6 □
Indian6 \

```

while (printf("%d", p("Indian"))-i )
{
    p("%d",i);++ ✓
}
p(i);


```

```

TC
File Edit Run Compile Project Options Debug Break/watch
Error: While statement missing ) in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while( i++ ; ; )
{
printf("%d\n",i);
}
getch();
}

```


3:32 PM 17-Sep-24

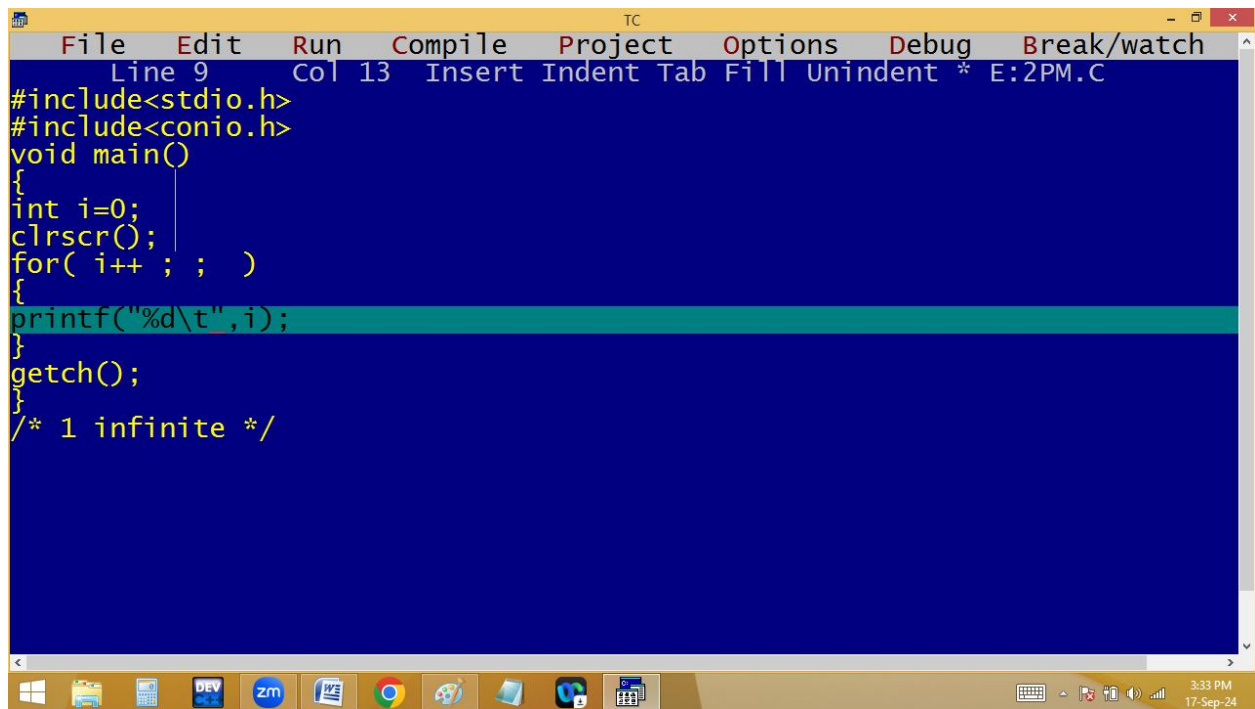

The screenshot shows the Turbo C++ IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 9 Col 13 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( i++ ; ; )
    {
        printf("%d\t",i);
    }
    getch();
}
/* 1 infinite */
```


The taskbar at the bottom shows various application icons including Windows Explorer, DEV C++, and a terminal window. The system clock in the bottom right corner displays '3:33 PM 17-Sep-24'.

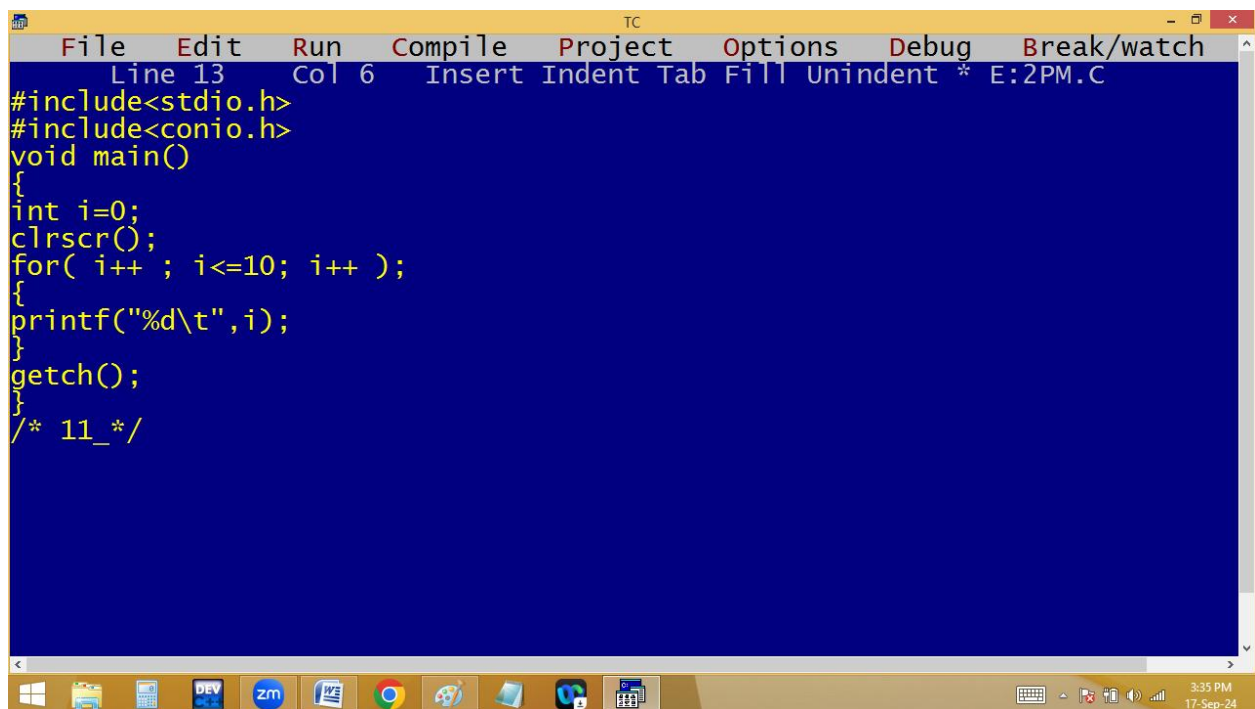

The screenshot shows the Turbo C++ IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 6 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( i++ ; i<=10; i++ );
    {
        printf("%d\t",i);
    }
    getch();
}
/* 11_*/
```


The taskbar at the bottom shows various application icons including Windows Explorer, DEV C++, and a terminal window. The system clock in the bottom right corner displays '3:35 PM 17-Sep-24'.

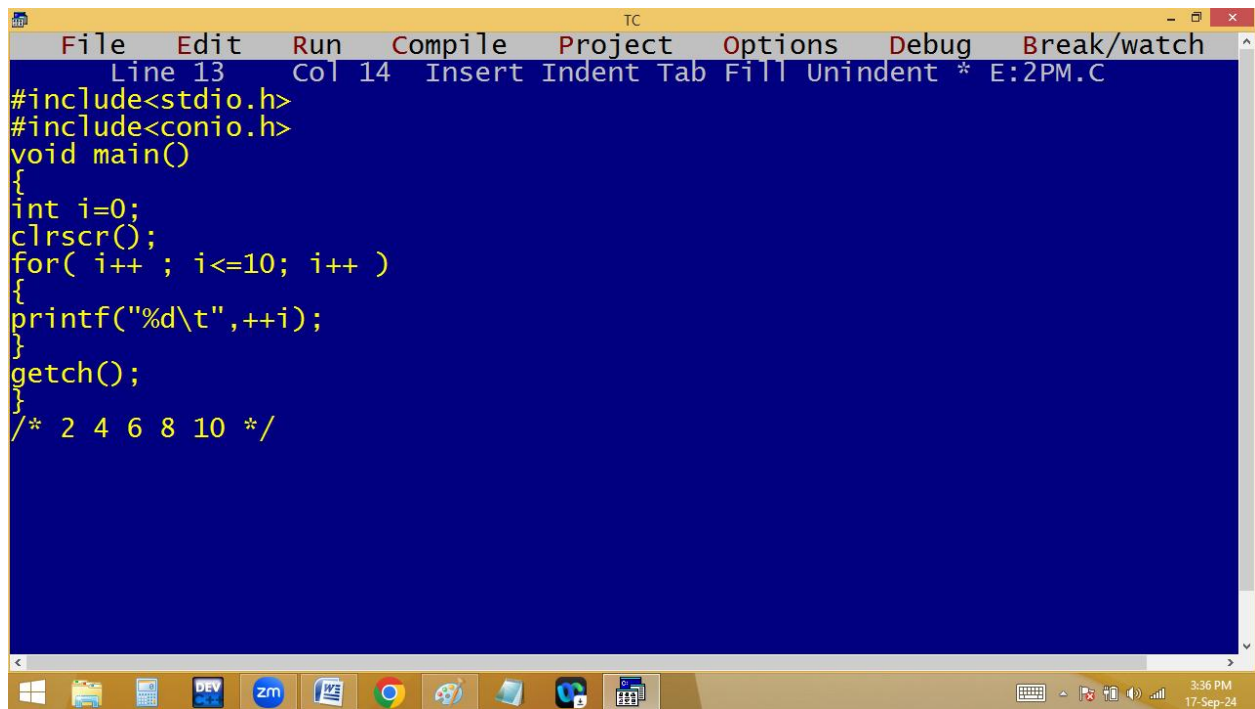

The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 13 Col 14 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( i++ ; i<=10; i++ )
    {
        printf("%d\t",++i);
    }
    getch();
}
/* 2 4 6 8 10 */
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, and others. The system clock in the bottom right corner displays '3:36 PM 17-Sep-24'.

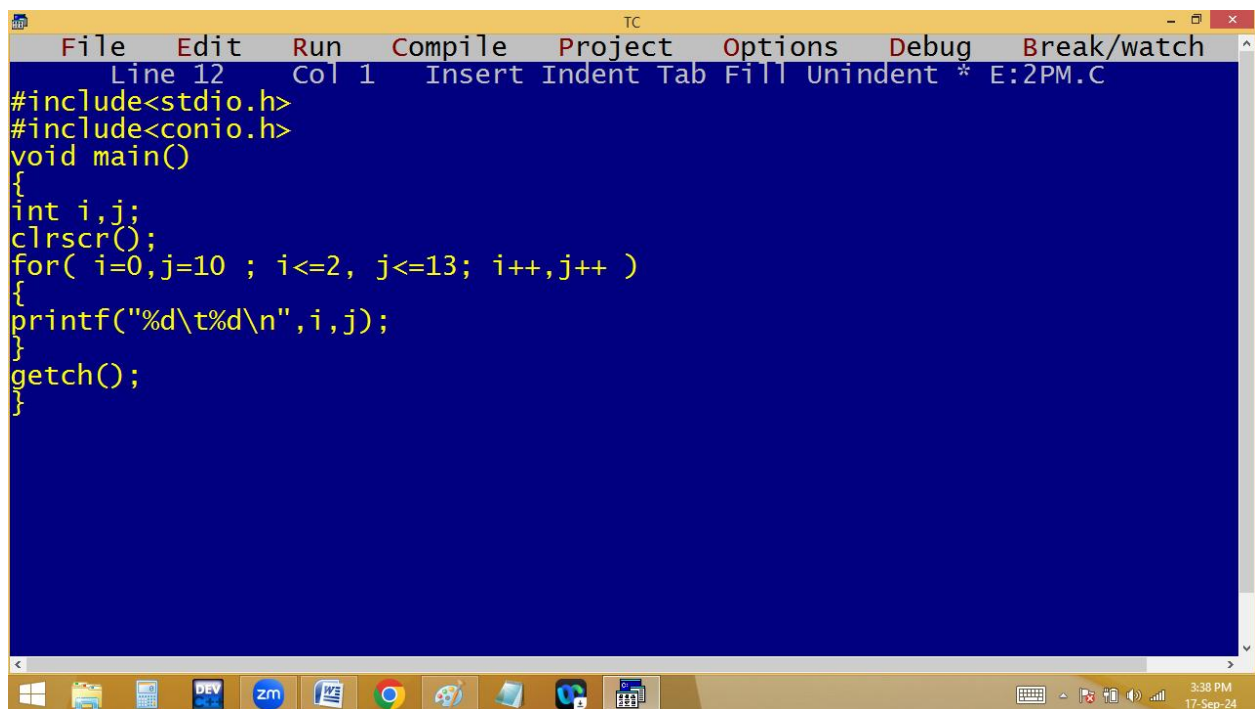


The screenshot shows the Turbo C++ (TC) IDE with a yellow title bar and a menu bar containing File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar at the top indicates 'Line 12 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for( i=0,j=10 ; i<=2, j<=13; i++,j++ )
    {
        printf("%d\t%d\n",i,j);
    }
    getch();
}
```


The Windows taskbar at the bottom shows various icons including Windows, File Explorer, DEV, zm, Word, Chrome, and others. The system clock in the bottom right corner displays '3:38 PM 17-Sep-24'.

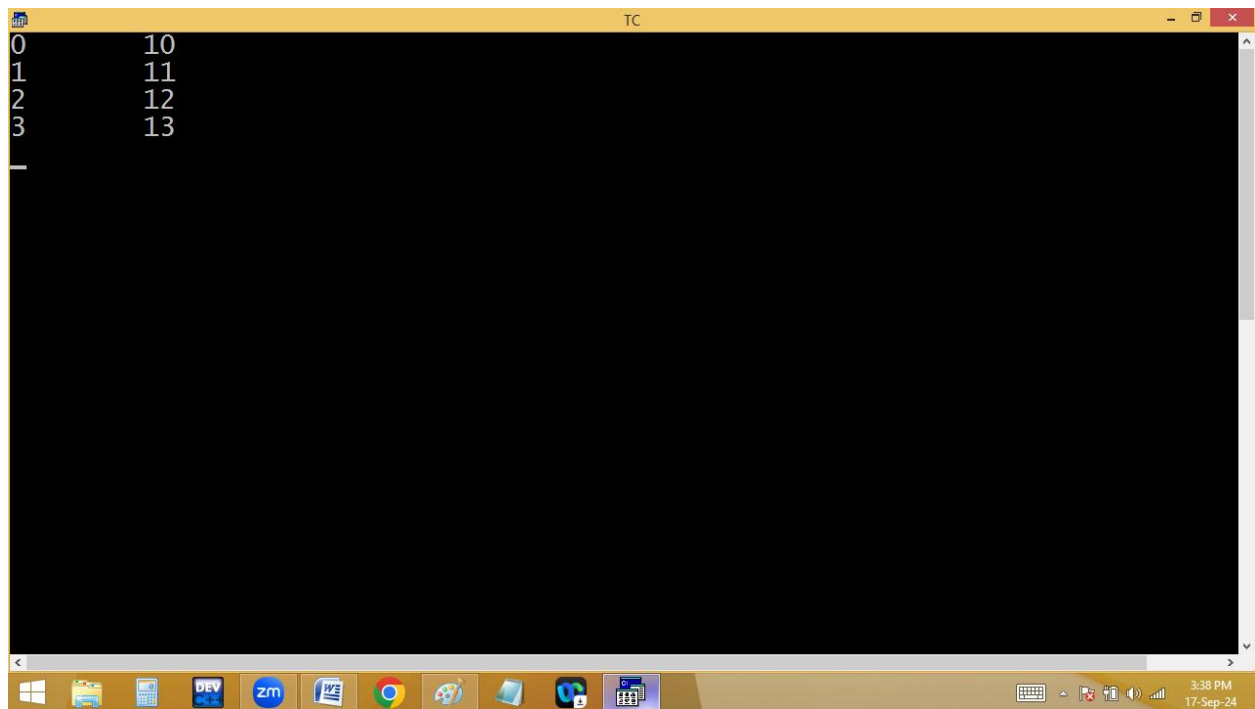


```
0 10
1 11
2 12
3 13
```

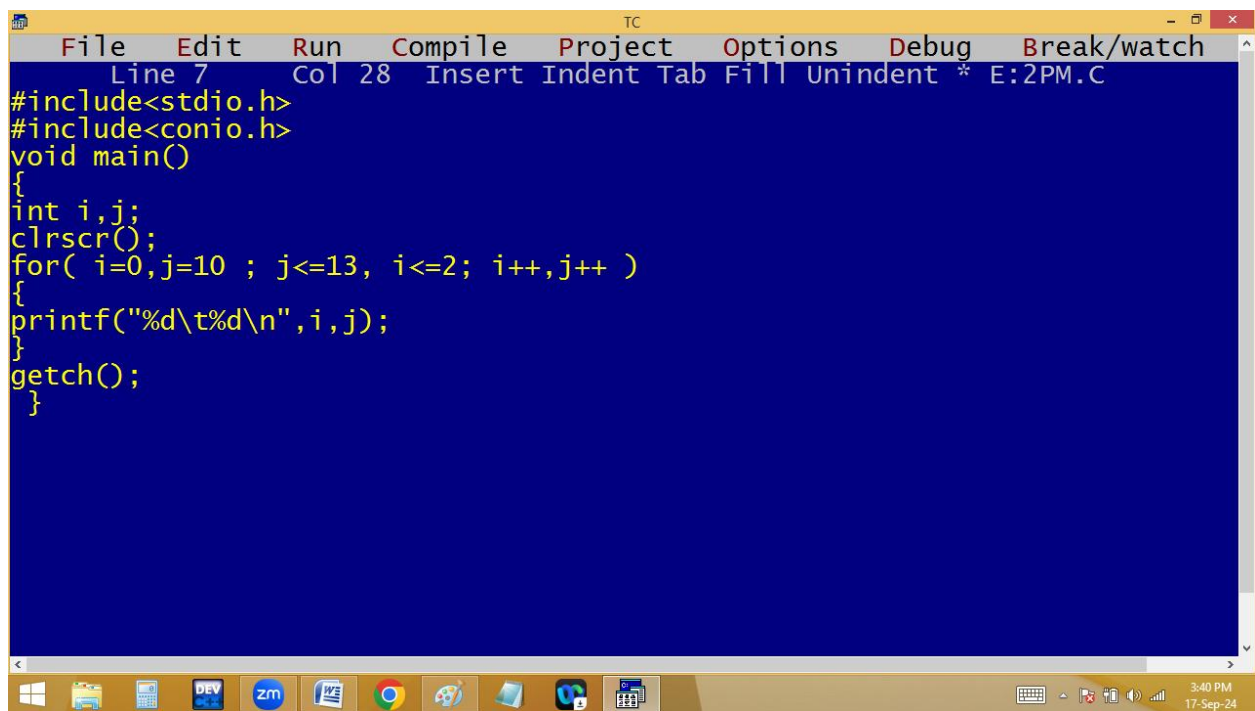

```
File Edit Run Compile Project Options Debug Break/watch
Line 7 Col 28 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for( i=0,j=10 ; j<=13, i<=2; i++,j++ )
{
printf("%d\t%d\n",i,j);
}
getch();
}
```

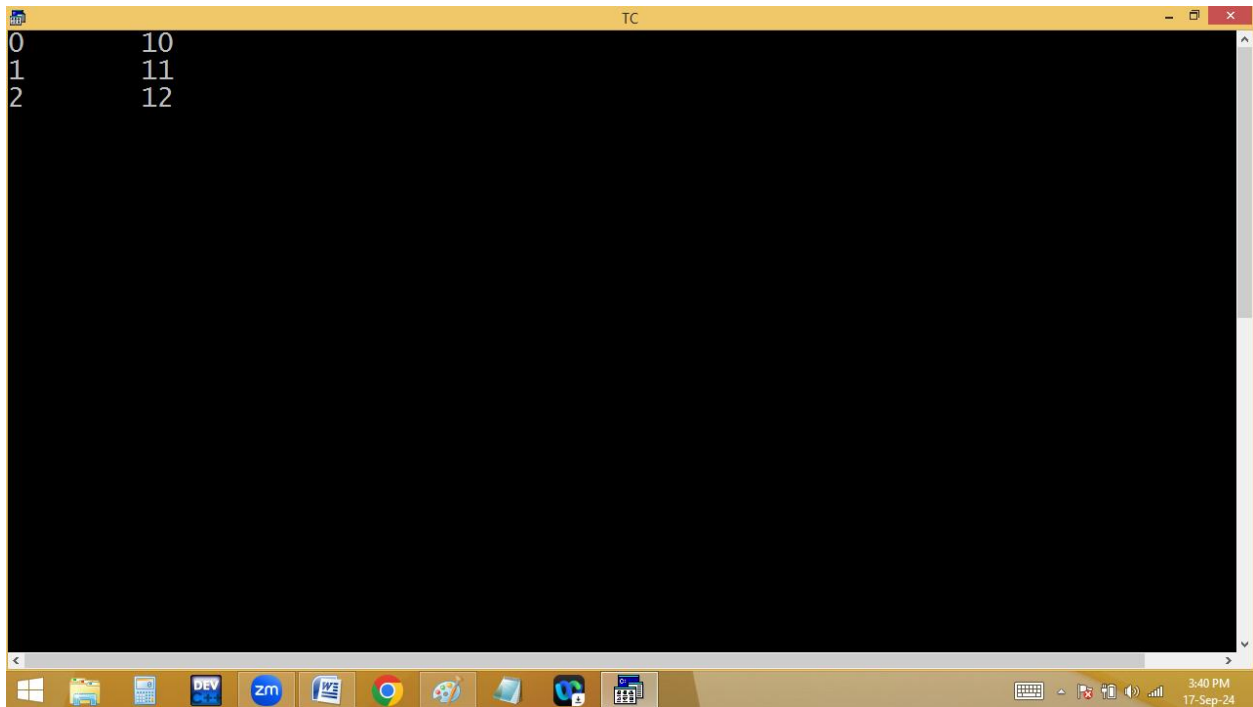

```
0    10
1    11
2    12
```

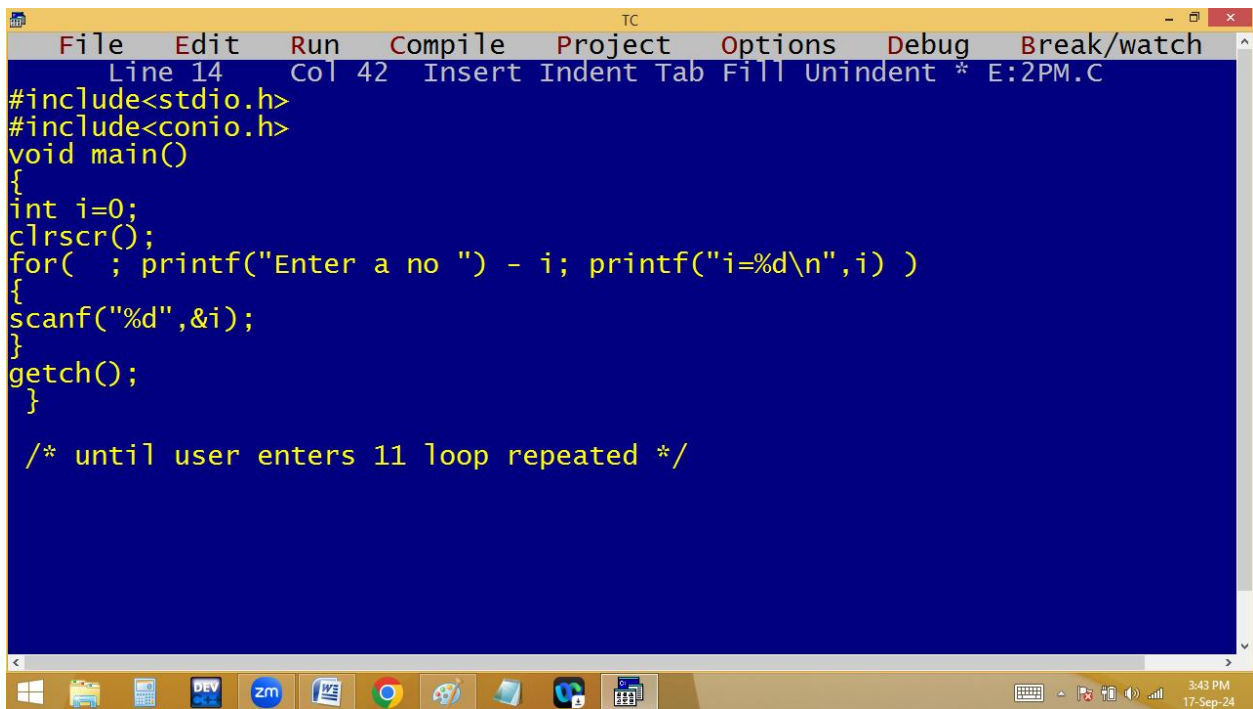

```
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 42 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( ; printf("Enter a no ") - i; printf("i=%d\n",i) )
{
scanf("%d",&i);
}
getch();
}


/* until user enters 11 loop repeated */
```

```
TC
Enter a no 0
i=0
Enter a no 1
i=1
Enter a no -1
i=-1
Enter a no 11
i=11
Enter a no
```


```
TC
Enter a no 1
i=1
Enter a no 2
i=2
Enter a no -1
i=-1
Enter a no 11
i=11
Enter a no 0
i=0
```

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 1 Col 1 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int i, j;
clrscr();
for( i=1 ; i<=10; i++ )
{
for( j=1;j<=10; j++)
{
if(j>i) break;
printf("%3d",j);
}
printf("\n");
}
getch();
}
```

```
TC
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5
1 2 3 4 5 6
1 2 3 4 5 6 7
1 2 3 4 5 6 7 8
1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8 9 10
```

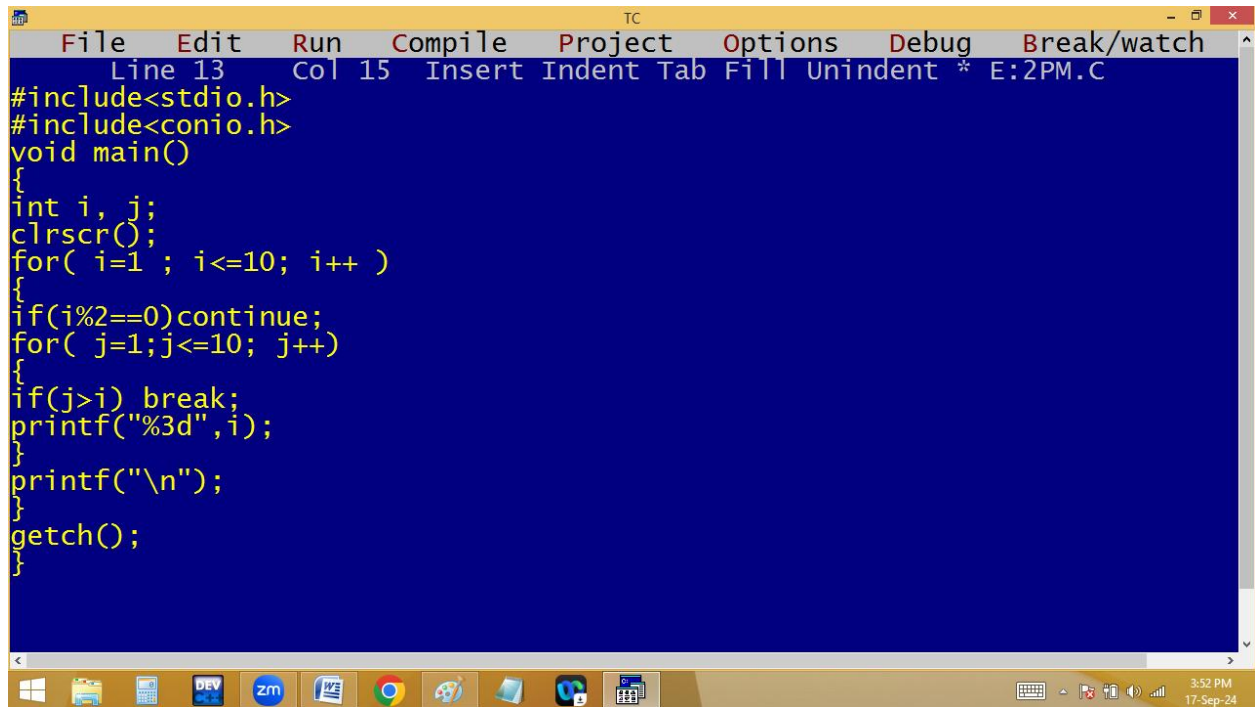

```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 15 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int i, j;
    clrscr();
    for( i=1 ; i<=10; i++ )
    {
        if(i%2==0)continue;
        for( j=1;j<=10; j++)
        {
            if(j>i) break;
            printf("%3d",i);
        }
        printf("\n");
    }
    getch();
}
```

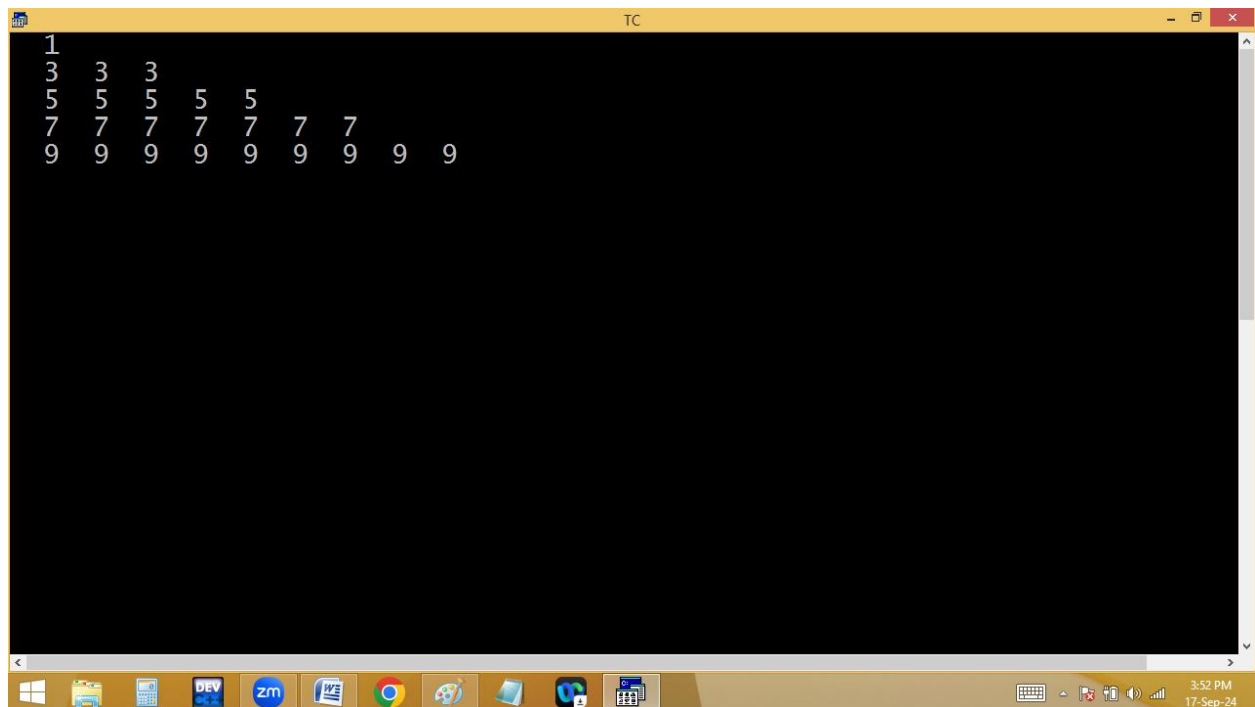

```
TC
1
3 3 3
5 5 5 5 5
7 7 7 7 7 7 7
9 9 9 9 9 9 9 9 9
```

