


if...else: when the program is having two options and user have to select one then go for if..else.

if the condition is true then statements in **if** block **{ }** are executed and **else** is not considered.

If condition false then statements in **else** block **{ }** are executed. **Else** never comes with a condition.

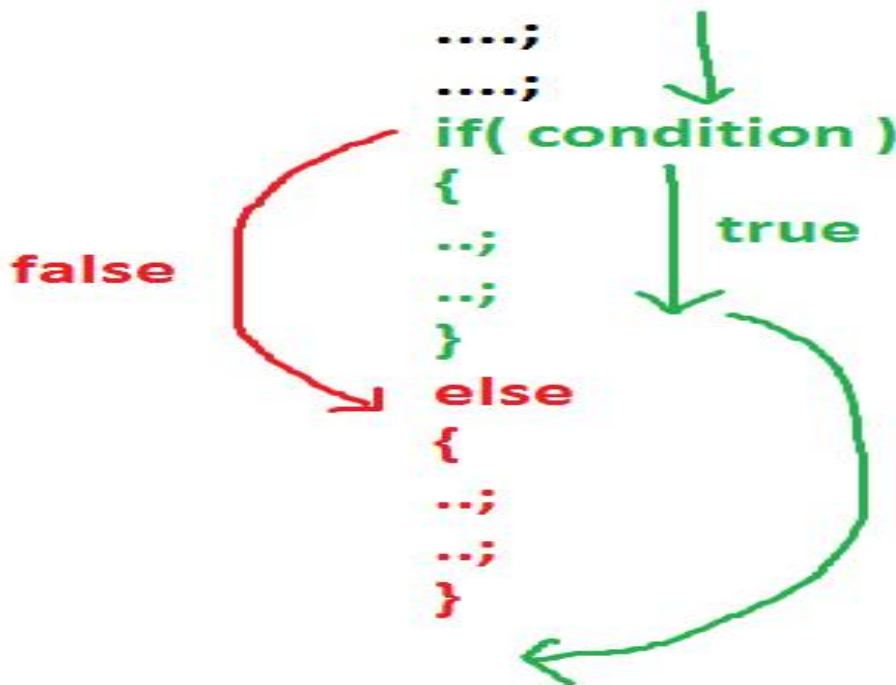

The image shows two screenshots of the Turbo C++ (TC) IDE. The top screenshot displays a compilation error: "Error: Misplaced else in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
else printf("Hi");
printf("Bye");
getch();
}
/* Error */
```

The bottom screenshot shows the same code after correction. The error message is gone, and the code is now valid C++ syntax. The status bar at the top of the editor window indicates "Line 11 Col 7".

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2);
else printf("Hi");
printf("Bye");
getch();
}
/* Bye_*/
```

TC

File Edit Run Compile Project Options Debug

Error: Misplaced else in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
else printf("Hi");
getch();
}
/* Error */
```

TC

File Edit Run Compile Project Options Debug

Error: Misplaced else in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
printf("a");
printf("b");
else
printf("c");
printf("d");
getch();
}
/* Error */
```


```
Line 17 Col 7 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
{
printf("a");
printf("b");
}
else
printf("c");
printf("d");
getch();
}
/* abd */
```


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
{
printf("a");
printf("b");
}
else
{
printf("c");
}
printf("d");
getch();
}
/* abd */
```

```
TC
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
{
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
}
getch();
}
/* ab */

Error: Misplaced else in function main
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2);
{
printf("a"); printf("b");
}
else
{
printf("c"); printf("d");
}
getch();
}
/* Error */

TC
2:32 PM
03-Sep-24
```

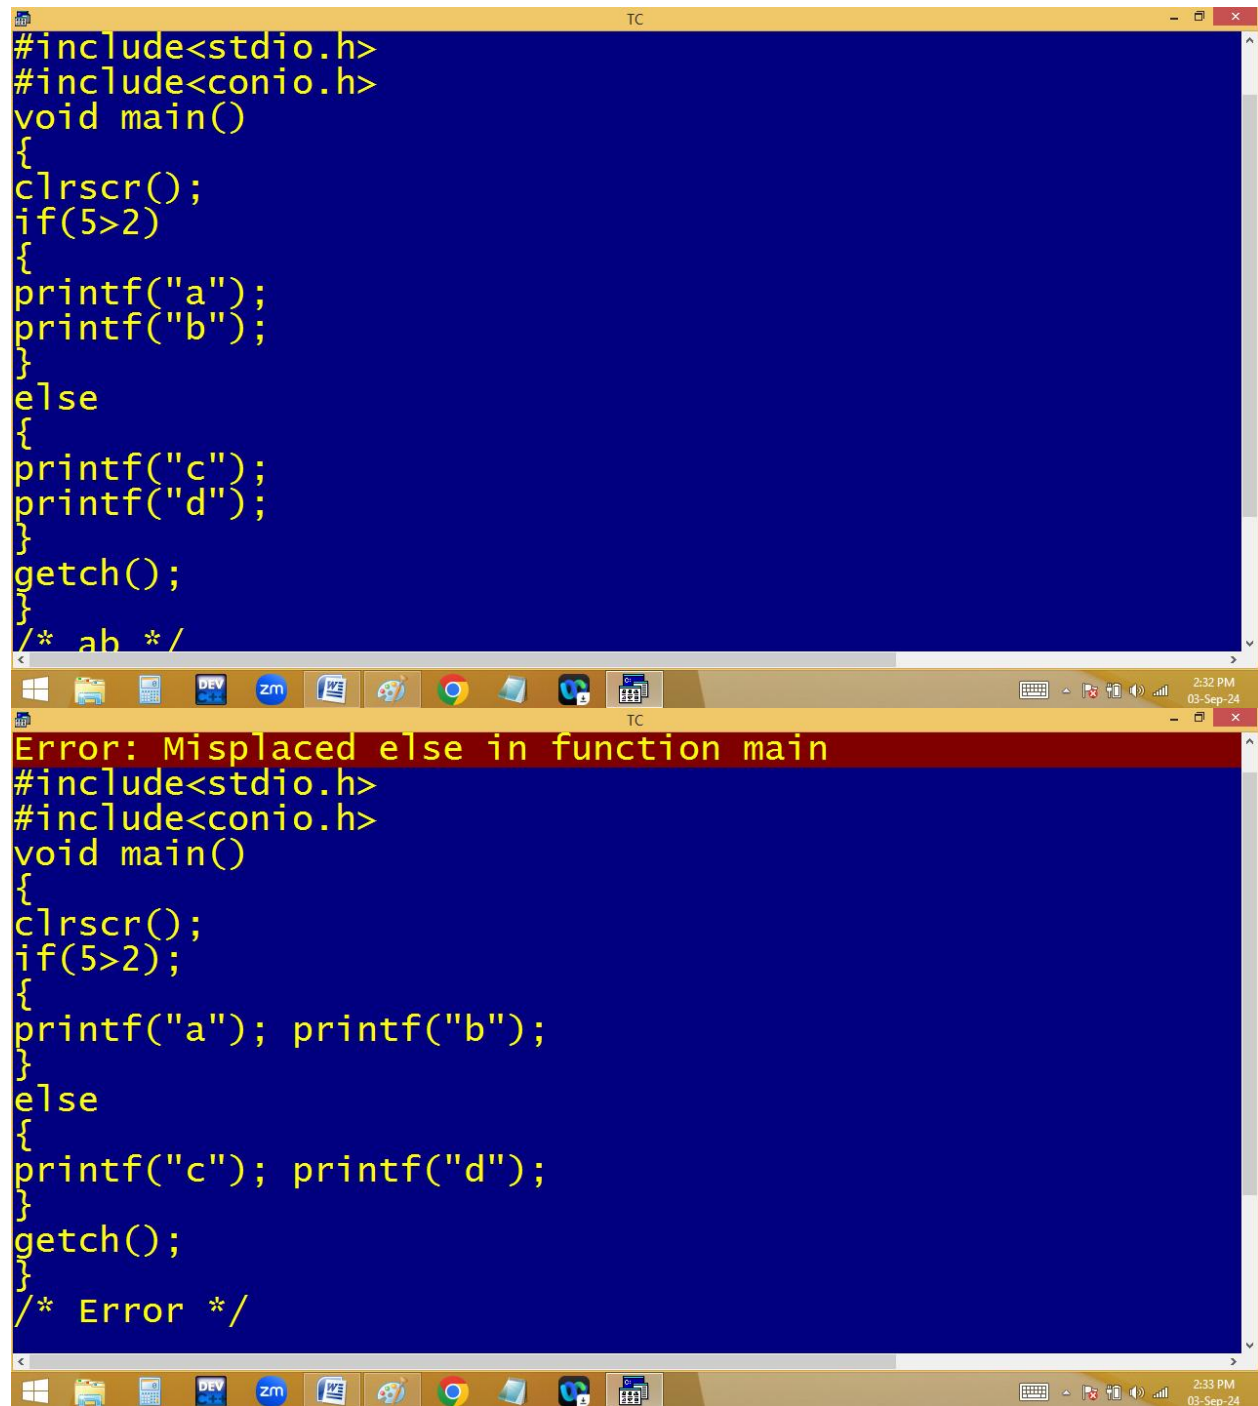

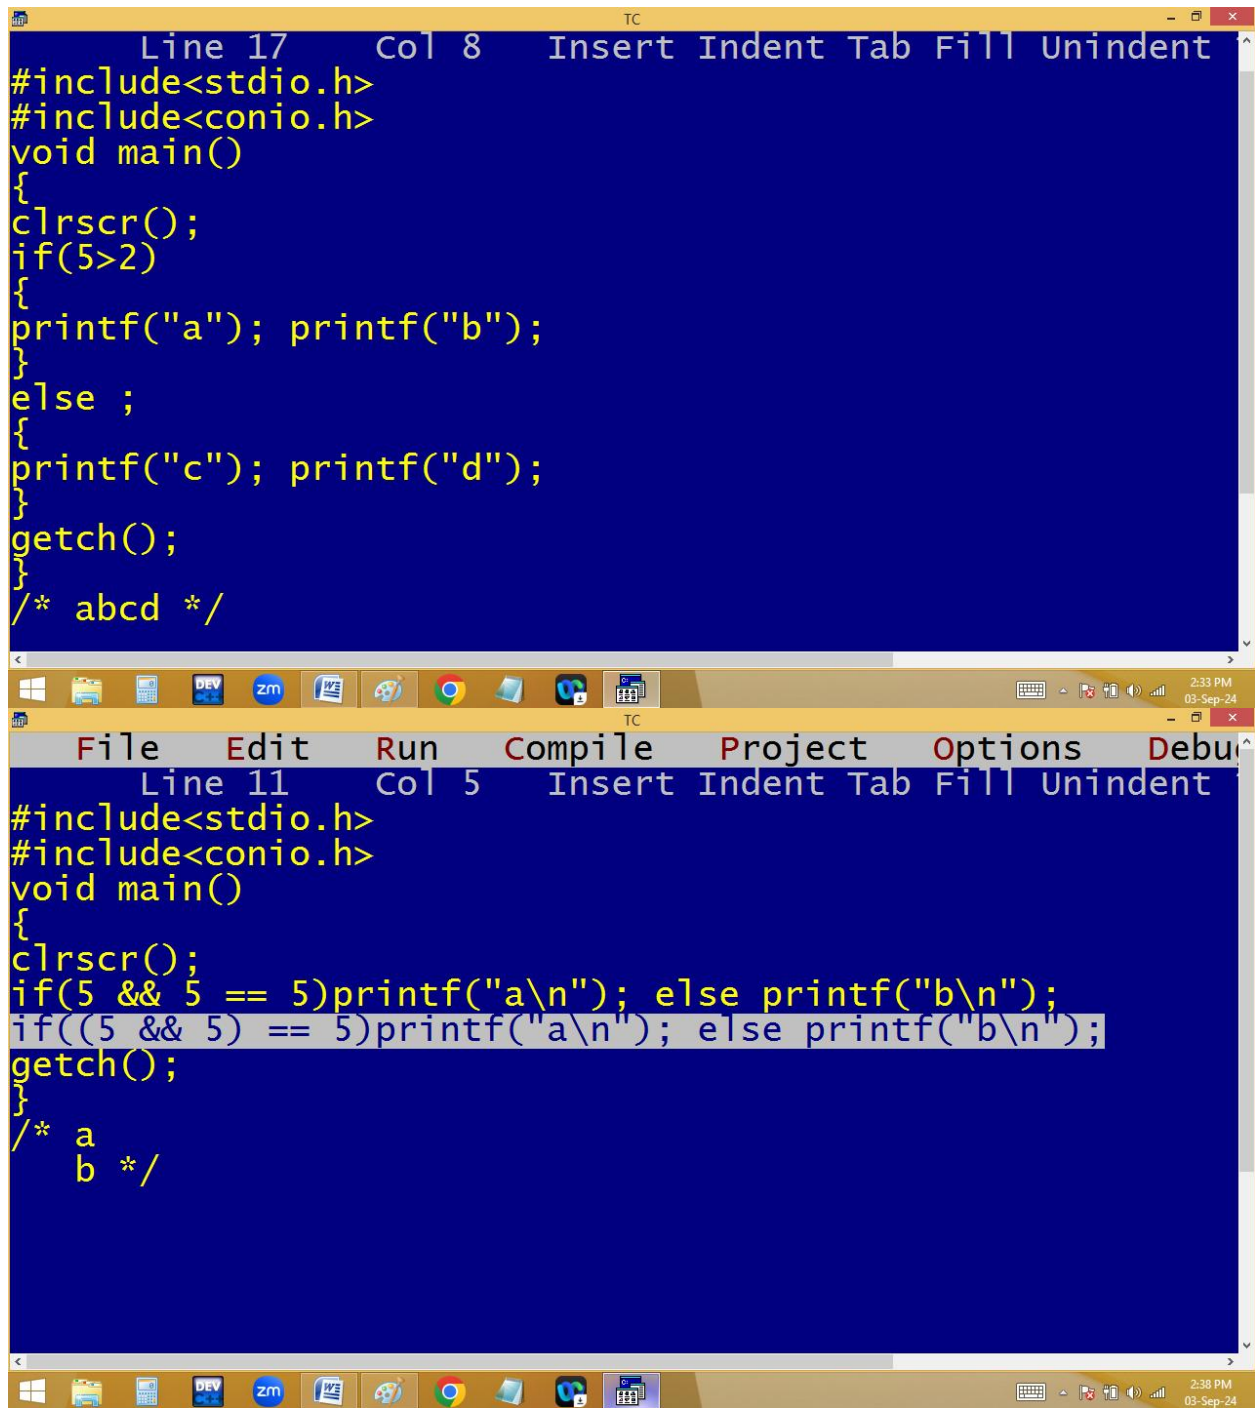


The image displays two instances of the Turbo C++ (TC) IDE. The top window, titled 'TC', shows a C program at Line 17, Column 8. The code is as follows:

```
Line 17 Col 8 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5>2)
{
printf("a"); printf("b");
}
else ;
{
printf("c"); printf("d");
}
getch();
}
/* abcd */
```

The bottom window, also titled 'TC', shows a C program at Line 11, Column 5. The code is as follows:

```
Line 11 Col 5 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(5 && 5 == 5)printf("a\n"); else printf("b\n");
if((5 && 5) == 5)printf("a\n"); else printf("b\n");
getch();
}
/* a
b */
```

Both windows have a standard Windows taskbar at the bottom with various application icons and a system clock showing 2:33 PM on 03-Sep-24.

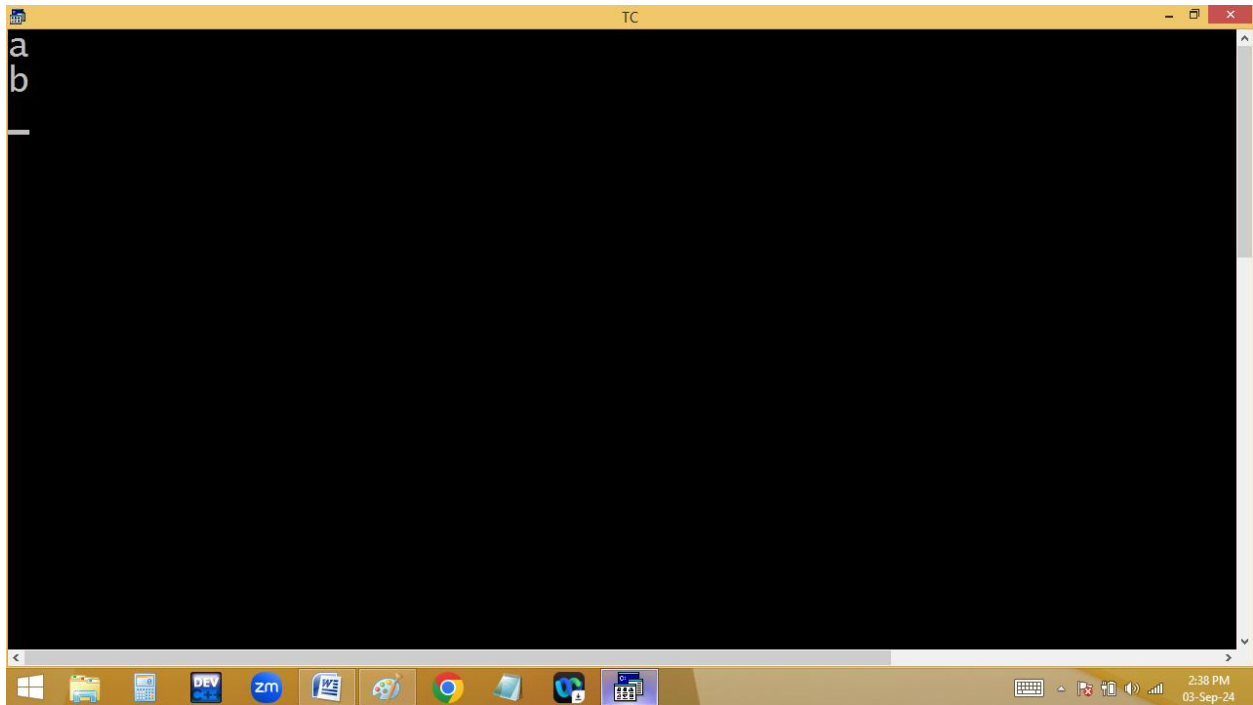

1 && 1

if(5 && 5) == 5) p(a, b); else p(c, d);


1 && 1

1 == 5

0

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 9 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(sizeof("ab")==sizeof("ab\0"))puts("Yes");
else puts("No");
getch();
}
/* No */_
```

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 6 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(sizeof("ab")==printf("ab\0"))puts("Yes");
else puts("No");
getch();
}
/* abNo */
```
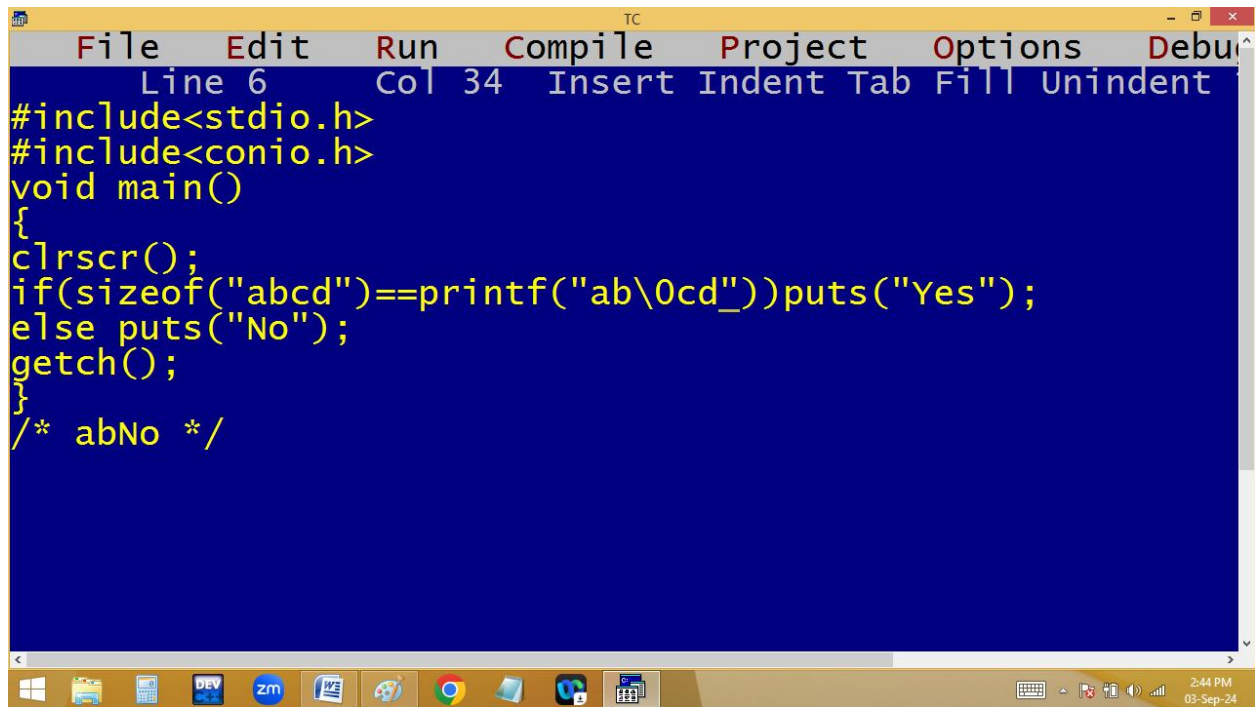
```
TC
File Edit Run Compile Project Options Debug
Line 6 Col 34 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(sizeof("abcd")==printf("ab\0cd_"))puts("Yes");
else puts("No");
getch();
}
/* abNo */
```

2:44 PM
03-Sep-24

TC

Line 17 Col 11 Insert Indent Tab Fill Unindent

#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.1;
clrscr();
if(a==1.1)puts("Yes"); else puts("No");
if(a==1.1f)puts("Yes"); else puts("No");
a=1.75;
if(a==1.75)puts("Yes"); else puts("No");
a=1.0;
if(a==1.0)puts("Yes"); else puts("No");
a=1.56;
if(a==1.56)puts("Yes"); else puts("No");
getch();
}
/* No */

No
Yes
Yes
Yes
No


2:49 Tuesday
September 3

Search
Share
Start
Devices
Settings

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 13 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.1; double b=1.1;
clrscr();
printf("a=%.10f, b=%.10lf\n",a,b);
a=1.6; b=1.6;
printf("a=%.10f, b=%.10lf\n",a,b);
a=1.0; b=1.0;
printf("a=%.10f, b=%.10lf\n",a,b);
a=1.5; b=1.5;
printf("a=%.10f, b=%.10lf\n",a,b);
getch();
}

TC
a=1.1000000238, b=1.1000000000
a=1.6000000238, b=1.6000000000
a=1.0000000000, b=1.0000000000
a=1.5000000000, b=1.5000000000

TC
2:52 PM
03-Sep-24
```

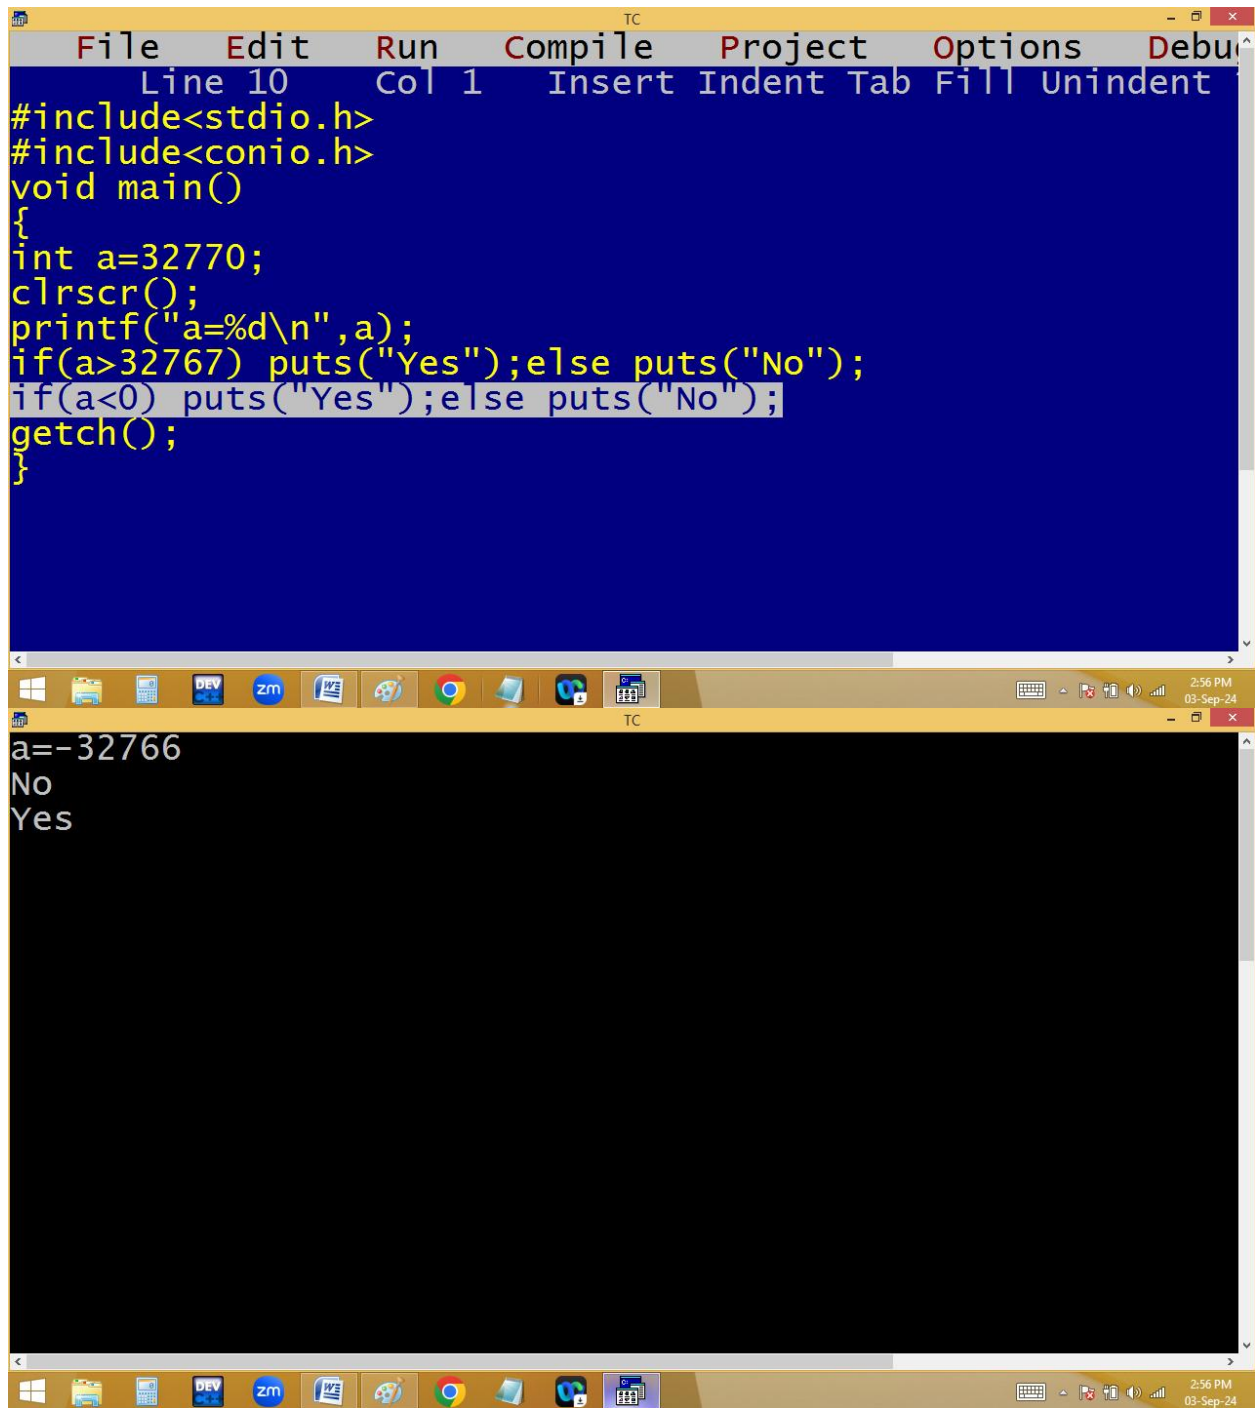


The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=32770;
clrscr();
printf("a=%d\n",a);
if(a>32767) puts("Yes");else puts("No");
if(a<0) puts("Yes");else puts("No");
getch();
}
```

The bottom window shows the output of the program:

```
a=-32766
No
Yes
```

The Windows taskbar at the bottom shows the time as 2:56 PM on 03-Sep-24. The TC window title bar indicates the file is named 'TC'.

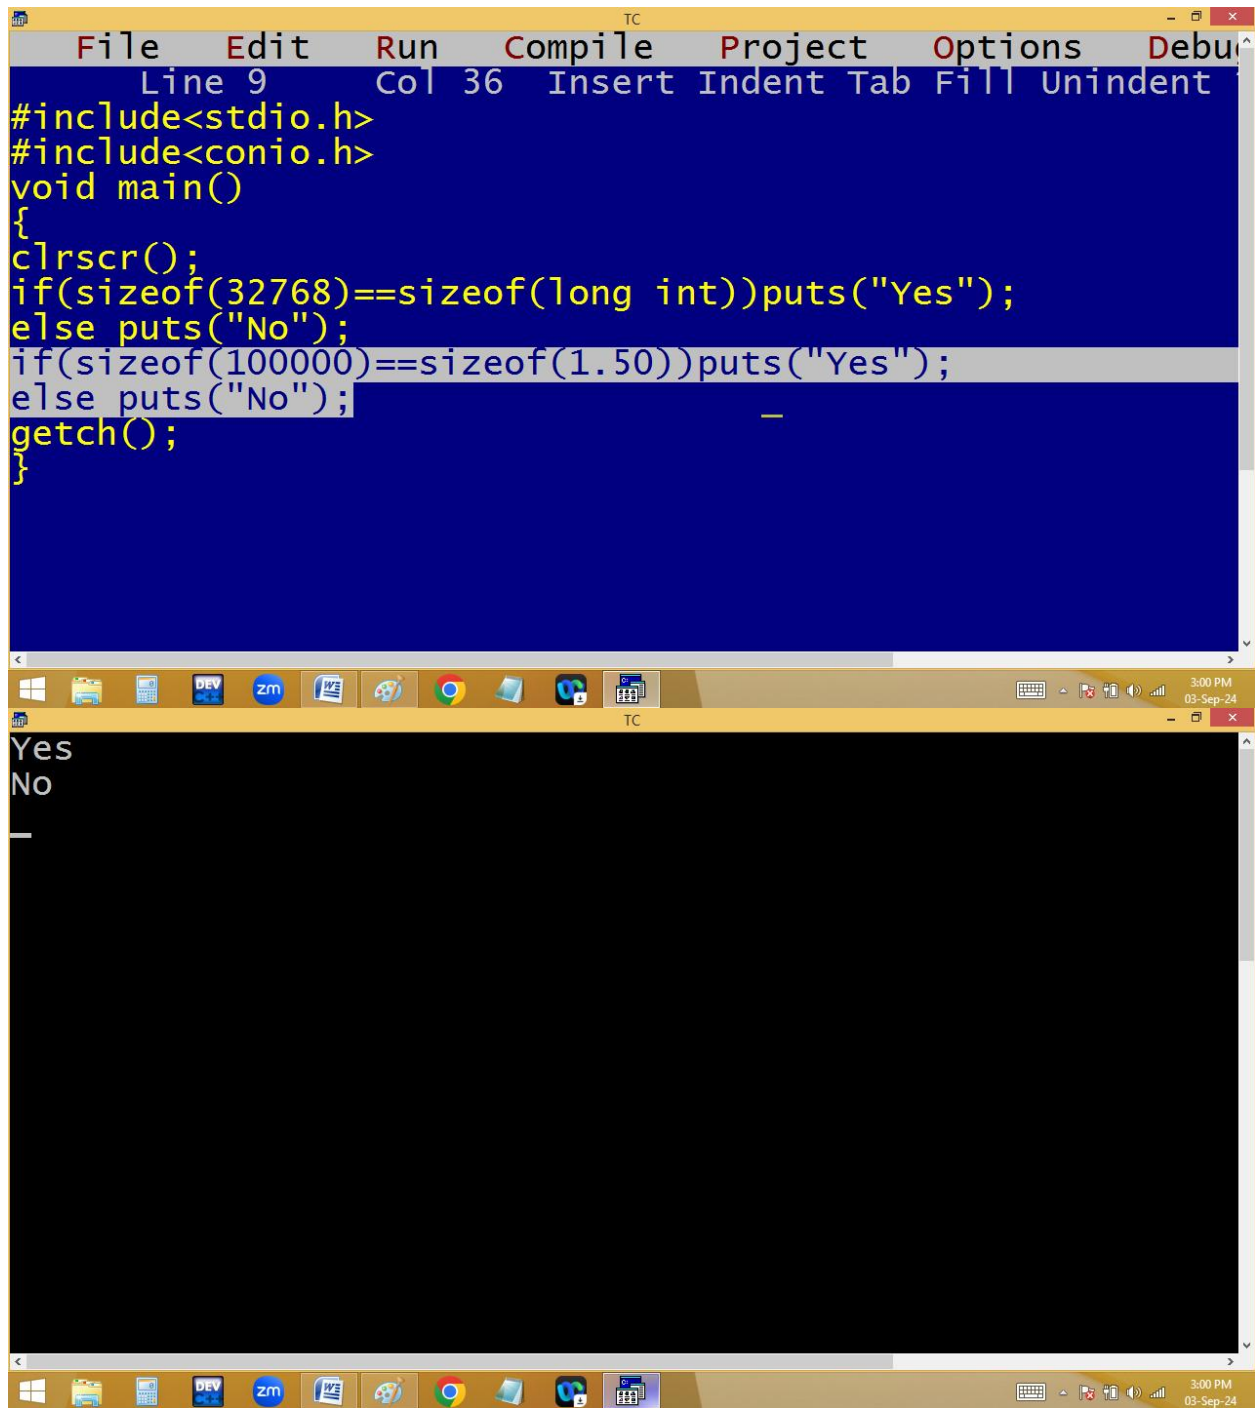

The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program with the following code:

```
File Edit Run Compile Project Options Debug
Line 9 Col 36 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(sizeof(32768)==sizeof(long int))puts("Yes");
else puts("No");
if(sizeof(100000)==sizeof(1.50))puts("Yes");
else puts("No");
getch();
}
```

The bottom window shows the output of the program, which is:

```
Yes
No
_
```

The Windows taskbar at the bottom shows the time as 3:00 PM on 03-Sep-24.

Finding even/odd:


The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays a C program for checking if a number is even or odd. The code is as follows:

```
File Edit Run Compile Project Options Debug
Line 9 Col 35 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n%2==0)puts("Even");else puts("Odd");
if(n%2)puts("Odd");else puts("Even");
getch();
}
```

The bottom window shows the execution output:


```
Enter a no 8
Even
Even
```

The taskbar at the bottom of the screen shows various application icons, including Windows Explorer, DEV C++, Zoom, and Google Chrome. The system clock in the bottom right corner indicates the time is 3:02 PM on 03-Sep-24.

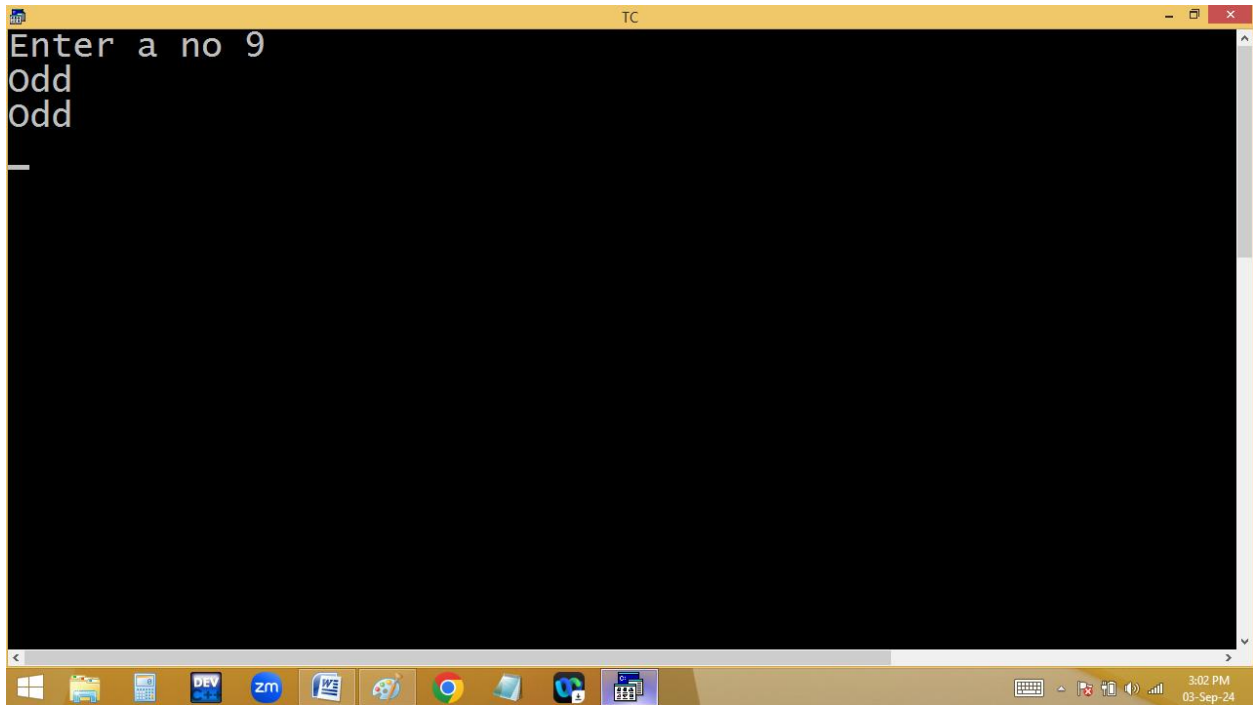

```
Enter a no 9
Odd
Odd
```

Without using % operator:

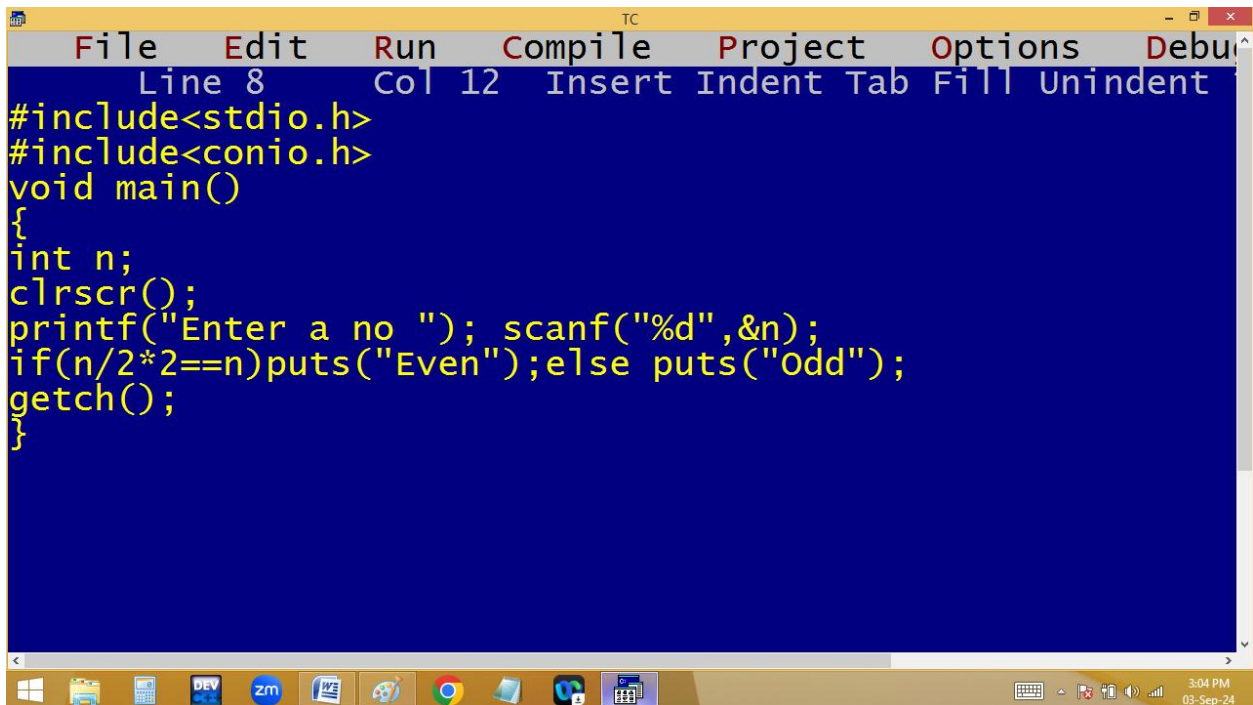

```
File Edit Run Compile Project Options Debug
Line 8 Col 12 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n/2*2==n)puts("Even");else puts("Odd");
getch();
}
```

```
TC
Enter a no 4
Even
```


```
TC
Enter a no 5
Odd
```

$$8/2=4*2=8==8$$


if($n/2*2==n$) p(even); else p(odd);

$$7/2=3*2=6==7$$


Without using arithmetic operators:

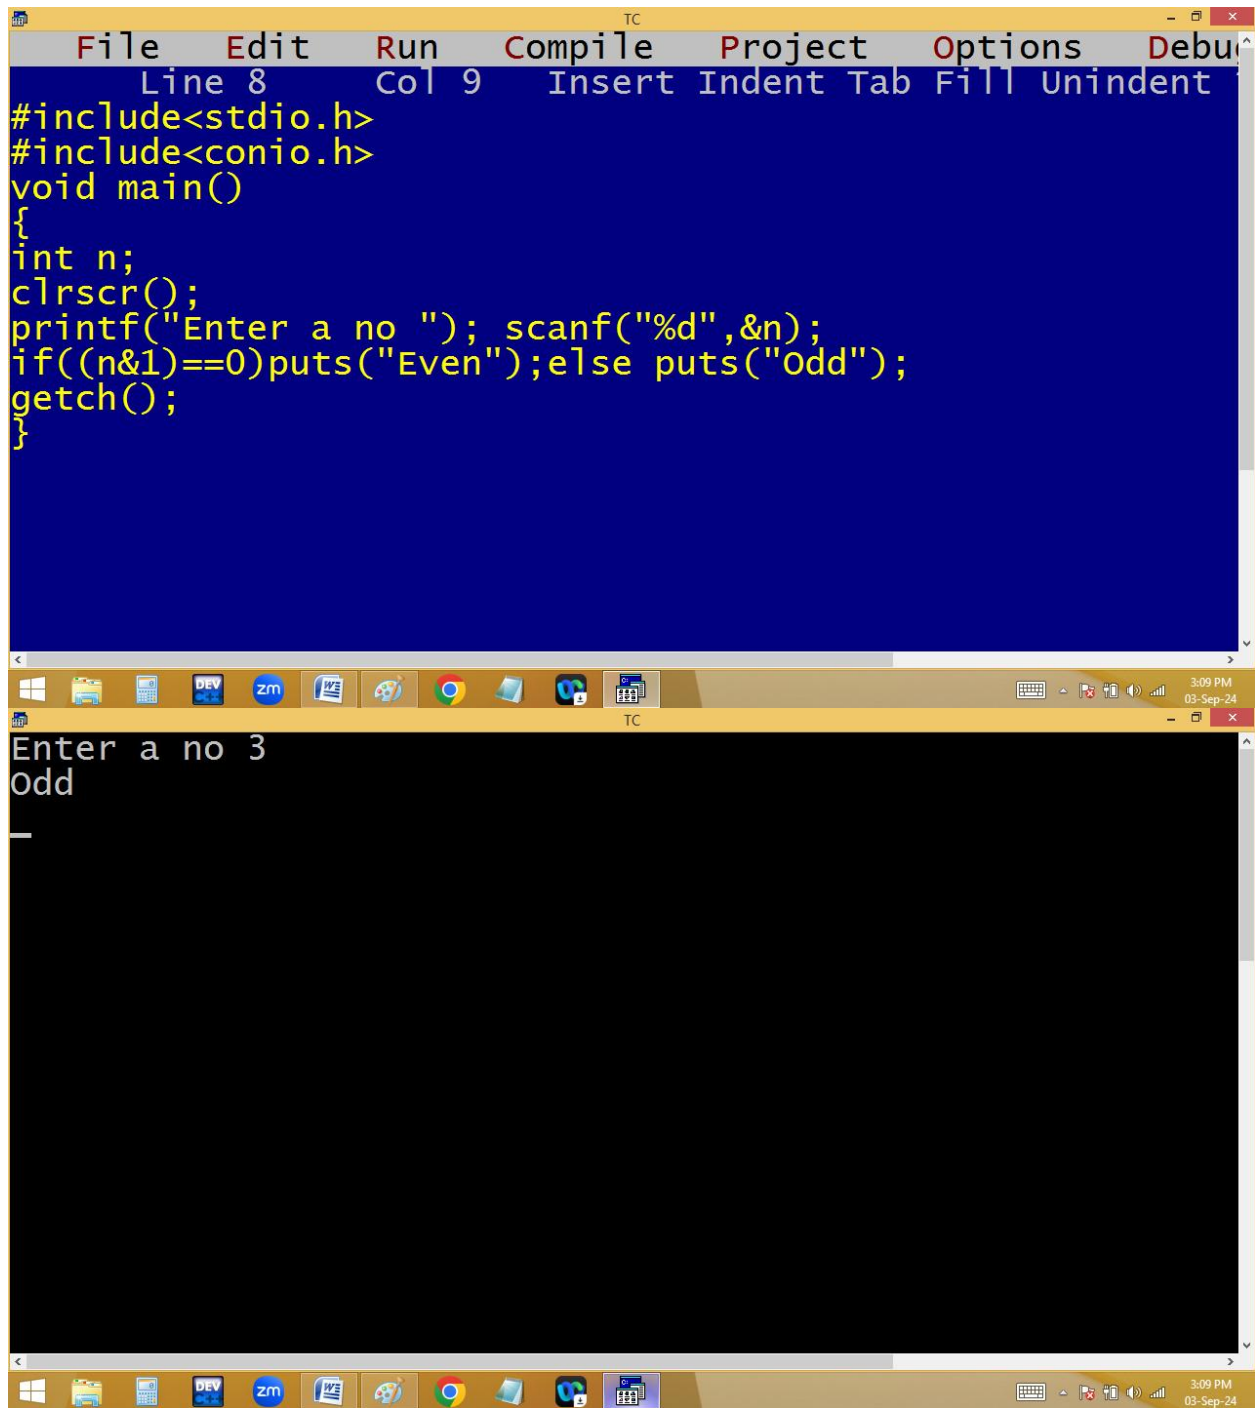

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 9 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if((n&1)==0)puts("Even");else puts("Odd");
getch();
}
```

Enter a no 3
Odd

```
TC
Enter a no 4
Even
```

4 = 100

1 = 001

000=0

if(4 & 1 == 0) p(even); else p(odd);

2=11

1=01

01=1

2 | 3
1-1

2 | 4
2 | 2-0
1-0

2 | 4
0-1


Finding lear year / common year:


The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays the source code for a program that checks if a year is a leap year. The code is as follows:

```
File Edit Run Compile Project Options Debug
Line 9 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter year no "); scanf("%d",&n);
if(n%4==0 && n%100!=0 || n%400==0)puts("Leap year");
else puts("Common year");
getch();
}
```


The bottom window shows the output of the program. It prompts the user to "Enter year no" and shows the input "1900". The output is "Common year".

Enter year no 1900
Common year

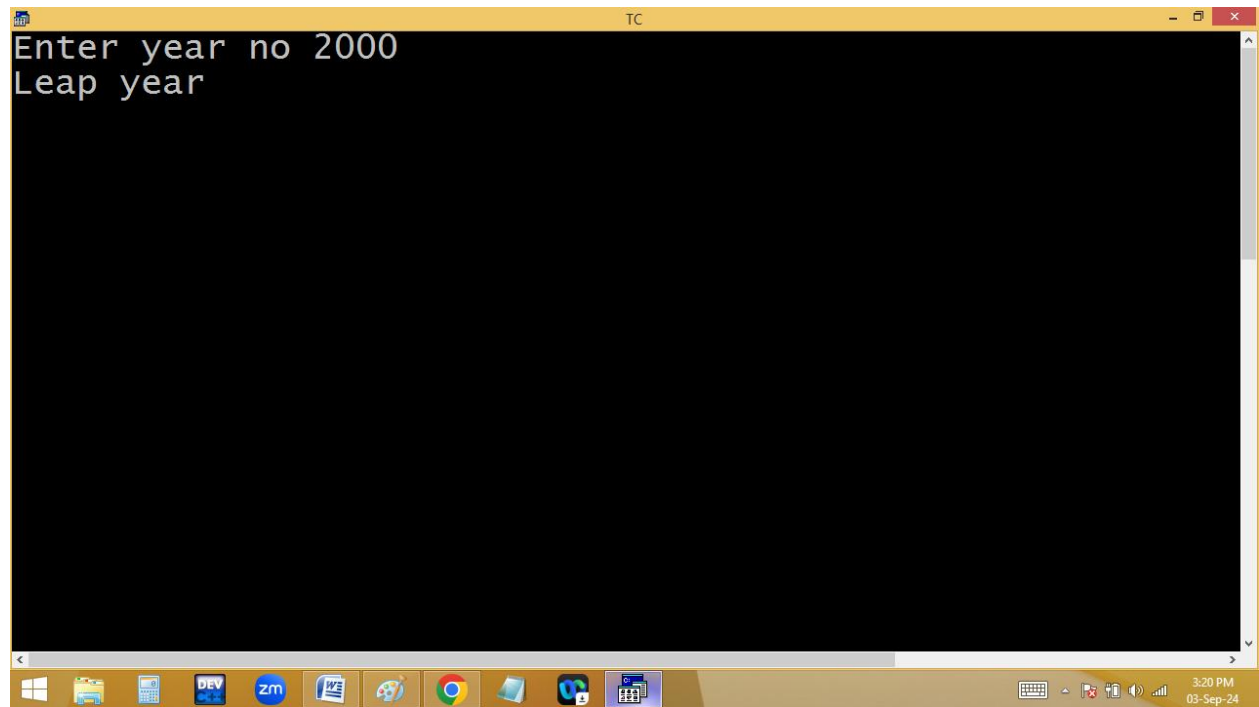

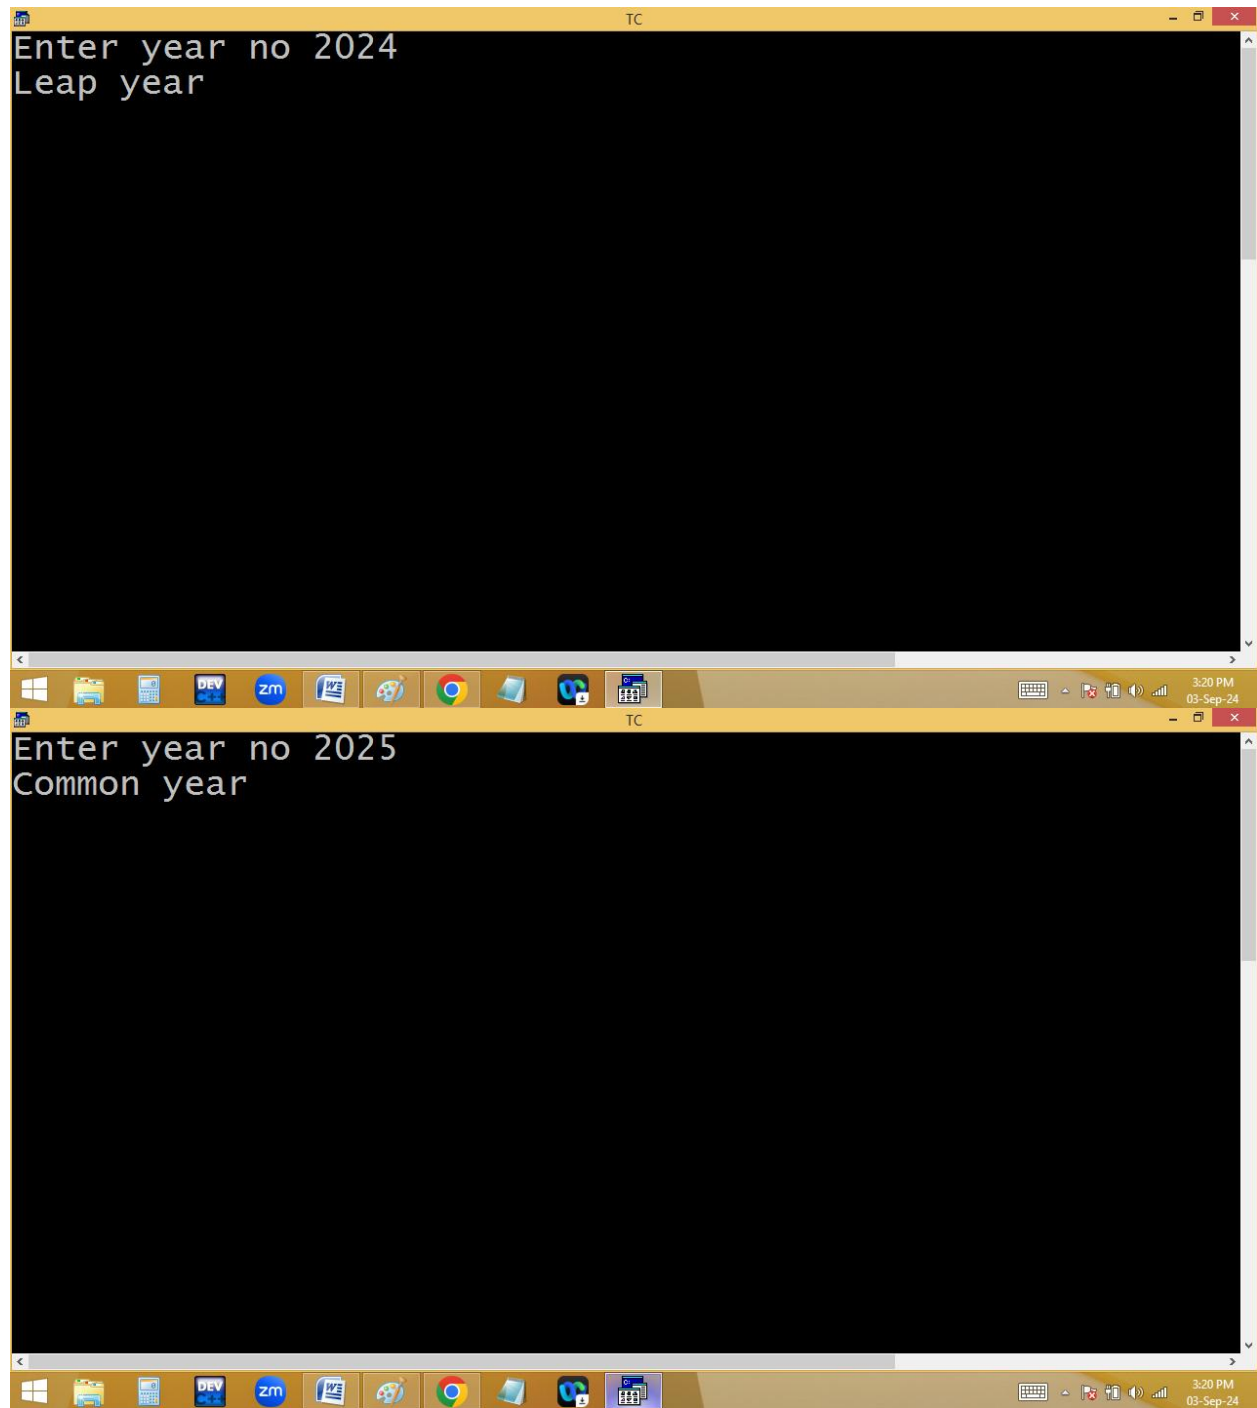


Finding special char or not?

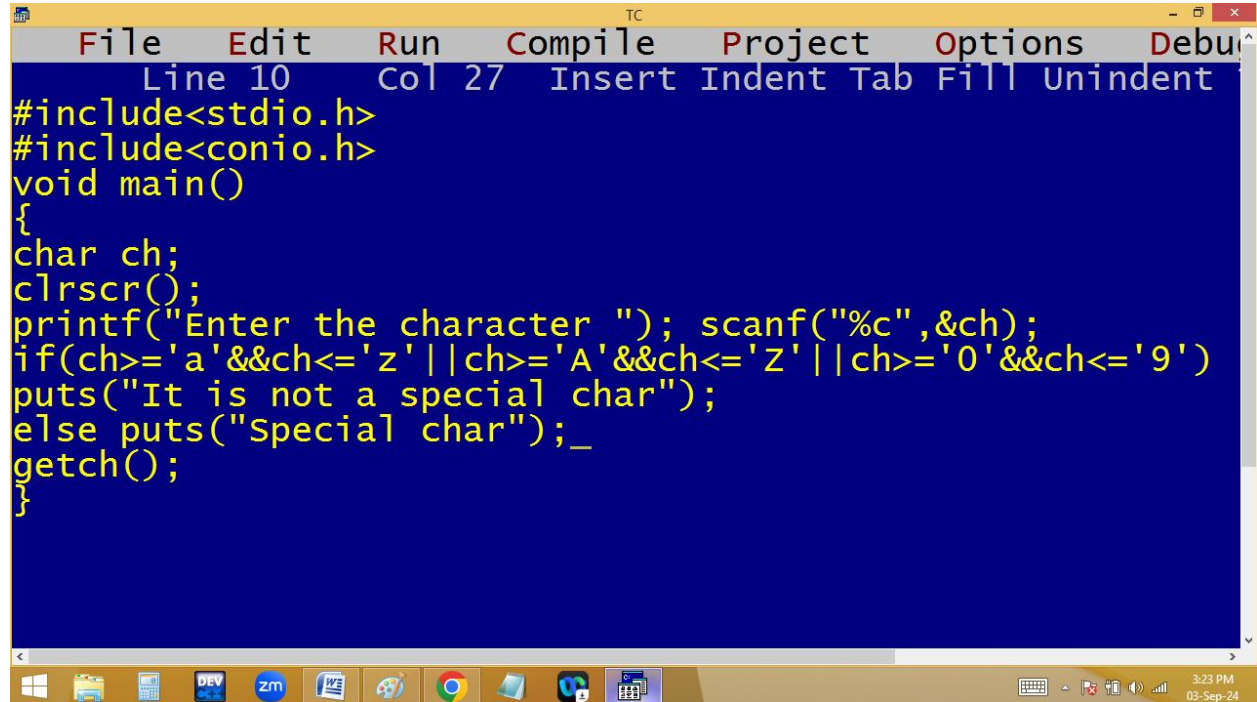


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 10", "Col 27", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter the character "); scanf("%c",&ch);
if(ch>='a'&&ch<='z' || ch>='A'&&ch<='Z' || ch>='0'&&ch<='9')
puts("It is not a special char");
else puts("Special char");_
getch();
}
```

The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Zm, a folder, a game controller, Google Chrome, a folder, a folder, and a folder. The system tray on the right shows the time as 3:23 PM and the date as 03-Sep-24.

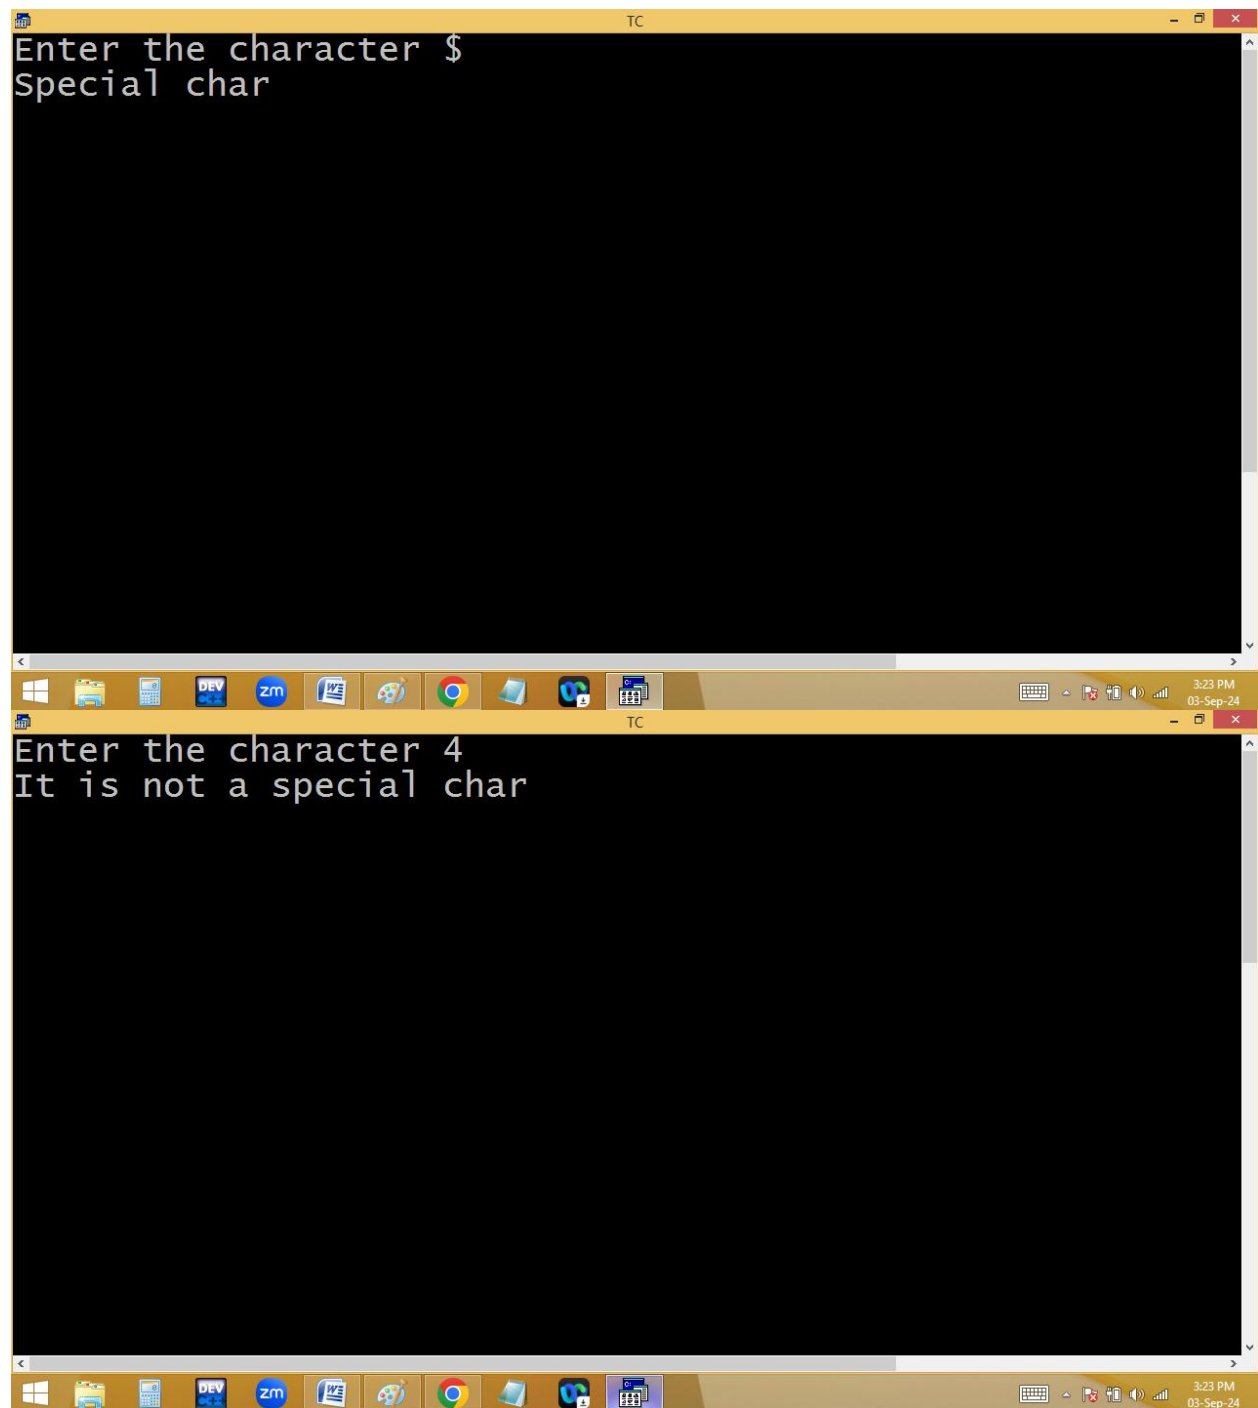

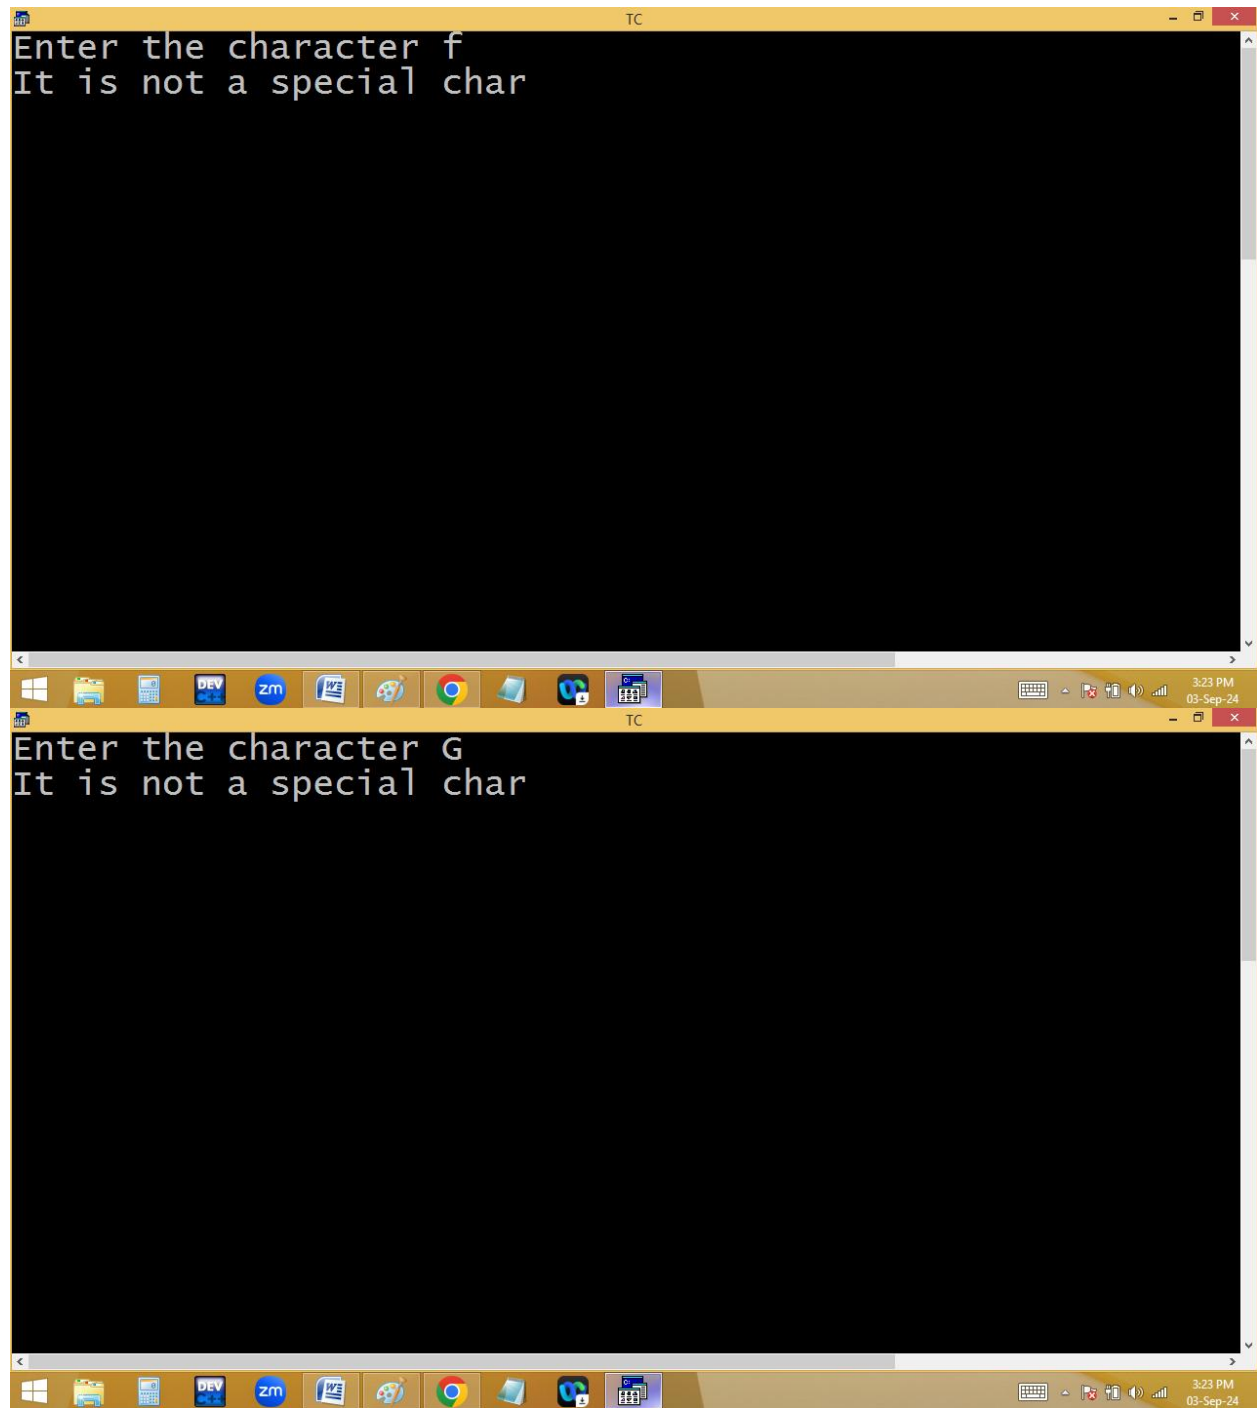



Finding two digit no or not?

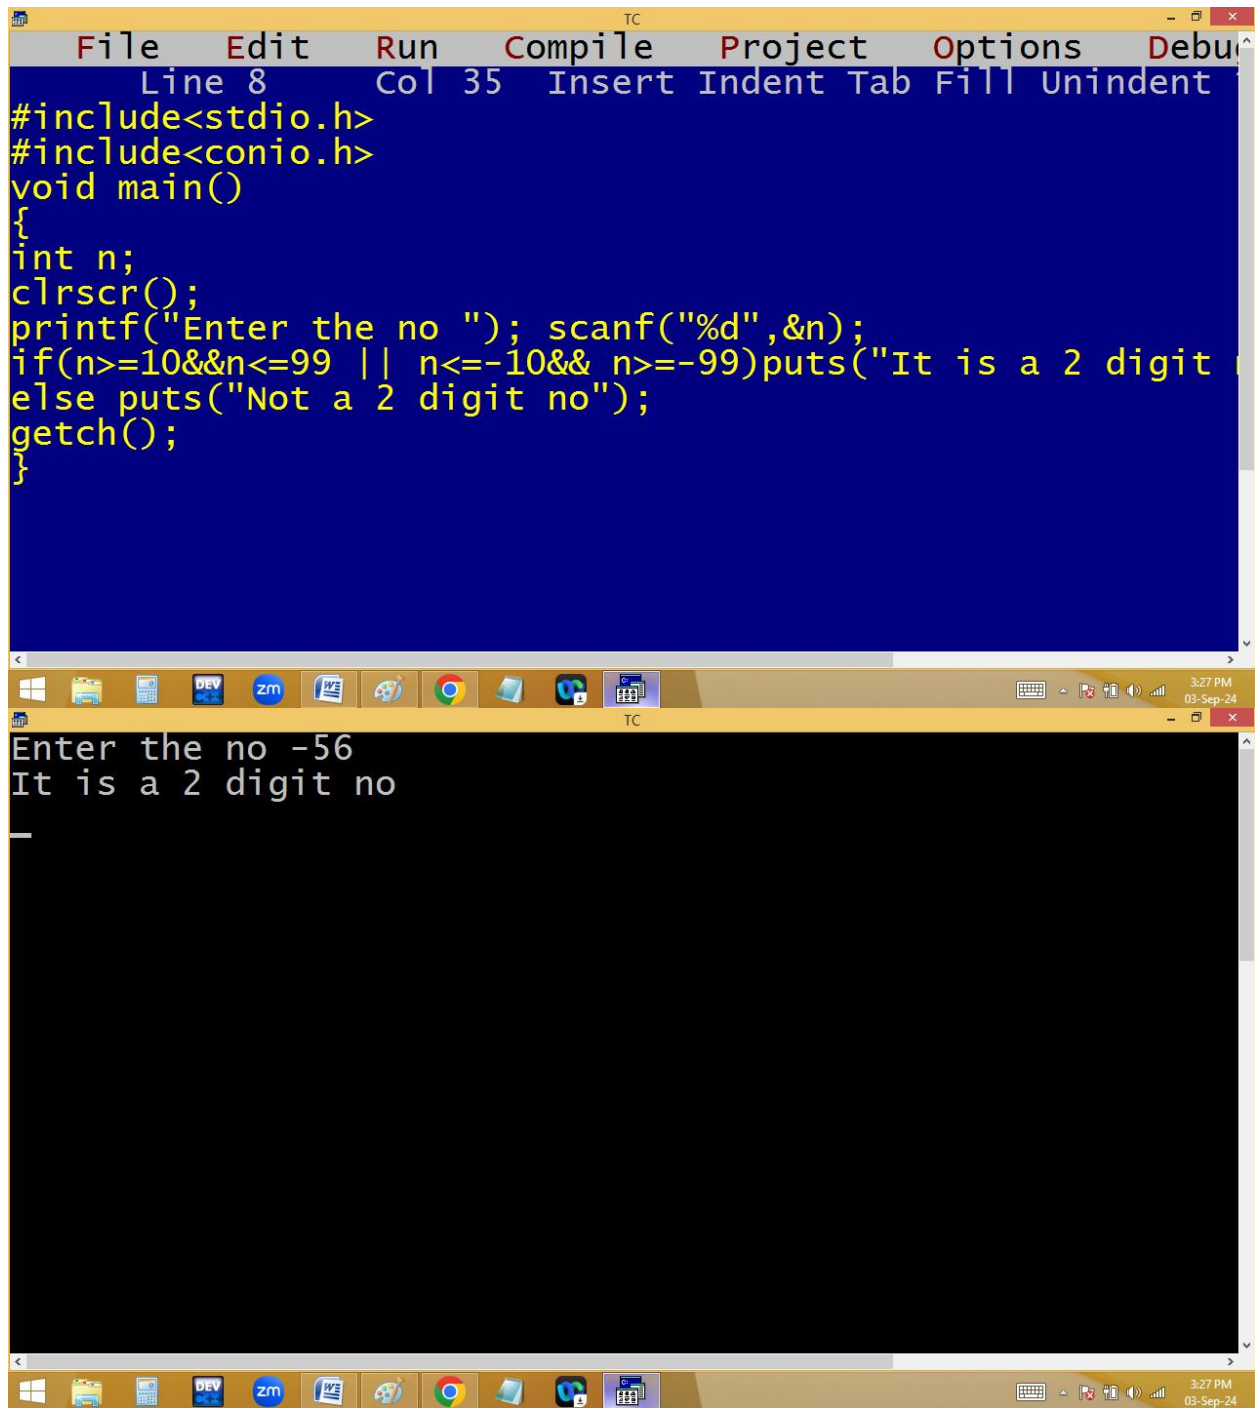

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 35 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter the no "); scanf("%d",&n);
if(n>=10&&n<=99 || n<=-10&&n>=-99)puts("It is a 2 digit no");
else puts("Not a 2 digit no");
getch();
}

TC
Enter the no -56
It is a 2 digit no
```

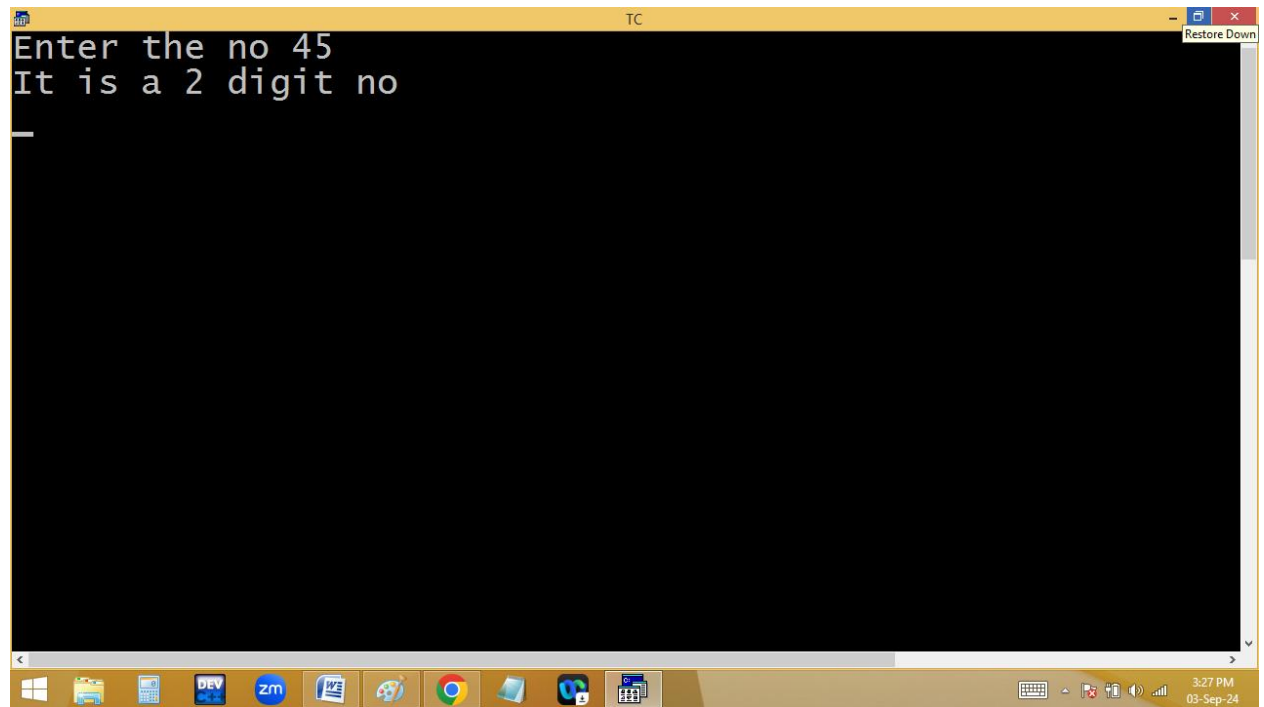

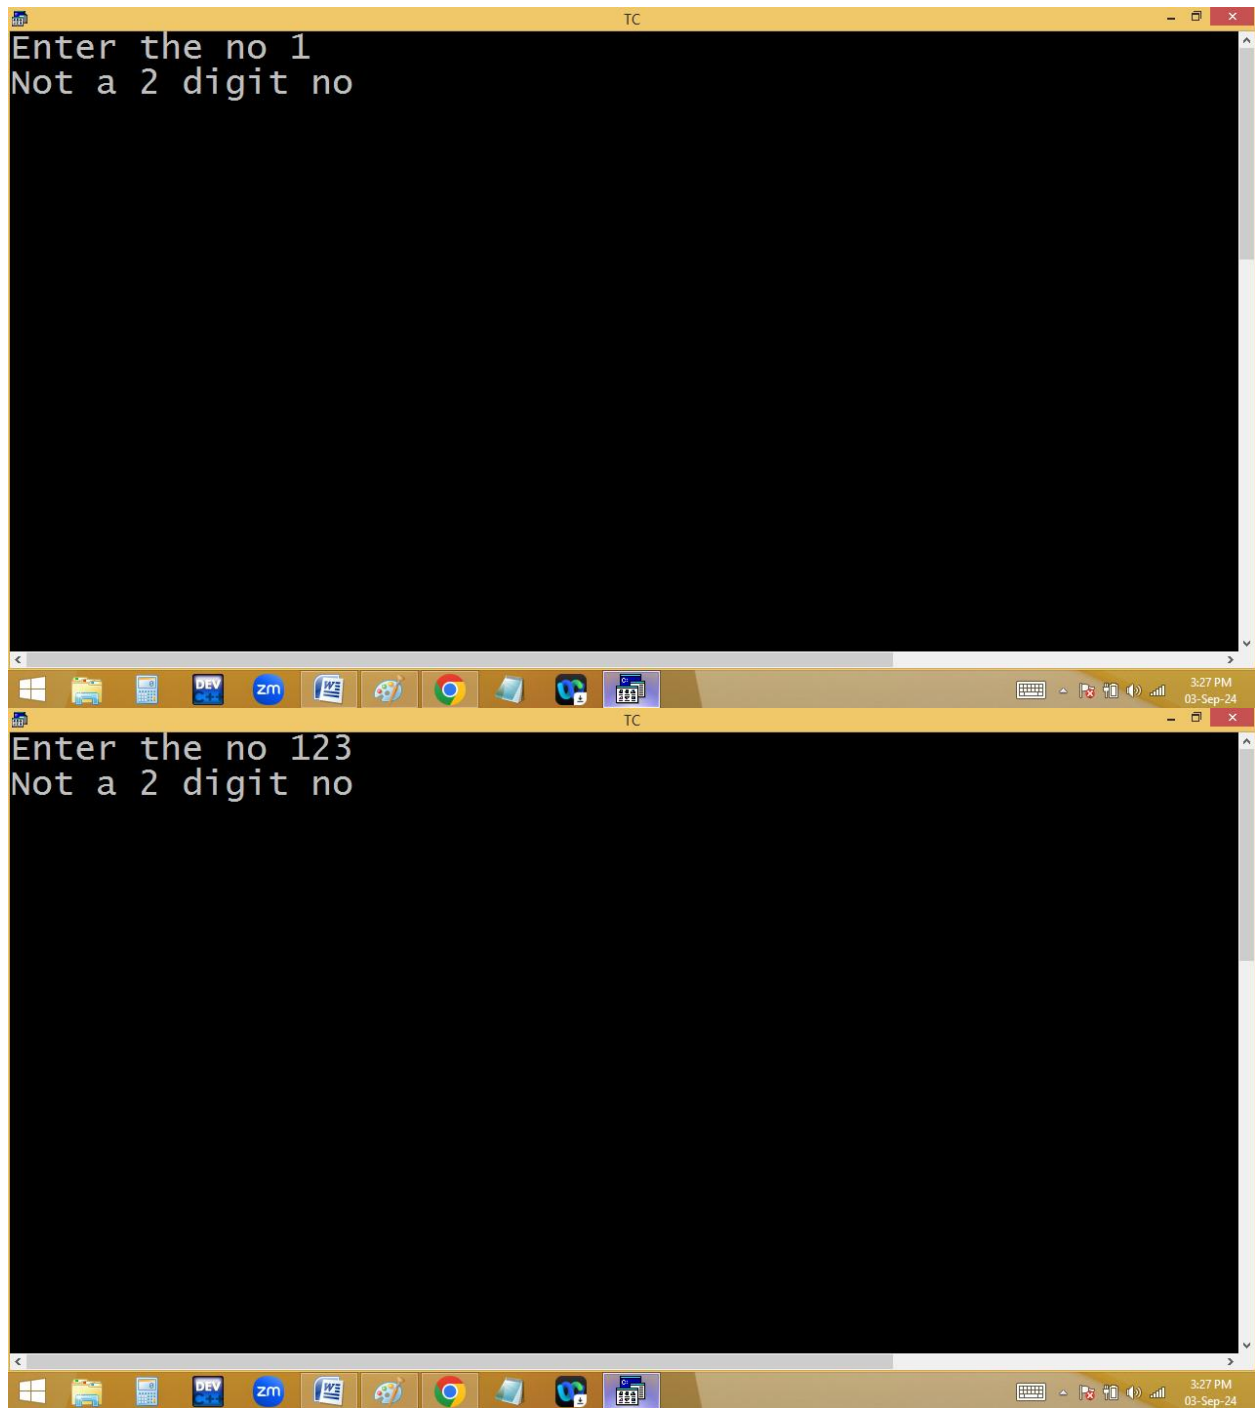

Read a salesman sales and find the gross salary using below table.

Sales $\geq$ 100000	Sales $<$ 100000
Basic=10000	Basic=10000
Da=65.5% if basic	Da=65.5% if basic
Bonus=10000	Bonus=2000
Commission=10% of sales	Commission=5% of sales

Gross = basic+da + bonus + commission

```
#include<stdio.h>
#include<conio.h>
void main()
{
float  sales, basic=10000,da=basic*65.5/100,bonus,comm,gross;
clrscr();
printf("Enter sales amount ");scanf("%f",&sales);
if(sales>=100000){bonus=10000;comm=sales*10/100;}
else {bonus=2000; comm=sales*5/100;}
gross = basic+da+bonus+comm;
printf("Basic=%.2f\n",basic);
printf("da=%.2f\n",da);
printf("Bonus=%.2f\n",bonus);
printf("Comm=%.2f\n",comm);
printf("Gross=%.2f",gross);
getch();
}
```

```
Enter sales amount 100000
Basic=10000.00
da=6550.00
Bonus=10000.00
Comm=10000.00
Gross=36550.00_
```

```
TC
Enter sales amount 99999
Basic=10000.00
da=6550.00
Bonus=2000.00
Comm=4999.95
Gross=23549.95
```

