


Finding no of words in given string:

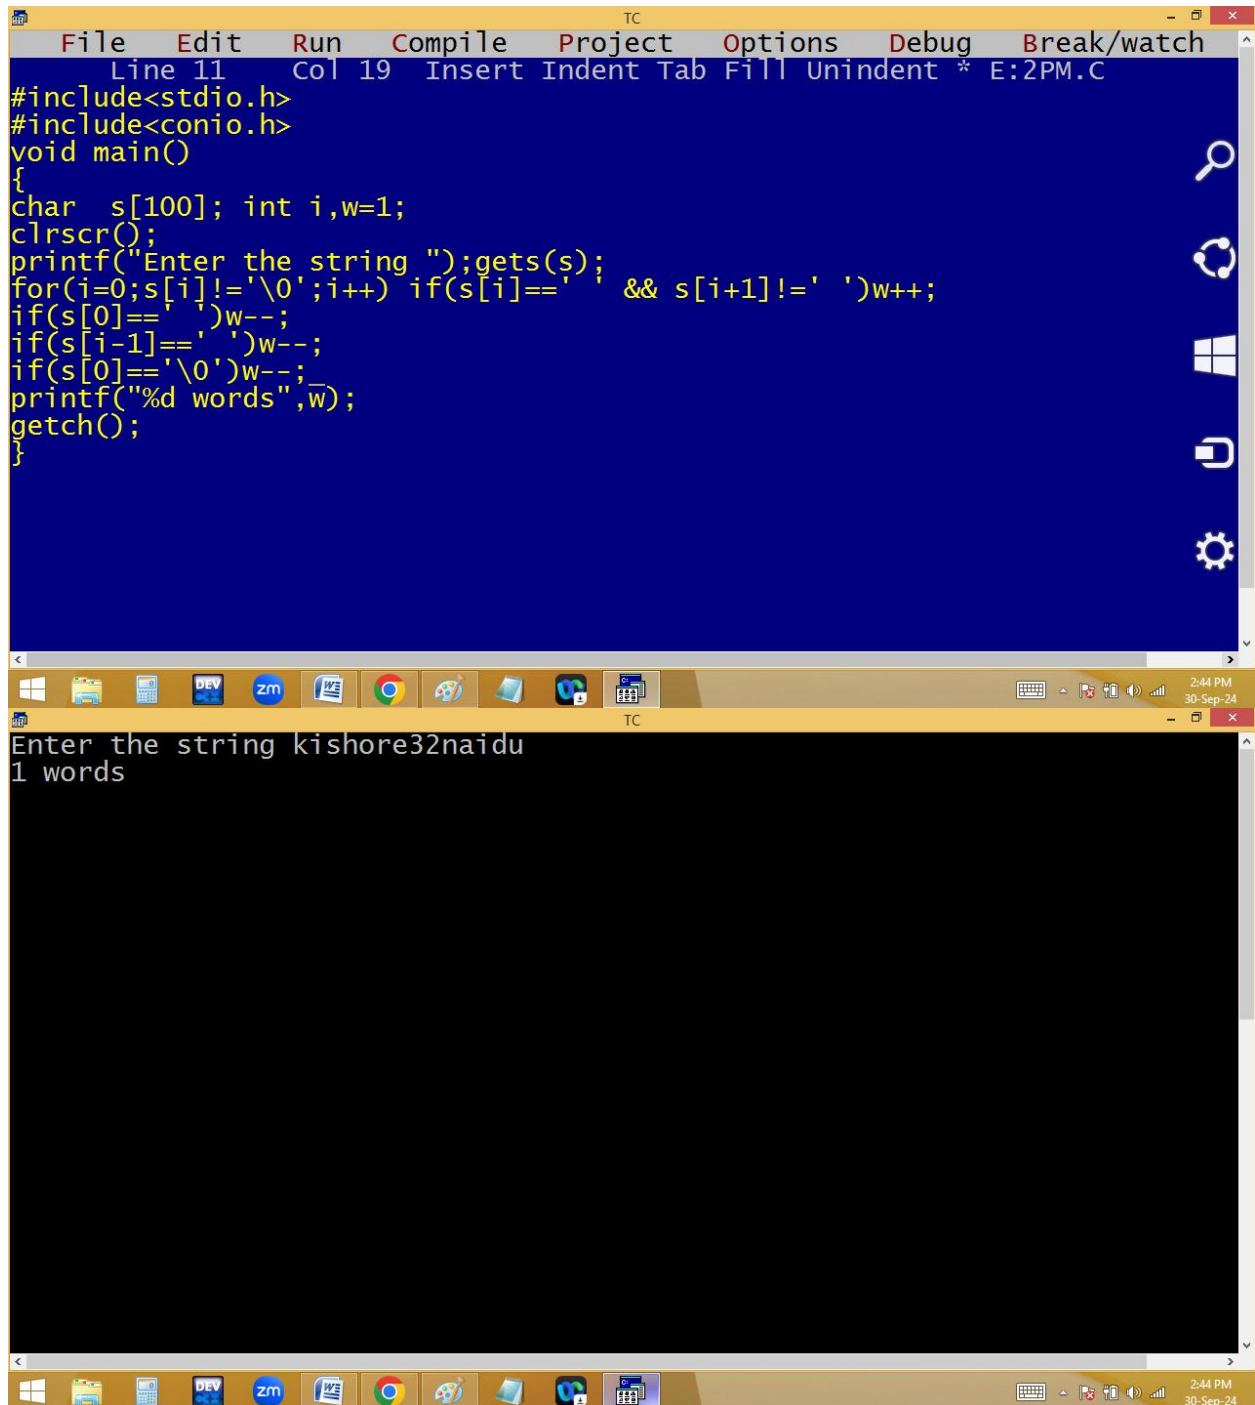


The image shows a screenshot of the Turbo C++ (TC) IDE. The top window displays the source code for a C program designed to count the number of words in a given string. The code uses a loop to traverse the string and increments a counter 'w' whenever a space character is encountered, while ensuring it doesn't count multiple consecutive spaces. The bottom window shows the program's execution, where the user has entered the string "kishore32naidu", and the program has correctly output "1 words".

```
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 19 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i,w=1;
clrscr();
printf("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++) if(s[i]==' ' && s[i+1]!=' ')w++;
if(s[0]!=' ')w--;
if(s[i-1]!=' ')w--;
if(s[i]=='\0')w--;
printf("%d words",w);
getch();
}
```

Enter the string kishore32naidu
1 words

Using user defined functions:

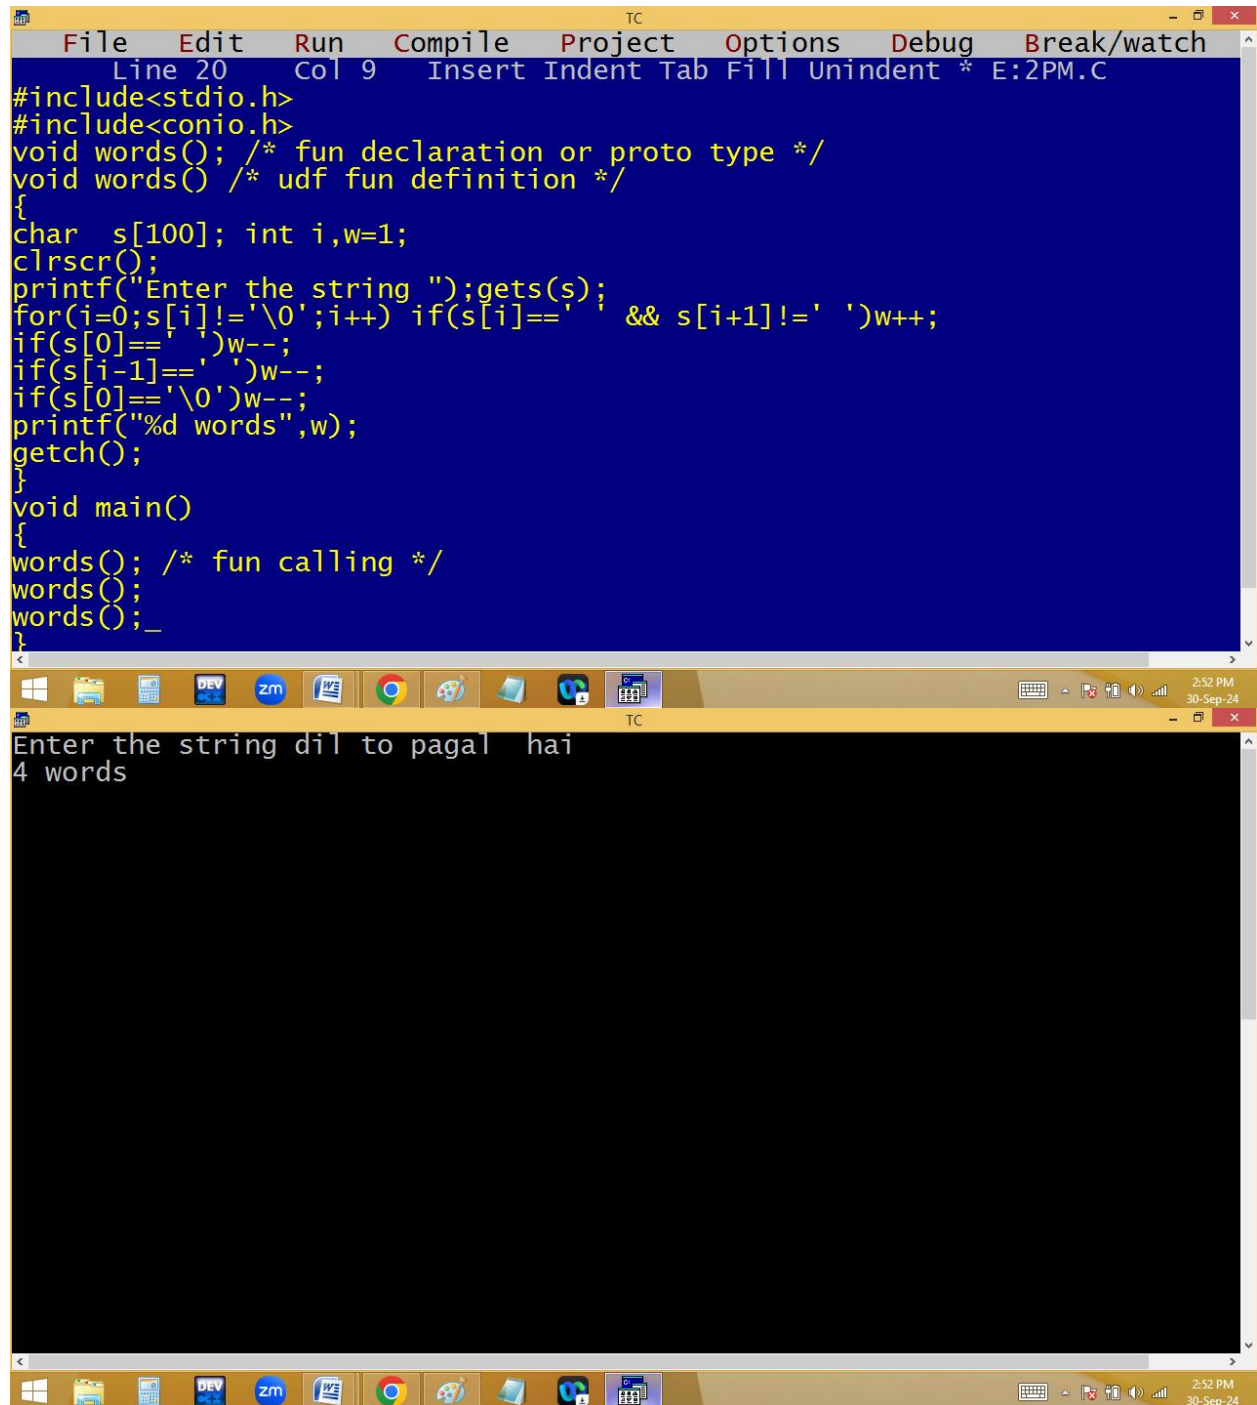


```
TC
File Edit Run Compile Project Options Debug Break/watch
Line 20 Col 9 Insert Indent Tab Fill Unindent * E:2PM.C
#include<stdio.h>
#include<conio.h>
void words(); /* fun declaration or proto type */
void words() /* udf fun definition */
{
char s[100]; int i,w=1;
clrscr();
printf("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++) if(s[i]==' ' && s[i+1]!=' ')w++;
if(s[0]!=' ')w--;
if(s[i-1]!=' ')w--;
if(s[i]=='\0')w--;
printf("%d words",w);
getch();
}
void main()
{
words(); /* fun calling */
words();
words();_
}
```

Enter the string dil to pagal hai
4 words

TC

```
TC
Enter the string jack
1 words_
```

```
TC
Enter the string Indiana Jones
2 words_
```

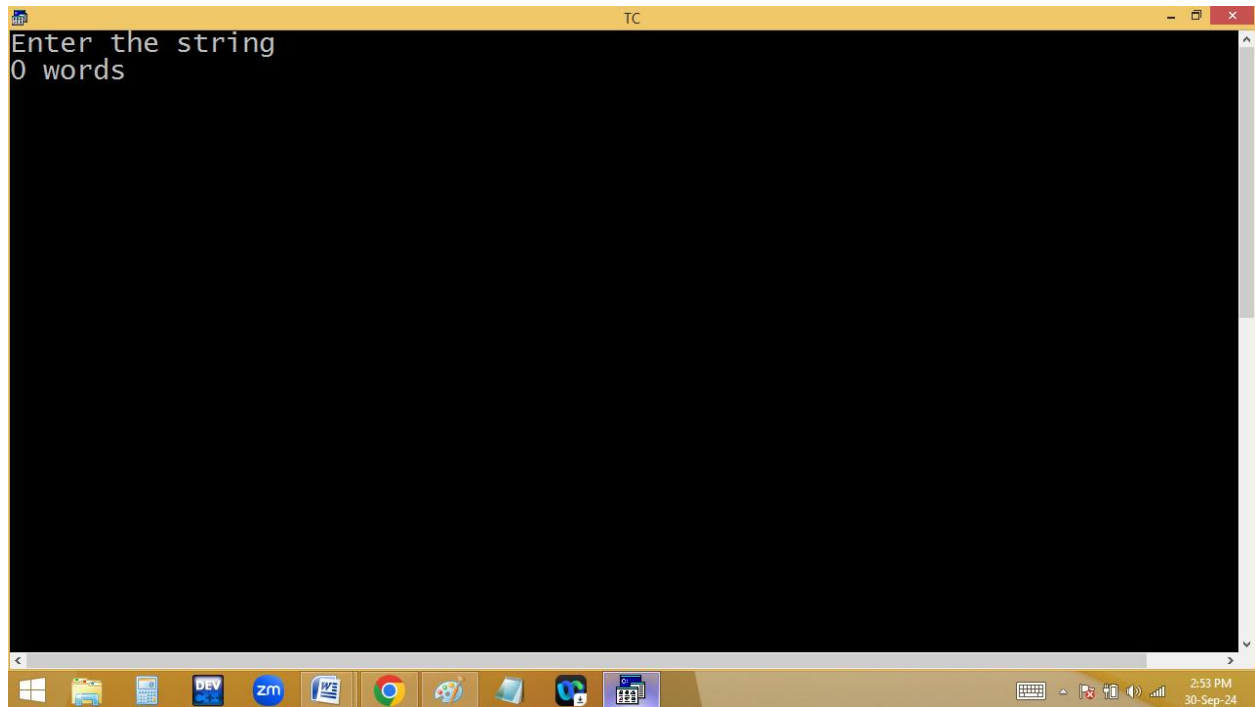

```
for( i=0; s[i]!='\0';i++)  
if( s[i]==' ') w++; ✓
```

if(s[i-1]==' ')w--;

p(w);

s	a	b		c	d		e		\0				
	0	1	2	3	4	5	6	7	8				

