

Practical No. 3

Aim: To make different plots and compare them over the same dataset.

Case 1: Tips

#Aim: To make different plots and compare them over the same data set.

```
import matplotlib.pyplot as plt  
import seaborn as sns
```

```
print(sns.get_dataset_names())
```

```
df=sns.load_dataset('tips')
```

```
['anagrams', 'anscombe', 'attention', 'brain_networks', 'car_crashes', 'diamonds', 'dots', 'dowjones', 'exercise', 'flights', 'fmri',  
'geyser', 'glue', 'healthexp', 'iris', 'mpg', 'penguins', 'planets', 'seaice', 'taxis', 'tips', 'titanic']
```

```
print(df.head())
```

| | total_bill | tip | sex | smoker | day | time | size |
|---|------------|------|--------|--------|-----|--------|------|
| 0 | 16.99 | 1.01 | Female | No | Sun | Dinner | 2 |
| 1 | 10.34 | 1.66 | Male | No | Sun | Dinner | 3 |
| 2 | 21.01 | 3.50 | Male | No | Sun | Dinner | 3 |
| 3 | 23.68 | 3.31 | Male | No | Sun | Dinner | 2 |
| 4 | 24.59 | 3.61 | Female | No | Sun | Dinner | 4 |

```
print(df)
```





| | total_bill | tip | sex | smoker | day | time | size |
|-----|------------|------|--------|--------|------|--------|------|
| 0 | 16.99 | 1.01 | Female | No | Sun | Dinner | 2 |
| 1 | 10.34 | 1.66 | Male | No | Sun | Dinner | 3 |
| 2 | 21.01 | 3.50 | Male | No | Sun | Dinner | 3 |
| 3 | 23.68 | 3.31 | Male | No | Sun | Dinner | 2 |
| 4 | 24.59 | 3.61 | Female | No | Sun | Dinner | 4 |
| .. | ... | ... | ... | ... | ... | ... | ... |
| 239 | 29.03 | 5.92 | Male | No | Sat | Dinner | 3 |
| 240 | 27.18 | 2.00 | Female | Yes | Sat | Dinner | 2 |
| 241 | 22.67 | 2.00 | Male | Yes | Sat | Dinner | 2 |
| 242 | 17.82 | 1.75 | Male | No | Sat | Dinner | 2 |
| 243 | 18.78 | 3.00 | Female | No | Thur | Dinner | 2 |

```
[244 rows x 7 columns]
```

```
print(df.tail())
```

| | total_bill | tip | sex | smoker | day | time | size |
|-----|------------|------|--------|--------|------|--------|------|
| 239 | 29.03 | 5.92 | Male | No | Sat | Dinner | 3 |
| 240 | 27.18 | 2.00 | Female | Yes | Sat | Dinner | 2 |
| 241 | 22.67 | 2.00 | Male | Yes | Sat | Dinner | 2 |
| 242 | 17.82 | 1.75 | Male | No | Sat | Dinner | 2 |
| 243 | 18.78 | 3.00 | Female | No | Thur | Dinner | 2 |

```
plt.figure(figsize=(8,6))
plt.subplot(2,2,1)
sns.barplot(x='day', y='tip', data=df)
plt.subplot(2,2,2)
sns.swarmplot(x='day', y='tip', data=df)
plt.subplot(2,2,3)
sns.lineplot(x='day', y='tip', data=df)
plt.subplot(2,2,4)
sns.scatterplot(x='day', y='tip', data=df)
plt.tight_layout()
```

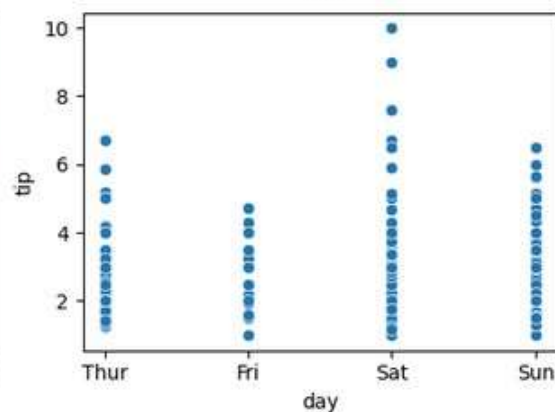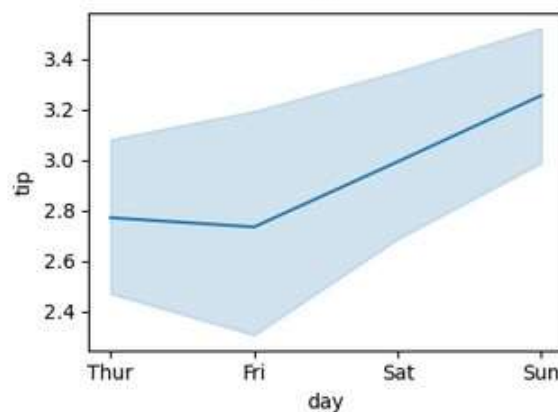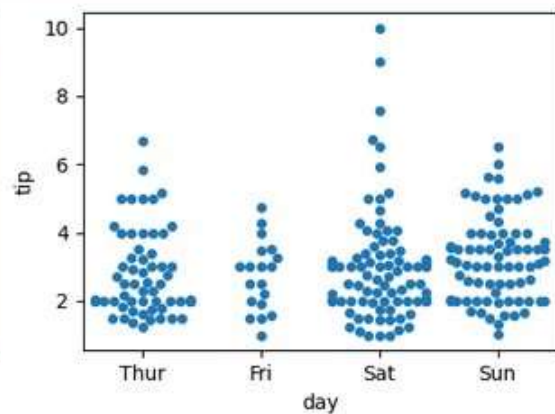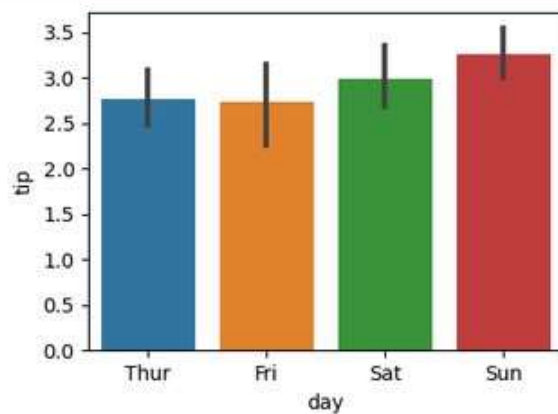

Case 2: Iris

#Aim: To make different plots and compare them over the same data set.

```
import matplotlib.pyplot as plt
import seaborn as sns
```

```
print(sns.get_dataset_names())
```

```
df=sns.load_dataset('iris')
```

['anagrams', 'anscombe', 'attention', 'brain_networks', 'car_crashes', 'diamonds', 'dots', 'dowjones', 'exercise', 'flights', 'fmri', 'geyser', 'glue', 'healthexp', 'iris', 'mpg', 'penguins', 'planets', 'seaice', 'taxi', 'tips', 'titanic']

```
print(df.head())
```

| | sepal_length | sepal_width | petal_length | petal_width | species |
|---|--------------|-------------|--------------|-------------|---------|
| 0 | 5.1 | 3.5 | 1.4 | 0.2 | setosa |
| 1 | 4.9 | 3.0 | 1.4 | 0.2 | setosa |
| 2 | 4.7 | 3.2 | 1.3 | 0.2 | setosa |
| 3 | 4.6 | 3.1 | 1.5 | 0.2 | setosa |
| 4 | 5.0 | 3.6 | 1.4 | 0.2 | setosa |

```
print(df)
```

| | sepal_length | sepal_width | petal_length | petal_width | species |
|-----|--------------|-------------|--------------|-------------|-----------|
| 0 | 5.1 | 3.5 | 1.4 | 0.2 | setosa |
| 1 | 4.9 | 3.0 | 1.4 | 0.2 | setosa |
| 2 | 4.7 | 3.2 | 1.3 | 0.2 | setosa |
| 3 | 4.6 | 3.1 | 1.5 | 0.2 | setosa |
| 4 | 5.0 | 3.6 | 1.4 | 0.2 | setosa |
| ... | ... | ... | ... | ... | ... |
| 145 | 6.7 | 3.0 | 5.2 | 2.3 | virginica |
| 146 | 6.3 | 2.5 | 5.0 | 1.9 | virginica |
| 147 | 6.5 | 3.0 | 5.2 | 2.0 | virginica |
| 148 | 6.2 | 3.4 | 5.4 | 2.3 | virginica |
| 149 | 5.9 | 3.0 | 5.1 | 1.8 | virginica |

[150 rows x 5 columns]

```
print(df.tail())
```

| | sepal_length | sepal_width | petal_length | petal_width | species |
|-----|--------------|-------------|--------------|-------------|-----------|
| 145 | 6.7 | 3.0 | 5.2 | 2.3 | virginica |
| 146 | 6.3 | 2.5 | 5.0 | 1.9 | virginica |
| 147 | 6.5 | 3.0 | 5.2 | 2.0 | virginica |
| 148 | 6.2 | 3.4 | 5.4 | 2.3 | virginica |
| 149 | 5.9 | 3.0 | 5.1 | 1.8 | virginica |

```
plt.figure(figsize=(12,10))
plt.subplot(2,2,1)
sns.barplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,2)
sns.swarmplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,3)
sns.lineplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,4)
sns.scatterplot(x='sepal_width', y='petal_width', data=df)
plt.tight_layout()
```

Name:-Om Patil
6265 SYIT-C

