

Name:- Harsh Pillai
62413 SYIT-C

Practical No. 3

Aim: To make different plots and compare them over the same dataset.

Case 1: Tips

```
#Aim: To make different plots and compare them over the same data set.
```

```
import matplotlib.pyplot as plt  
import seaborn as sns
```

```
print(sns.get_dataset_names())
```

```
df=sns.load_dataset('tips')
```

```
['anagrams', 'anscombe', 'attention', 'brain_networks', 'car_crashes', 'diamonds', 'dots', 'dowjones', 'exercise', 'flights', 'fmri',  
'geyser', 'glue', 'healthexp', 'iris', 'mpg', 'penguins', 'planets', 'seaice', 'taxi', 'tips', 'titanic']
```

```
print(df.head())
```

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

```
print(df)
```

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4
..
239	29.03	5.92	Male	No	Sat	Dinner	3
240	27.18	2.00	Female	Yes	Sat	Dinner	2
241	22.67	2.00	Male	Yes	Sat	Dinner	2
242	17.82	1.75	Male	No	Sat	Dinner	2
243	18.78	3.00	Female	No	Thur	Dinner	2





```
[244 rows x 7 columns]
```

Name:- Harsh Pillai
62413 SYIT-C

```
print(df.tail())
```

	total_bill	tip	sex	smoker	day	time	size
239	29.03	5.92	Male	No	Sat	Dinner	3
240	27.18	2.00	Female	Yes	Sat	Dinner	2
241	22.67	2.00	Male	Yes	Sat	Dinner	2
242	17.82	1.75	Male	No	Sat	Dinner	2
243	18.78	3.00	Female	No	Thur	Dinner	2

```
plt.figure(figsize=(8,6))  
plt.subplot(2,2,1)  
sns.barplot(x='day', y='tip', data=df)  
plt.subplot(2,2,2)  
sns.swarmplot(x='day', y='tip', data=df)  
plt.subplot(2,2,3)  
sns.lineplot(x='day', y='tip', data=df)  
plt.subplot(2,2,4)  
sns.scatterplot(x='day', y='tip', data=df)  
plt.tight_layout()
```

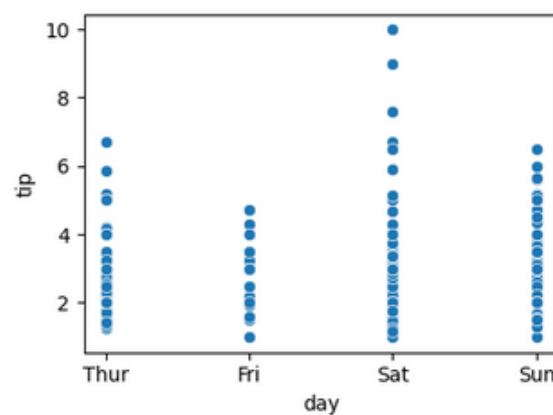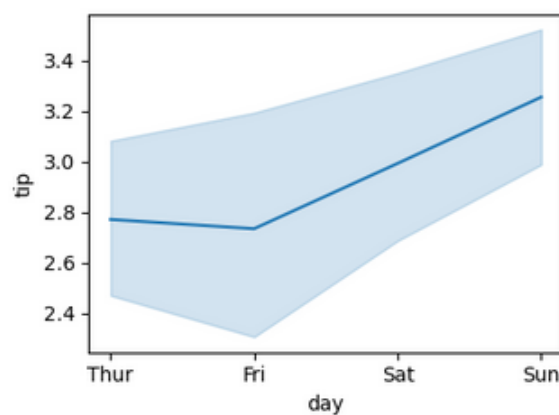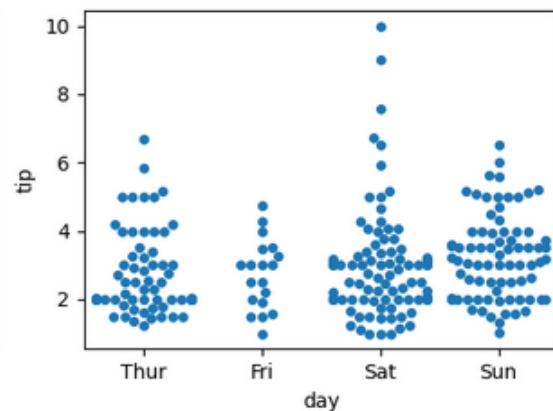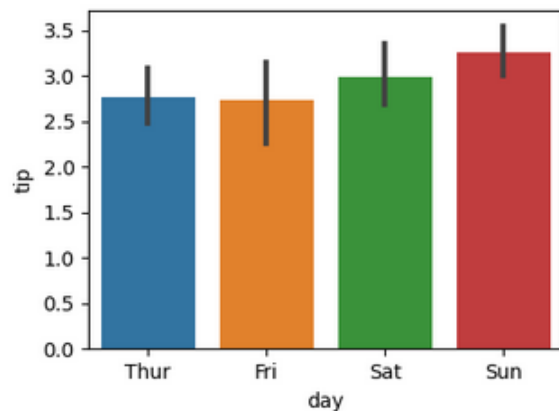

Name:- Harsh Pillai
62413 SYIT-C

Case 2: Iris

#Aim: To make different plots and compare them over the same data set.

```
import matplotlib.pyplot as plt
import seaborn as sns
```

```
print(sns.get_dataset_names())
```

```
df=sns.load_dataset('iris')
```

```
['anagrams', 'anscombe', 'attention', 'brain_networks', 'car_crashes', 'diamonds', 'dots', 'dowjones', 'exercise', 'flights', 'fmri', 'geyser', 'glue', 'healthexp', 'iris', 'mpg', 'penguins', 'planets', 'seaice', 'taxis', 'tips', 'titanic']
```

```
print(df.head())
```

	sepal_length	sepal_width	petal_length	petal_width	species
0	5.1	3.5	1.4	0.2	setosa
1	4.9	3.0	1.4	0.2	setosa
2	4.7	3.2	1.3	0.2	setosa
3	4.6	3.1	1.5	0.2	setosa
4	5.0	3.6	1.4	0.2	setosa

```
print(df)
```

	sepal_length	sepal_width	petal_length	petal_width	species
0	5.1	3.5	1.4	0.2	setosa
1	4.9	3.0	1.4	0.2	setosa
2	4.7	3.2	1.3	0.2	setosa
3	4.6	3.1	1.5	0.2	setosa
4	5.0	3.6	1.4	0.2	setosa
..
145	6.7	3.0	5.2	2.3	virginica
146	6.3	2.5	5.0	1.9	virginica
147	6.5	3.0	5.2	2.0	virginica
148	6.2	3.4	5.4	2.3	virginica
149	5.9	3.0	5.1	1.8	virginica

[150 rows x 5 columns]

```
print(df.tail())
```

	sepal_length	sepal_width	petal_length	petal_width	species
145	6.7	3.0	5.2	2.3	virginica
146	6.3	2.5	5.0	1.9	virginica
147	6.5	3.0	5.2	2.0	virginica
148	6.2	3.4	5.4	2.3	virginica
149	5.9	3.0	5.1	1.8	virginica

```
plt.figure(figsize=(12,10))
plt.subplot(2,2,1)
sns.barplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,2)
sns.swarmplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,3)
sns.lineplot(x='sepal_width', y='petal_width', data=df)
plt.subplot(2,2,4)
sns.scatterplot(x='sepal_width', y='petal_width', data=df)
plt.tight_layout()
```

Name:- Harsh Pillai
62413 SYIT-C

