



Faculty of Computer Applications

**BCA Sem-1
(AY-2026-27)**

Lab Book

**Sub Code : 05BC3103
(Programming Practices : 1)**

Roll No :	92600527015
Full Name :	Harshrajsinh Jadeja

GitHub Link | [harshrajjadeja701-coder \(Harshrajsinh-701\)](https://github.com/harshrajjadeja701-coder)

Sub.Faculty Name : Dr.Ashwin Dobariya

Index

Unit : 1	
Program No	Definition
1.	Write a program that input 2 values from user and find out Maximum.
2.	Write a program that input 2 values from user and find out Minimum.
3.	Write a program that input age from user if age $\geq$ 18 then print person is eligible for vote else person is not eligible for vote.
4.	Write a program that input value from user and find out number is even or odd.
5.	Write a program that input 2 number from user and find out number is equal or not.
6.	Write a program that Input Salary From the user if salary Greater than or equal to 5000 then hr=5% of basic salary, ta=6% of basic salary, da=4% of basic salary and pf=5% of basic salary. but if salary is less than 5000 then hra=4%,ta=5%,da=3% and pf=4%.find out gross salary. Print hra,ta,da,pf and gross salary(Hint : take all variable as float. Formula for gross salary=salary+hra+ta+da- pf).
7.	Write a C Program to input price quantity of an item from user and display final payment according to following condition. If total purchase(price*quantity) is greater than Rs.1000 then calculate discount 15% otherwise calculate discount 10% of total rupees.
8.	Write a program to input year and find whether year is leap year or not.(Hint Use % Sign)

9.	9. Write a program to input two values from user and check whether the first number is divisible by second or not. (Hint Use % Sign)
10.	Write a program to Input a character, if it is capital convert into small else convert into capital.
11.	Write a program that input one character from user and find out that character is vowel or not.(aeiou is called vowel).
12.	Write programs that find out character is in uppercase or lowercase. (Using If...Else..If or Switch.. Case)
13.	Input Three Values from user and Find Maximum.
14.	Input Three Values from user and Find Minimum.
15.	Input RollNumber, Marks of 5 Subjects and find out Total, Percentage, Result and Grade.
16.	Input day in number and print in text (for Example input 1 then Output Monday)
17.	Input Month in number and print in text (for example input 1 then output January)
18.	Input number and check whether the number is positive, negative or zero.

(1) Write a program that input 2 values from user and find out Maximum.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables $x=0$, $y=0$

Step 3 : INPUT x , y

Step 4 : IF $x > y$ THEN


PRINT "X is Maximum"

Step 5 : ELSE

PRINT "Y is Maximum"

Step 6 : STOP

Flowchart :

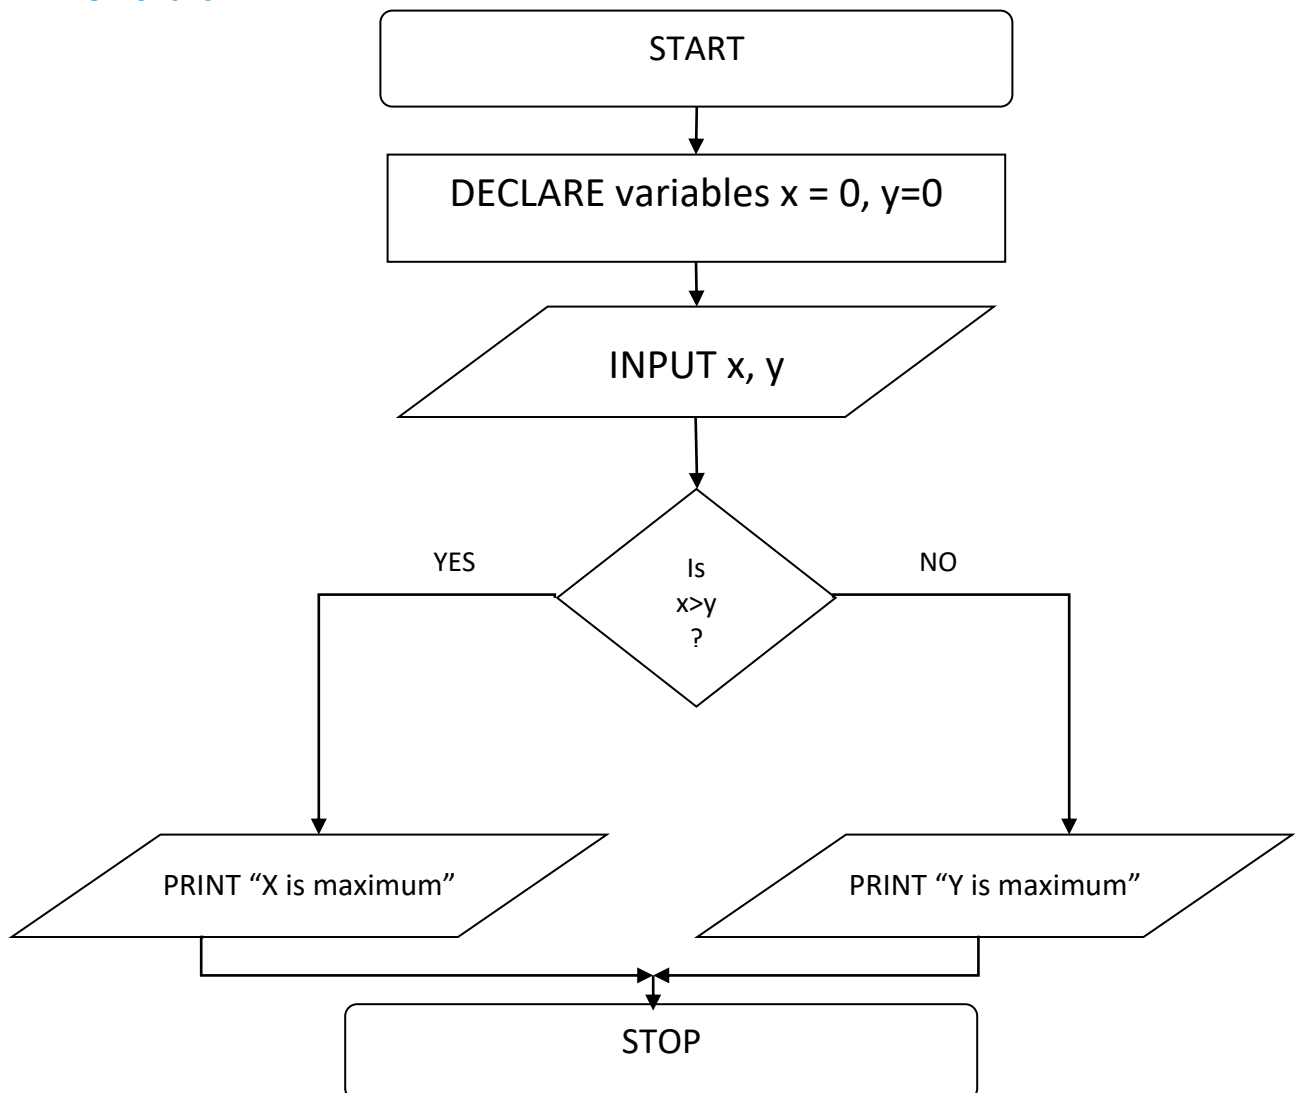


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y;
    clrscr();
    printf("\nEnter Number 1: ");
    scanf("%d",&x);
    printf("\nEnter Number 2: ");
    scanf("%d",&y);
    if(x!=y){
        if(x>y){
            printf("Number 1: %d, is maximum", x);
        }
        else
            printf("Number 2: %d, is maximum", y);
    }
    else{
        printf("Both are equal");
    }
    getch();
}
```

Output :

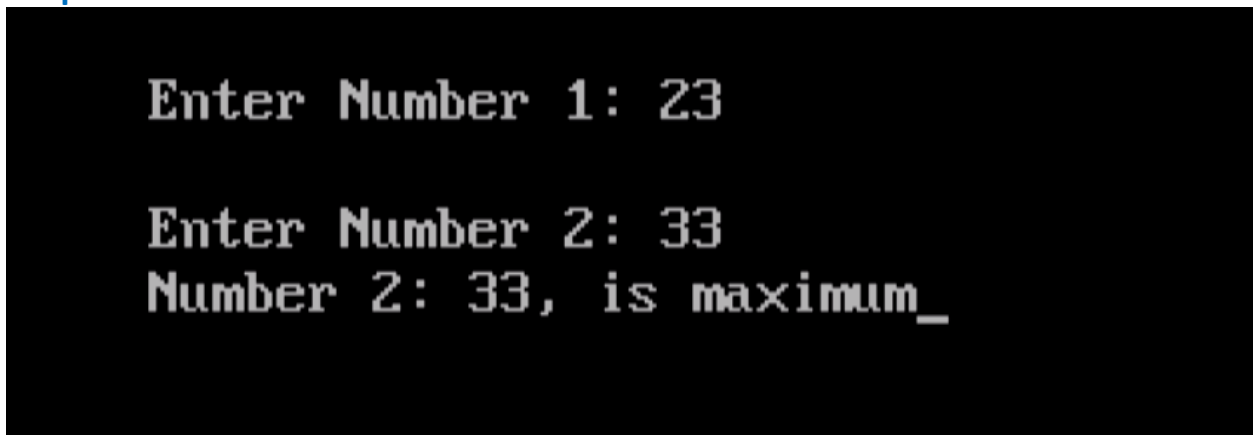

```
Enter Number 1: 23

Enter Number 2: 33
Number 2: 33, is maximum_
```

(2) Write a program that input 2 values from user and find out Minimum.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables $x=0$, $y=0$


Step 3 : INPUT x , y

Step 4 : IF $x < y$ THEN
PRINT "X is Minimum"

Step 5 : ELSE
PRINT "Y is Minimum"

Step 6 : STOP

Flowchart :

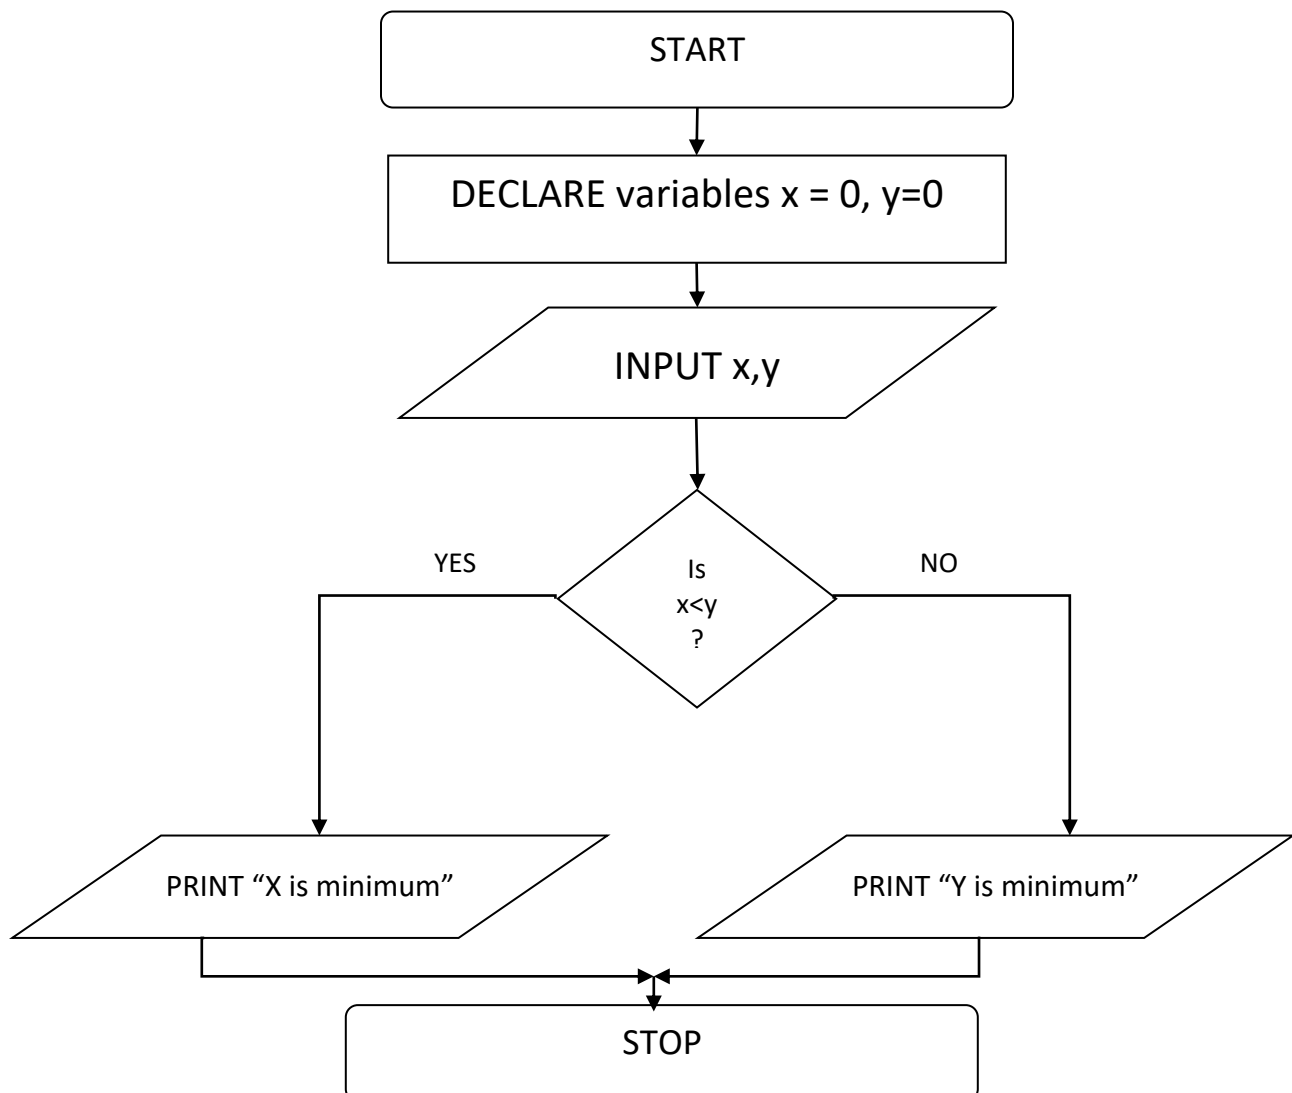


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y;
    clrscr();
    printf("\nEnter Number 1: ");
    scanf("%d",&x);
    printf("\nEnter Number 2: ");
    scanf("%d",&y);
    if(x<y){
        printf("Number 1: %d, is minimum", x);
    }
    else if(y<x)
        printf("Number 2: %d, is minimum", y);
    else
        printf("Numbers are equal");
    getch();
}
```

Output :

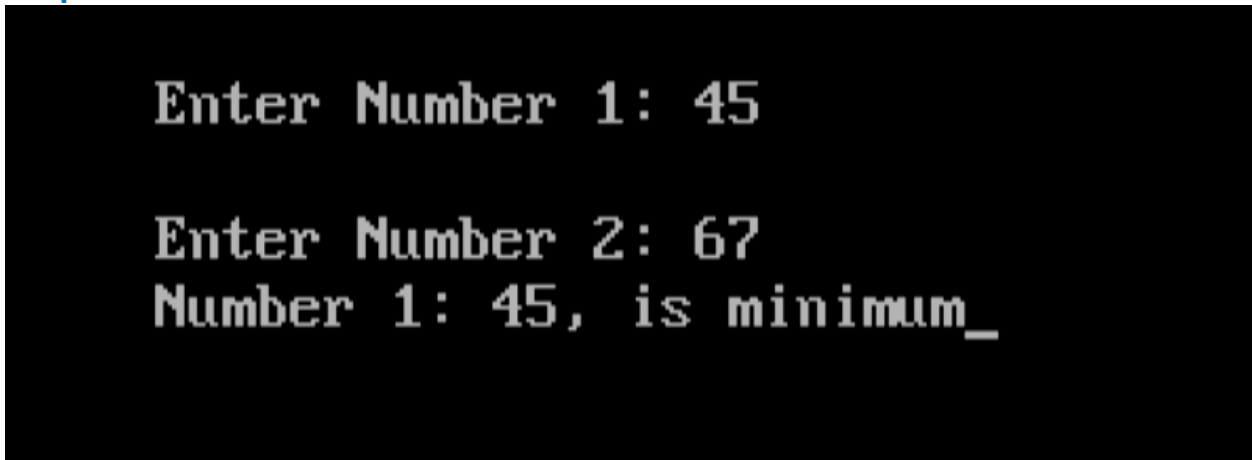A screenshot of a terminal window with a black background and white text. The text shows the program's execution: 'Enter Number 1: 45', 'Enter Number 2: 67', and 'Number 1: 45, is minimum_'.

```
Enter Number 1: 45
Enter Number 2: 67
Number 1: 45, is minimum_
```

(3) Write a program that input age from user if $\text{age} \geq 18$ then print person is eligible for vote else person is not eligible for vote.

Algorithm :

Step 1 : START

Step 2 : DECLARE variable age=0

Step 3 : INPUT age

Step 4 : IF age $\geq$ 18 THEN


PRINT "Person is eligible to vote"

Step 5 : ELSE

PRINT "Person is not eligible to vote"

Step 6 : STOP

Flowchart :

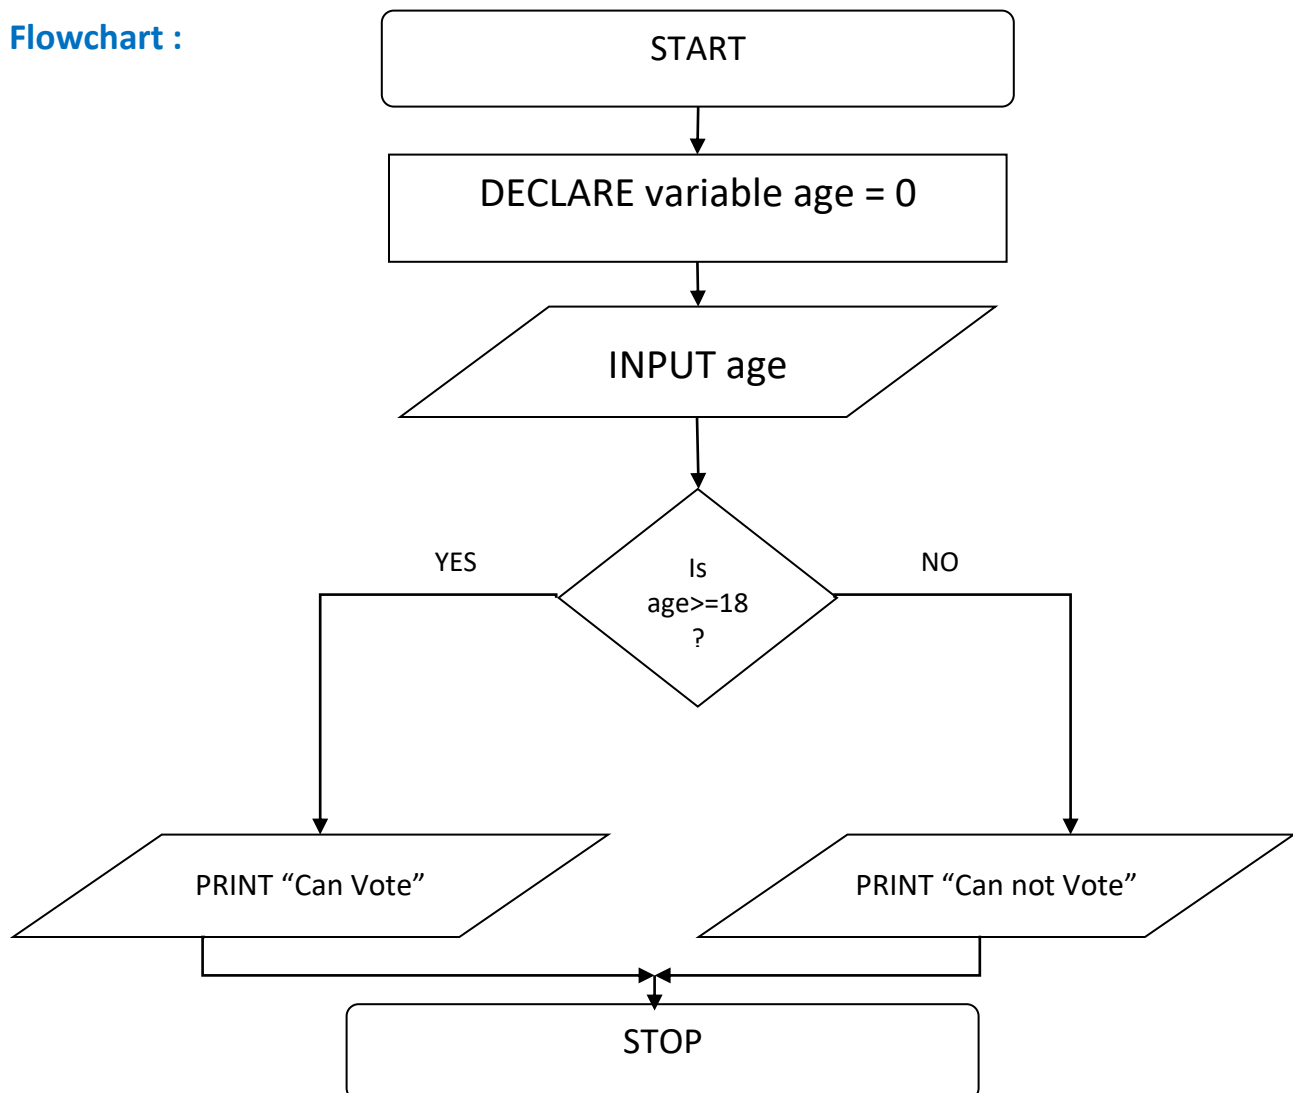


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x;
    clrscr();
    printf("\nEnter Age: ");
    scanf("%d",&x);
    if(x>=18){
        printf("Person is eligible to vote");
    }
    else
        printf("Person is not eligible to vote");
    getch();
}
```

Output:

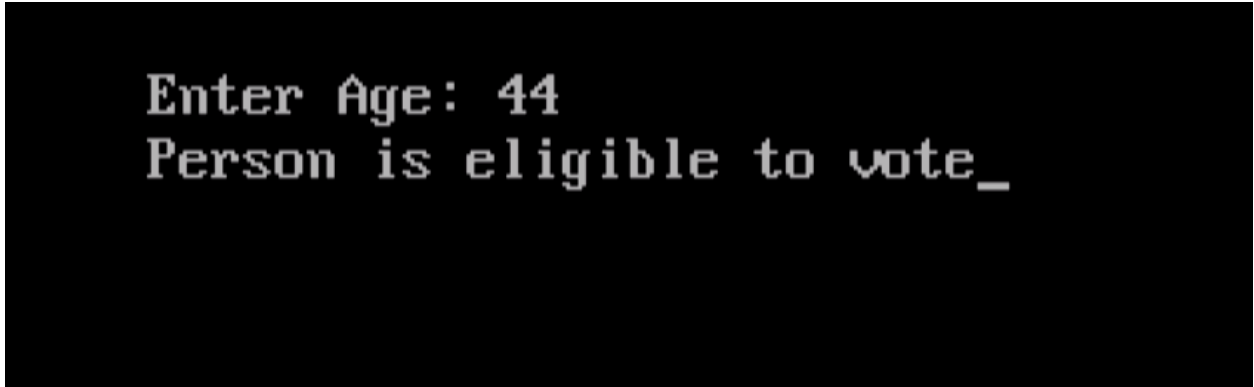

```
Enter Age: 44
Person is eligible to vote_
```

(4) Write a program that input value from user and find out number is even or odd.

Algorithm :

Step 1 : START

Step 2 : DECLARE variable x=0


Step 3 : INPUT x

Step 4 : IF $x \% 2 == 0$ THEN
PRINT "Even Number"

Step 5 : ELSE
PRINT "Odd Number"

Step 6 : STOP

Flowchart :

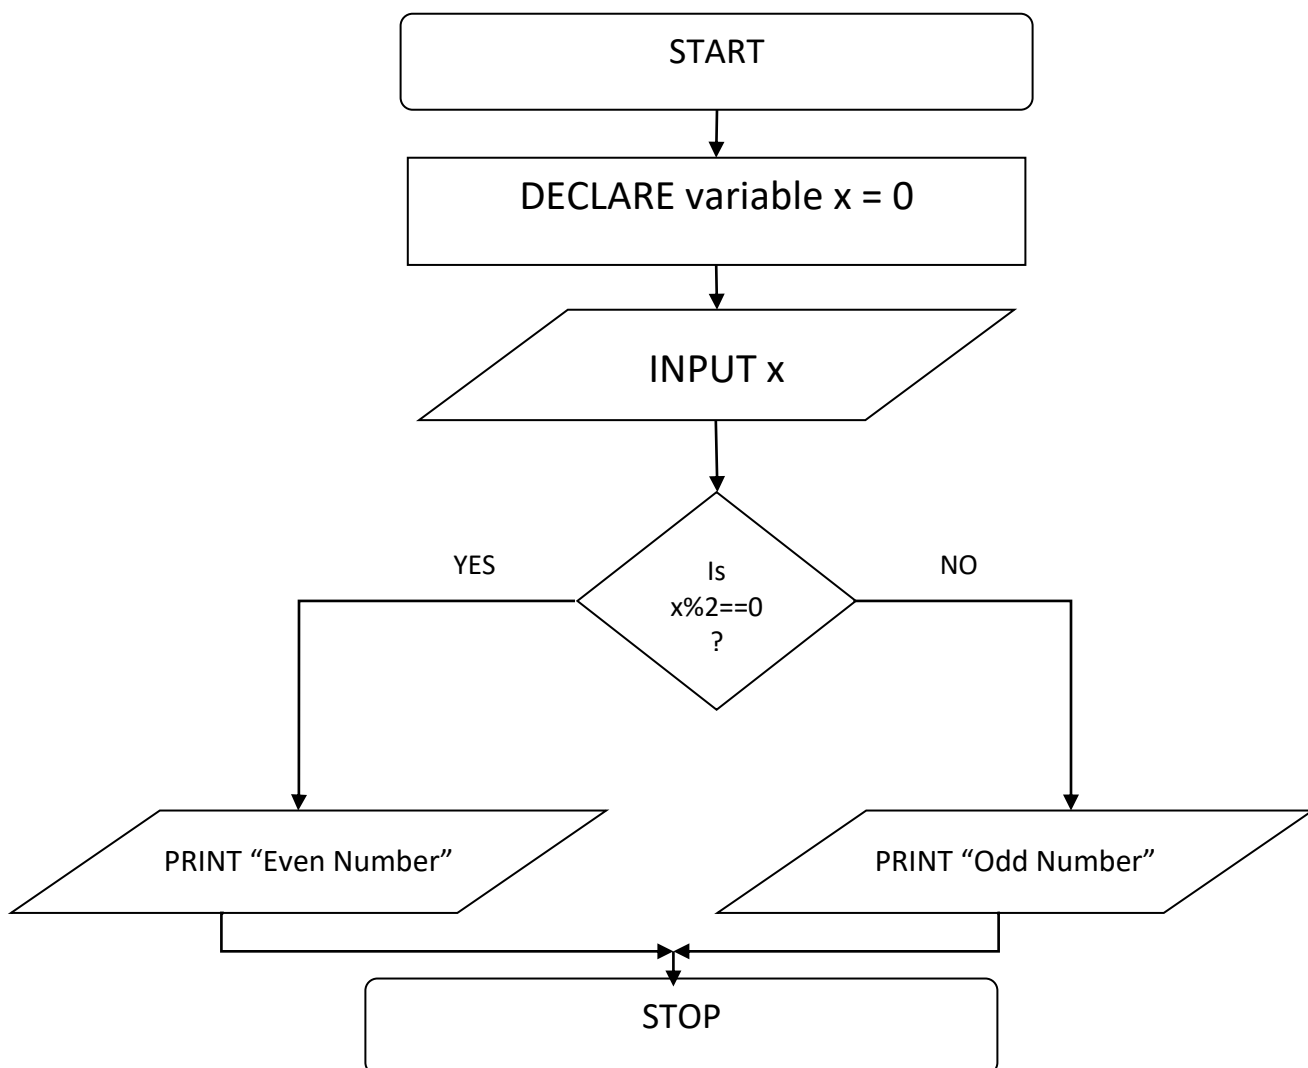


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x;
    clrscr();
    printf("\nEnter Number: ");
    scanf("%d",&x);
    if(x%2==0){
        printf("Even Number");
    }
    else
        printf("Odd Number");
    getch();
}
```

Output :

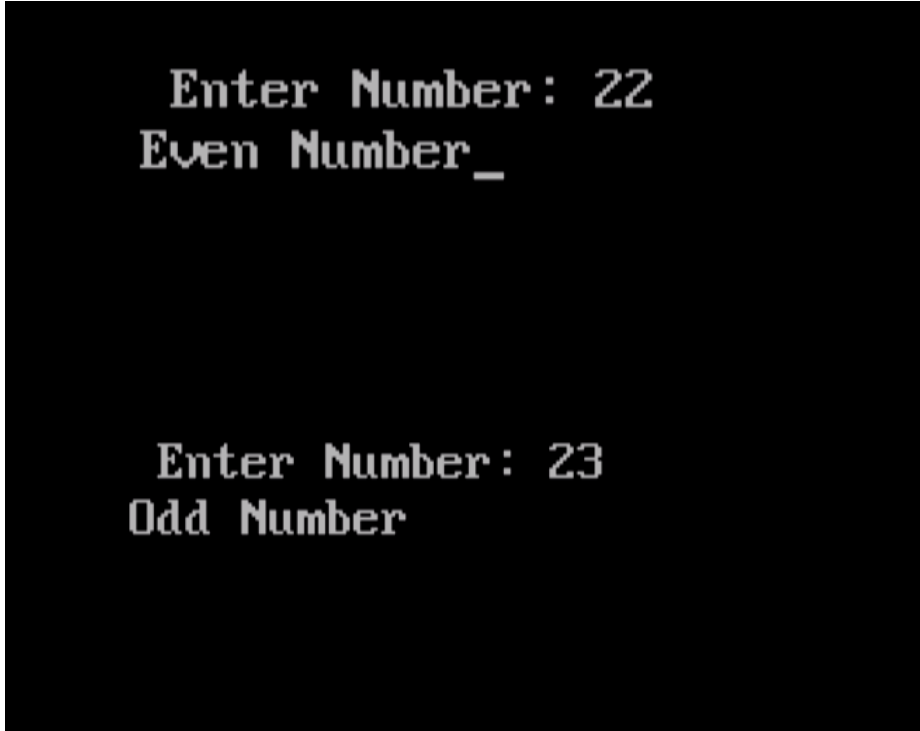

Enter Number: 22
Even Number_

Enter Number: 23
Odd Number

(5) Write a program that input 2 number from user and find out number is equal or not.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables x=0, y=0


Step 3 : INPUT x, y

Step 4 : IF x == y THEN
PRINT "Equal Numbers"

Step 5 : ELSE
PRINT "Not Equal Numbers"

Step 6 : STOP

Flowchart :

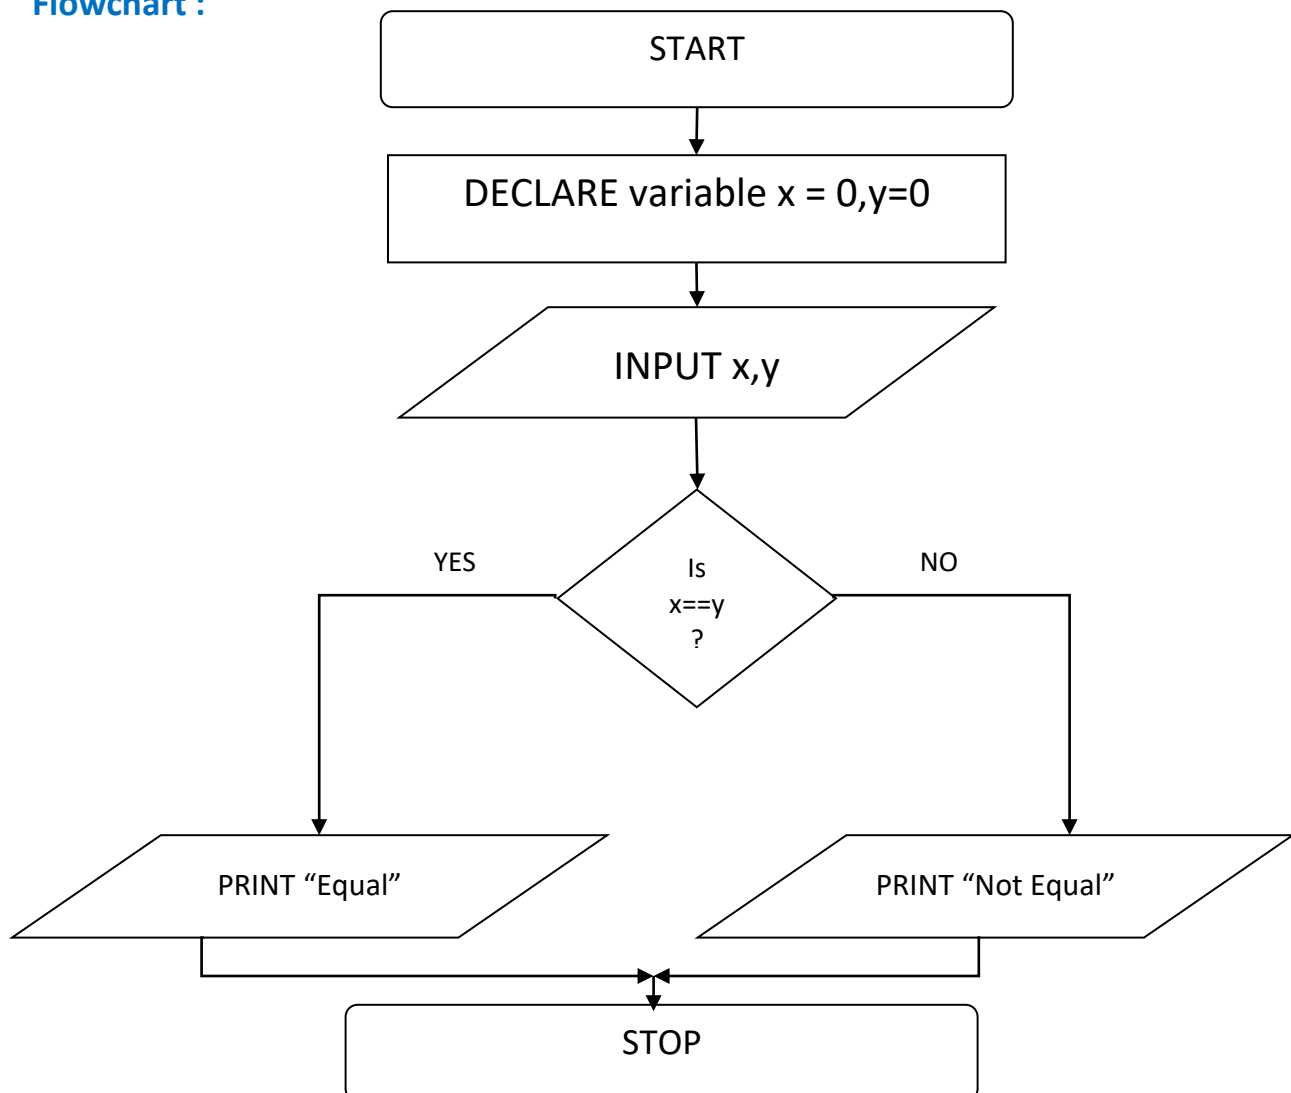


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y;
    clrscr();
    printf("\nEnter Number 1: ");
    scanf("%d",&x);
    printf("\nEnter Number 2: ");
    scanf("%d",&y);
    if(x==y){
        printf("Equal Numbers");
    }
    else
        printf("Not Equal Numbers");
    getch();
}
```

Output :

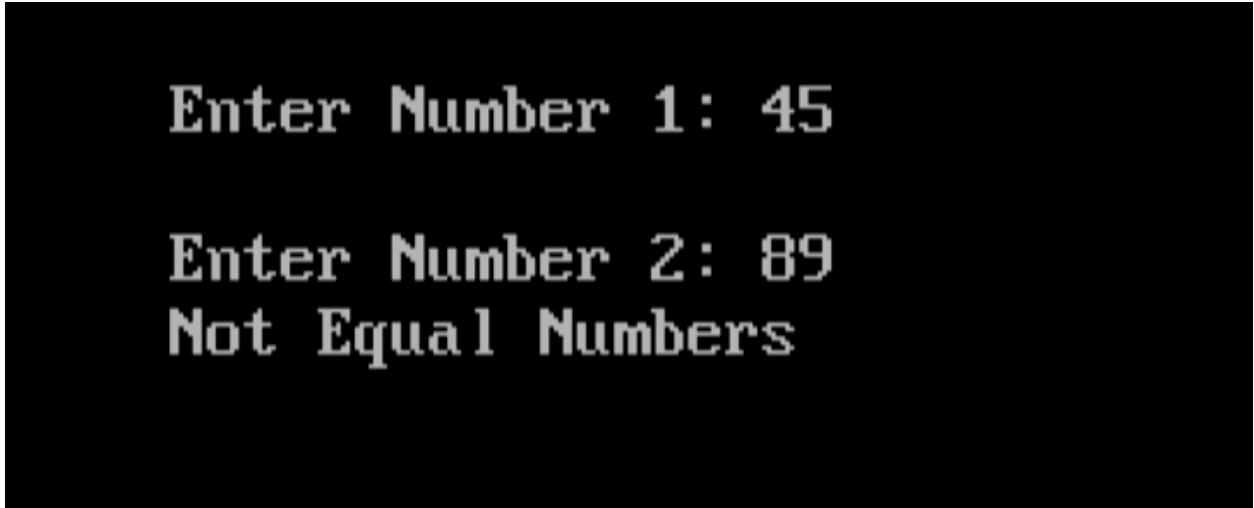A screenshot of a terminal window with a black background and white text. The text shows the program's execution: it prompts for 'Enter Number 1:' and the user enters '45'; it then prompts for 'Enter Number 2:' and the user enters '89'; finally, it outputs 'Not Equal Numbers'.

```
Enter Number 1: 45

Enter Number 2: 89
Not Equal Numbers
```

(6) Write a program that Input Salary From the user if salary Greater than or equal to 5000 then hr=5% of basic salary, ta=6% of basic salary, da=4% of basic salary and pf=5% of basic salary. but if salary is less than 5000 then hra=4%,ta=5%,da=3% and pf=4%.find out gross salary. printhra,ta,da,pf and gross salary(Hint : take all variable as float. Formula for gross salary=salary+hra+ta+da- pf).

Algorithm :

Step 1 : START

Step 2 : DECLARE variables sal, hra, ta, da, pf, gross_sal

Step 3 : INPUT sal

Step 4 : IF sal >= 5000 THEN

 hra = 5% of sal

 ta = 6% of sal

 da = 4% of sal

 pf = 5% of sal

Step 5 : ELSE

 hra = 4% of sal

 ta = 5% of sal

 da = 3% of sal


 pf = 4% of sal

Step 6 : gross_sal = sal + hra + ta + da - pf

Step 7 : PRINT sal, hra, ta, da, pf, gross_sal

Step 8 : STOP

Flowchart :

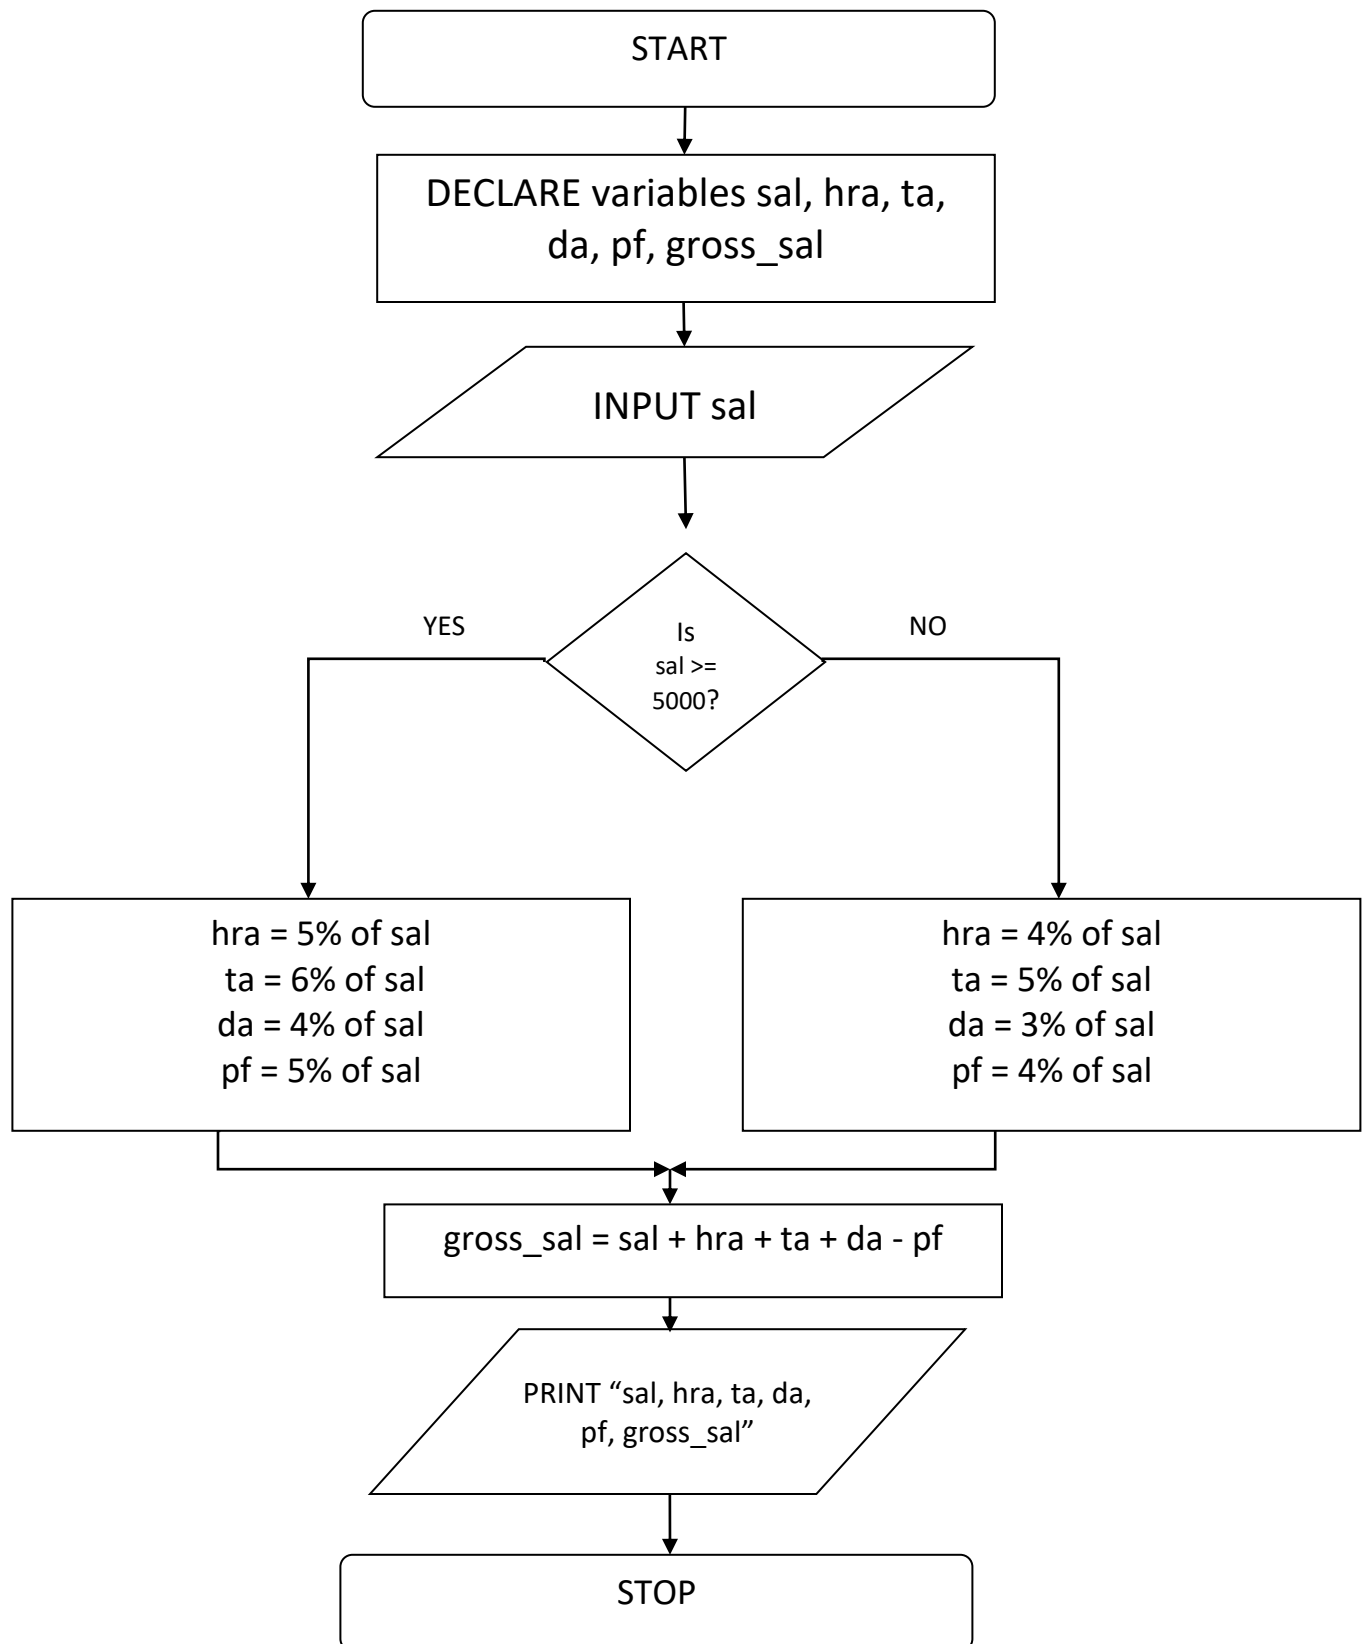

Code :

```
#include <stdio.h>
#include <conio.h>

void main()
{
    float sal, hra, ta, da, pf, gross_sal;

    printf("\nEnter Salary: ");
    scanf("%f", &sal);

    if (sal >= 5000){
        hra = (5.0 / 100) * sal;
        ta = (6.0 / 100) * sal;
        da = (4.0 / 100) * sal;
        pf = (5.0 / 100) * sal;
    }
    else{
        hra = (4.0 / 100) * sal;
        ta = (5.0 / 100) * sal;
        da = (3.0 / 100) * sal;
        pf = (4.0 / 100) * sal;
    }
    gross_sal = sal + hra + ta + da - pf;

    printf("\nSalary = %.2f", sal);
    printf("\nHRA = %.2f", hra);
    printf("\nTA = %.2f", ta);
    printf("\nDA = %.2f", da);
    printf("\nPF = %.2f", pf);
    printf("\nGross Salary = %.2f", gross_sal);

    getch();
}
```


Output :

```
Enter Salary: 3000

Salary = 3000.00
HRA = 120.00
TA = 150.00
DA = 90.00
PF = 120.00
Gross Salary = 3240.00_
```

(7) Write a C Program to input price quantity of an item from user and display final payment according to following condition. If total purchase(price*quantity) is greater than Rs.1000 then calculate discount 15% otherwise calculate discount 10% of total rupees.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables price, quantity, total, discount, finalAmount

Step 3 : INPUT price, quantity

Step 4 : $\text{total} = \text{price} * \text{quantity}$

Step 5 : IF $\text{total} > 1000$ THEN

$\text{discount} = \text{total} * 15 / 100$

Step 6 : ELSE


$\text{discount} = \text{total} * 10 / 100$

Step 7 : $\text{finalAmount} = \text{total} - \text{discount}$

Step 8 : PRINT total, discount, finalAmount

Step 9 : STOP

Flowchart :

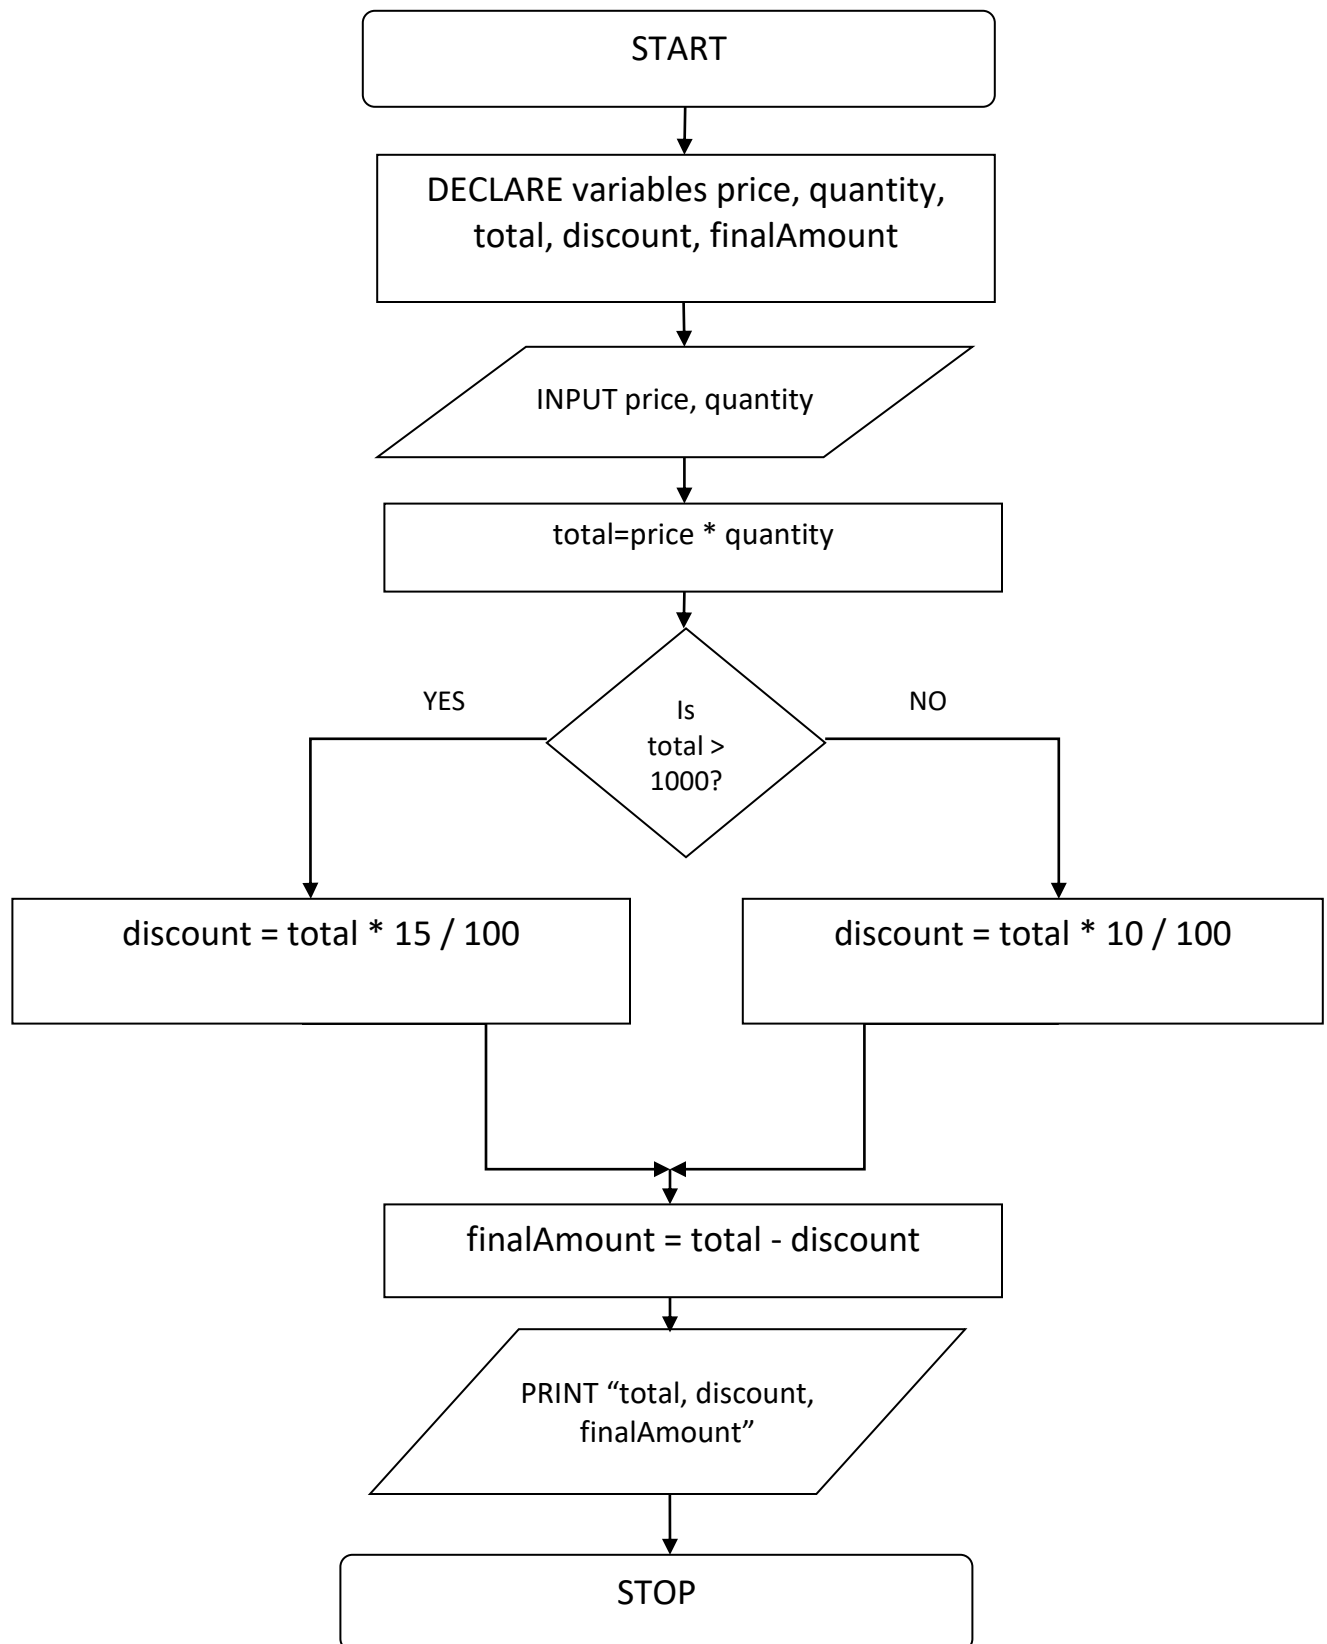

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    int quantity;
    float price, total, discount, finalAmount;

    clrscr();

    printf("Enter price of item: ");
    scanf("%f", &price);

    printf("Enter quantity: ");
    scanf("%d", &quantity);

    total = price * quantity;

    if (total > 1000)
        discount = total * 15 / 100;
    else
        discount = total * 10 / 100;

    finalAmount = total - discount;

    printf("\nTotal Amount = %.2f", total);
    printf("\nDiscount = %.2f", discount);
    printf("\nFinal Payment = %.2f", finalAmount);

    getch();
    return 0;
}
```

Output :

```
Enter price of item: 300
Enter quantity: 10

Total Amount = 3000.00
Discount = 450.00
Final Payment = 2550.00_
```

(8) Write a program to input year and find whether year is leap year or not.(Hint Use % Sign)

Algorithm :

Step 1 : START

Step 2 : DECLARE variable year=0


Step 3 : INPUT year

Step 4 : IF (year % 400 = 0) OR (year % 4 = 0 AND year % 100 != 0) THEN
PRINT "Leap Year"

Step 5 : ELSE
PRINT "Not a Leap Year"

Step 6 : STOP

Flowchart :

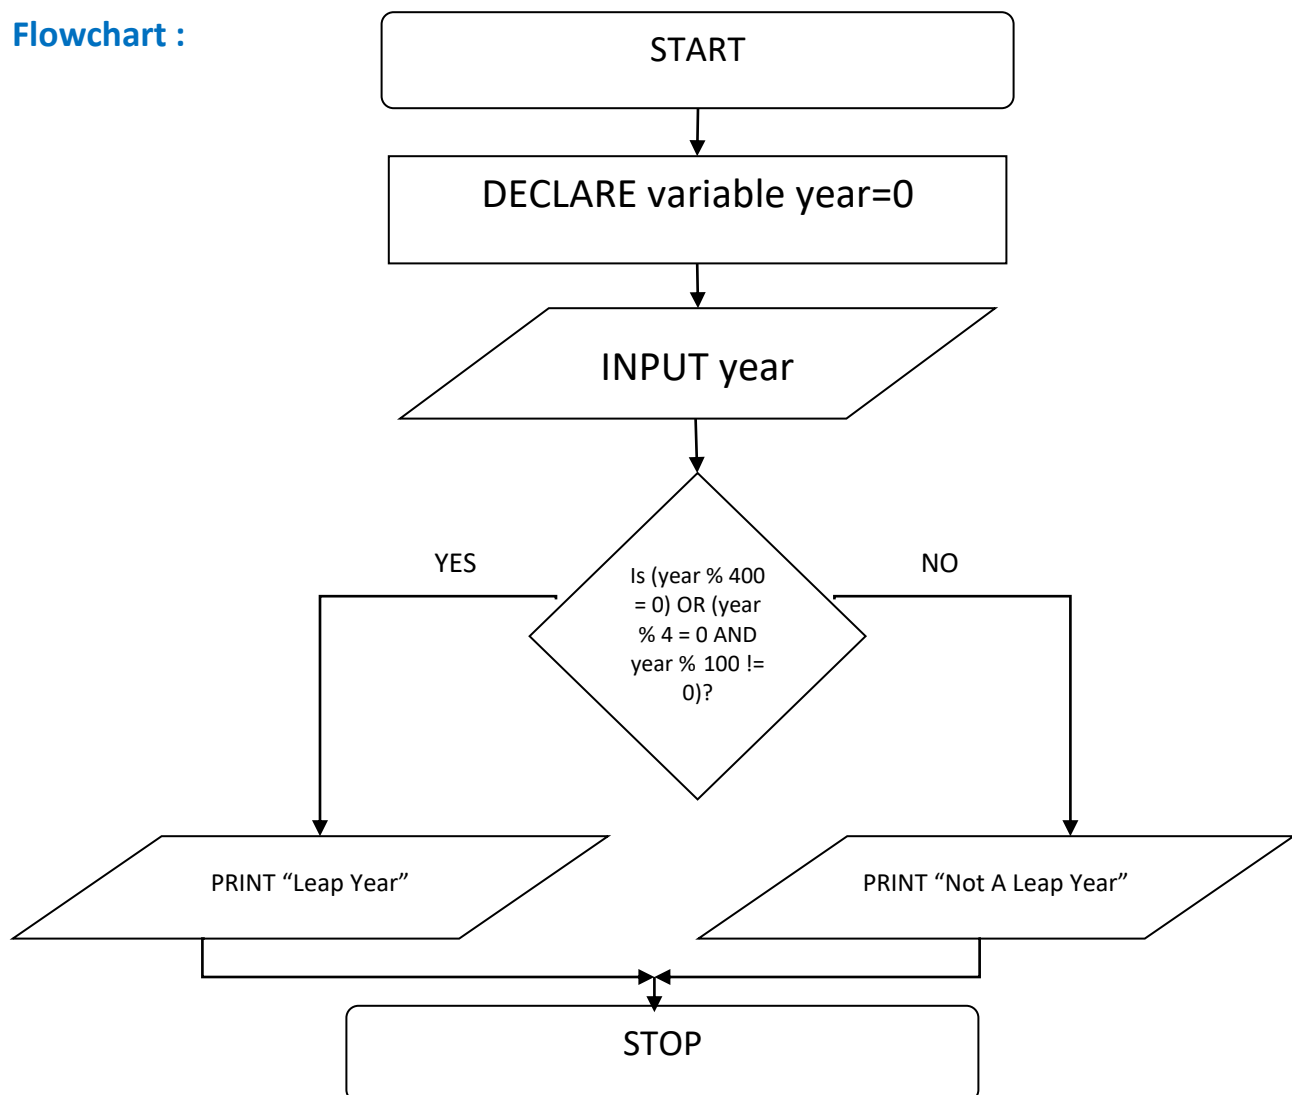

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    int year;


    clrscr();

    printf("Enter year: ");
    scanf("%d", &year);

    if ((year % 400 == 0) || (year % 4 == 0 && year % 100 != 0))
        printf("Leap Year");
    else
        printf("Not a Leap Year");

    getch();
    return 0;
}
```

Output :

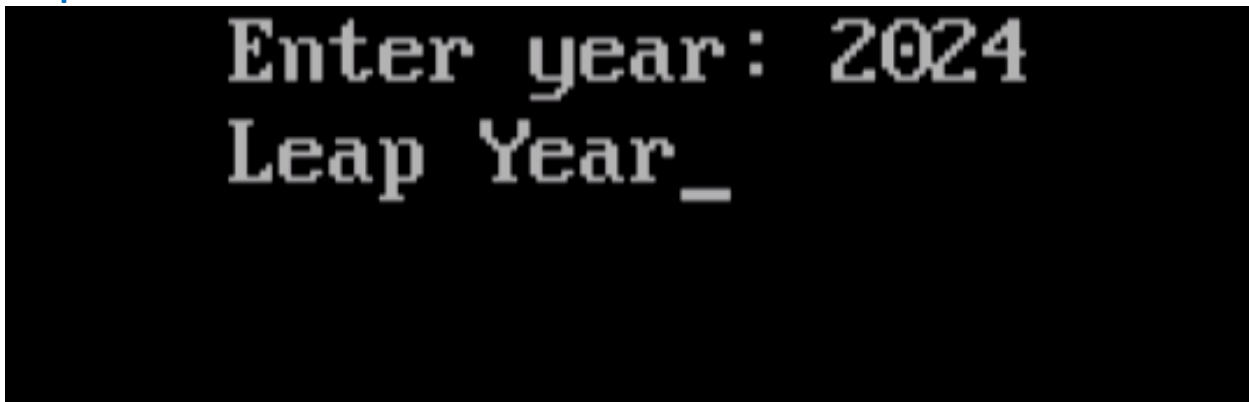

```
Enter year: 2024
Leap Year_
```

(9) Write a program to input two values from user and check whether the first number is divisible by second or not. (Hint Use % Sign)

Algorithm :

Step 1 : START

Step 2 : DECLARE variables a=0, b=0


Step 3 : INPUT a, b

Step 4 : IF $a \% b == 0$ THEN
PRINT "a is divisible by b"

Step 5 : ELSE
PRINT "a is not divisible by b"

Step 6 : STOP

Flowchart :

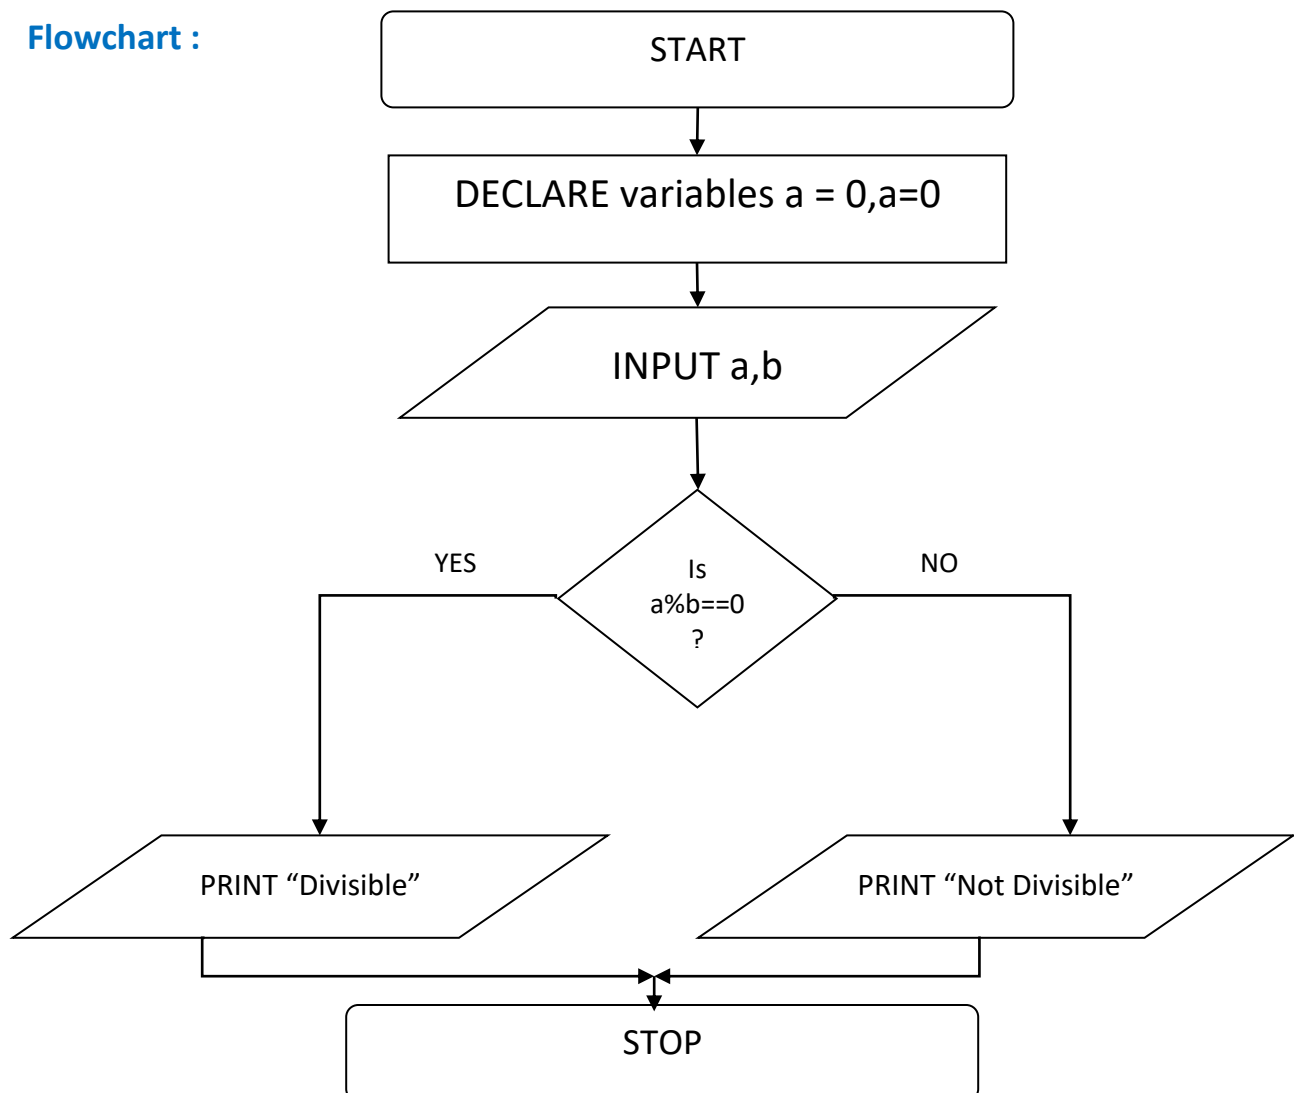

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    int a, b;

    clrscr();


    printf("Enter first number: ");
    scanf("%d", &a);

    printf("Enter second number: ");
    scanf("%d", &b);

    if (a % b == 0)
        printf("%d is divisible by %d", a, b);
    else
        printf("%d is not divisible by %d", a, b);

    getch();
    return 0;
}
```

Output :

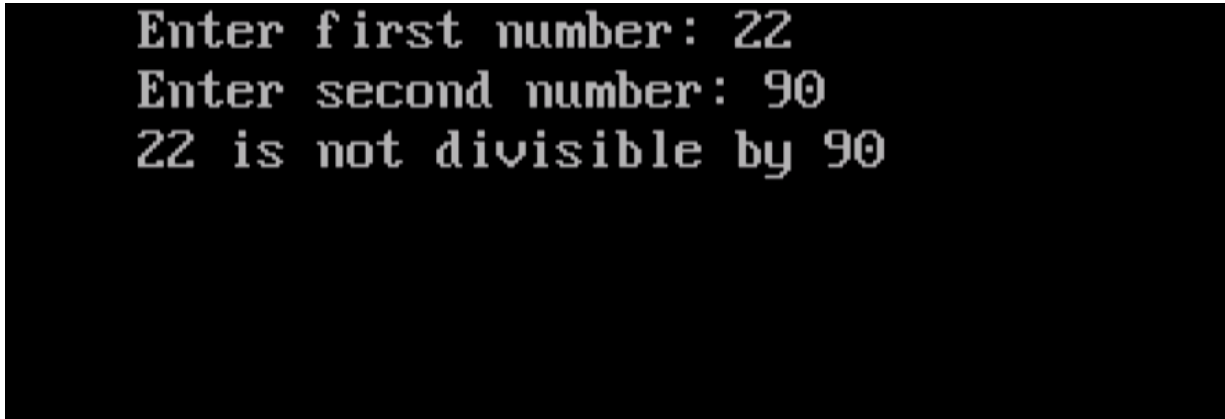A screenshot of a terminal window with a black background and white text. It shows the output of the C program: 'Enter first number: 22', 'Enter second number: 90', and '22 is not divisible by 90'.

```
Enter first number: 22
Enter second number: 90
22 is not divisible by 90
```

(10) Write a program to Input a character, if it is capital convert into small else convert into capital.

Algorithm :

Step 1 : START

Step 2 : DECLARE variable ch

Step 3 : INPUT ch

Step 4 : IF $ch \geq "A"$ AND $ch \leq "Z"$ THEN

$ch = ch + 32$

Step 5 : ELSE IF $ch \geq "a"$ AND $ch \leq "z"$ THEN

$ch = ch - 32$


Step 6 : ELSE

PRINT "Not A Letter"

Step 7 : PRINT ch

Step 8 : STOP

Flowchart :

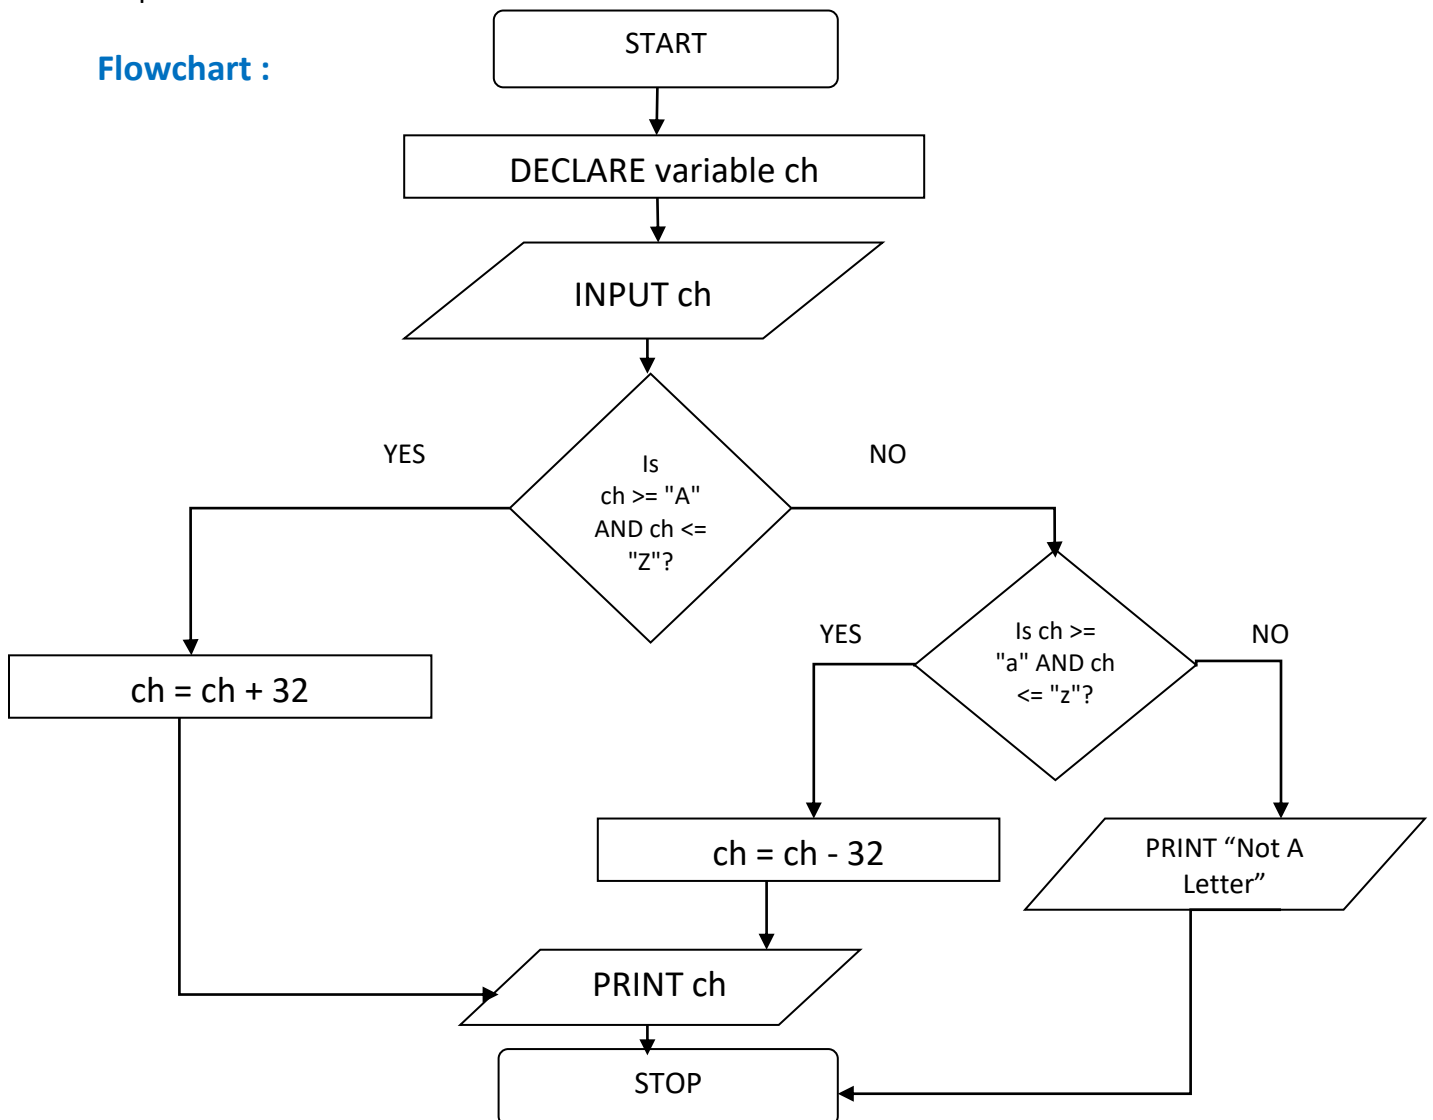

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    char ch;

    clrscr();


    printf("Enter a character: ");
    scanf(" %c", &ch);

    if (ch >= 'A' && ch <= 'Z')
        ch = ch + 32;
    else if (ch >= 'a' && ch <= 'z')
        ch = ch - 32;

    printf("Converted character: %c", ch);

    getch();
    return 0;
}
```

Output :

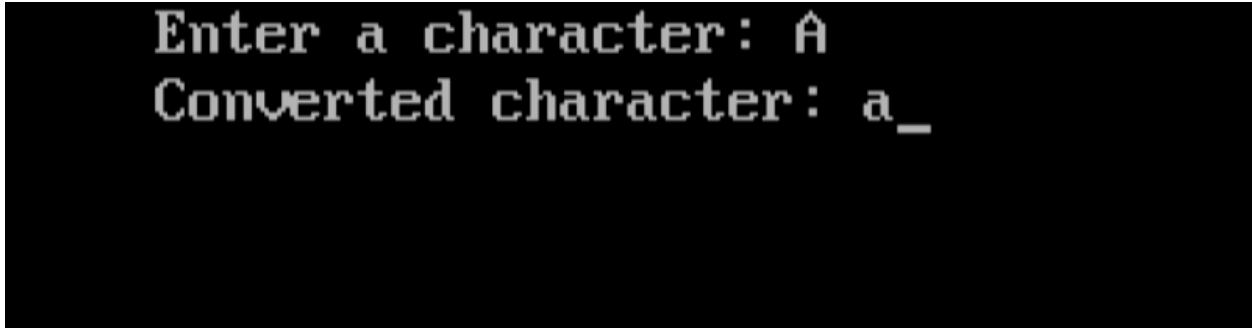A screenshot of a terminal window with a black background and white text. The first line shows the prompt "Enter a character:" followed by the input 'A'. The second line shows the output "Converted character:" followed by 'a' and a cursor underscore '_'.

```
Enter a character: A
Converted character: a_
```

(11) Write a program that input one character from user and find out that character is vowel or not.(aeiou is called vowel).

Algorithm :

Step 1 : START

Step 2 : DECLARE variable ch


Step 3 : INPUT ch

Step 4 : IF ch is vowel (aeiouAEIOU) THEN
PRINT "Vowel"

Step 5 : ELSE
PRINT "Not a Vowel"

Step 6 : STOP

Flowchart :

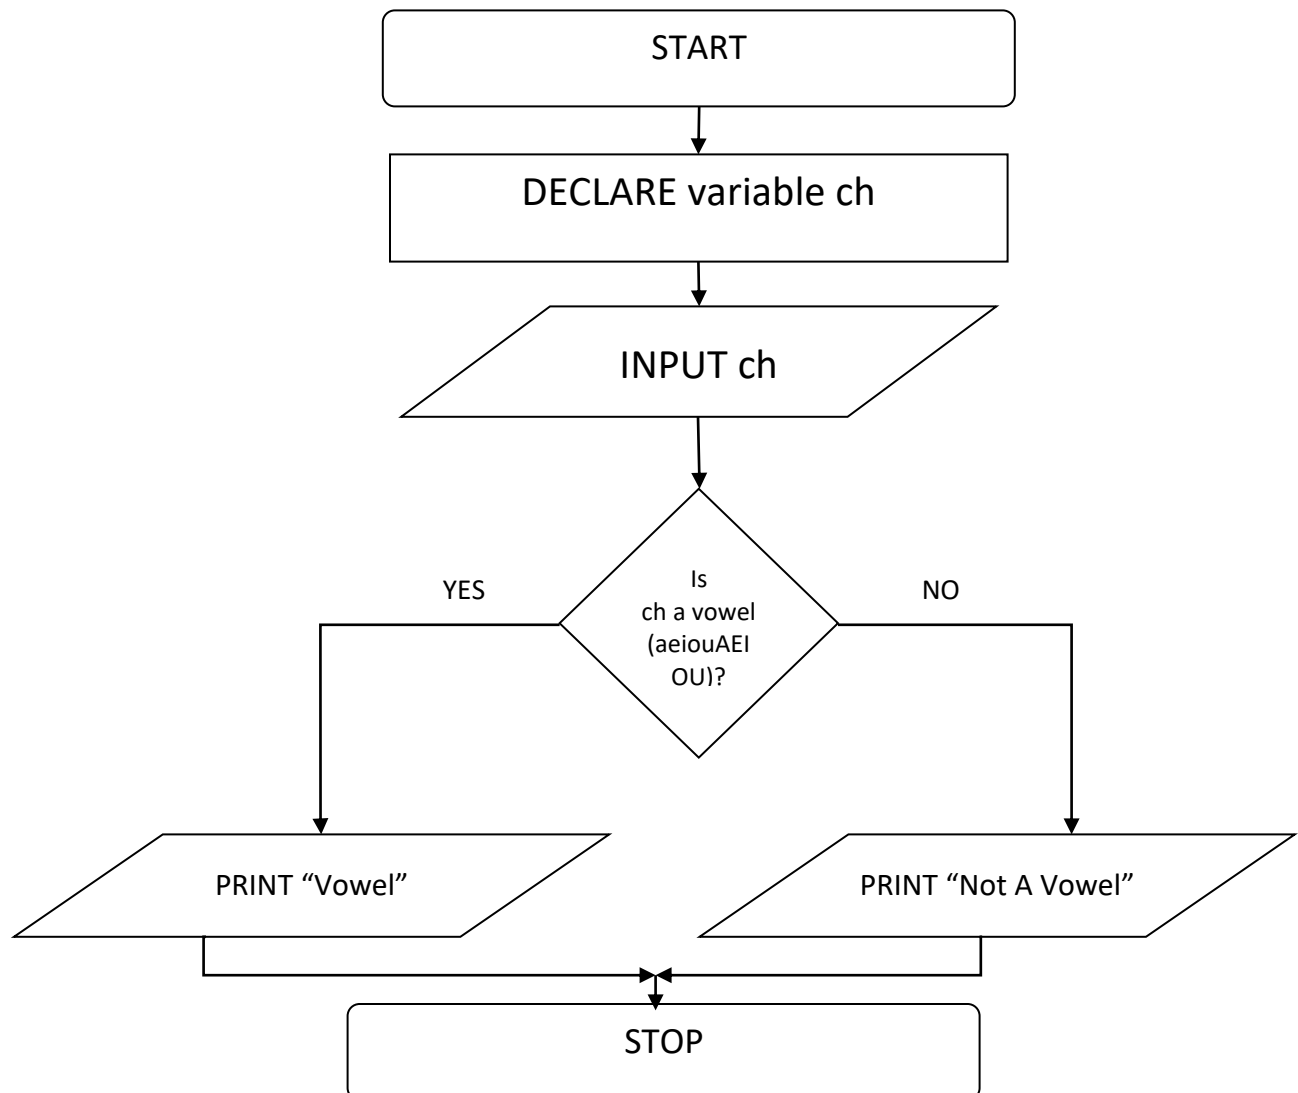

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    char ch;


    clrscr();

    printf("Enter a character: ");
    scanf(" %c", &ch);

    if (ch=='A' || ch=='E' || ch=='I' || ch=='O' || ch=='U' ||
        ch=='a' || ch=='e' || ch=='i' || ch=='o' || ch=='u')
        printf("Vowel");
    else
        printf("Not a Vowel");

    getch();
    return 0;
}
```

Output :

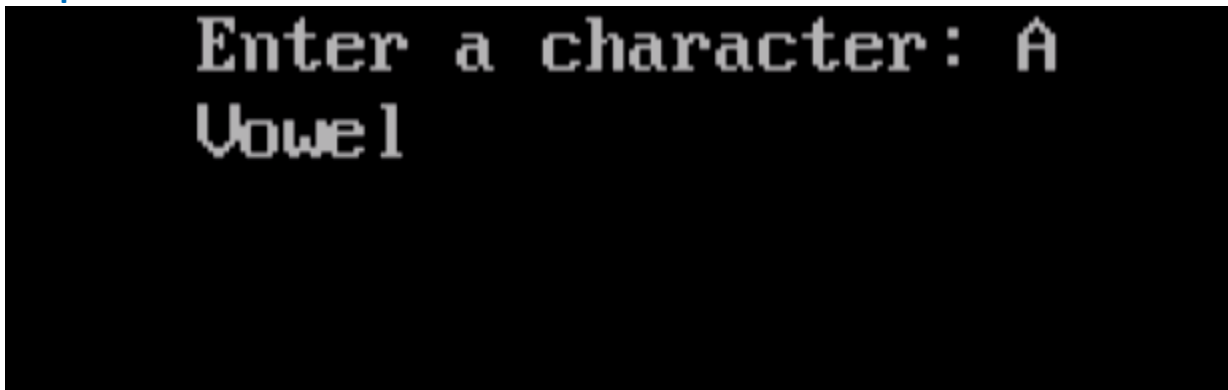


```
Enter a character: A
Vowel
```

(12) Write programs that find out character is in uppercase or lowercase. Using If...Else..If or Switch.. Case

Algorithm :

Step 1 : START
Step 2 : DECLARE variable ch
Step 3 : INPUT ch
Step 4 : IF ch >= "A" AND ch <= "Z" THEN
 PRINT "Uppercase Letter"
Step 5 : ELSE IF ch >= "a" AND ch <= "z" THEN
 PRINT "Lowercase Letter"
Step 6 : ELSE
 PRINT "Not an Alphabet"
Step 7 : STOP

Flowchart :

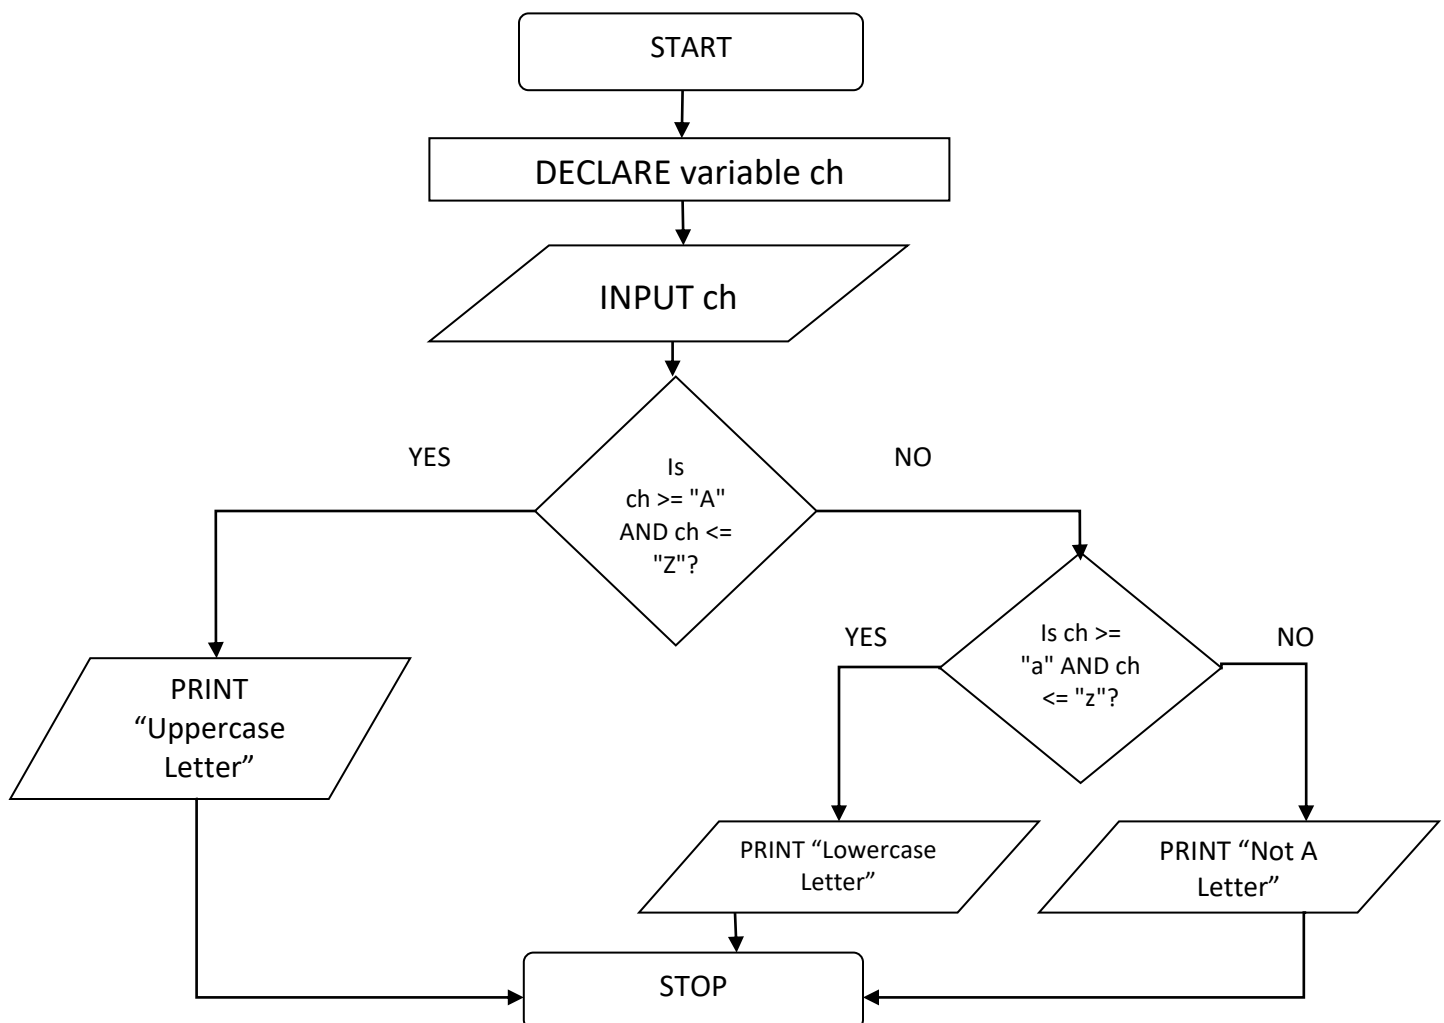

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    char ch;


    clrscr();

    printf("Enter a character: ");
    scanf(" %c", &ch);

    if (ch >= 'A' && ch <= 'Z')
        printf("Uppercase Letter");
    else if (ch >= 'a' && ch <= 'z')
        printf("Lowercase Letter");
    else
        printf("Not an Alphabet");

    getch();
    return 0;
}
```

Output :

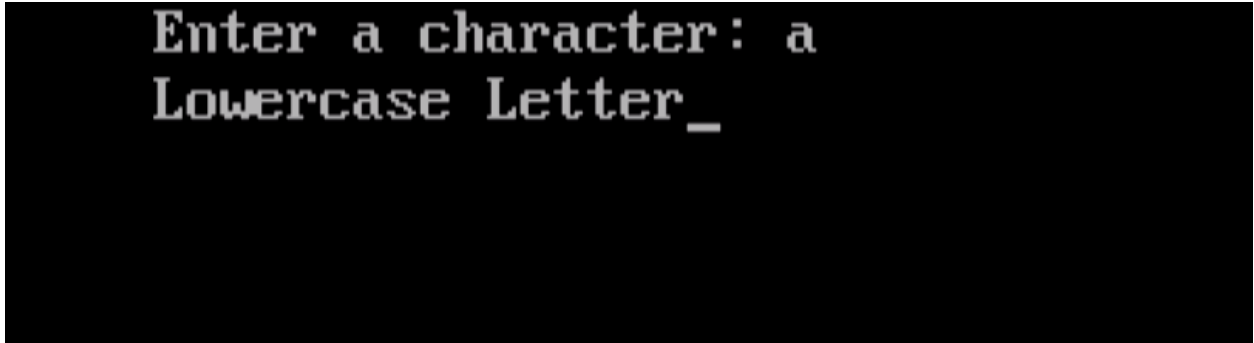A screenshot of a terminal window with a black background and white text. The text displays the output of the program: "Enter a character: a" on the first line and "Lowercase Letter_" on the second line, where the underscore indicates the cursor position.

```
Enter a character: a
Lowercase Letter_
```

(13) Input Three Values from user and Find Maximum.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables x, y, z

Step 3 : INPUT x, y, z


Step 4 : IF $x > y$ AND $x > z$ THEN
PRINT "X is Maximum"

Step 5 : ELSE IF $y > x$ AND $y > z$ THEN
PRINT "Y is Maximum"

Step 6 : ELSE
PRINT "Z is Maximum"

Step 7 : STOP

Flowchart :

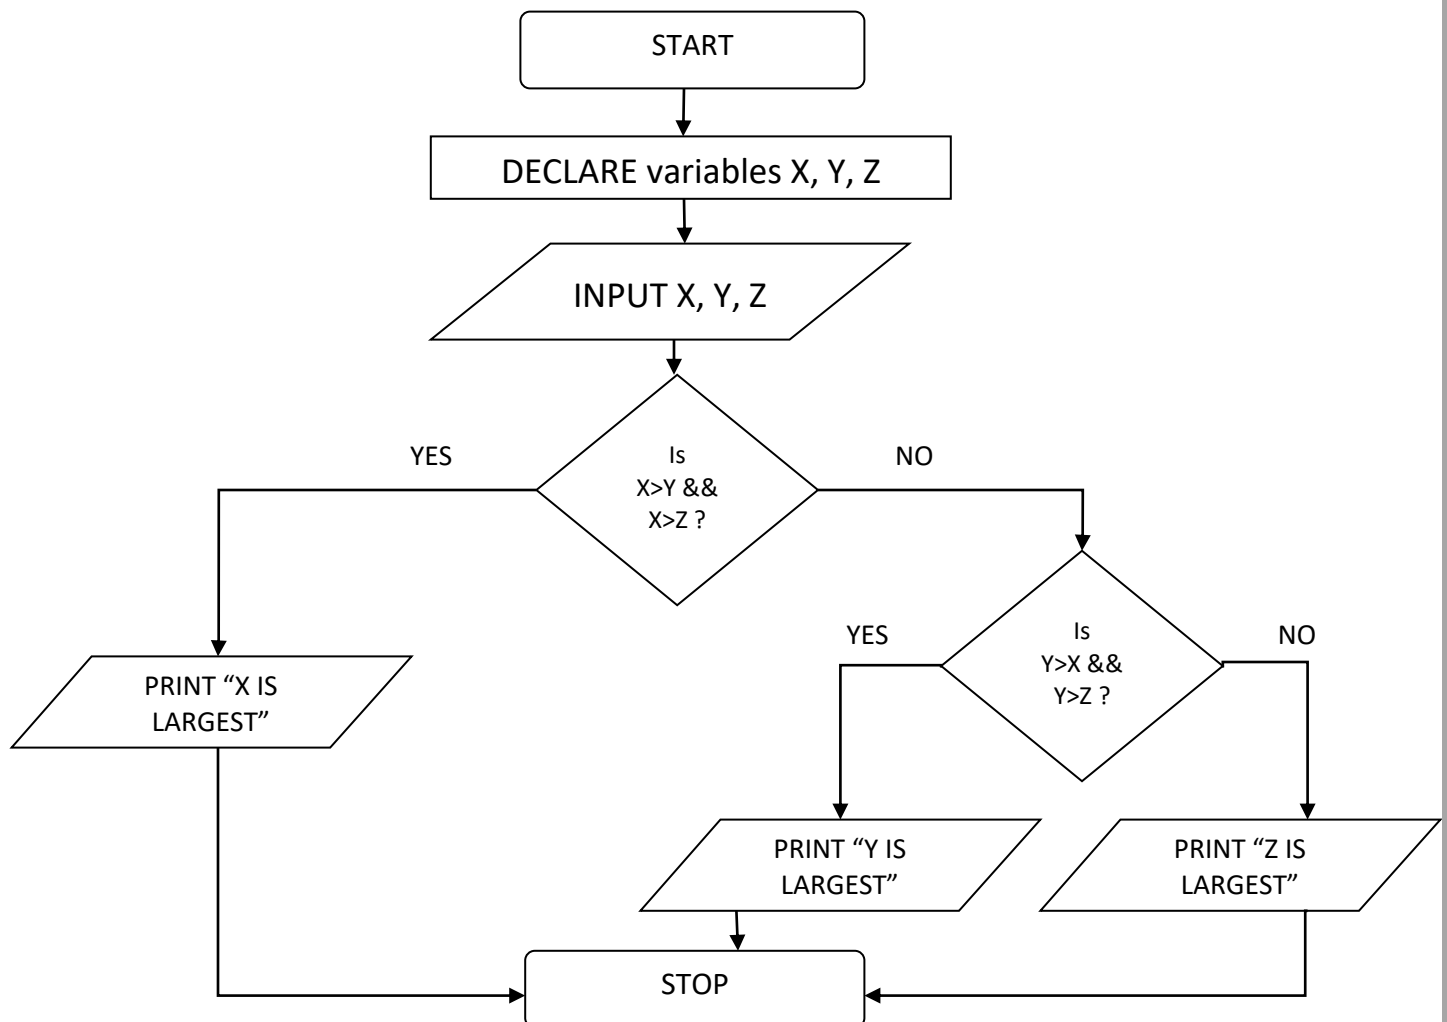


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y,z;
    clrscr();
    printf("\nEnter Number 1:");
    scanf("%d",&x);
    printf("\nEnter Number 2:");
    scanf("%d",&y);
    printf("\nEnter Number 3:");
    scanf("%d",&z);
    if(x>y && x>z){
        printf("Number 1: %d, is maximum", x);
    }
    else if(y>x && y>z){
        printf("Number 2: %d, is maximum", y);
    }
    else
        printf("Number 3: %d, is maximum", z);
    getch();
}
```

Output :

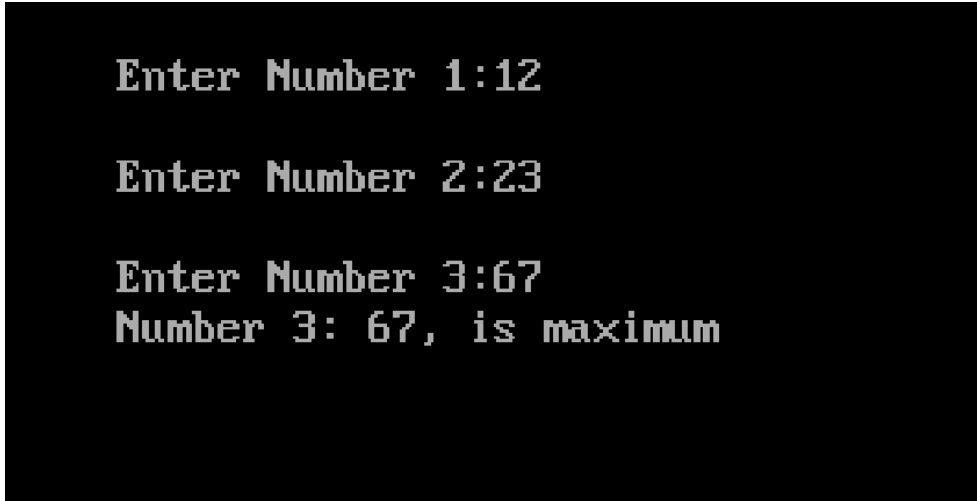

```
Enter Number 1:12

Enter Number 2:23

Enter Number 3:67
Number 3: 67, is maximum
```

(14) Input Three Values from user and Find Minimum.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables x, y, z

Step 3 : INPUT x, y, z


Step 4 : IF $x < y$ AND $x < z$ THEN
PRINT "X is Minimum"

Step 5 : ELSE IF $y < x$ AND $y < z$ THEN
PRINT "Y is Minimum"

Step 6 : ELSE
PRINT "Z is Minimum"

Step 7 : STOP

Flowchart :

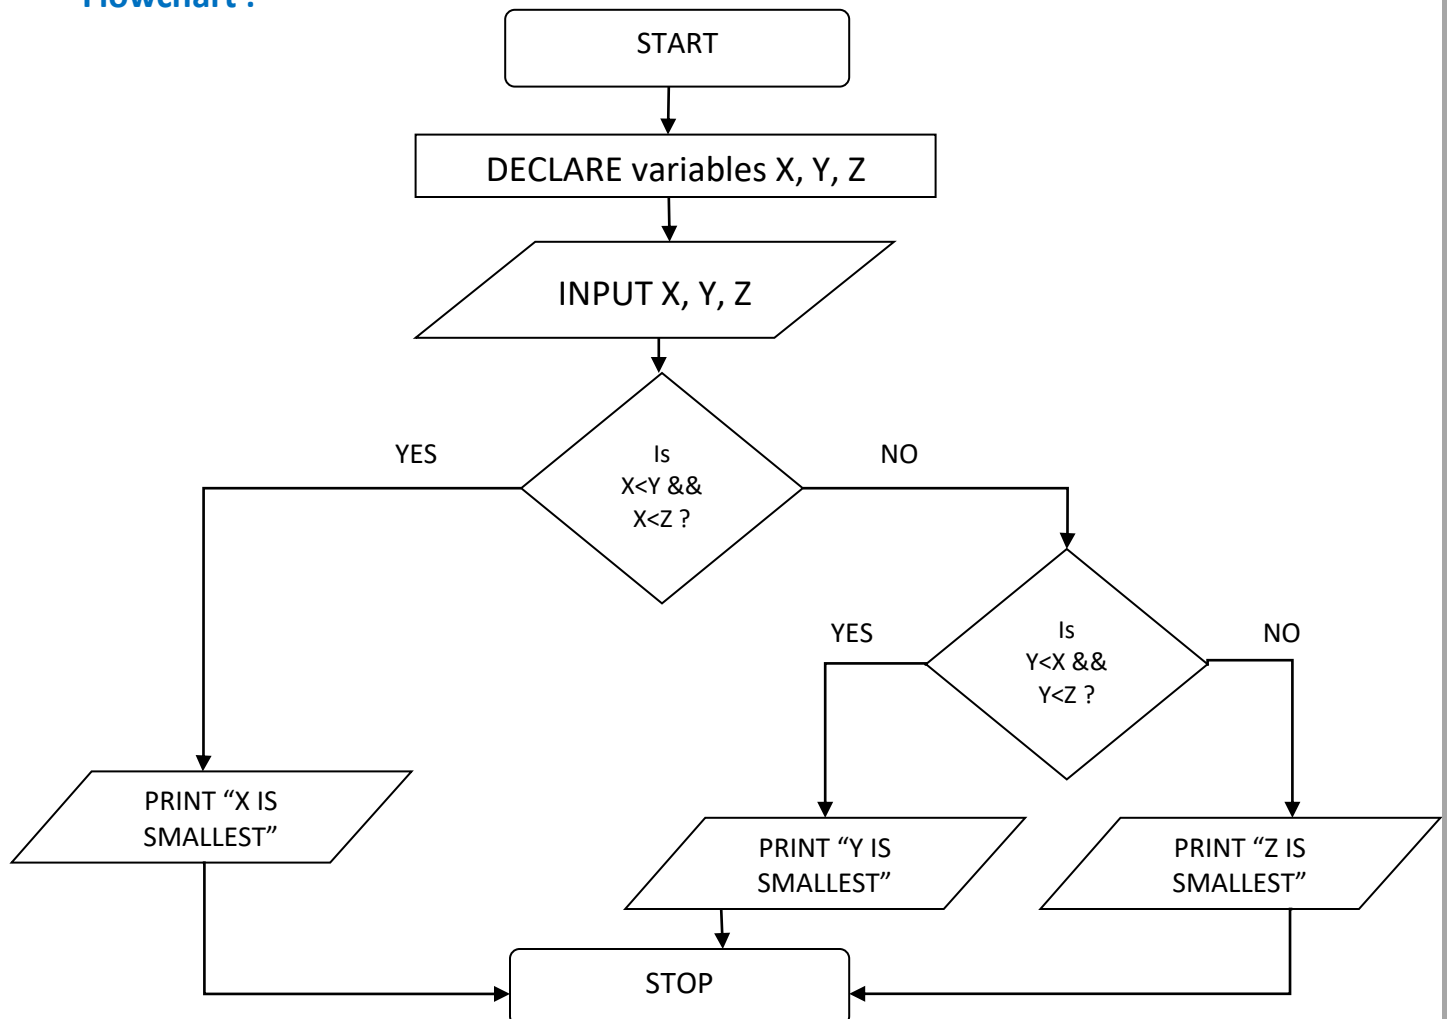


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y,z;
    clrscr();
    printf("\nEnter Number 1:");
    scanf("%d",&x);
    printf("\nEnter Number 2:");
    scanf("%d",&y);
    printf("\nEnter Number 3:");
    scanf("%d",&z);
    if(x<y && x<z){
        printf("Number 1: %d, is minimum", x);
    }
    else if(y<x && y<z){
        printf("Number 2: %d, is minimum", y);
    }
    else
        printf("Number 3: %d, is minimum", z);
    getch();
}
```

Output :

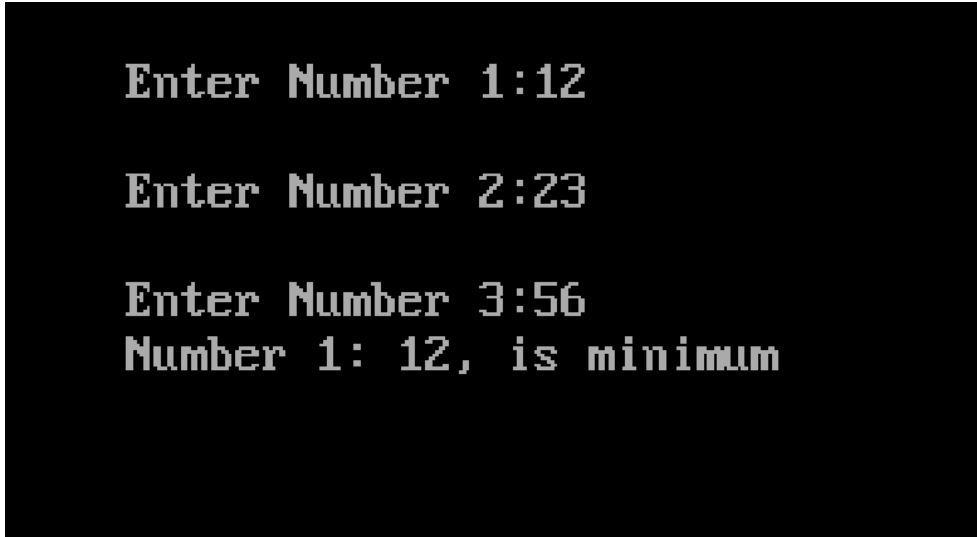

```
Enter Number 1:12
```

```
Enter Number 2:23
```

```
Enter Number 3:56
```

```
Number 1: 12, is minimum
```

(15) Input RollNumber, Marks of 5 Subjects and find out Total, Percentage, Result and Grade.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables roll, m1,m2,m3,m4,m5, total, percentage, grade, result

Step 3 : INPUT roll, m1, m2, m3, m4, m5

Step 4 : $\text{total} = m1 + m2 + m3 + m4 + m5$

Step 5 : $\text{percentage} = \text{total} / 5$

Step 6 : IF any mark < 35 THEN

 result = Fail

 grade = F

Step 7 : ELSE

 result = Pass

Step 8 : IF percentage ≥ 90 THEN

 grade = A+

Step 9 : ELSE IF percentage ≥ 80 THEN

 grade = A

Step 10 : ELSE IF percentage ≥ 70 THEN

 grade = B

Step 11 : ELSE IF percentage ≥ 60 THEN

 grade = C

Step 12 : ELSE IF percentage ≥ 50 THEN

 grade = D


Step 13 : ELSE


 grade = E

Step 14 : PRINT total, percentage, grade, result

Step 15 : STOP

Flowchart :

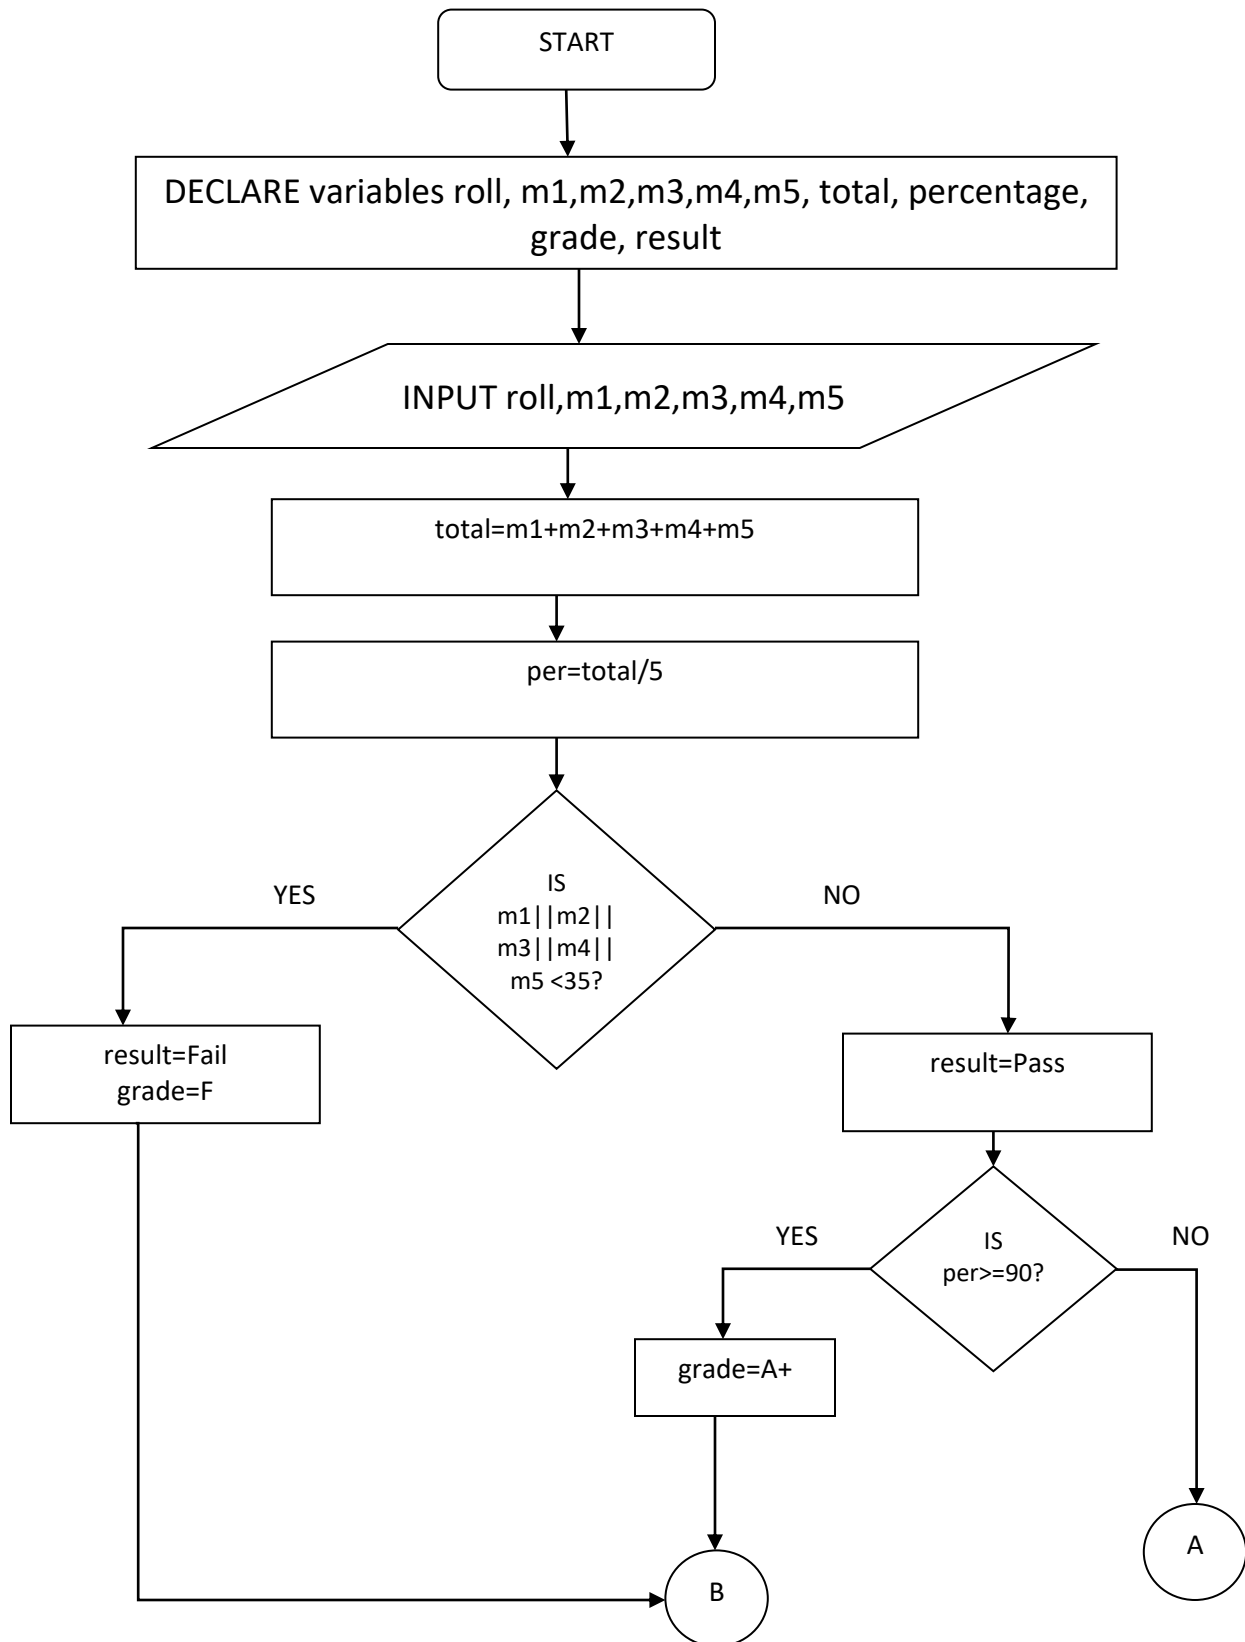

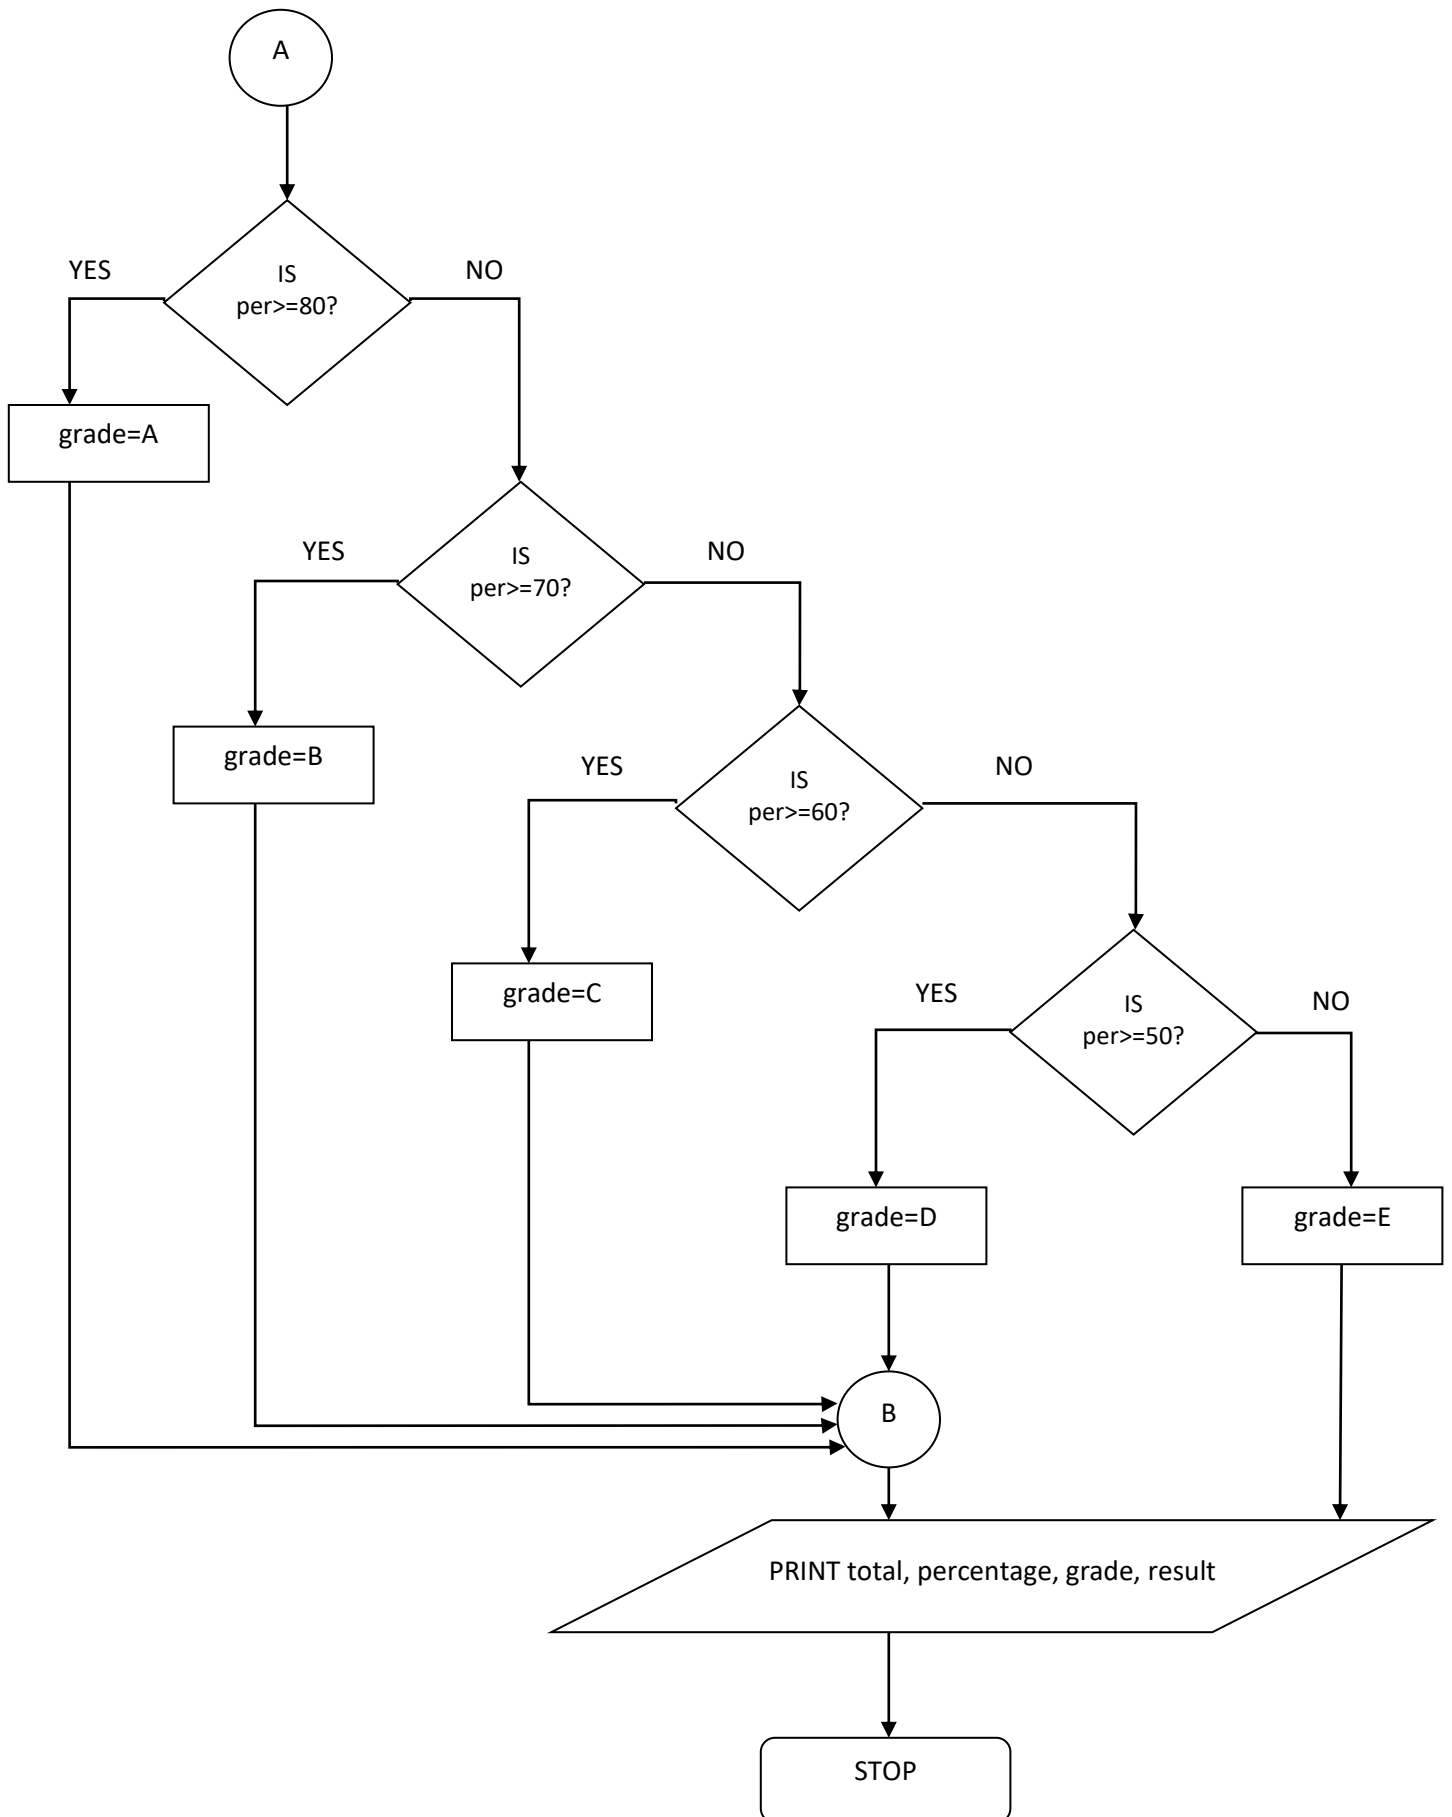

Code :

```
#include <stdio.h>
#include <conio.h>

int main()
{
    int roll, m1, m2, m3, m4, m5;
    int total;
    float percentage;

    clrscr();

    printf("Enter Roll Number: ");
    scanf("%d", &roll);

    printf("Enter marks of 5 subjects:\n");
    scanf("%d%d%d%d%d", &m1, &m2, &m3, &m4, &m5);

    total = m1 + m2 + m3 + m4 + m5;
    percentage = total / 5.0;

    printf("\nRoll Number = %d", roll);
    printf("\nTotal = %d", total);
    printf("\nPercentage = %.2f", percentage);

    if (m1 < 35 || m2 < 35 || m3 < 35 || m4 < 35 || m5 < 35)
    {
        printf("\nResult = Fail");
        printf("\nGrade = F");
    }
    else
    {
        printf("\nResult = Pass");

        if (percentage >= 90)
            printf("\nGrade = A+");
    }
}
```

```
    else if (percentage >= 80)
        printf("\nGrade = A");
    else if (percentage >= 70)
        printf("\nGrade = B");
    else if (percentage >= 60)
        printf("\nGrade = C");
    else if (percentage >= 50)
        printf("\nGrade = D");
    else
        printf("\nGrade = E");
}

getch();
return 0;
}
```

Output :

```
Enter Roll Number: 7044
Enter marks of 5 subjects:
78
88
89
70
87


Roll Number = 7044
Total = 412
Percentage = 82.40
Result = Pass
Grade = A
```



(16) Input day in number and print in text(for Example input 1 then Output Monday)

Algorithm :

```
Step 1 : START
Step 2 : DECLARE variable day
Step 3 : INPUT day
Step 4 : IF day == 1 THEN
            PRINT "Monday"
Step 5 : ELSE IF day == 2 THEN
            PRINT "Tuesday"
Step 6 : ELSE IF day == 3 THEN
            PRINT "Wednesday"
Step 7 : ELSE IF day == 4 THEN
            PRINT "Thursday"
Step 8 : ELSE IF day == 5 THEN
            PRINT "Friday"
Step 9 : ELSE IF day == 6 THEN
            PRINT "Saturday"
Step 10 : ELSE IF day == 7 THEN
            PRINT "Sunday"
Step 11 : ELSE
            PRINT "Invalid Day"
Step 12 : STOP
```

Flowchart :

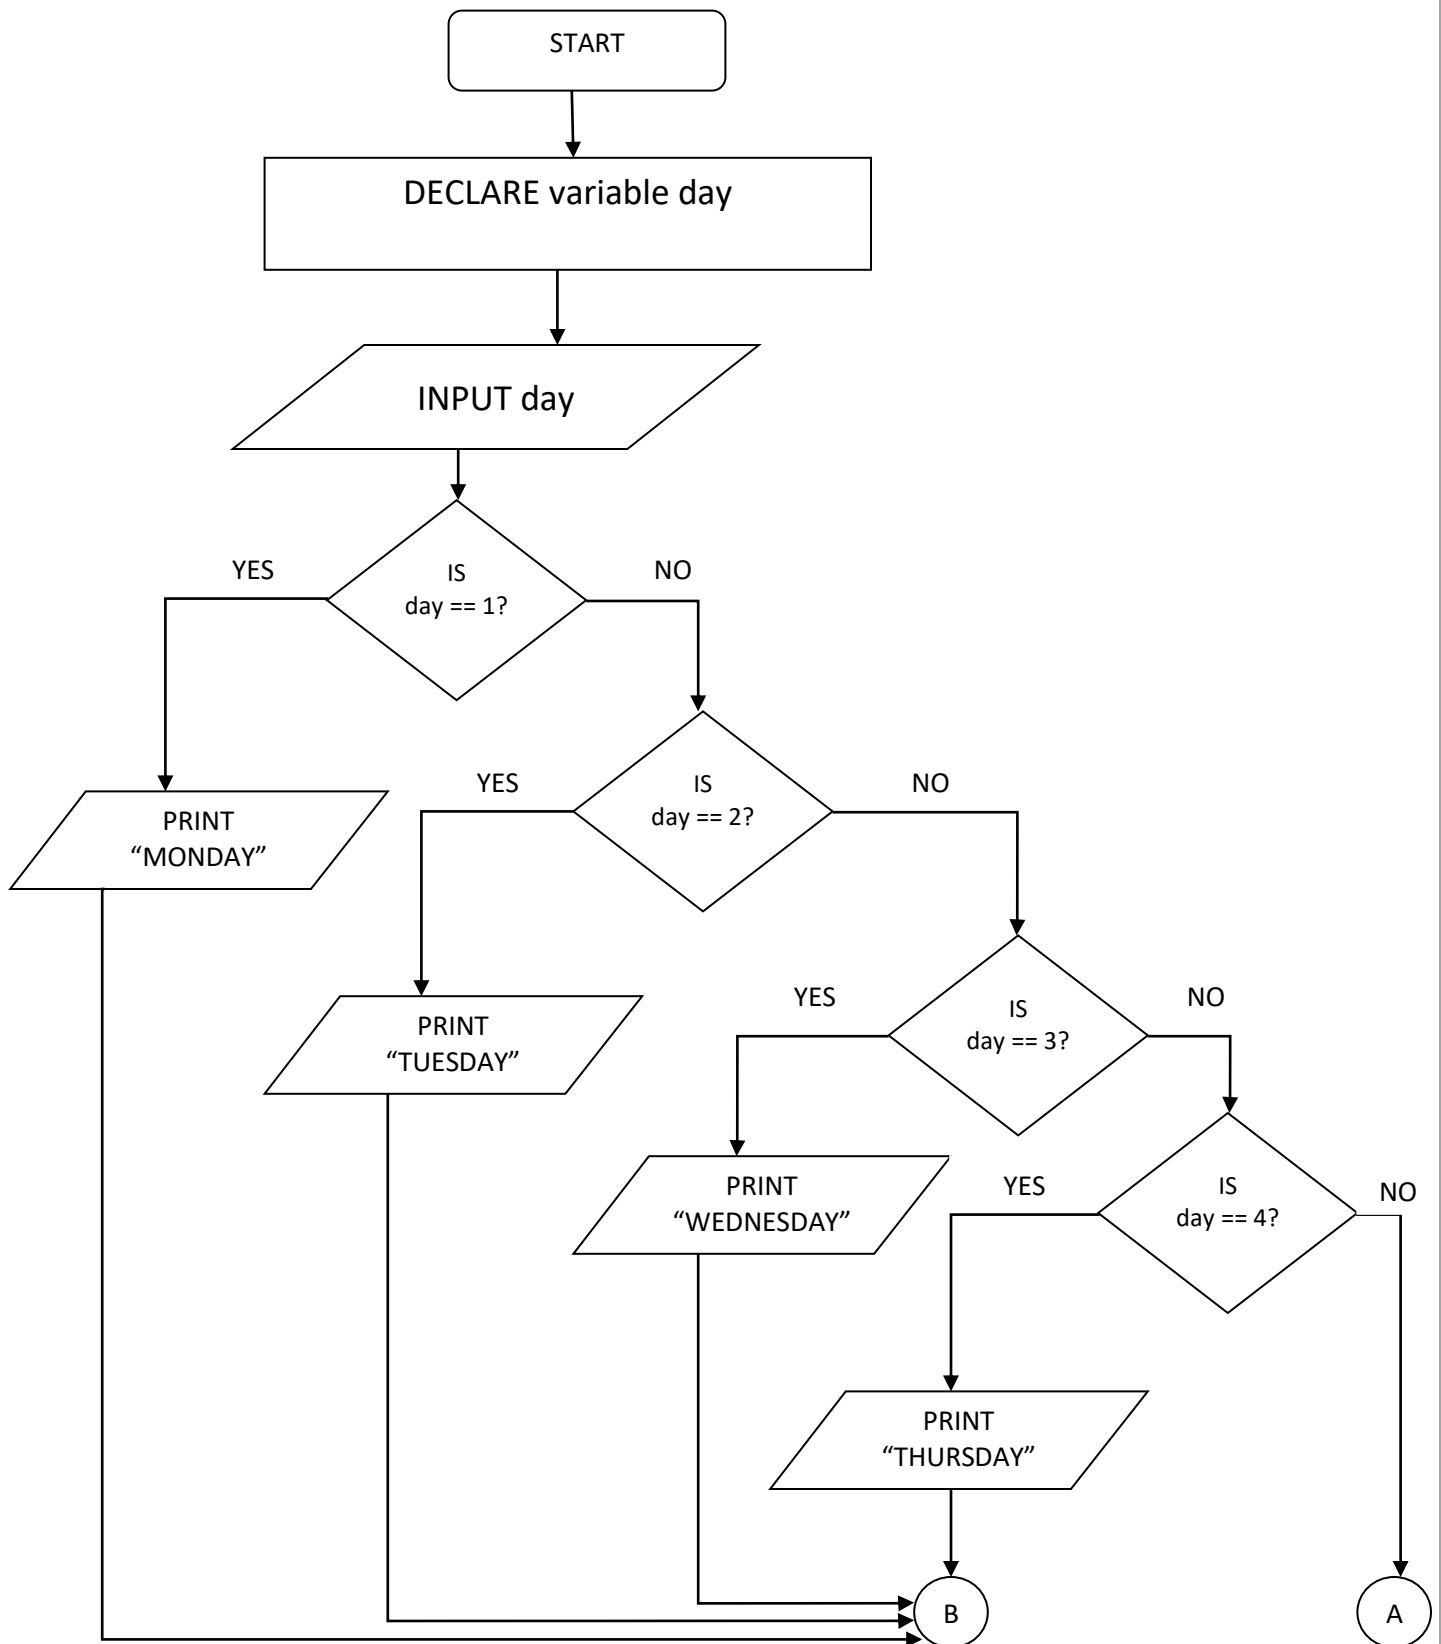

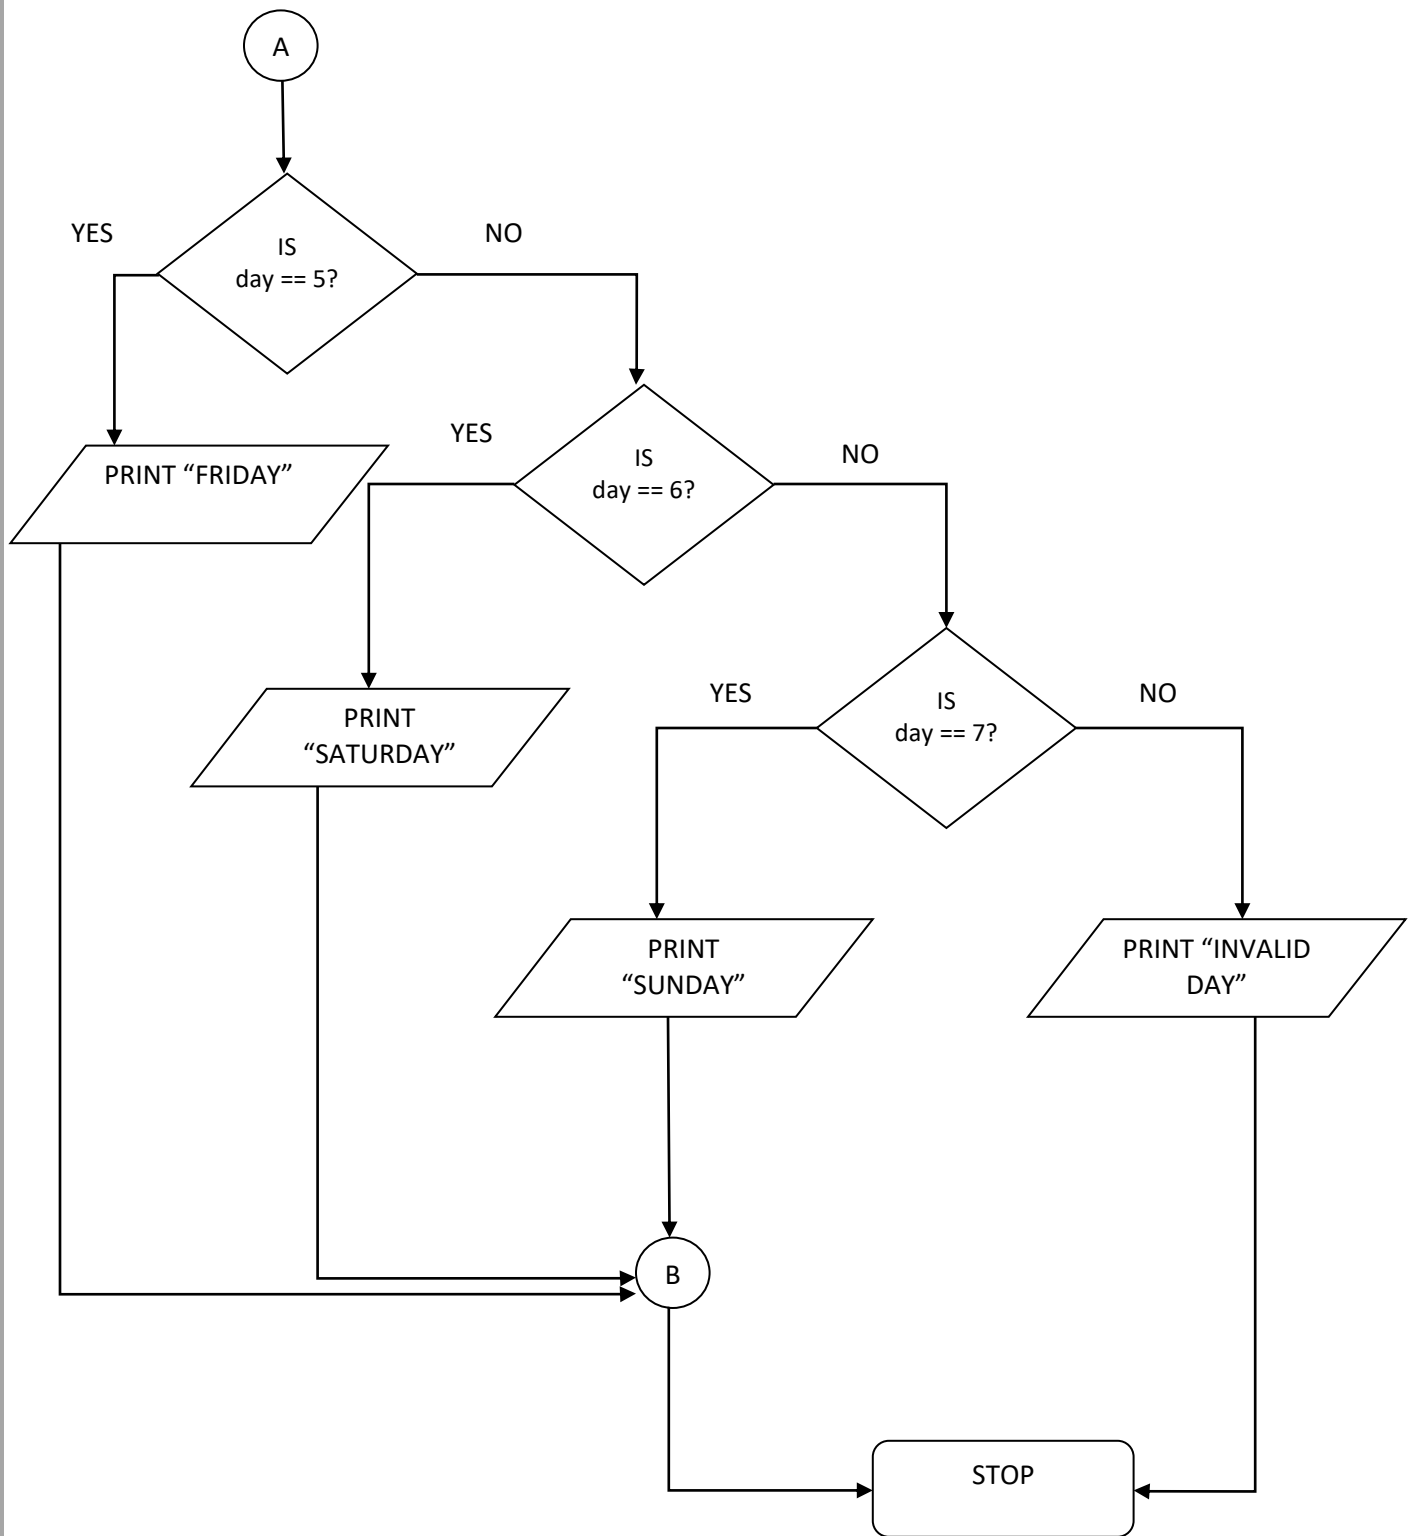

Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int i;
    clrscr();
    printf("\nEnter Day Number (1-7): ");
    scanf("%d",&i);
    if(i==1){
        printf("Monday");
    }
    else if(i==2){
        printf("Tuesday");
    }
    else if(i==3){
        printf("Wednesday");
    }
    else if(i==4){
        printf("Thursday");
    }
    else if(i==5){
        printf("Friday");
    }
    else if(i==6){
        printf("Saturday");
    }
    else if(i==7){
        printf("Sunday");
    }
    else{
        printf("Invalid Day");
    }
    getch();
}
```

Output :


```
Enter Day Number (1-7): 3
Wednesday
```


(17) Input Month in number and print in text(for example input 1 then output January)


Algorithm :

Step 1 : START
Step 2 : DECLARE variable month
Step 3 : INPUT month
Step 4 : IF month = 1 THEN
 PRINT "January"
Step 5 : ELSE IF month = 2 THEN
 PRINT "February"
Step 6 : ELSE IF month = 3 THEN
 PRINT "March"
Step 7 : ELSE IF month = 4 THEN
 PRINT "April"
Step 8 : ELSE IF month = 5 THEN
 PRINT "May"
Step 9 : ELSE IF month = 6 THEN
 PRINT "June"
Step 10 : ELSE IF month = 7 THEN
 PRINT "July"
Step 11 : ELSE IF month = 8 THEN
 PRINT "August"
Step 12 : ELSE IF month = 9 THEN
 PRINT "September"
Step 13 : ELSE IF month = 10 THEN
 PRINT "October"
Step 14 : ELSE IF month = 11 THEN
 PRINT "November"
Step 15 : ELSE IF month = 12 THEN
 PRINT "December"
Step 16 : ELSE
 PRINT "Invalid Month"
Step 17 : STOP

Flowchart :

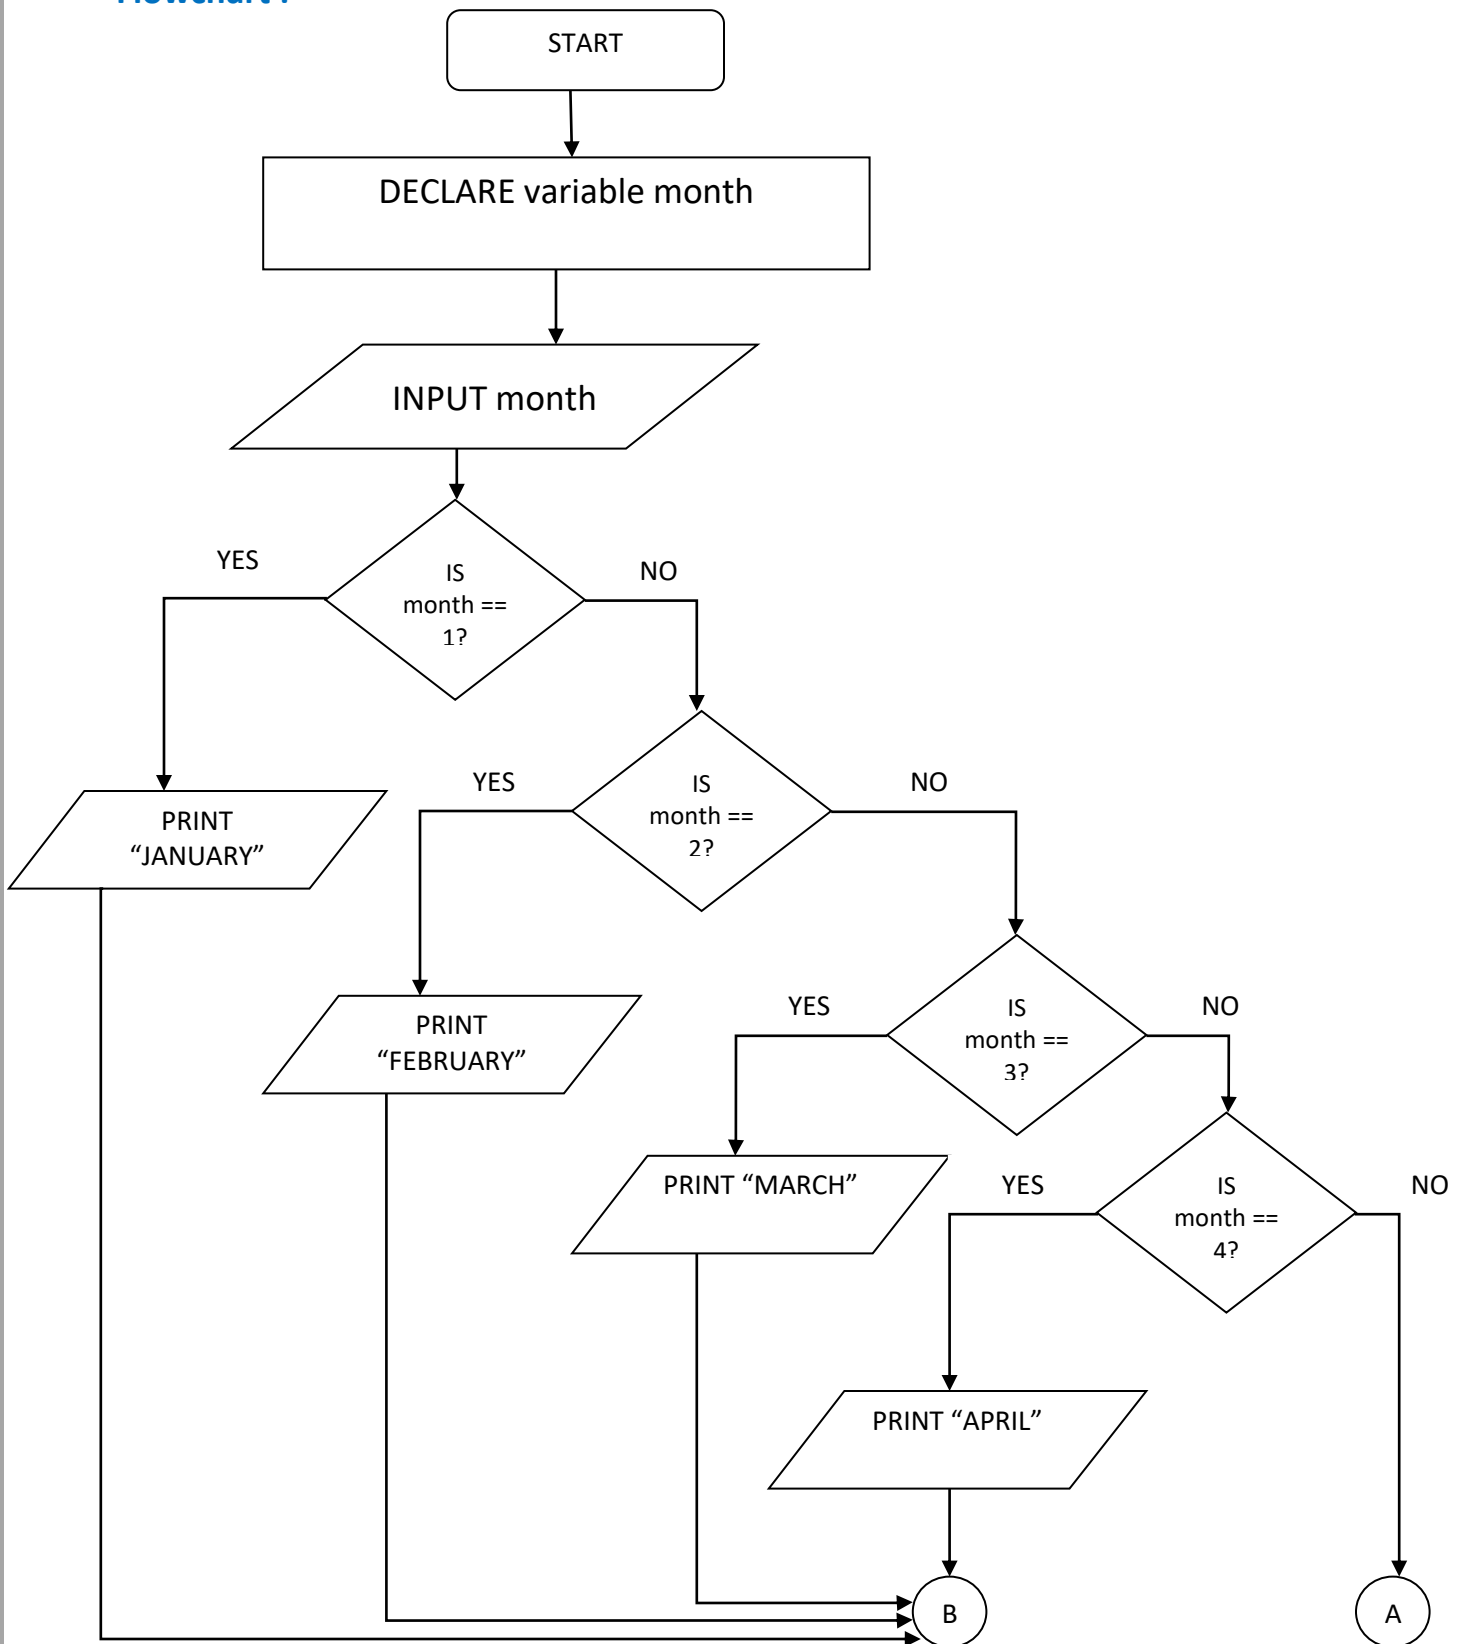

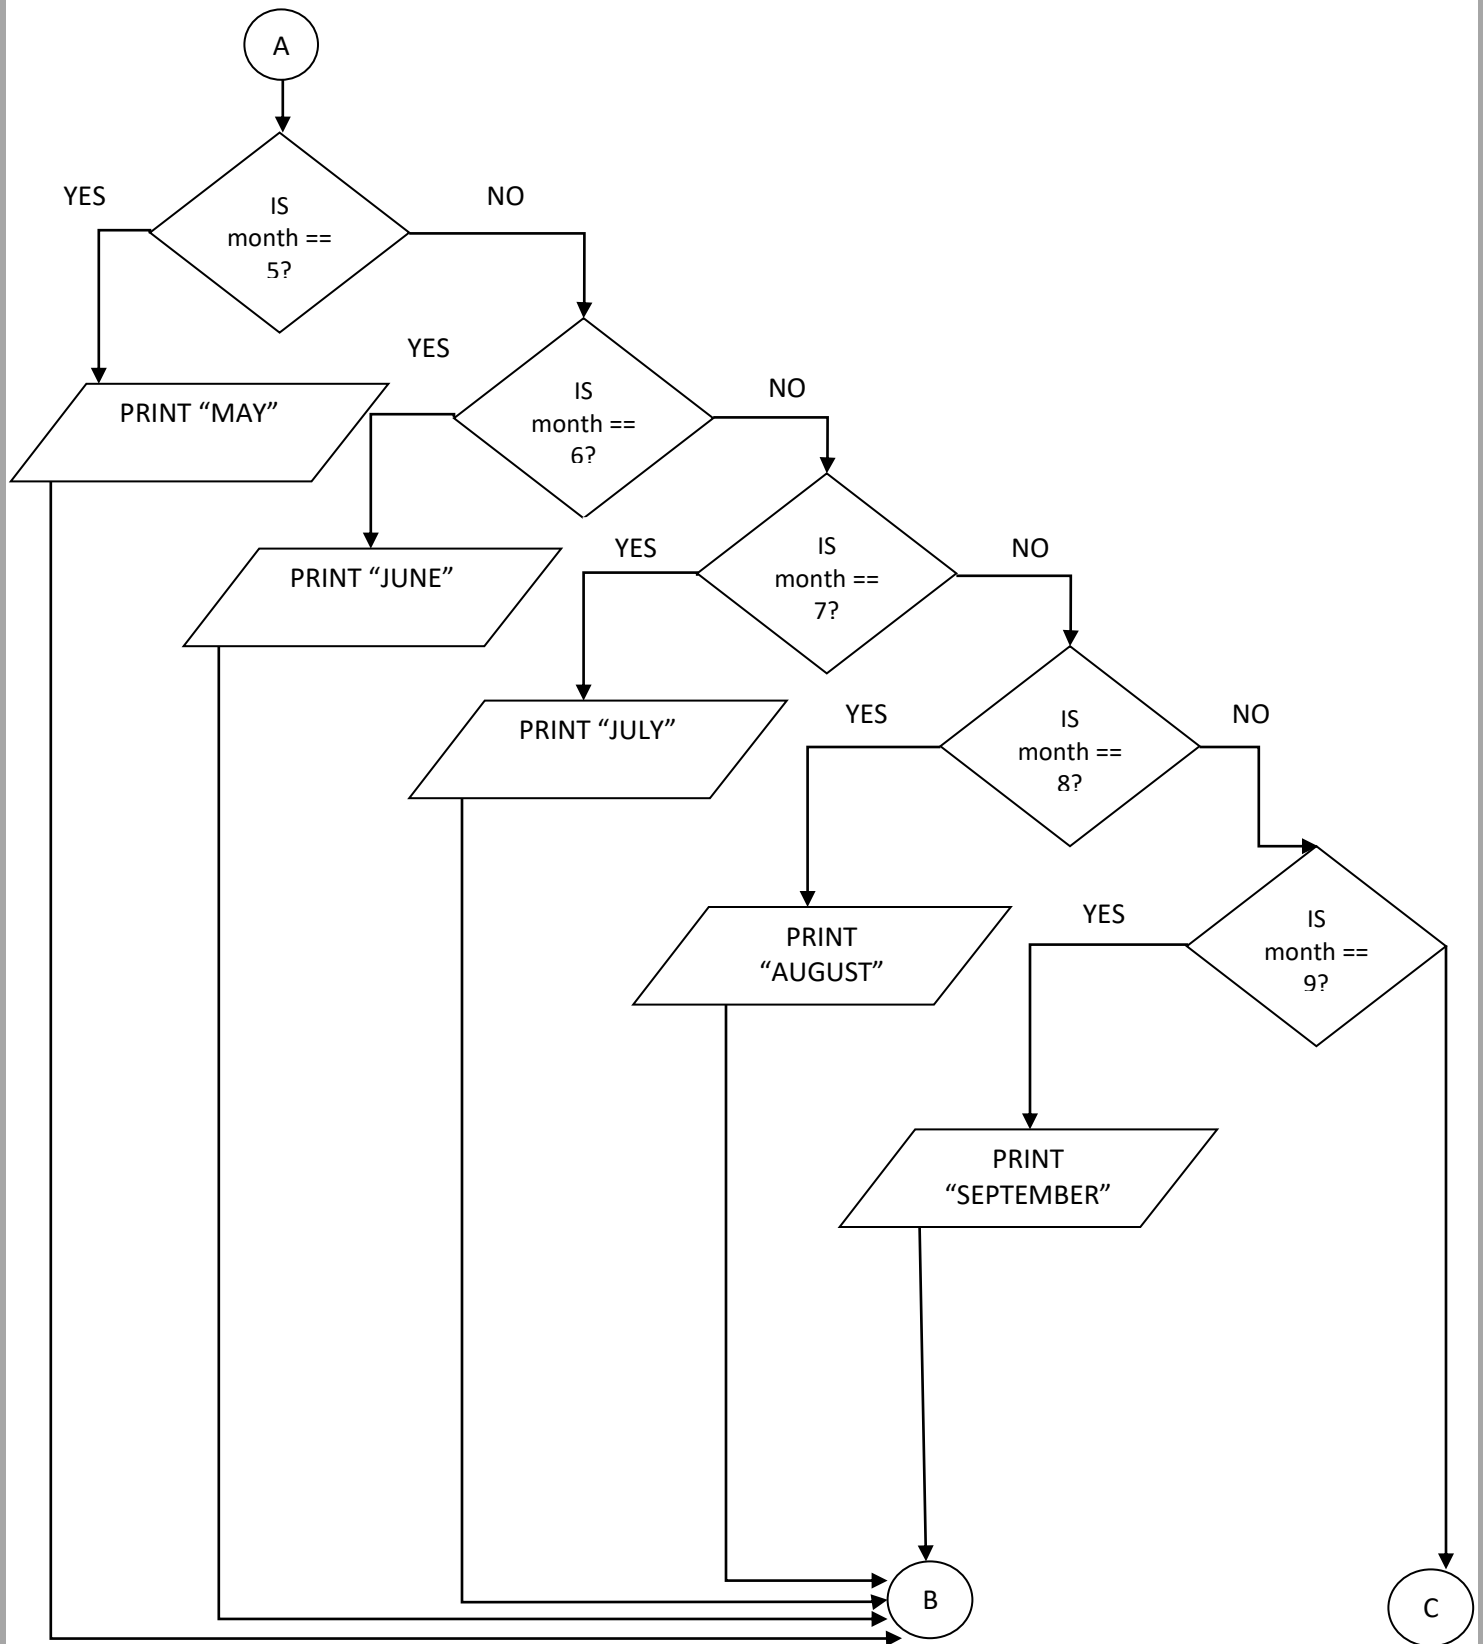

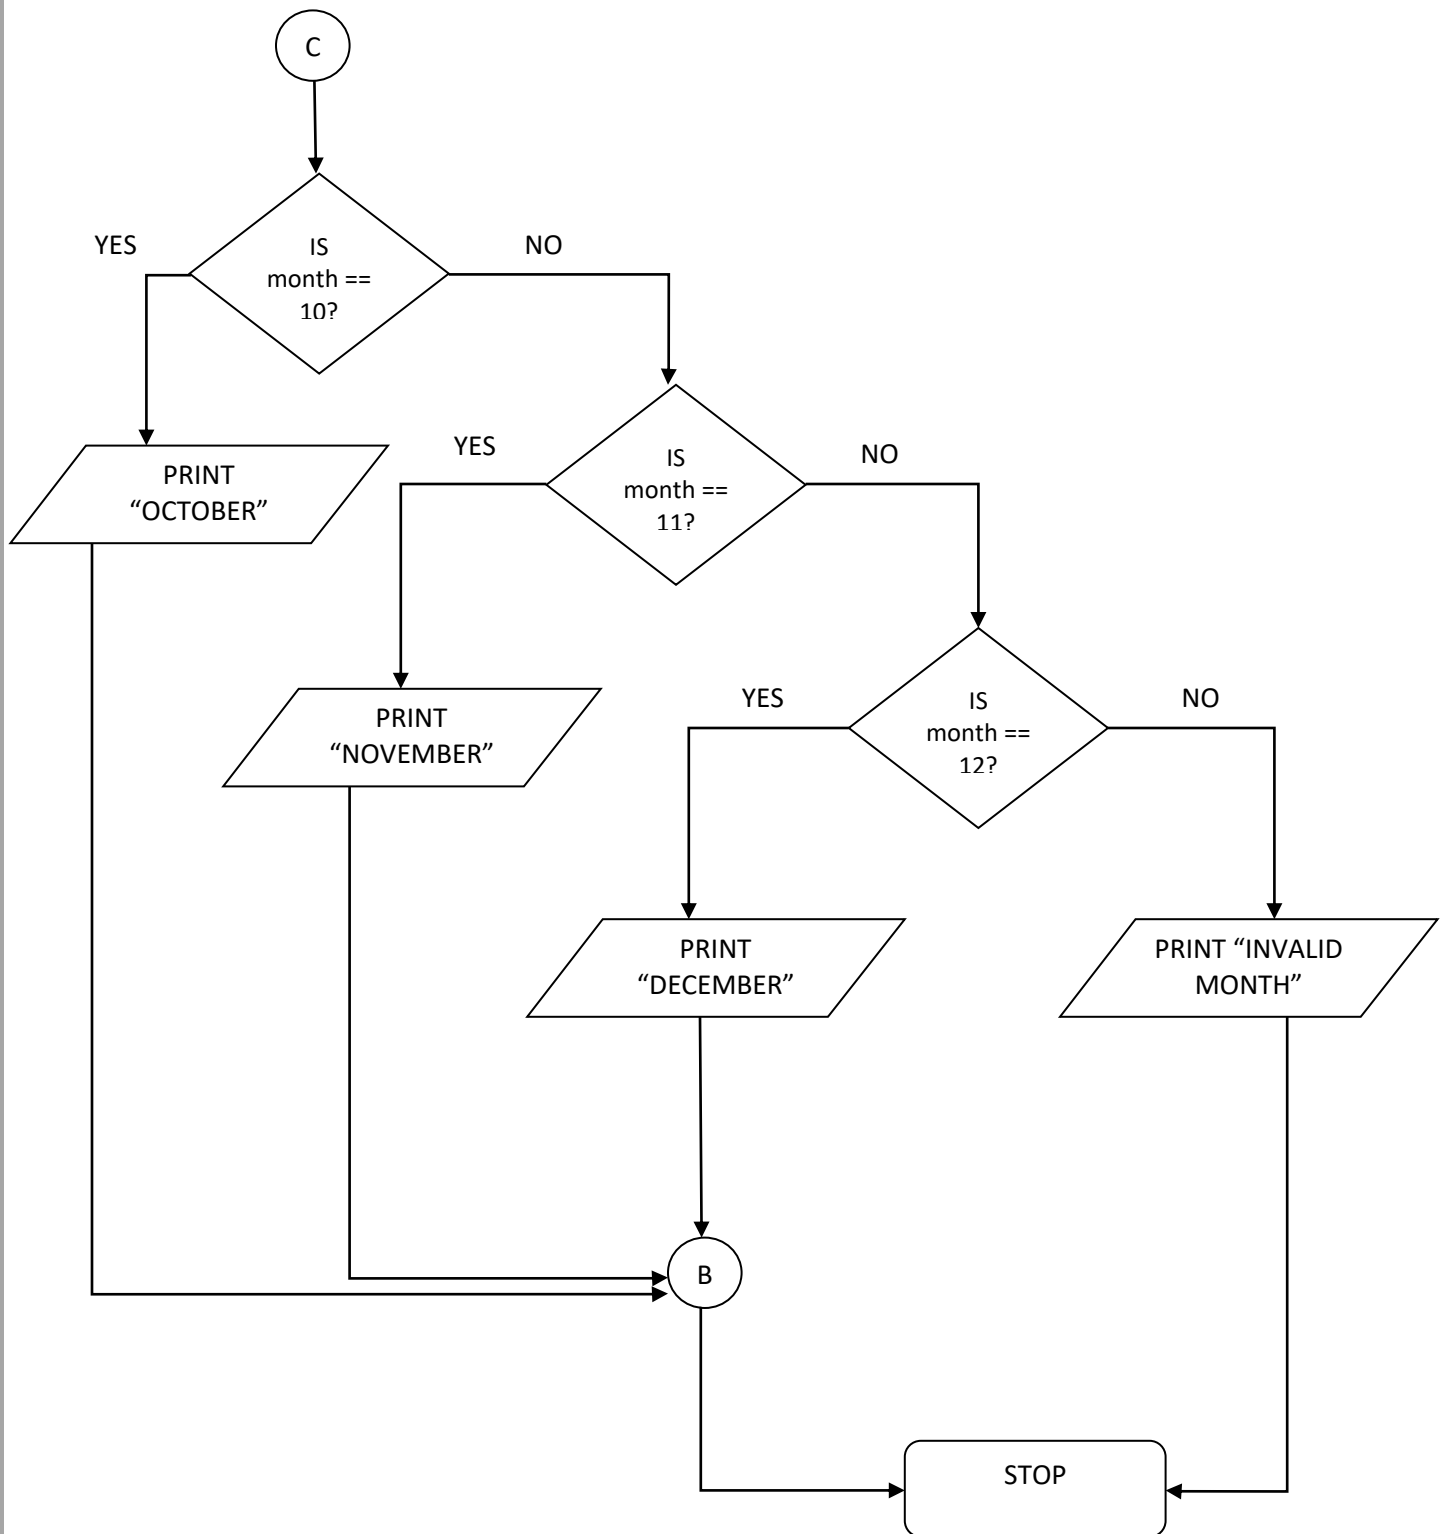


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int i;
    clrscr();
    printf("\nEnter Day Number (1-12): ");
    scanf("%d",&i);
    if(i==1){
        printf("January");
    }
    else if(i==2){
        printf("February");
    }
    else if(i==3){
        printf("March");
    }
    else if(i==4){
        printf("April");
    }
    else if(i==5){
        printf("May");
    }
    else if(i==6){
        printf("June");
    }
    else if(i==7){
        printf("July");
    }
    else if(i==8){
        printf("August");
    }
    else if(i==9){
        printf("September");
    }
}
```

```
else if(i==10){
    printf("October");
}
else if(i==11){
    printf("November");
}
else if(i==12){
    printf("December");
}
else{
    printf("Invalid Month");
}
getch();
}
```

Output :

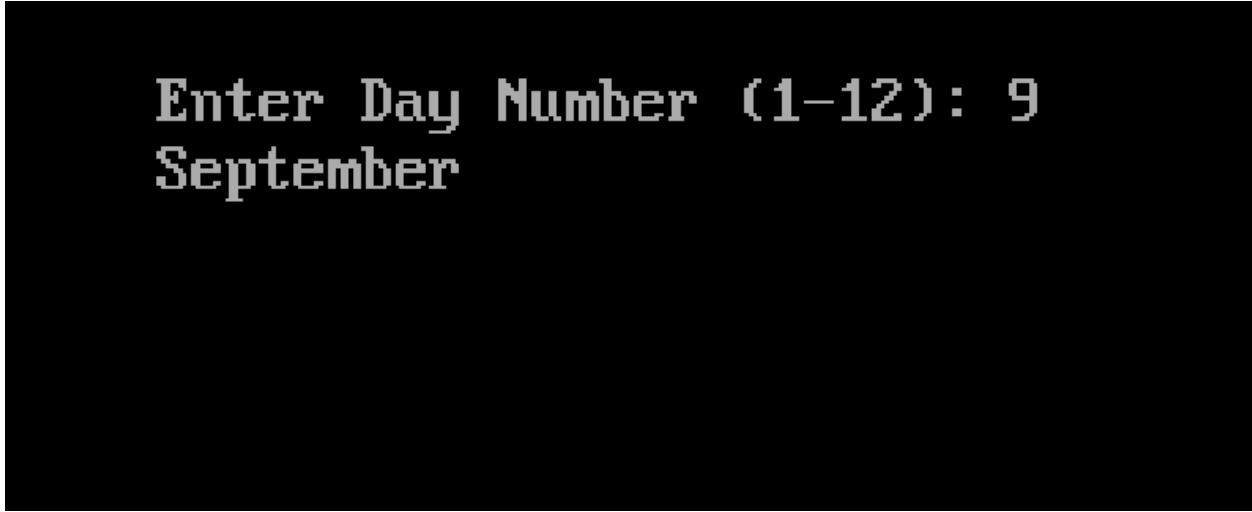A screenshot of a terminal window with a black background and white text. The text displays the prompt 'Enter Day Number (1-12):' followed by the user input '9' and the program's output 'September' on a new line.

Enter Day Number (1-12): 9
September

(18) Input number and check whether the number is positive, negative or zero.

Algorithm :

Step 1 : START

Step 2 : DECLARE variable x

Step 3 : INPUT x

Step 4 : IF $x == 0$ THEN

PRINT "Number is Zero"

Step 5 : ELSE IF $x > 0$ THEN


PRINT "Number is Positive"

Step 6 : ELSE

PRINT "Number is Negative"

Step 7 : STOP

Flowchart :

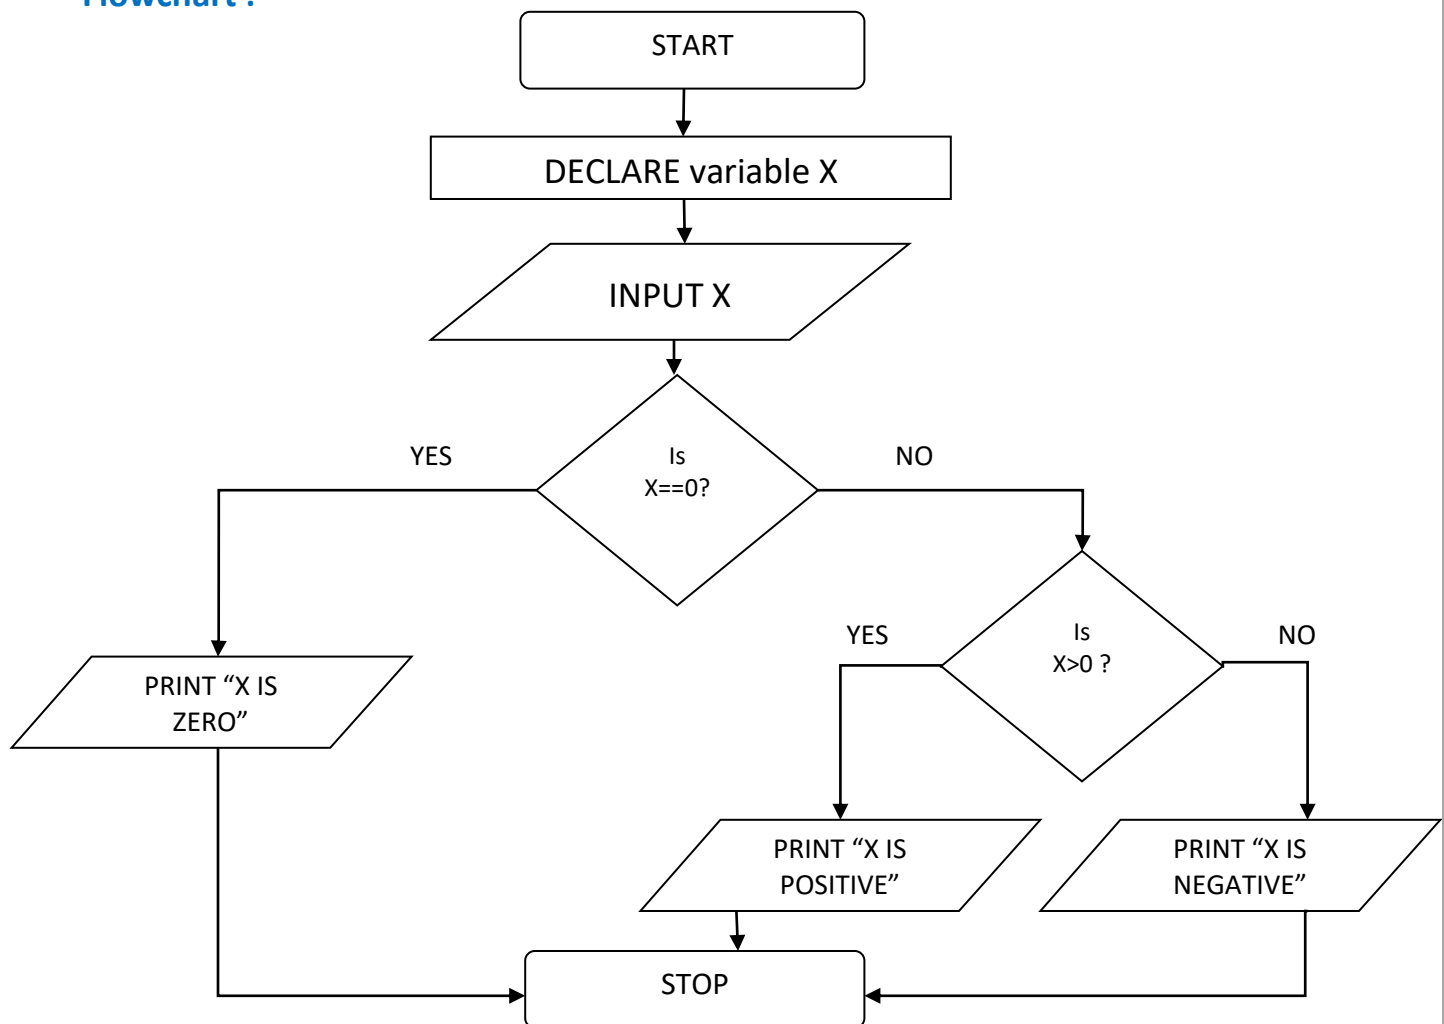


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x;
    clrscr();
    printf("\nEnter Number :");
    scanf("%d",&x);
    if(x==0){
        printf("Number %d, is zero", x);
    }
    else if(x>0){
        printf("Number %d, is positive", x);
    }
    else
        printf("Number %d, is negative", x);

    getch();
}
```

Output :

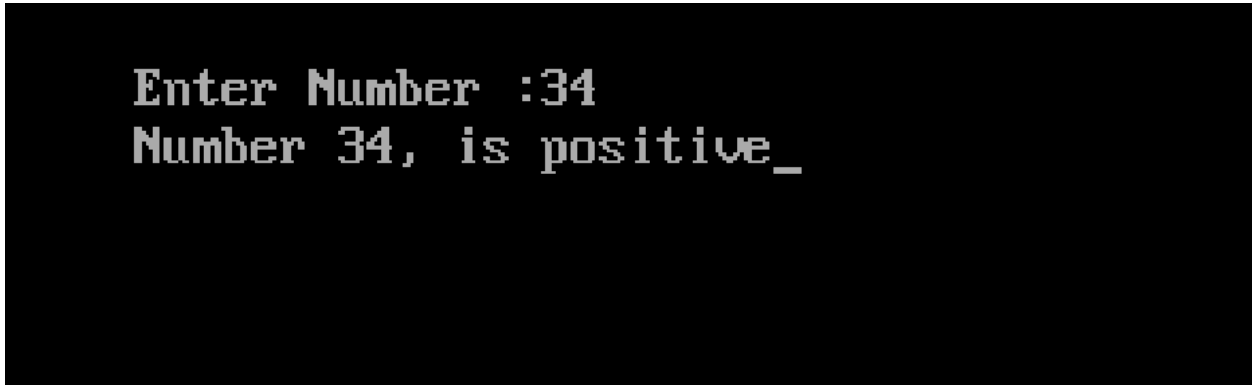A screenshot of a terminal window with a black background and white text. The text shows the program's output: 'Enter Number :34' on the first line and 'Number 34, is positive_' on the second line.

```
Enter Number :34
Number 34, is positive_
```