

## 16-782, Fall '19, Planning and Decision Making in Robotics

### Homework III: Symbolic Planning

**DUE: November 10<sup>th</sup> at 11:59PM**

#### Description:

In this homework, you will implement a generic symbolic planner. We have provided the code for reading an environment description from a file by using regular expressions and generating the corresponding environment object. Your job is to write a planner that gets an environment object as an input and outputs a sequence of actions to go from the start to the goal. An example of the environment description for the Blocks world that was taught in the class is below:



Symbols: A,B,C,Table

Initial Conditions: On(A,B), On(B,Table), On(C,Table), Block(A), Block(B), Block(C), Clear(A), Clear(C)

Goal Conditions: On(B,C), On(C,A), On(A,Table)

Actions:

MoveToTable(b,x)

Preconditions: On(b,x), Clear(b), Block(b), Block(x)

Effects: On(b,Table), Clear(x), !On(b,x)

Move(b,x,y)

Preconditions: On(b,x), Clear(b), Clear(y), Block(b), Block(y)

Effects: On(b,y), Clear(x), !On(b,x), !Clear(y)

In the provided code, we parse the description file for you and provide you with the environment object (Env class) which includes the 1) initial conditions, 2) goal conditions, 3) actions, and 4) symbols. An object of the Env class is passed to your planner. Your description file should follow the same template as the example above.

The Env class uses the data structures below. Feel free to add more functions to them as needed. However, DO NOT change the main function.

- Condition: this class includes 3 variables: 1) name of the condition, 2) the arguments, and 3) if the condition is negated or not.
- GroundedCondition: this class includes 3 variables: 1) name of the condition, 2) the values for the arguments, and 3) if the condition is negated or not.
- Action: this class includes 4 variables: 1) name of the action, 2) action arguments, 3) preconditions, and 4) effects.
- GroundedAction: this class includes 2 variables: 1) name of the action and 2) values for the arguments.


In this homework, you are supposed to write the environment description files for two environments 1) Blocks and Triangles World and 2) Fire Extinguisher Environment. We will explain these environments later on. Note that the parser doesn't verify if your environment description is valid, so make sure that your description files follow the template (i.e., regular expressions) we have provided. These environment description files are parsed and an environment object is passed to your planner. Your job is to write a general planner that outputs a sequence of steps to get from the initial condition to the goal condition. The output of your planner is a list of GroundedActions.

## Environments:

You have to write an environment description file for the following environments and feed them to your planner.

### 1. Blocks and Triangles Environment:

This environment is similar to the Blocks world problem explained in the class. In addition to the blocks, this environment has triangles that can be moved in the exact same way as blocks with the exception that nothing can be put on top of them. A simple example of this environment with only three objects is shown below.

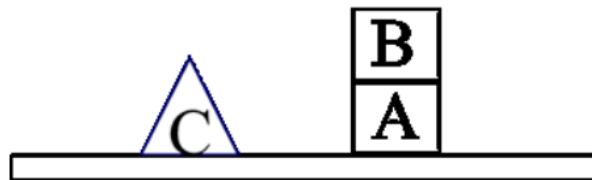

Write a description file for an environment with 5 blocks (B0, B1, B2, B3, B4), 2 triangles (T0, T1) and a Table. The start and goal conditions are below:

- Start conditions: B0 is on B1, B1 is on B4, B2 is on Table, B3 is on B2, B4 is on Table, T0 is on B0, and T1 is on B3.
- Goal conditions: B0 is on B1, B1 is on B3, and T1 is on B0.

## 2. Fire Extinguisher Environment:

The goal of this problem is to have a pair of robots put out a fire. This domain has two robots 1) a quadcopter and 2) a mobile robot. The mobile robot can travel between locations. The quadcopter only moves between locations by landing on the mobile robot and having the mobile robot travel to the other location. The quadcopter can fly around a single location (cannot navigate between locations) if its battery level is High, but it won't be able to take off if its battery level is Low. Whenever the quadcopter is on the mobile robot, it can charge its battery by calling the charge action. The quadcopter has a tank that can be filled with water when the quadcopter is on the mobile robot at location W (where there is water). The fire is at location F. The W and F locations are far from each other. The quadcopter should fly around location F in order to pour water on the fire. The quadcopter needs to pour water on the fire three times in order to extinguish the fire. Every time the quadcopter pours water on the fire, its battery level becomes low and its water tank becomes empty (it should go back to W to fill its tank). The robots will each start at one of five different locations (A, B, C, D, E), which are far from W and F. The quadcopter cannot land on the ground.

- Start conditions: the quadcopter is flying and at location B. The mobile robot is at location A. The quadcopter's water tank is empty.
- Goal: The fire is extinguished.

To compile the code run `g++ planner.cpp -o planner.out` (add `-std=c++11` if needed). To run the code add the name of the input file to your command.

```
>> g++ planner.cpp -o planner.out
```

```
>> ./planner.out exmaple.txt
```

Once your planner returns the plan, it will be printed out. It is your responsibility to check whether the plan is valid with respect to the start conditions, actions, and goal conditions.

NOTE: you should write a **domain-independent** planner. The environment object is passed into your **GENERIC** (domain-independent) planner which just runs a search by applying available valid actions to every state. Your code will be tested with other environments.

In summary, you should 1) write environment description files for the Blocks and Triangles and the Fire Extinguisher environments, 2) write a domain-independent planner that generates a plan for any environment that follows the strips representation, and 3) include the discussion and results (i.e., planning time and number of expanded states) of your generic planner applied on the three environments: the Blocks and Triangles environment, the Fire Extinguisher environment, and the Blocks world (we provided as an example) in your homework.

## To submit:

Submissions need to be made through Gradescope and they should include:

- A folder named *code* that contains 1) all the C++ source files for the planner and 2) the description files for the two environments.
- A PDF writeup named *<Andrew ID>.pdf* with instructions to compile code, results, and everything we need to know about your implementations and submission. Do not leave any details out because we will not assume any missing information. Include the time that the planner takes and the number of states that the search expands for each of the three environments with and without a heuristic.

## Grading:

The grade will depend on:

- The correctness of the description files for the two environments.
- How well-founded your approach is. In other words, can your planner guarantee completeness?
- How domain-independent the planner is. That is, is it implemented as a generic search that can be used to solve a completely different problem?
- The quality of the plan. Is your plan optimal (minimizes the number of steps)? Can your planner solve problems within SECONDS (up to 30 seconds)?
- The quality of your writeup. Provide a discussion on how much improvement you get when you use a heuristic in your search by comparing it with a planner that does not use any heuristics.