

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

 Frontend Web Development | MPA 3 | AY 2026-27

59m left

Finish Assessment



Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Mark for review

Question 1 of 21

What is the job of the event loop?

☐ To make synchronous loops run faster

☐ To create new threads for slow tasks

☐ To block the page until every timer finishes

☒ To move queued callbacks onto the call stack once it is empty

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search



ENG IN

15:31 09-10-2026

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

 Frontend Web Development | MPA 3 | AY 2026-27

59m left

Finish Assessment

Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 2 of 21

A promise starts out `pending`. Once it settles, what happens to its state afterwards?

☐ It keeps flipping between `fulfilled` and `rejected`

☐ It returns to `pending` so it can be reused

☐ Nothing — it settles once to `fulfilled` or `rejected` and stays there

☐ It becomes all three states at the same time

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search



ENG IN 15:31 09-10-2026



Your camera feed, audio and screen are being proctored.



Instructions

- 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Question 3 of 21

What does putting the `async` keyword in front of a function do?

- ☐ It makes the function run on a separate thread
- ☐ It makes the function return a promise and lets you use `await` inside it
- ☐ It stops the function from ever returning a value
- ☐ It causes the function to run twice automatically

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next



Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

 Frontend Web Development | MPA 3 | AY 2026-27

59m left

Finish Assessment

Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 4 of 21

What does it mean that JavaScript code is, by default, synchronous?

☐ Each statement runs to completion before the next one starts

☐ The statements run in a random, unpredictable order

☐ Every statement runs at the same time, in parallel

☐ Slow statements are automatically skipped

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search



ENG IN

15:31 09-10-2026



Your camera feed, audio and screen are being proctored.



Instructions

1	2	3
4	5	6
7	8	9
10	11	12
13	14	15
16	17	18

Question 5 of 21

A common misconception: when a `setTimeout` callback finally runs, where and how does it actually execute?

- ☐ On a second thread, running in parallel with the main code
- ☐ Immediately, before any of the synchronous code
- ☐ It is discarded and never runs at all
- ☐ On the same single thread, scheduled by the event loop after the current code finishes

[< Previous](#)

kalvium.community is sharing your screen.

[Stop sharing](#)

[Hide](#)

[Next >](#)



Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

Frontend Web Development | MPA 3 | AY 2026-27

59m left

Finish Assessment

Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 6 of 21

With a promise, which method handles the case where it is rejected, receiving the error?

☐ .then

☐ .finally

☐ .success

☐ .catch

Clear Response

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search



ENG IN 15:32 09-10-2026

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

 Frontend Web Development | MPA 3 | AY 2026-27

59m left

Finish Assessment



Your camera feed, audio and screen are being proctored.

Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 7 of 21

On its single thread, why is a slow, blocking operation a problem for a web page?

☐ It makes the rest of the code run faster

☐ The whole page freezes and cannot respond to the user until it finishes

☐ It automatically moves the work to a second thread

☐ It silently returns `undefined` and continues

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search



ENG IN


15:32 09-10-2026



Your camera feed, audio and screen are being proctored.



Instructions

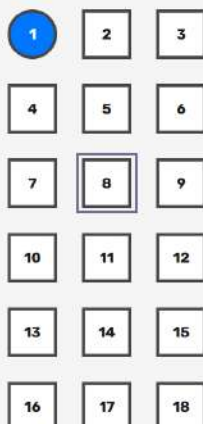

Question 8 of 21

After you compile TypeScript, what happens to the type annotations like `: number` in the final JavaScript?

- ☐ They are converted into comments that stay in the file
- ☐ They are turned into runtime checks that slow the code down
- ☐ They are copied unchanged into the JavaScript output
- ☐ They are erased entirely — the output is ordinary JavaScript with the types removed

< Previous

|| kalvium.community is sharing your screen.

Stop sharing

Hide

Next >





Your camera feed, audio and screen are being proctored.



Instructions

- | | | |
|----|----|----|
| 1 | 2 | 3 |
| 4 | 5 | 6 |
| 7 | 8 | 9 |
| 10 | 11 | 12 |
| 13 | 14 | 15 |
| 16 | 17 | 18 |

Question 9 of 21

You write `let city = "Delhi"` in TypeScript without any annotation. What does type inference do here?

- ☐ It automatically figures out that `city` is a string and enforces that
- ☐ It refuses to compile because you forgot to write a type
- ☐ It lets `city` hold any type at all, exactly like plain JavaScript
- ☐ It turns `city` into a number by default

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next





Your camera feed, audio and screen are being proctored.



Instructions

1	2	3
4	5	6
7	8	9
10	11	12
13	14	15
16	17	18

Question 10 of 21

Given `function logLength<T extends { length: number }>(item: T)`, which call is rejected?

☐

`logLength(42)`

☐

`logLength("hello")`

☐

`logLength([1, 2, 3])`

☐

`logLength("a")`



Clear Response

[< Previous](#)

kalvium.community is sharing your screen.

[Stop sharing](#)

[Hide](#)

[Next >](#)



Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

Frontend Web Development | MPA 3 | AY 2026-27

58m left

Finish Assessment

Your camera feed, audio and screen are being proctored.

Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 11 of 21

A function expects a number but receives a string, and the app returns `NaN` only when a user triggers it. What kind of error is this, and how does TypeScript help?

☐ A styling error; TypeScript restyles the page to hide it

☐ A runtime error; TypeScript would flag the wrong type before the code ever runs

☐ A network error; TypeScript retries the request automatically

☐ A syntax error; the browser refuses to load the page at all

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search

ENG IN

15:32 09-10-2026



Your camera feed, audio and screen are being proctored.



Instructions

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Question 12 of 21

You call `first(["a", "b", "c"])` on `function first<T>(items: T[]): T`. What type does `T` become, and what is returned?

- ☐ `T` becomes `any`, and the result is `any`
- ☐ `T` becomes `number`, and the result is `a number`
- ☐ `T` stays as the literal letter `T`, returning `"T"`
- ☐ `T` becomes `string`, and the result is `a string`

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next





Your camera feed, audio and screen are being proctored.



Instructions

1	2	3
4	5	6
7	8	9
10	11	12
13	14	15
16	17	18

Question 13 of 21

Why does `function box(x: T): T[] { return [x]; }` fail to compile?

- ☐ Because a function cannot return an array
- ☐ Because `T` is used without being declared with `<T>`
- ☐ Because the parameter name `x` is reserved
- ☐ Because generics are not allowed to return arrays

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next



Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

Frontend Web Development | MPA 3 | AY 2026-27

58m left

Finish Assessment

Your camera feed, audio and screen are being proctored.

Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 14 of 21

In the phrase "type system", what does the word *type* actually refer to?

☐ The speed at which a value is processed

☐ The name a programmer gives to a variable

☐ The kind of a value, such as `number`, `string` or `boolean`

☐ The number of times a value is used in a program

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search

ENG IN 15:33 09-10-2026

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

Frontend Web Development | MPA 3 | AY 2026-27

58m left

Finish Assessment

Your camera feed, audio and screen are being proctored.

Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 15 of 21

What is the main advantage of a generic `first<T>` over writing `firstNumber`, `firstString`, and `firstUser` separately?

☐ It makes the program run measurably faster at runtime

☐ It converts every array into the same type automatically

☐ One definition covers all types without duplication, while keeping each type accurate

☐ It removes the need to ever pass arguments to the function

Previous

kalvium.community is sharing your screen. Stop sharing Hide

Next

34°C Sunny

Search

ENG IN

15:33 09-10-2026

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

Frontend Web Development | MPA 3 | AY 2026-27

58m left

Finish Assessment

Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 16 of 21

In `function identity<T>(value: T): T`, what is `T`?

☐ A built-in TypeScript type that means "anything"

☐ The required name every generic must use, or it fails

☐ A value that must be passed as the first argument

☐ A type parameter — a placeholder name, conventionally a capital letter

[< Previous](#)

kalvium.community is sharing your screen. [Stop sharing](#) [Hide](#)

[Next >](#)

34°C Sunny

Search



ENG IN

15:33 09-10-2026



Your camera feed, audio and screen are being proctored.



Instructions

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Question 17 of 21

You need one "get the first item" function that works on `number[]`, `string[]` and `User[]` while keeping full type safety. Which tool is designed for exactly this?

- ☐ A generic function with a type placeholder like `<T>`
- ☐ Three separate copies of the function, one per type
- ☐ A single function typed with `any` everywhere
- ☐ A union type such as `number | string | User`

Previous


kalvium.community is sharing your screen.

Stop sharing

Hide

Next





Instructions

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Question 18 of 21

You have `function wrapInArray(x: string): string[] { return [x]; }` and want it to work for any type. Which rewrite is correct?

- ☐ `function wrapInArray(x: any): any[] { return [x]; }`
- ☐ `function wrapInArray<T>(x: T): T[] { return [x]; }`
- ☐ `function wrapInArray<T>(x: string): string[] { return [x]; }`
- ☐ `function wrapInArray(x: T): T[] { return [x]; }`

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next

Kalvium

Ask Gemini

kalvium.community/assessment/fewd6_v2_mpa3/attempt/c8339e81-d1da-4a85-a71f-902e744e20e3

School

 Frontend Web Development | MPA 3 | AY 2026-27

57m left

Finish Assessment

 Your camera feed, audio and screen are being proctored.



Instructions

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Question 19 of 21

What does it mean that JavaScript is "dynamically typed"?

☐ A variable can hold any kind of value, and JavaScript never checks the kind before running

☐ Every variable must be labelled with its type or the code refuses to run

☐ Variables can only ever hold numbers and strings, nothing else

☐ The types of all values are checked and fixed while you type in the editor

Previous

kalvium.community is sharing your screen.

Stop sharing

[Hide](#)

Next

34°C Sunny

Search



ENG IN

15:33 09-10-2026



Instructions

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Question 20 of 21

After `const item = first(["x", "y"])` where `first<T>(items: T[]): T`, can you safely call `item.toUpperCase()`?

- ☐ Yes – `item` is inferred as `string` so string methods are available
- ☐ No – `item` is `any`, so no methods are guaranteed
- ☐ No – generic results are always typed as `unknown`
- ☐ Yes – but only because `toUpperCase` works on every type

Previous

kalvium.community is sharing your screen.

Stop sharing

Hide

Next