

MAXIMO ENTERPRISE ASSET MANAGEMENT AT OTORITA IBU KOTA NEGARA (OIKN)

Training Material – Administration

PT. ANAGILE KHARISMA UTAMA
LINA BUILDING OFFICE NO 305 SETIABUDI
JAKARTA SELATAN 12930

Table of Contents

Table of Contents	1
1 Sets, Organizations, & Sites	2
1.1 Overview	2
1.2 Applications Overview	2
1.2.1 Sets Application	2
1.2.2 Organizations Application	3
2 Calendar & Shifts	5
2.1 Overview	2
2.2 Applications Overview	2
2.2.1 Calendar Application	2
3 Users & Security Groups	9
3.1 Overview	9
3.2 Applications Overview	2
3.2.1 Security Groups Application	10
3.2.2 Users Application	15
4 Integration with GFS	9
4.1 Integration Overview	17
4.2 Integration Monitoring	17

1 Organizations, Sites, & Sets

1.1 Overview

Organizations and **Sites** are organizational structural level defined in EMS. Below are the functionality of each of them:

- **Organization's** main general purpose is to define legal entities within EMS. When there are more than 1 legal entity that will share 1 EMS environment, and each legal entity maintains their own Chart of Account, user should define each legal entities into separated **Organization**.
- **Site's** main general purpose is as data restriction handling. When user need to restrict data access of one location and the others within same **Organization**, user need to separate each locations into multiple **Site**.



Sets are collections of items and companies master data that an **Organization** have. By its definition, Sets are divided into two types:

- Item Set
- Company Set

This implementation manages only one **Organization** named **NPCT**, and contains only one **Site** named **NPCT1**. **Item Set** defined for **NPCT** organization is **NPCTISET**, while the **Company Set** is **NPCTCSET**.




1.2 Sets Application

Below are step by step to create Sets in IBM Maximo:

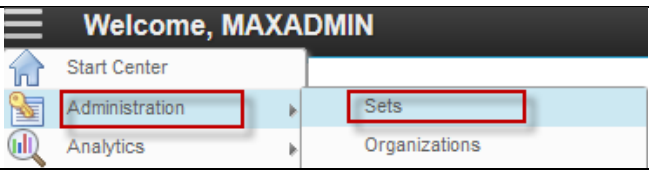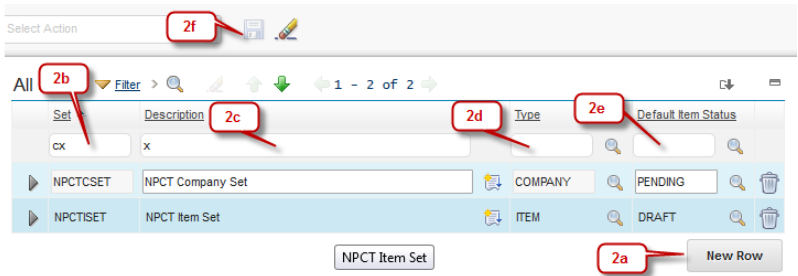Step	Action
Go to Sets application by click GoTo – Administration - Sets	
2a. Click New Row. 2b. Enter the name of Set. 2c. Enter the description of Set. 2d. Choose the Set type either "COMPANY" or "ITEM". 2e. Choose default item status. 2f. Click Save.	

1.3 Organizations Application

User define organization and site master data in **Organizations** application. Below are details about **Organizations** applications accessibility.

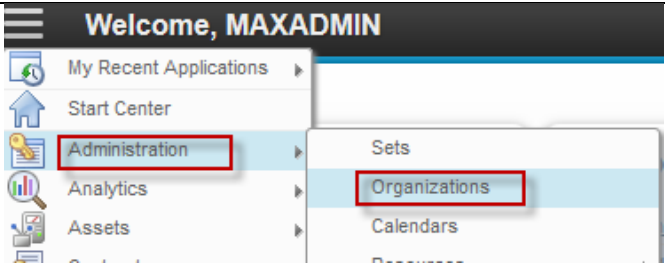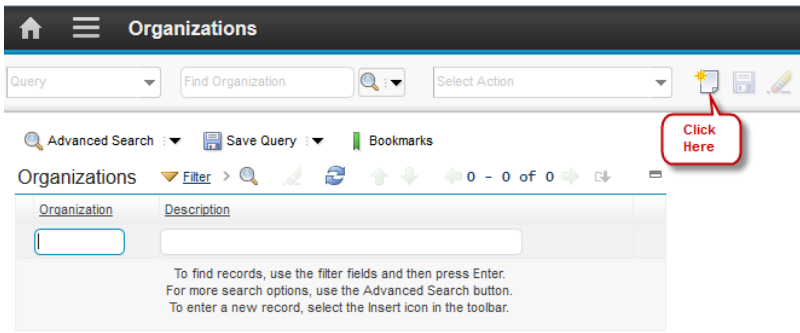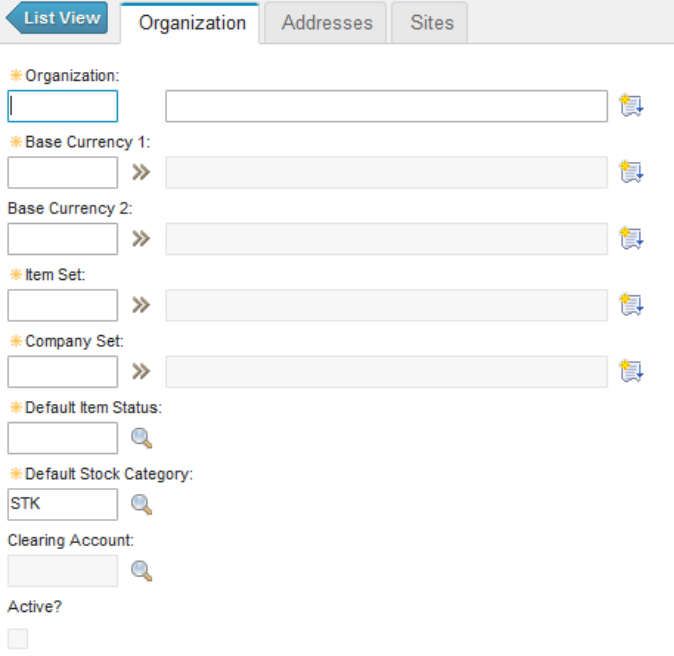Step	Action
Go to Organizations application by click GoTo – Administration - Organizations	
Click New Organization .	
3. Input the organization details like organization name, organization description, base currency, set, default item status, default stock category, and clearing account.	
	

- 4a. Click **Addresses Tab** than click **New Row** to input the address of the organization.
4b. Input the address information.


The screenshot shows the 'Addresses' tab selected in the top navigation bar. Below the navigation bar, there is a search bar for 'Organization' and a table with columns 'Address Code', 'Address', 'City', and 'State/Province'. A 'New Row' button is located at the bottom right of the table, highlighted with a red box and labeled '4a'. To the left of the table, there is a 'Details' section for the selected address, highlighted with a red box and labeled '4b'. This section contains input fields for 'Address Code', 'Address', 'City', 'State/Province', 'ZIP/Postal Code', 'Country', and 'Tax Code 1'.

- 5a. Click **Site Tab**, there are two object on the screen. **Site** and **Site addresses**

The screenshot shows the 'Sites' tab selected in the top navigation bar. Below the navigation bar, there is a search bar for 'Organization' and a table with columns 'Site', 'Description', 'Site Contact', 'Site Contact Group', and 'Active?'. A 'New Row' button is located at the bottom right of the table, highlighted with a red box and labeled '5b'. Below the table, there is a section for 'Addresses for Site' with a 'New Row' button also highlighted with a red box and labeled '5b'.

- 5b. Click **New Row** to add sites an New Row to addresses for Site
5c. Input the sites information and address site information.

The screenshot shows the 'Sites' tab selected in the top navigation bar. Below the navigation bar, there is a search bar for 'Organization' and a table with columns 'Site', 'Description', 'Site Contact', 'Site Contact Group', and 'Active?'. A 'New Row' button is located at the bottom right of the table, highlighted with a red box and labeled '5b'. To the left of the table, there is a 'Details' section for the selected site, highlighted with a red box and labeled '5c'. This section contains input fields for 'Site', 'Site Contact', 'Site Contact Group', and 'Active?'.

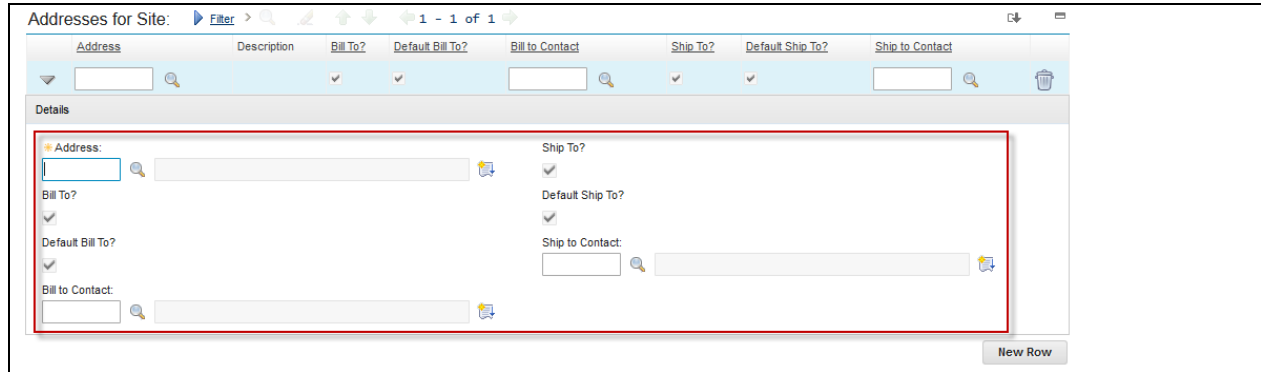

2 Calendars & Shifts

2.1 Overview

Calendars are shared entities that define the framework for working time, shifts, holiday, and so on, for an organizations. In a calendar, user can define the working days, all shifts available, working hours for each shift, non-working time, and etc.

This implementation manages 2 calendars, which are:


- *NP1FCAL* calendar, to define financial working days. This calendar is used to determine the financial period date range.
- *NP1CAL* calendar, to define the working times for Engineering.

Three work shifts is defined for *NP1CAL*, with detail is as follow:

- *SHIFT1*, 07:00 until 15:30, 7 days of work in a week.
- *SHIFT2*, 15:30 until 23:00, 7 days of work in a week.
- *SHIFT3*, 23:00 until 07:00, 7 days of work in a week.

2.2 Calendar Application

Calendars and shifts are defined in Calendars application. Below are details about **Calendars** applications accessibility.

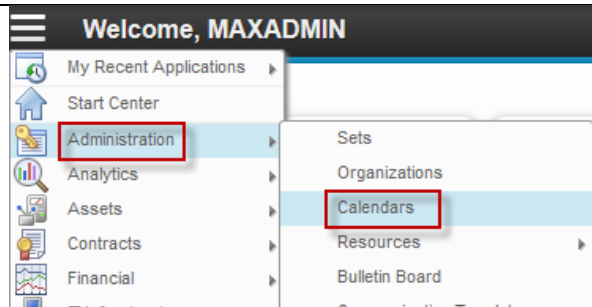Step	Action
Go to Calendars application by click GoTo – Administration – Calendars.	
2. Click New	

Calendar.

Query

Find Calendar

Select Action

Advanced Search

Save Query

Bookmarks

Calendars

Filter

0 - 0 of 0

Calendar	Description	Start Date	End Date	Organization
				=NPCT

To find records, use the filter fields and then press Enter.

For more search options, use the Advanced Search button.

To enter a new record, select the Insert icon in the toolbar.

Click Here

3a. Input the calendar name and description.

3b. Input the start date for this calendar.

3c. Input the end date for this calendar.

3d. Click **Save**.

Query

Find Calendar

Select Action

List View

Calendar

Work Periods

Calendar:

3a

Start Date:

3b

End Date:

3c

Organization:

NPCT

May

2016

Today is: Monday, May 9, 2016

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

3d

Click **Select Action - Define/Apply Shifts**.

Select Action

Define/Apply Shifts

Define/Apply Non-Working Time

Duplicate Calendar

Delete Calendar

Add to Bookmarks

Run Reports

Cognos Reporting

5a. Click **New Row**.

- 5b. Input shift information like shift Name, Description, Start day, and Day in Pattern (better to use 7)
5c. Click **Define Pattern**.

Define/Apply Shifts

Shifts     2 - 4 of 5  

☐ Shift	Description	Start Day	Days in Pattern
☐ SHIFT2	Shift 2	SUNDAY	7
☐ SHIFT3	Shift 3	SUNDAY	7
☐			0

* Shift:

Description:

* Start Day:

* Days in Pattern:

Organization:

NPCT >>

5b

5c

5a

Define Pattern Apply Shift(s) New Row

Shift Pattern for     0 - 0 of 0  

Sequence of Pattern Day	Start Time	End Time	Work Hours
There are no rows to display.			

- 5d. Input the **Start Time** and **End Time** for each day and then click **Ok**. Sequence 001 means Sunday, because you define Sunday as a start day above.

Define Pattern

Shift Pattern     1 - 7 of 7  

Sequence of Pattern Day	Start Time	End Time	Work Hours
001	7:00 AM	3:30 PM	8:30
002	7:00 AM	3:30 PM	8:30
003	7:00 AM	3:30 PM	8:30
004	7:00 AM	3:30 PM	8:30
005	7:00 AM	3:30 PM	8:30
006	7:00 AM	3:30 PM	8:30
007	7:00 AM	3:30 PM	8:30

OK Cancel

- 5e. Check the shift that you want to apply to Calendar.

Define/Apply Shifts

Shifts     1 - 3 of 4  

☒	Shift	Description	Start Day	Days in Pattern
☒	SHIFT1	Shift 1	SUNDAY 	7 
☒	SHIFT2	Shift 2	SUNDAY 	7 
☒	SHIFT3	Shift 3	SUNDAY 	7 

Define Pattern Apply Shift(s) New Row

5. Click **Apply shisf(s)**, Message box will appear like below. Select the option which one that you want apply to. Then click OK if done

Apply Shifts with Range

Apply Shift To:

☒ Entire Calendar

☐ Selected Dates

StartDate: 1/1/16  End Date: 12/31/16 

OK Cancel


Click **Select Action – Define/Apply Non-Working Time**

Select Action 

- Define/Apply Shifts
- Define/Apply Non-Working Time**
- Duplicate Calendar
- Delete Calendar
- Add to Bookmarks
- Run Reports
- Cognos Reporting

7a. Click **New Row**.

- 7b. Input the Non-Working Time information, like Description, Start Date, End Date, and Type.
7c. Click **Apply**.

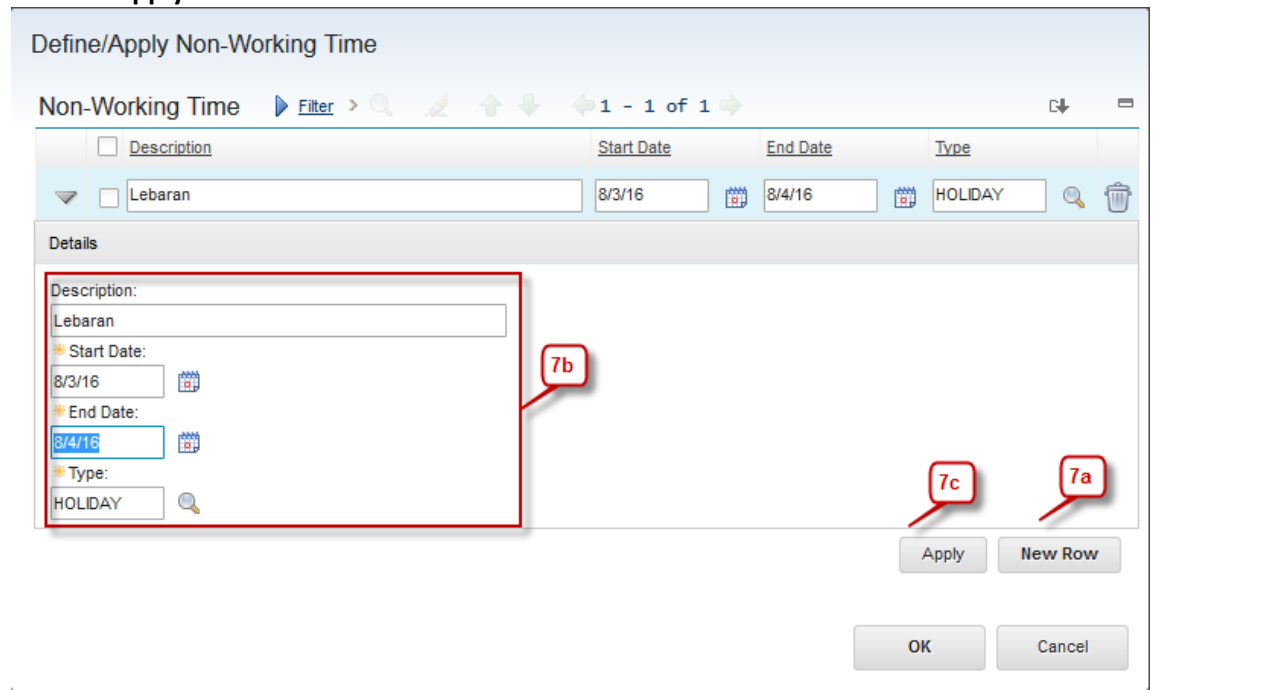

Define/Apply Non-Working Time

Non-Working Time [Filter](#) >     1 - 1 of 1  

Description	Start Date	End Date	Type
 Lebaran	8/3/16 	8/4/16 	HOLIDAY  

Details

Description:
Lebaran

Start Date:
8/3/16 

End Date:
8/4/16 

Type:
HOLIDAY 

7b

7c

7a

Apply New Row

OK Cancel

3 Users & Security Groups

3.1 Overview

Security Groups is used to set up and manage security privilege. What can be managed in a security group are follow:




- Start Center,
- Site access,
- Application access,
- Storeroom access,
- GL Components access,
- Limit and tolerance, and
- Data restrictions.

Security Groups can be assigned to user, so the users can have privilege based on defined Security Group. A user can have multiple security groups, and the privilege will be combined among the Security Group that the user have.

User data is created based on person data in **People** application. So, when a user needs to be created, the person data should be created first. In EMS, a feature is added to automatically create person data, when a user data is going to be created, but don't have person data related to it yet.

3.2 Security Groups Application

Security Groups is created and managed in **Security Groups** application. Below are details about **Security Groups** applications accessibility.

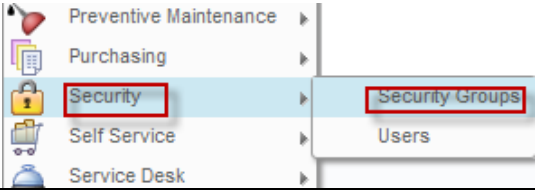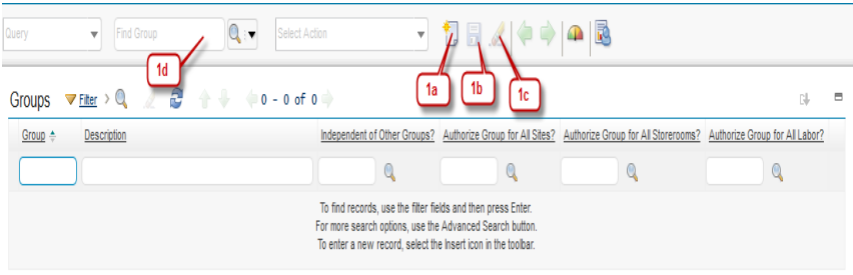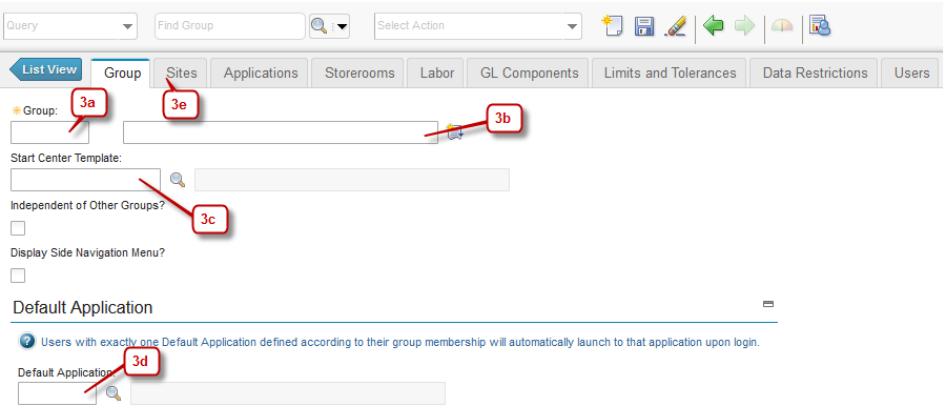Step	Action
1. Go to Security Groups application by click GoTo – Security – Security Groups .	
The security group interface will appear. 1a. Create New Group 1b. save your Change 1c. Clear your Change 1d. Find other group	
Klik New Group 3a. Input the Security Group name. 3b. Input the description of this security group. 3c. Input the start center template for this security group. 3d. If needed, input the default application for this security group. 3e. Click Sites tab to manage the privilege for Sites in this security group.	

4a. Check **Authorize Group for All Sites** checkbox if this security group has access for all sites.

4b. If this security group only has access for specified sites, click **New Row**.

4c. Input the site that can be accessed by this security group.

4d. Click **Applications** tab to manage the privilege for Applications in this security group.

5a. The **Applications** tab consist of 2 table : table **Applications** and table **Options**.

In the picture below is table **Applications** that list all applications in IBM Maximo.

5b. You can filter the application by input the filter here.

5c. To grant all the listed application, click **Grant Listed Applications**.

5d. You can choose **Read**, **Insert**, **Save**, **Delete**, or **All Above** (to give all Read, Insert, Save, Delete into listed applications).

5e. **Revoke Listed Applications** is used to cancel the privileges for listed applications.

6a. In the picture below is table **Options** for each application.

6b. Check the checkbox to grant access for **Read, Insert, Save, or Delete** for this application.

6c. Check the checkbox to grant access for Action for this application.

Options for Actions

Filter > 1 - 4 of 4

Grant Listed Options for This Application

Description	Grant Access?	Condition
Delete Action	☒	
New Action	☒	
Read Access to Actions	☒	
Save Action	☒	

Filter > 1 - 10 of 10

Description	Grant Access?	Condition
Bookmarks	☐	
Create KPI	☐	
Duplicate Action	☐	
More Search Fields	☐	
Save Current Query	☐	
Sigoption to control the editability of the Clause field in View/Manage Queries dialog	☐	
Sigoption to control the visibility of the Detail section in View/Manage Queries dialog	☐	
View Search Tips	☐	
View/Manage Queries	☐	

7a. ikc tab Storeroom, Check **Authorize Group for All Storerooms** checkbox if this security group has access for all Storeroom.

7b. Click **Labor** tab.

List View Group Sites Applications Storerooms Labor GL Components Limits and Tolerances

Group: Authorize Group for All Storerooms? ☐


Storeroom Authorization Filter > 0 - 0 of 0

Site	Storeroom	Description
There are no rows to display.		

New Row

8a. Check **Authorize Group for All Labor** checkbox if this security group has access for all Labor.

8b. Click **GL Components** tab.

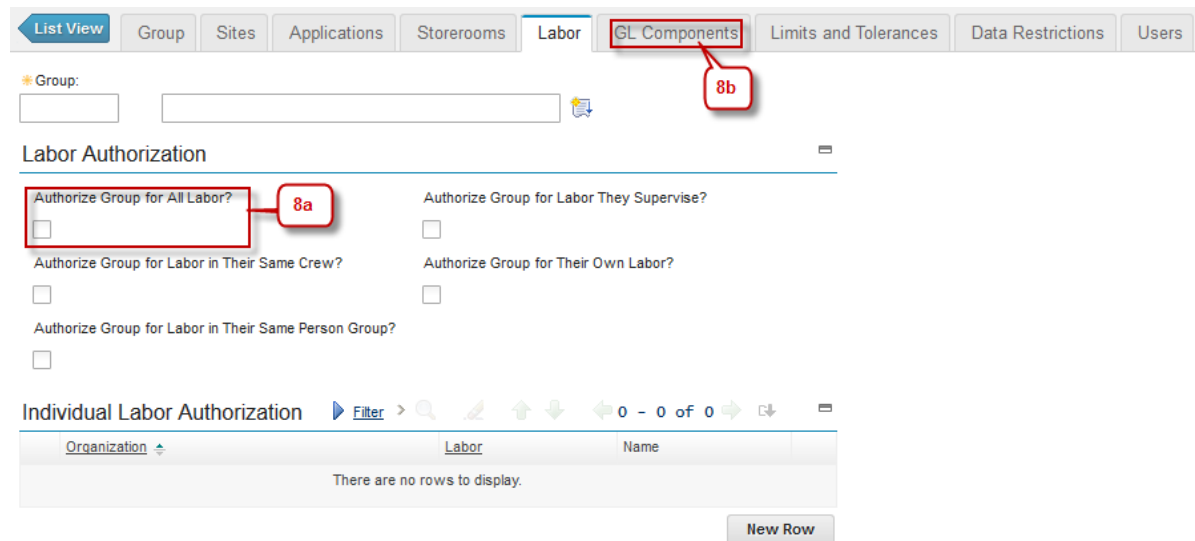

Group:

Labor Authorization

☐ **Authorize Group for All Labor?** 8a

☐ Authorize Group for Labor They Supervise?

☐ Authorize Group for Labor in Their Same Crew?

☐ Authorize Group for Their Own Labor?

☐ Authorize Group for Labor in Their Same Person Group?


Individual Labor Authorization Filter 0 - 0 of 0

Organization	Labor	Name
There are no rows to display.		

[New Row](#)

8a. Check **Authorize Group to Change All GL Component Types** checkbox if this security group has access for all Labor.

8b. Click **GL Components** tab.

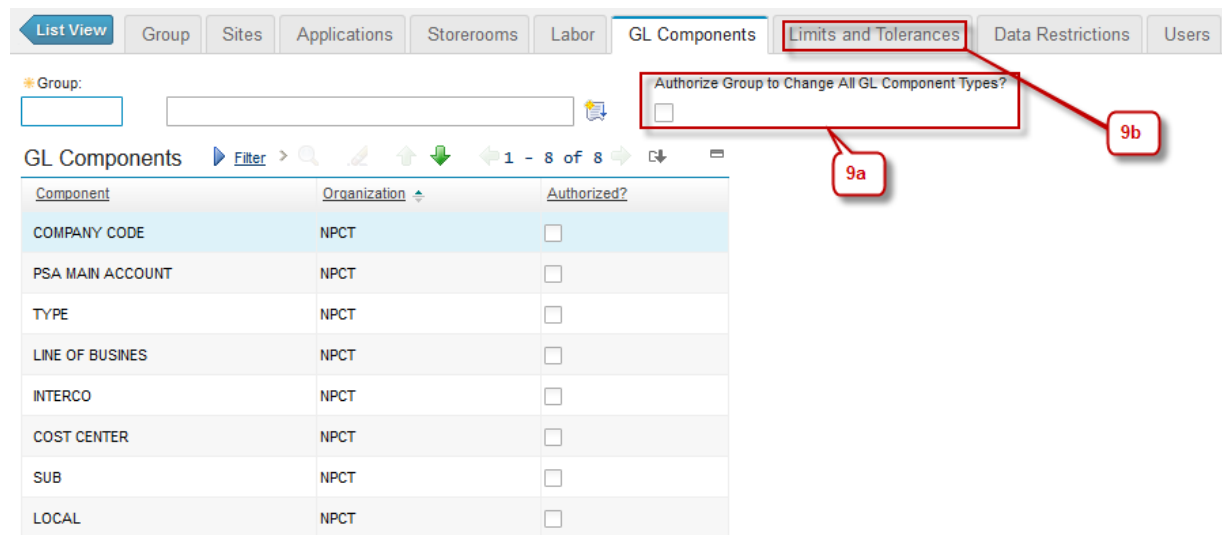

Group:

GL Components Filter 1 - 8 of 8

Component	Organization	Authorized?
COMPANY CODE	NPCT	☐
PSA MAIN ACCOUNT	NPCT	☐
TYPE	NPCT	☐
LINE OF BUSINES	NPCT	☐
INTERCO	NPCT	☐
COST CENTER	NPCT	☐
SUB	NPCT	☐
LOCAL	NPCT	☐

☐ **Authorize Group to Change All GL Component Types?** 9a

9b


(This step only be done if there is requirement for amount limit)

9a. Click **New Row**.

9b. Input the Organization.

9c. Input the Limit for PR, PO, MR, Invoice, Contract.

9d. Click **User** tab.

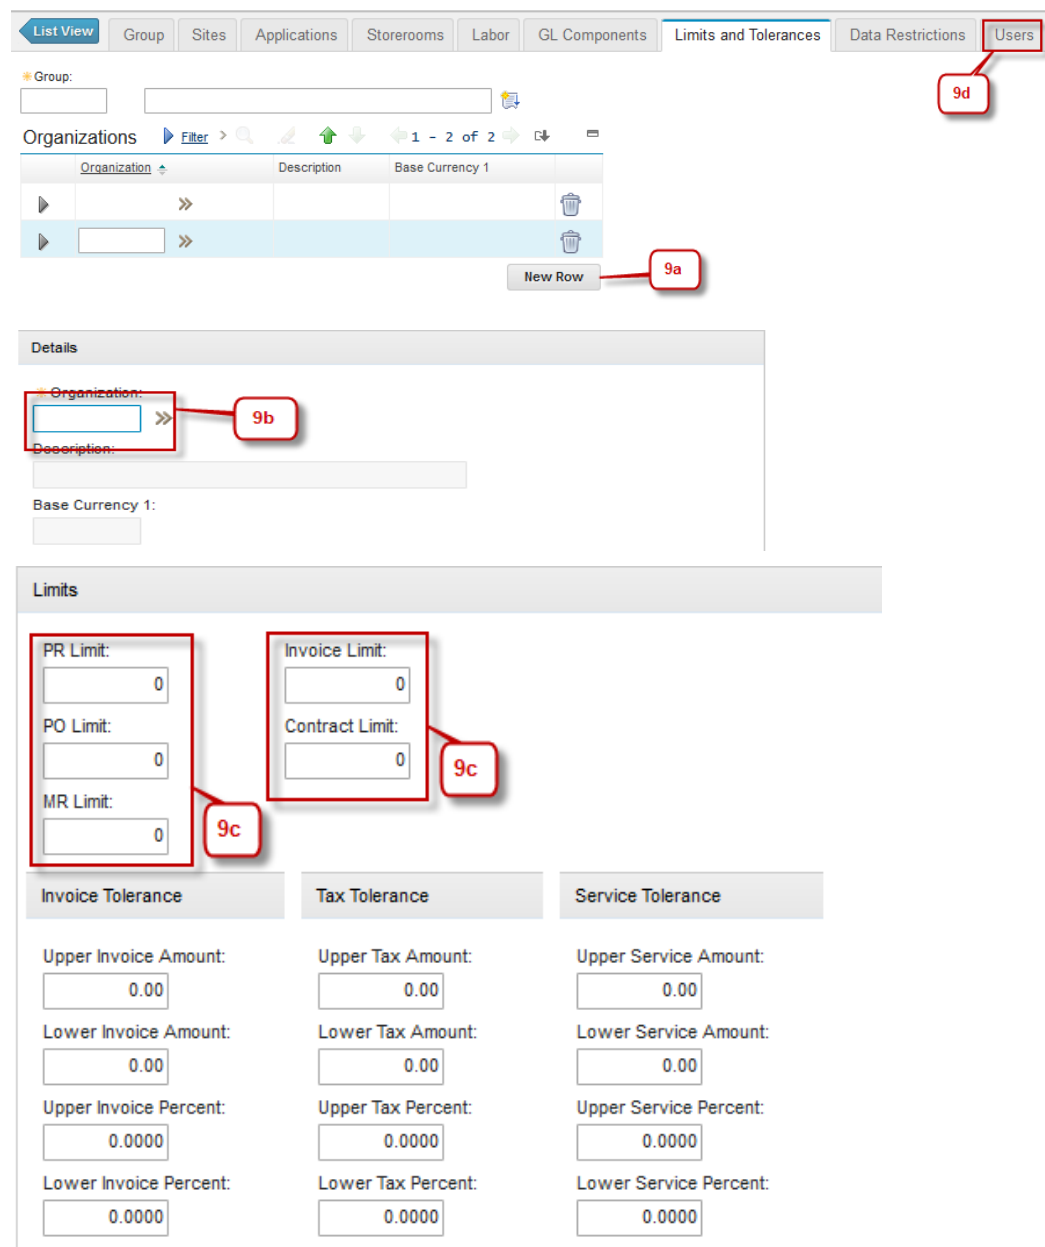

Navigation Bar: List View | Group | Sites | Applications | Storerooms | Labor | GL Components | **Limits and Tolerances** | Data Restrictions | Users (9d)

Group: [Input Field]

Organizations Table:

Organization	Description	Base Currency 1
[Input Field]	[Input Field]	[Input Field]

New Row (9a)

Details Section:

Organization: [Input Field] (9b)

Description: [Input Field]

Base Currency 1: [Input Field]

Limits Section:

PR Limit: [Input Field: 0] (9c)

PO Limit: [Input Field: 0] (9c)

MR Limit: [Input Field: 0] (9c)

Invoice Limit: [Input Field: 0] (9c)

Contract Limit: [Input Field: 0] (9c)

Tolerance Section:

Invoice Tolerance	Tax Tolerance	Service Tolerance
Upper Invoice Amount: [Input Field: 0.00]	Upper Tax Amount: [Input Field: 0.00]	Upper Service Amount: [Input Field: 0.00]
Lower Invoice Amount: [Input Field: 0.00]	Lower Tax Amount: [Input Field: 0.00]	Lower Service Amount: [Input Field: 0.00]
Upper Invoice Percent: [Input Field: 0.0000]	Upper Tax Percent: [Input Field: 0.0000]	Upper Service Percent: [Input Field: 0.0000]
Lower Invoice Percent: [Input Field: 0.0000]	Lower Tax Percent: [Input Field: 0.0000]	Lower Service Percent: [Input Field: 0.0000]

10a. Click **New Row**.

10b. Input the user who member of this security group.

10c. Click **Save**.

The screenshot shows the 'Users' application interface. At the top, there is a toolbar with various icons. Below the toolbar, there are tabs for 'List View', 'Group', 'Sites', 'Applications', 'Storerooms', 'Labor', 'GL Components', 'Limits and', 'Users', 'Data Restrictions', and 'Users'. The 'Users' tab is selected. Below the tabs, there is a 'Group' dropdown menu. Below the 'Group' dropdown, there is a 'Users' section with a 'Filter' button and a table with columns 'User', 'Person', 'Name', 'Status', and 'Type'. The table is empty, and there is a 'New Row' button at the bottom right. A red box labeled '10a' points to the 'New Row' button. A red box labeled '10b' points to the 'User' input field. A red box labeled '10c' points to the 'Save' icon in the toolbar.


3.3 Users Application

User data is created and managed in **Users** application. Below are details about **Users** applications accessibility.

Step	Action
1. Go to Users application by click GoTo – Security – Users .	The screenshot shows the application menu. The 'Security' option is highlighted, and the 'Users' option is selected. A red box labeled 'Click Here' points to the 'Users' option.
2. Click New User .	The screenshot shows the 'Users' application interface. At the top, there is a toolbar with various icons. Below the toolbar, there are tabs for 'List View', 'Group', 'Sites', 'Applications', 'Storerooms', 'Labor', 'GL Components', 'Limits and', 'Users', 'Data Restrictions', and 'Users'. The 'Users' tab is selected. Below the tabs, there is a 'Group' dropdown menu. Below the 'Group' dropdown, there is a 'Users' section with a 'Filter' button and a table with columns 'User', 'Person', 'First Name', 'Last Name', and 'Display Name'. The table is empty, and there is a 'New User' button at the bottom right. A red box labeled 'Click Here' points to the 'New User' button.


- 3a. Input the User ID for this user.
- 3b. Input the person ID for this user.
- 3c. Input Default Insert Site for this user.
- 3d. Input the login ID for this user.
- 3e. Click **Set Password** to set the password for this user.

In the picture below, the screen shows GL Component Value that exist on component **COMPANY**. In this case the GL Component Value is only **MM_**

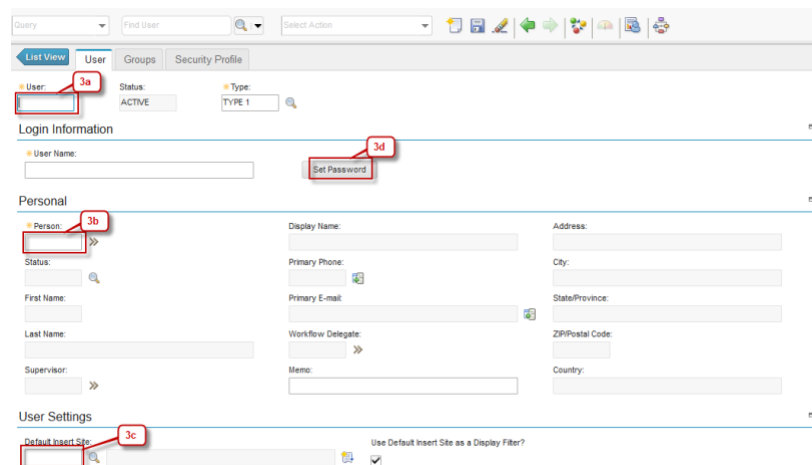

The screenshot shows the 'User' management interface. Callout 3a points to the 'User' tab. Callout 3b points to the 'Person' dropdown in the 'Personal' section. Callout 3c points to the 'Default Insert Site' field in the 'User Settings' section. Callout 3d points to the 'Set Password' button. The 'Login Information' section shows 'User Name' and 'Status: ACTIVE'. The 'Personal' section includes fields for 'Display Name', 'Address', 'City', 'State/Province', 'ZIP/Postal Code', 'Country', 'Primary Phone', 'Primary E-mail', 'Workflow Delegate', 'Memo', and 'Supervisor'. The 'User Settings' section includes 'Default Insert Site' and a checkbox for 'Use Default Insert Site as a Display Filter?'. The 'GL Component Value' is shown as 'MM_'.

- 4a. Input the password.
- 4b. Check the **Password Should Expire After First Login** checkbox.
- 4c. Click **OK**.

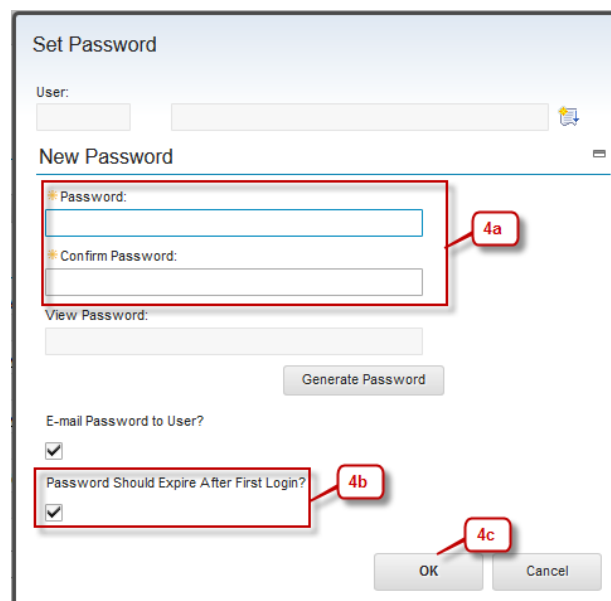

The screenshot shows the 'Set Password' dialog box. Callout 4a points to the 'Password' field. Callout 4b points to the 'Password Should Expire After First Login?' checkbox, which is checked. Callout 4c points to the 'OK' button. The dialog box includes fields for 'User', 'New Password', 'Confirm Password', and 'View Password'. There is a 'Generate Password' button and a checkbox for 'E-mail Password to User?'. The 'OK' and 'Cancel' buttons are at the bottom.

4 Integration with GFS

4.1 Overview

Integration module is divided into 2 categories, which are:


1. Outbound Integration, where EMS act as the provider. Therefore, EMS need to provide source data (in this case, flat file type data source) that can be read by Oracle GFS. There are 4 integration points of outbound integration which are:
 - Item Master
 - Purchase Requisition
 - Receiving
 - Journal Transaction
2. Inbound Integration, where EMS act as the consumer. EMS will read source data (in this case, flat file type data source) provided by Oracle GFS, and populate the data into EMS object. There are two integration points integration which are:
 - Companies
 - Purchase Order

4.2 Integration Monitoring


Related with message exchange between EMS and Oracle GFS, there are 3 applications can be used to monitor integration process which are:

1. NP1 Integration Error Log

This application used to monitor error message that occurred in the data exchange process between EMS and Oracle GFS. User can access this application through **Go To > Integration > NP1 Integration Error Log**.

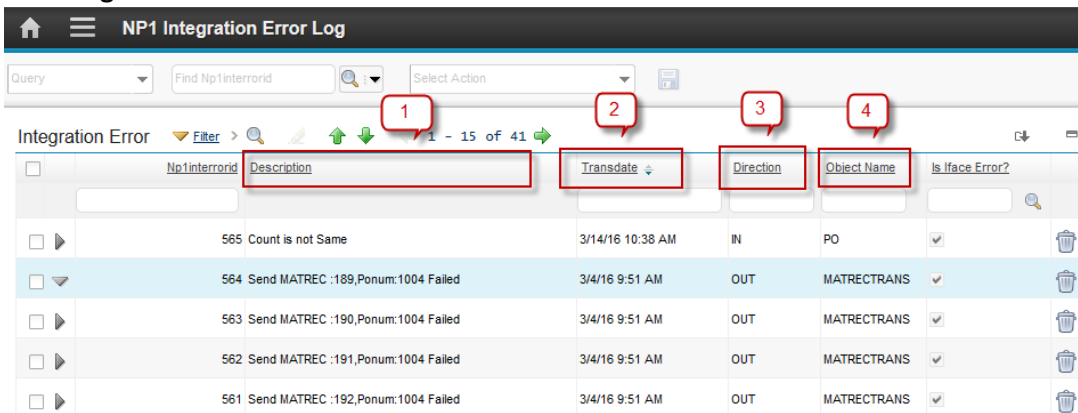

Np1Interrord	Description	Transdate	Direction	Object Name	Is Iface Error?
565	Count is not Same	3/14/16 10:38 AM	IN	PO	✓
564	Send MATREC :189,Ponum:1004 Failed	3/4/16 9:51 AM	OUT	MATRECTRANS	✓
563	Send MATREC :190,Ponum:1004 Failed	3/4/16 9:51 AM	OUT	MATRECTRANS	✓
562	Send MATREC :191,Ponum:1004 Failed	3/4/16 9:51 AM	OUT	MATRECTRANS	✓
561	Send MATREC :192,Ponum:1004 Failed	3/4/16 9:51 AM	OUT	MATRECTRANS	✓

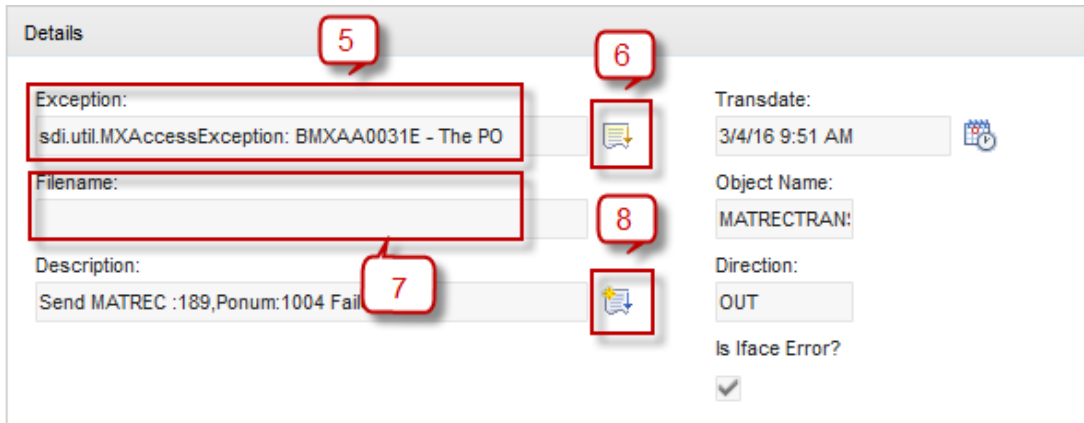

Details

Exception: sdi.util.MXAccessException: BMXAA0031E - The PO

Filename:

Description: Send MATREC :189,Ponum:1004 Fail

Transdate: 3/4/16 9:51 AM

Object Name: MATRECTRAN:

Direction: OUT


Is Iface Error? ☒

There are integration error log attributes that can give user information about error that occurred as follows:

1. **Description** – Short description of error that occurred
2. **Transdate** - Date when transaction is processed
3. **Direction** – **IN** represent inbound transaction to Maximo, **OUT** represent outbound transaction from EMS
4. **Objectname** – Object name of the error data (PO,COMPANIES,PR,MATRECTRANS,SERVRECTRANS)
5. **Exception** – Short description of caught system exception
6. **Exception Long Description** – Long description of caught system exception
7. **Filename** – Source filename of the error data (Inbound only)
8. **Description Long Description** – Long description of error that occurred

Error Message Deletion

To Clear all error message that exists on the list, user can choose menu from **Select Action > Delete All Log** shown in image below :

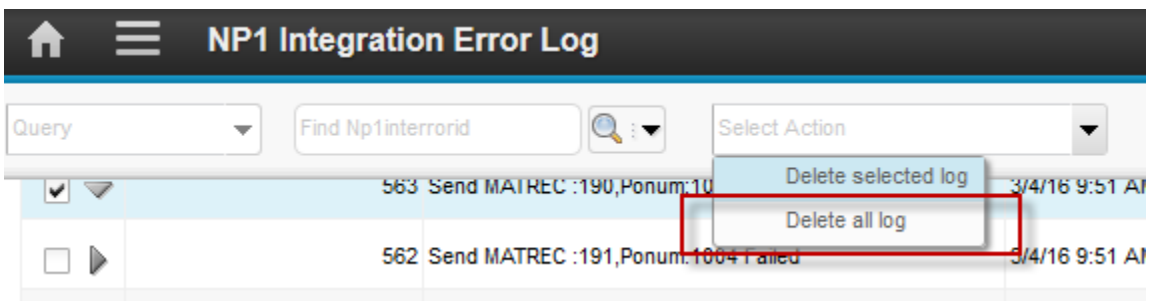


NP1 Integration Error Log

Query Find Np1nterrorid Select Action

Query	Find Np1nterrorid	Select Action
☒	563 Send MATREC :190,Ponum:10	Delete selected log
☐	562 Send MATREC :191,Ponum:1004 Failed	Delete all log

Or if user want to delete particular messages, user can select the checkbox of item that user want to delete and then from **Select Action** Menu, choose **Delete Selected Log** menu.

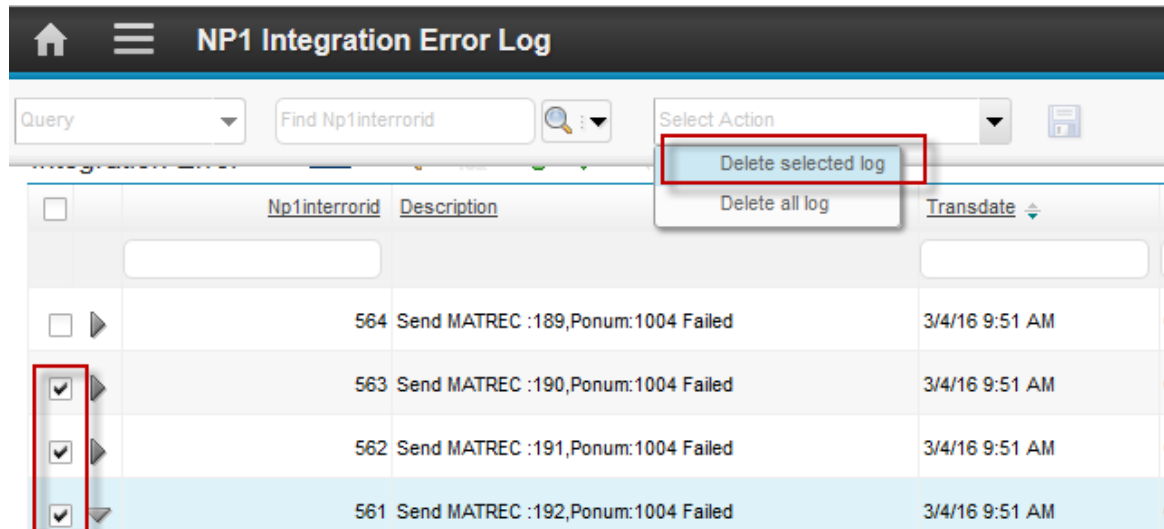

2. NP1 GFS Companies Interface

This application used to track all message of supplier/companies data that come from Oracle GFS. There are 3 interface statuses of message in the lists:

a. ENTERED

The supplier data is entered from Oracle GFS, haven't not processed yet and can't be used in transaction.

b. SUCCESS

The supplier data already processed by integration cron task and successfully saved as companies data in EMS. The data is ready to be used in transaction.


c. FAILED

The supplier data already processed by integration cron task and failed to be saved as companies data in EMS. The data can't be used in transaction

As default, the list only display supplier data with interface status in **ENTERED** and **FAILED**, the **SUCCESS** supplier data is hidden until user force to display it using display **All Record** action as figure below :



Integration cron task only process the data with **ENTERED** status, when the supplier data in **FAILED** status user can trace the error in the **NP1 Integration Error Log** application. User can fix failed data from this application and then change the status into **ENTERED** again. Integration Cron task will process again the data until successfully saved as companies data in EMS.

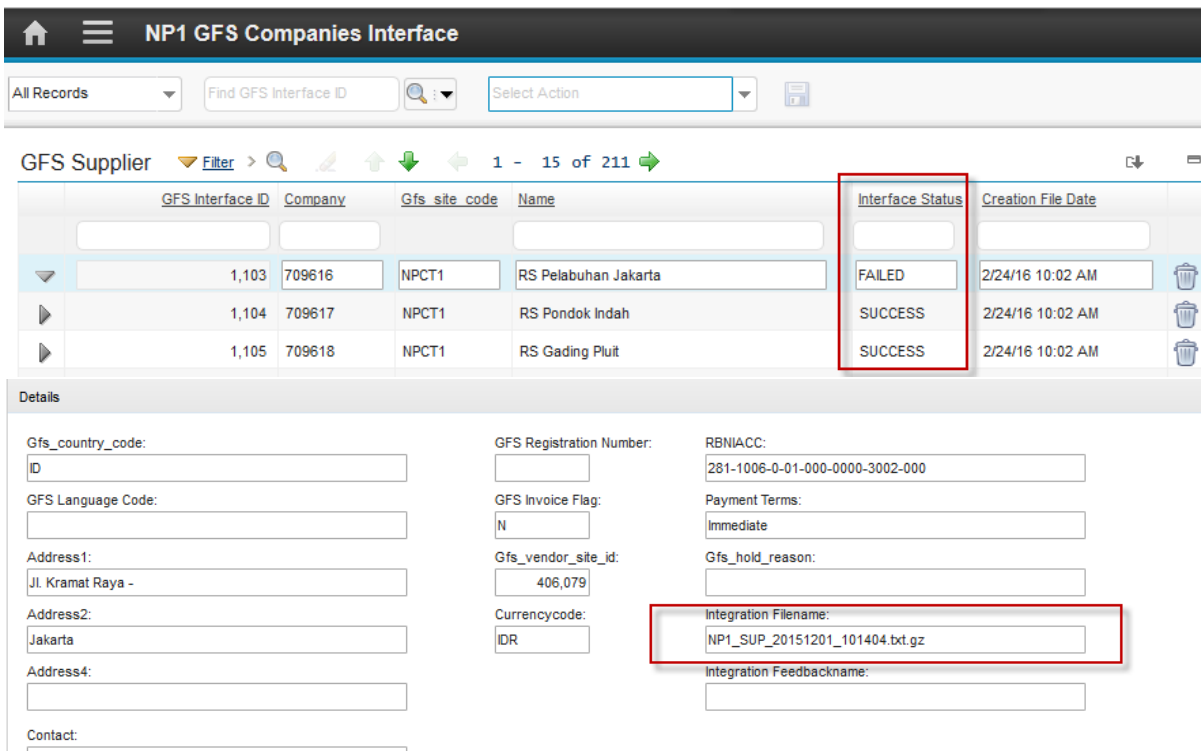

NP1 GFS Companies Interface

All Records Find GFS Interface ID Select Action

GFS Supplier Filter 1 - 15 of 211

GFS Interface ID	Company	Gfs_site_code	Name	Interface Status	Creation File Date
1,103	709616	NPCT1	RS Pelabuhan Jakarta	FAILED	2/24/16 10:02 AM
1,104	709617	NPCT1	RS Pondok Indah	SUCCESS	2/24/16 10:02 AM
1,105	709618	NPCT1	RS Gading Pluit	SUCCESS	2/24/16 10:02 AM

Details


Gfs_country_code: ID
GFS Language Code:
Address1: Jl. Kramat Raya -
Address2: Jakarta
Address4:
Contact:

GFS Registration Number: 281-1006-0-01-000-0000-3002-000
GFS Invoice Flag: N
Gfs_vendor_site_id: 406,079
Currencycode: IDR

RBNIACC: 281-1006-0-01-000-0000-3002-000
Payment Terms: Immediate
Gfs_hold_reason:
Integration Filename: NP1_SUP_20151201_101404.txt.gz
Integration Feedbackname:

Supplier Integration Message Deletion

To clear all succesfull supplier data that processed into **Companies** data in Maximo, you can use **Select Action** menu from this application and the choose **Clear Successful History** as figure below:

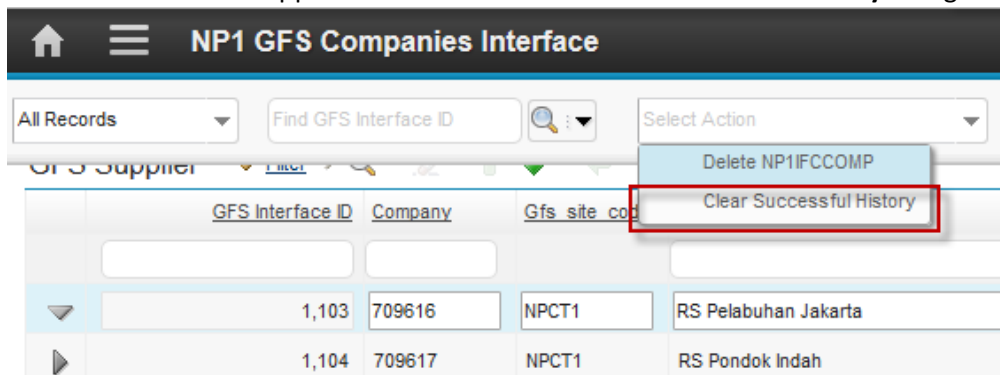

NP1 GFS Companies Interface

All Records Find GFS Interface ID Select Action

GFS Supplier Filter

Delete NP1IFCCOMP
Clear Successful History


GFS Interface ID	Company	Gfs_site_code	Name
1,103	709616	NPCT1	RS Pelabuhan Jakarta
1,104	709617	NPCT1	RS Pondok Indah

3. NP1 GFS Interface PO.


This application used to track all message of PO data that come from Oracle GFS. There are 3 interface statuses of message in the lists:

- a. ENTERED
The PO data is entered from Oracle GFS, haven't not processed yet.
- b. SUCCESS
The PO data already processed by integration cron task and succesfully saved in Maximo.
- c. FAILED
The PO data already processed by integration cron task and failed to be saved in Maximo.
- d. IGNORED
The PO data already processed by integration cron task, because there is PO data in Maximo with PO number and revision number same with interface data, this data will be ignored.

As default, the list only display PO data with interface status in ENTERED and FAILED, the SUCCESS and IGNORED PO data is hidden until you force to display it using display **All Record** action as figure below :

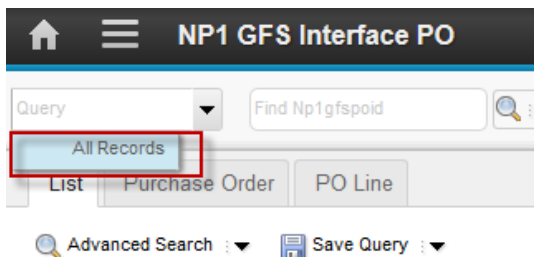

Integration cron task only process the data with ENTERED status, when the PO data in FAILED status you can trace the error in the **NP1 Integration Error Log** application. You can fix failed data from this application and then change the status into ENTERED again. Integration Cron task will process again the data until succesfully saved in Maximo.

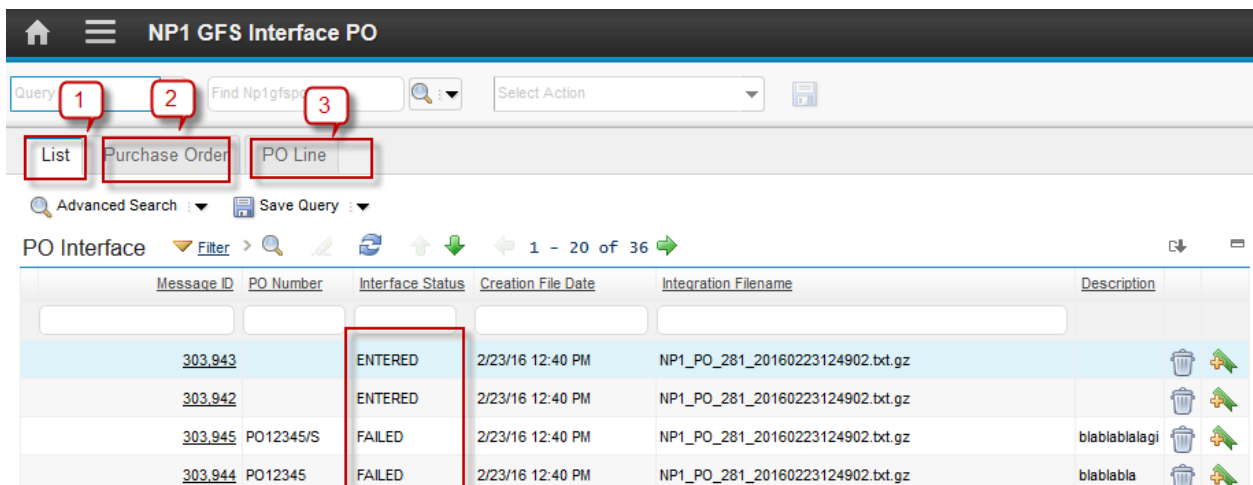


There are 3 tabs on **NP1 GFS Interface PO** application

1. List

List all of PO header data that come from GFS. You can enter into detail of record by click the Message ID of each record.

2. Purchase Order

Shown the detail information of the PO header data. You can edit and then save the data when the interface status is FAILED to reprocess it by integration cron task before saved as PO data in Maximo.

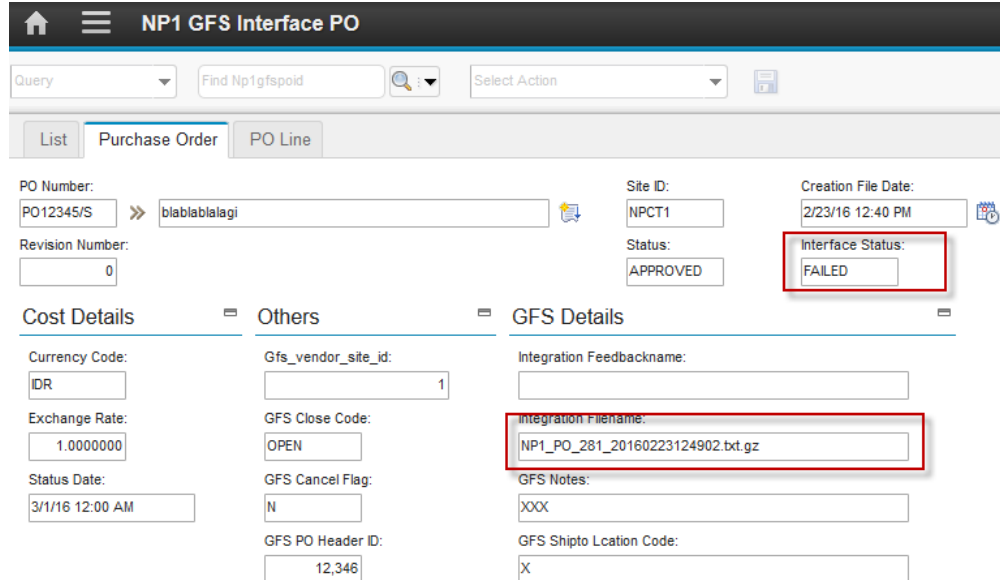

NP1 GFS Interface PO

Query: Find Np1gfsoid Select Action

PO Number: PO12345/S » blablalalagi Site ID: NPCT1 Creation File Date: 2/23/16 12:40 PM

Revision Number: 0 Status: APPROVED Interface Status: FAILED

Cost Details **Others** **GFS Details**

Currency Code: IDR Gfs_vendor_site_id: 1 Integration Feedbackname:


Exchange Rate: 1.0000000 GFS Close Code: OPEN Integration Filename: NP1_PO_281_20160223124902.txt.gz

Status Date: 3/1/16 12:00 AM GFS Cancel Flag: N GFS Notes: XXX

GFS PO Header ID: 12,346 GFS Shipto Location Code: X

3. PO Line

Display all of the PO Lines data related to this PO record. Same with PO header you can edit and then save the PO Line data when the interface status is FAILED before it processed by integration cron task.

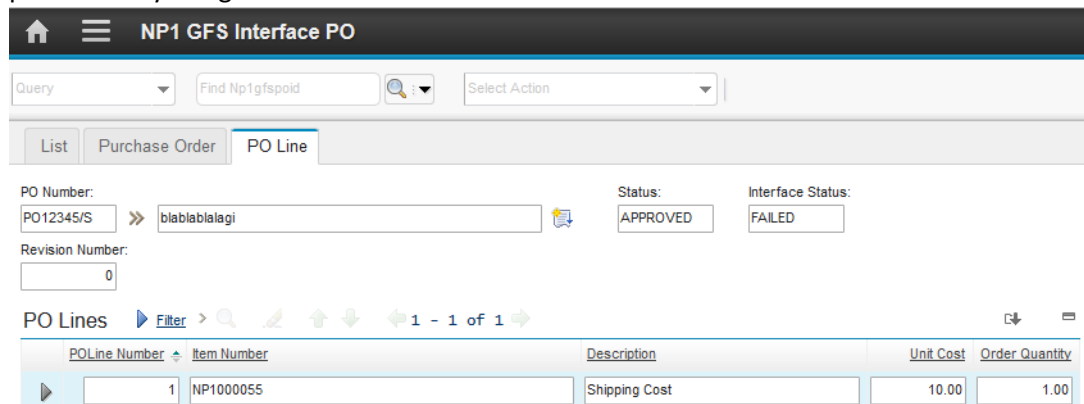

NP1 GFS Interface PO

Query: Find Np1gfsoid Select Action

PO Number: PO12345/S » blablalalagi Site ID: NPCT1 Creation File Date: 2/23/16 12:40 PM

Revision Number: 0 Status: APPROVED Interface Status: FAILED

PO Lines Filter > 1 - 1 of 1

PO Line Number	Item Number	Description	Unit Cost	Order Quantity
1	NP1000055	Shipping Cost	10.00	1.00